

TEST AND GARAGE EQUIPMENT

NEW



iNEXT



3D wheel aligner
with two-camera
alignment system

C 880 iNEXT

Installation layout

Small bay. Due to the compact size and the camera technology, it is suitable for installations in small areas and installations with 4 post lifts.


Installation with column:

- ☐ Compatible with pits and fork, 4-column and parallelogram lift installations.
- ☐ For 4-column lifts, the minimum internal column distance required to operate on production vehicles is of 2,950 mm.
- ☐ For parallelogram lifts, the distance between the indicated centre of the plates and the camera must be taken at a height of 1 m.

For installations with a layout other than the recommended one and for compatibility with the lift model, contact your authorised service centre.

Dimensions

A = Min. 1800 - Max 3000 mm
B = 2918 mm
C = 2878 mm
D = Work from 500 to 2560 mm
E = Min. 400 mm

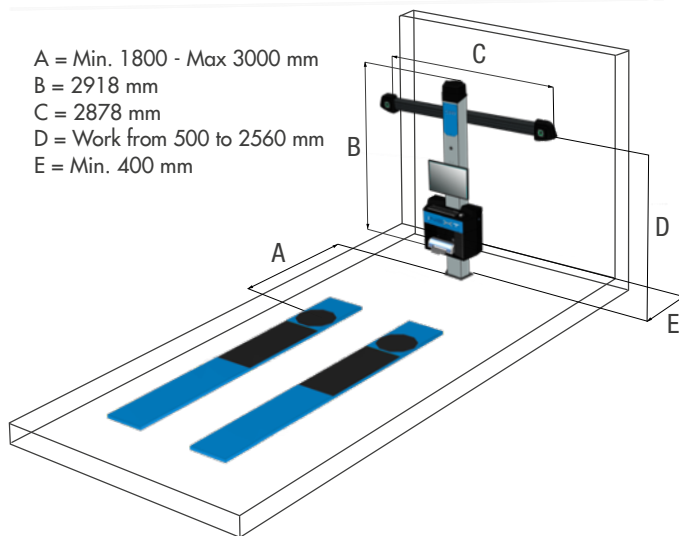

Standard equipment




* For Full Pack versions only

Technical data

Measuring ranges		Power supply	
Total toe	± 20°	Power supply voltage	115-230 Vac
Half toe	± 10°		50-60 Hz 1ph
Camber	± 10°	Power absorption	500 W
Caster	± 30°	Pc Holder	11 kg
King pin	± 30°	Camera beam	26 kg
Set back	± 22°	Column	66 kg
Thrust angle	± 10°	Camera resolution	2592 × 1944
Steering difference	± 20°		10,000,000 Pixel

Recommended accessories

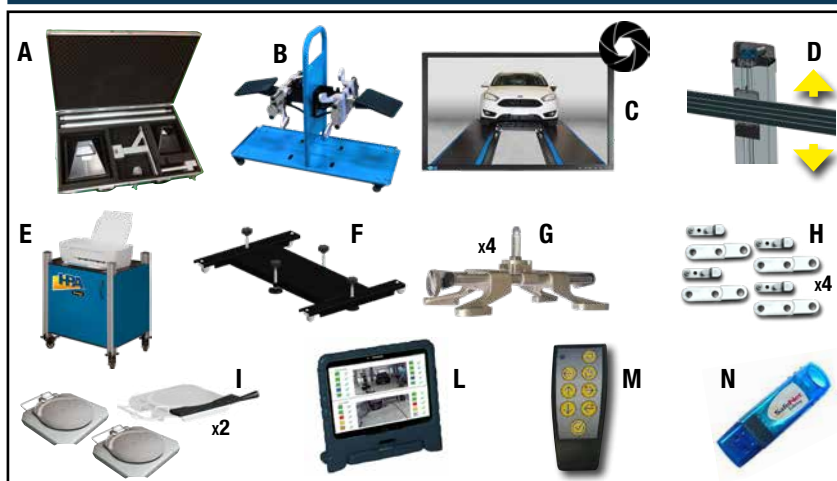

- ☐ **A.** 2.0 complete kit for calibration and check
- ☐ **B.** Trolley for brackets and targets
- ☐ **C.** Driving assistance for vehicle positioning
- ☐ **D.** Camera Mover with worm-gear
- ☐ **E.** Printer cabinet with wheels and door
- ☐ **F.** Trolley for mobile wheel aligner
- ☐ **G.** Turntable 10-21" basic brackets. 4 Pieces
- ☐ **H.** 26" extension kit for basic brackets
- ☐ **I.** Turntables with ROC adapters
- ☐ **L.** NexRemote Tablet: Remote Control - extra monitor
- ☐ **M.** Radio Remote Control
- ☐ **N.** Graphic animation kit

The illustrations, configurations and technical features in this publication are intended to present the product only, and are subject to variation. To ensure correct ordering, always refer to the current price list.