

C880 iNEXT Slim



New C 880 iNEXT Slim 3D
wheel aligner with 2-camera
reading system

Technology
at your service: simple,
quick, accurate.

Integrated camera movement system
with manual operation

Pre-arrangement for additional monitor
or A4 printer

Provision for trolley

Integrated bracket support

High-quality components and modern design

**New user-friendly software for precise
and fast alignment**

Data display down to **0.01°**

Intuitive two-button operation
with easily accessible tutorial

Easy access to all adjustment values


11" to 26" sensor holder
(with adaptor)



HPA

Faip



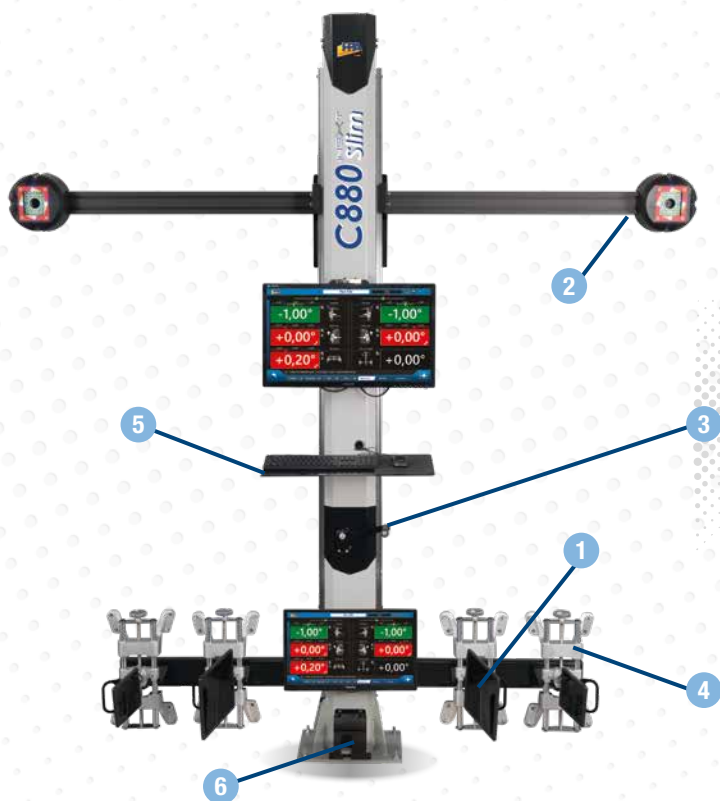

USER FRIENDLY

HPA-Faip Icon user friendly graphics.

Simple and efficient easy to learn, fast to select.



Handle for **moving the camera beam**.
Fast and precise movement.

1_LIGHT-DUTY AND HIGH-RESOLUTION TARGET

It can be detached from the bracket and is compatible with all the catalogue brackets.

Front infra-red filter for a high immunity to sunlight reflections.



2_SUPERIOR QUALITY CAMERA

Latest generation high-resolution HI-Q camera for artificial vision.

Operating Light Indications thanks to the integrated synoptic panel.

Measurement in difference. Each acquisition is differentially processed by 2 consecutive images to eliminate measurement problems in critical sunlight conditions or in the presence of light reflections.

4_10" TO 26" CLAMPS with adaptor (optional).



5_MAIN UNIT

complete with integrated mini PC and work surface

6_SECURITY RELEASE

Release pedal for chamber mover safeties.



NEW INTEGRATED LIFT AND SAFETY SYSTEM WITH MANUAL OPERATION

Camera movement kit allows the operator to work from pit level to over 2.00 meters.

Fast and easy.

Integrated safety system, with quick release of the safeties by foot pedal operation



NEW SOFTWARE, FOR THE WHEEL ALIGNMENT PROFESSIONAL



New modern and professional graphic interface specifically developed for the wheel alignment specialist. Rich with new features, such as the lower progress bar, the convenient vertical

pop-up selection menu, and enhanced data visibility in the operating area. It also features useful quick selection icons for the most common functions and simple wizards with clear instructions for less experienced operators.

The procedure is fully customisable with an always up-to-date and comprehensive database.


- Multilanguage **Windows 10 IoT operating system**
- **User friendly** procedure
- A first class international database with over **84,000 vehicles**
- Live **graphic indications**
- **User databank** for insert or modification vehicle data
- **Chassis** measurement data
- **Factory-calibrated**, calibration checked only upon installation, **no periodic calibrations required**
- Databank on **HDD**
- Job operation **customer data bank**, to recall and **memorize all customer data**

WHEEL ALIGNER COMPATIBLE WITH PROADAS

The wheel aligner is compatible with the new PROADAS universal system used for the **calibration of driver assistance systems** on new-generation vehicles.

Using the wheel aligner cameras, the system for calibrating the camera and radar on board the vehicle **can be aligned precisely and quickly**.

Manufacturers recommend calibrating ADAS systems after aligning the vehicle. For further information, visit the PROADAS product sections on our website.

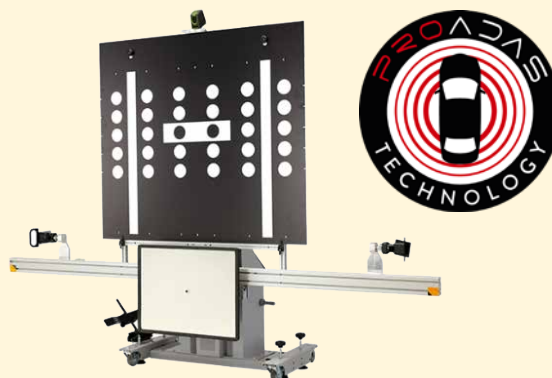

RECOMMENDED ACCESSORIES



8-34900011

Carrying case with kit for calibration and calibration check



x4

8-34100020

Self-centring 10-21" brackets



x4

8-34100021

26" extender kit for brackets



x2

x2

8-34900019

Turntables with pad



8-34900072

Aligner Trolley. To use the wheel aligner in different lifts or in drive thru mode.



8-21120005


A4 Inkjet Printer

The manufacturer reserves the right to modify the features of its products at any time.

TECHNICAL DATA

Total toe	$\pm 20^\circ$
Half toe	$\pm 10^\circ$
Camber	$\pm 10^\circ$
Caster	$\pm 30^\circ$
King pin	$\pm 30^\circ$
Set back	$\pm 22^\circ$
Thrust angle	$\pm 10^\circ$
Steering difference	$\pm 20^\circ$

DIMENSIONS

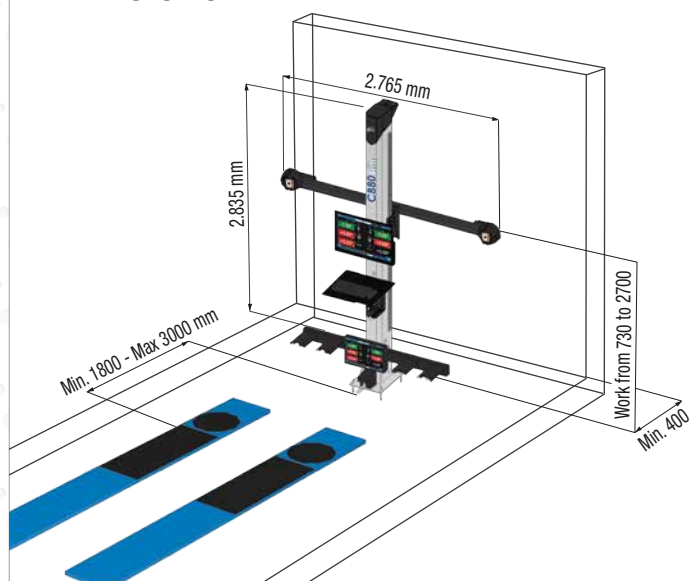

STANDARD ACCESSORIES



POWER SUPPLY

Power supply voltage	115/230Vac - 50/60Hz - 1 Ph
Power absorption	500 W
Camera resolution	2592 x 1944 10,000,000 Pixel

The manufacturer reserves the right to modify the features of its products at any time.