

Exp No: 14

EMBEDDED C PROGRAM TO DISPLAY “HELLO WORLD” MESSAGE

AIM:

To write an Embedded C program to display “HELLO WORLD” message using Keil software.

SOFTWARE REQUIRED:

- Keil software

Program:

```
#include <reg51.h>
```

```
#include <stdio.h>
```

```
void main (void)
```

```
{ SCON = 0x50;
```

```
/* SCON: mode 1, 8-bit UART, enable rcvr / TMOD = 0x20;
```

```
/TMOD: timer 1, mode 2, 8-bit reload / TH1 = 0xFD;
```

```
/TH1: reload value for 9600 baudrate / TR1 = 1;
```

```
/TR1: timer 1 run / TI = 1;
```

```
/TI: set TI to send first char of UART */
```


```
while (1)
```

```
{ printf ("Hello World ! \n ");
```

```
}
```

```
}
```

OUTPUT:

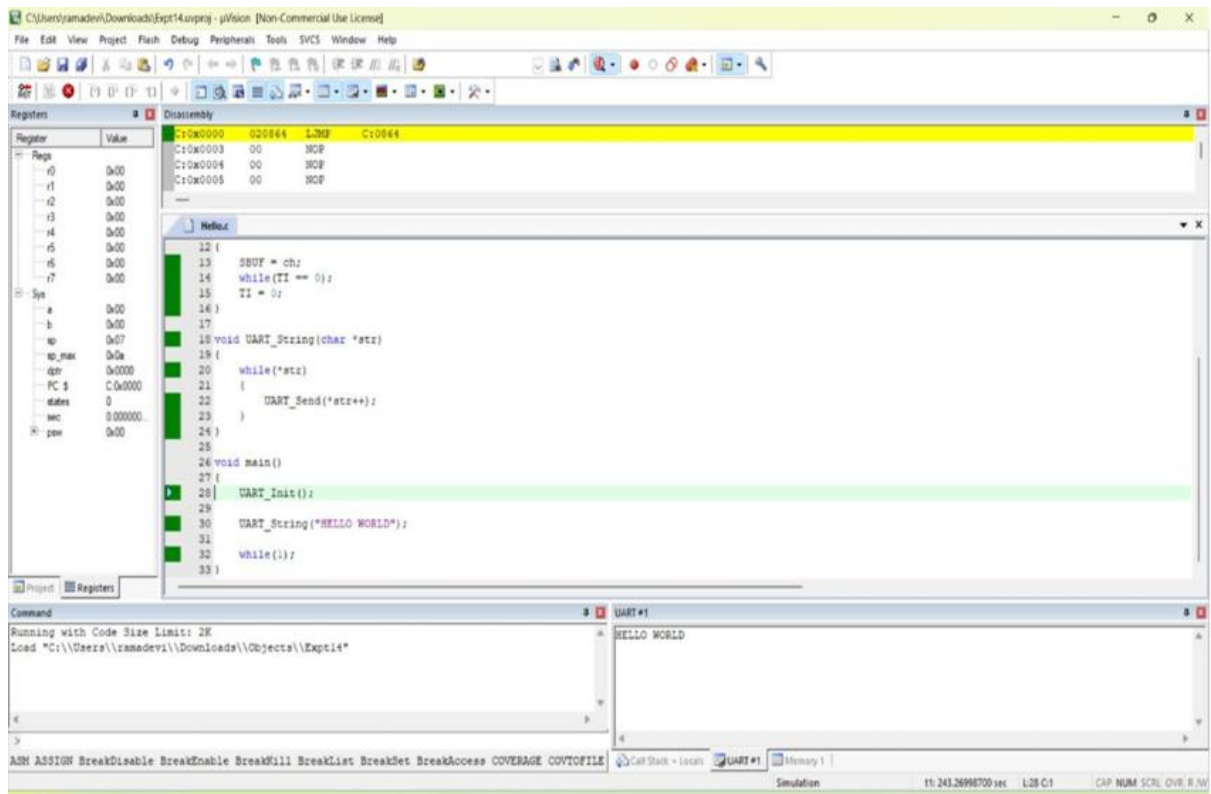

RESULT: Thus the program has been successfully verified and executed.