

EXP – 1

FLASHING OF LED USING AT89C51 MICROCONTROLLER USING PROTEUS

AIM:

To Write an assembly language program to flash the LED using AT89C51

SOFTWARES REQUIRED:

- Proteus software

PROGRAM

ORG 0000H

UP: SETB P2.0

ACALL DELAY

CLR P2.0

ACALL DELAY

SJMP UP

DELAY: MOV R4,#35

H1:MOV R3,#255


H2:DJNZ R3,H2

DJNZ R4,H1

RET

END

OUTPUT:

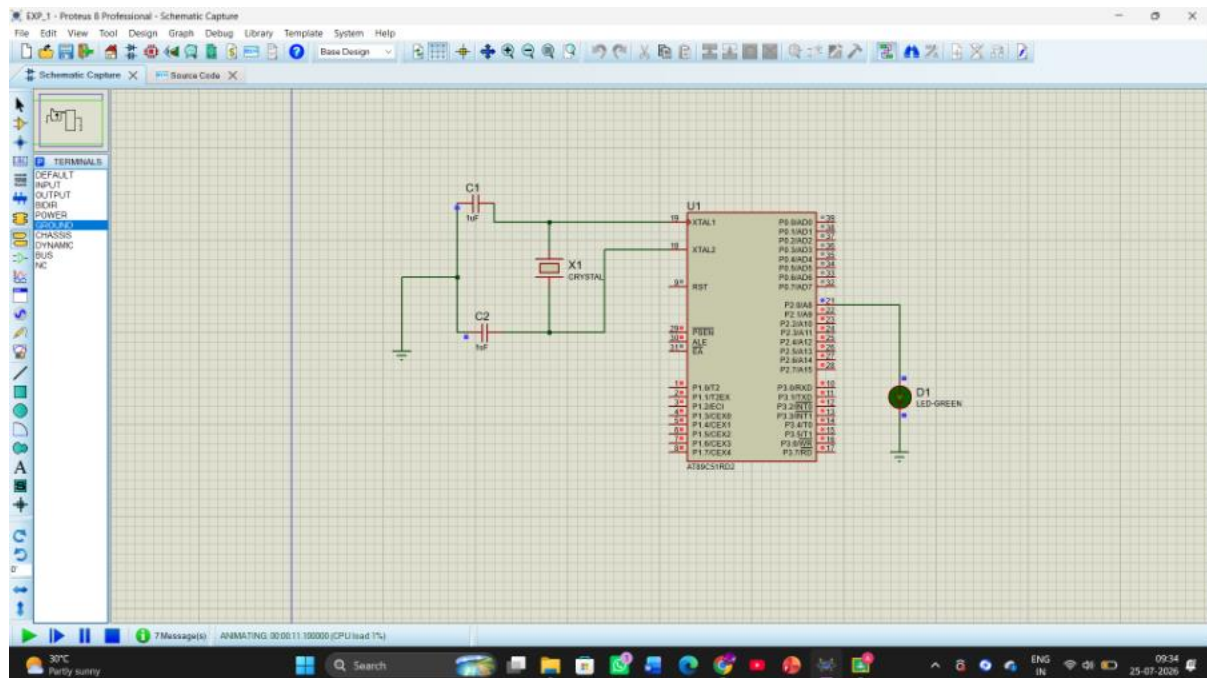

RESULT:

Thus the program has been successfully verified and executed.