


### 34.A/C Filter


#### A: REPLACEMENT

- 1) Remove the pocket assembly.
  - (1) Attach the protective tape (a) to the panel center LWR.
  - (2) Remove the damper COMPL - pocket.
  - (3) Release the stoppers and remove the pocket assembly by pulling it toward you.

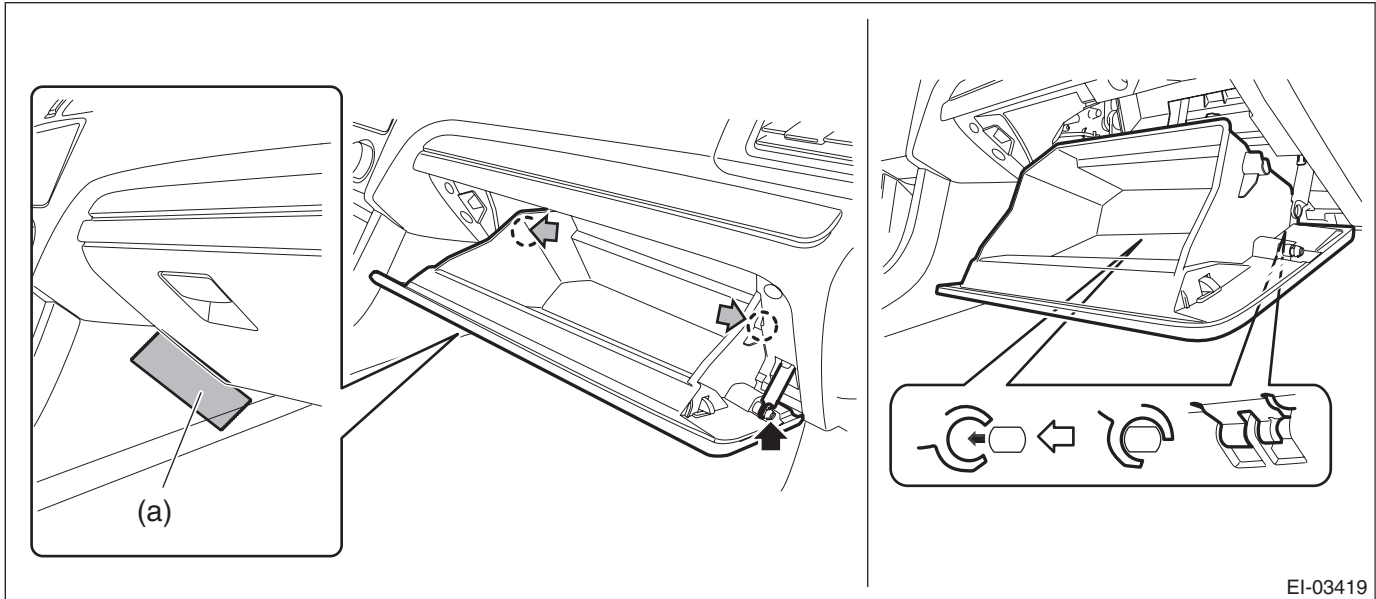

EI-03419

- 2) Pinch the tabs to release the lock, and remove the filter kit.

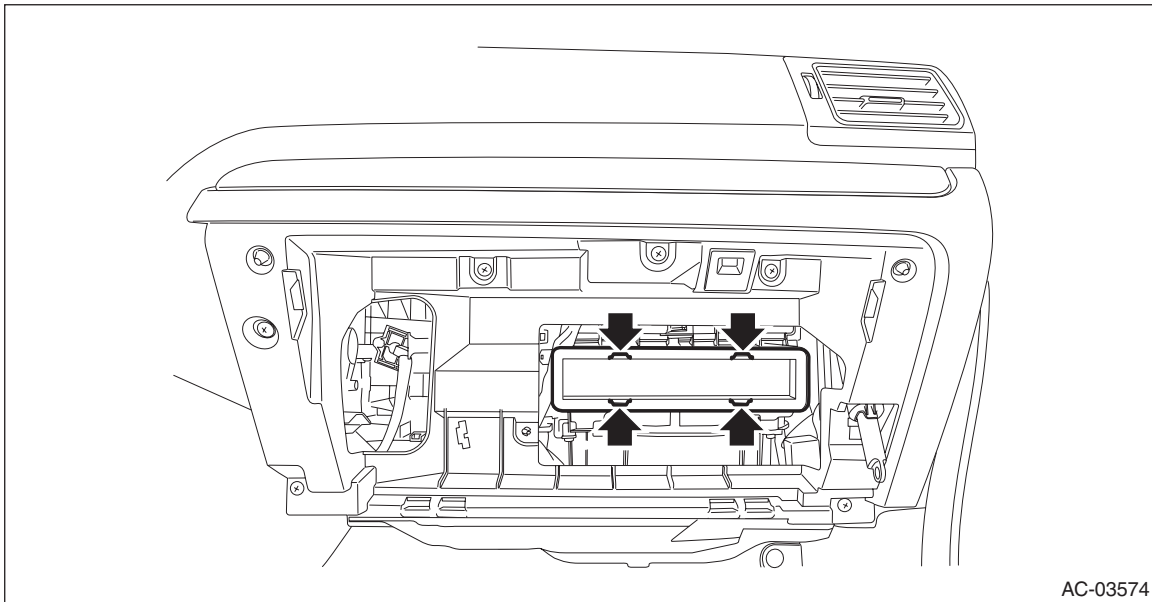

AC-03574

- 3) Install each part in the reverse order of removal.