30203 - Computer Systems Fundamentals Attack Lab: Understanding Buffer Overflow Bugs

Assigned: Tuesday, October 15

Due: Monday, October 28 by 23:59:59

1 Introduction

This assignment involves generating a total of five attacks on two programs which have different security vulnerabilities.

In this lab, you will:

- Learn different ways that attackers can exploit security vulnerabilities when programs do not safeguard themselves well enough against buffer overflows.
- Gain a better understanding of how to write programs that are more secure, as well as some of the features provided by compilers and operating systems to make programs less vulnerable.
- Gain a deeper understanding of the stack and parameter-passing mechanisms of x86-64 machine code.
- Gain a deeper understanding of how x86-64 instructions are encoded.
- Gain more experience with debugging tools such as GDB and OBJDUMP.

Note: In this lab, you will gain firsthand experience with methods used to exploit security weaknesses in operating systems and network servers. The purpose is to help you learn about the runtime operation of programs and to understand the nature of these security weaknesses so that you can avoid them when you write system code. I do not condone the use of any other form of attack to gain unauthorized access to any system resources.

You will want to study Sections 3.10.3 and 3.10.4 of the book as reference material for this lab.

Table 1 summarizes the five phases of this lab. The first three involve code-injection (CI) attacks on ctarget, while the last two involve return-oriented-programming (ROP) attacks on rtarget.

Table 1:	The five phases	of attack lab,	with scoring

Phase	Program	Level	Method	Function	Points
1	CTARGET	1	CI	touch1	10
2	CTARGET	2	CI	touch2	25
3	CTARGET	3	CI	touch3	25
4	RTARGET	2	ROP	touch2	35
5	RTARGET	3	ROP	touch3	5

Each phase can be completed independently; you do not need to do them in the order they are listed above. Unlike the Bomb Lab, there is no penalty for making mistakes in this lab. Feel free to fire away at CTARGET and RTARGET with any strings you like.

Good luck and have fun!

2 Logistics

As usual, this is an individual project. You will generate attacks for target programs that are custom generated for you. As usual, you must do the assignment on babbage.cs.tcu.edu.

2.1 Getting Files

Each student will have a different set of target programs to test their exploits. Your specific target is identified by the last two digits of your TCU ID number. For those students whose TCU ID number is 00-09, then your target id is 0-9. Example: target05.tar and target42.tar

You can obtain your target programs from out server by executing the following commands:

```
cp ../mscherger/public/targetk .
tar xvf targetk
```

This will extract a directory targetk containing the files described below.

The files in targetk include:

README.txt: A file describing the contents of the directory.

ctarget: An executable program vulnerable to *code-injection* attacks.

rtarget: An executable program vulnerable to *return-oriented-programming* attacks.

cookie.txt: Contains an 8-digit hex code that you will need for level 2 and 3 attacks.

In the following instructions, I will assume that you have already extracted your targetk.tar on the babbage.cs.tcu.edu and you are working in the targetk directory.

2.2 Important Points

Here is a summary of some important things to know about this lab. These may not make much sense when you read this document for the first time. They are presented here as a reference for once you get started.

- You are encouraged to research the subject of code injection and ROP attacks in as much detail as you like. The "Extra Reading" and "References" sections at the end of this document have some starting points. They also include a pointer to an x86 machine language reference, which may be very useful to you.
- You are allowed to use standard debugging tools for this assignment, such as objdump, gdb, 11db, strace, and valgrind. You are also allowed to write your own tools, from scratch, to assist with the assignment.

- You are **not** allowed to use any existing tools or plugins that are designed to assist in implementing code injection or ROP attacks.
- All of your attacks will destroy some of the information that gdb uses to keep track of what the program is doing. You should expect source-level debugging commands (e.g. step, next, until, printing the values of local variables) and stack-walking commands (e.g. backtrace, up, down, frame) to malfunction once your exploit starts running. Assembly-level commands, however, should still work correctly (e.g. stepi, disas, printing the values of registers).
- It is common for attacks to malfunction because they are not *quite* in the place, or the order, that you expected them to be. You should use gdb's memory inspection commands to verify that each attack is loaded onto the stack correctly, before allowing it to run.
- ctarget and rearrest start up in an unusual manner. I recommend setting a breakpoint on decode_line and
 letting the program run until it reaches that breakpoint, rather than trying to single-step from the beginning of
 main.
- Much as you did not need to understand the code inside __isoc99_sscanf in order to complete bomb lab, you will not need to understand the code inside get_hex_byte and print_line to complete this lab.
- Your attacks may not bypass the functions touch1, touch2, and touch3.
- In phases 4 and 5, you should only use gadgets whose starting addresses are in between the symbols named start_farm and end_farm.
- However, you can use any gadgets you discover in the farm, not just those for which I give the byte codes in Table 2.

3 Target Programs

CTARGET and RTARGET are almost the same program (I talk about the differences in Section 5). What they *do* is this: they read a sequence of byte values in hexadecimal and print the corresponding ASCII characters. For example:

```
$ ./ctarget -t 999 1
Cookie: 0x599051eb
Type hex bytes: 68 65 6c 6c 6f 20
Keep going: 77 6f 72 6c 64 0a
hello world
$
```

The ctarget and rtarget programs have a few options. Type:

```
./ctarget -h
```

to see all the options.

In the above example, since I was typing by hand the hexadecimal numbers, I set the timer to be 999 seconds. The '1' is the expected exploit level.

In this listing, text in **boldface** was printed by ctarget or by the shell (it will not be in boldface if you try this yourself). I entered 68 65 6c 6c 6f 20 and then 77 6f 72 6c 64 0a. These are the ASCII codes for "hello world" followed by a newline, and so ctarget printed "hello world".

You can input as many lines of hex as you like. All of the characters will be stored in memory until CTARGET encounters an encoded byte with value 0a, which is the ASCII code for newline ('\n'), and then they are printed all at once, after which CTARGET exits. RTARGET does exactly the same thing.

(Note: If you try this yourself, you will see a different number on the Cookie: line. The importance of the cookie number will be explained later.)

Both ctarget and rtarget read their input with this function, which has a bug:

```
1 /* decode_line - Read and decode hex bytes from INFILE.
     This function has a buffer overflow vulnerability.
 3 void decode_line(FILE *infile) {
       unsigned char buf[BUFFER_SIZE];
       unsigned char *sp = buf;
 5
 6
       while ((c = get_hex_byte(infile)) != EOF && c != '\n') {
 7
 8
           *sp++ = c;
       }
9
       *sp = '\0';
10
       print_line(buf);
11
12 }
```

You can see that decode_line stores decoded characters in a local variable buf, which is an array of fixed size, BUFFER_SIZE bytes. (BUFFER_SIZE is a compile-time constant, specific to your version of CTARGET and RTARGET.) Notice that the while loop does not stop when BUFFER_SIZE bytes have been read. This is the same bug that's found in the C library function gets: it keeps reading data until the *input* ends, possibly overrunning the bounds of the storage allocated for the data.

Because of this bug, if you enter too many encoded bytes, ctarget will crash:

```
$ ./ctarget -t 999 1
Cookie: 0x599051eb
Type hex bytes: 54 68 69 73 20 69 73 20 6e 6f 74 20 61 20 76 65
Keep going: 72 79 20 69 6e 74 65 72 65 73 74 69 6e 67 20 73
Keep going: 74 72 69 6e 67 2c 20 62 75 74 20 69 74 20 69 73
Keep going: 20 71 75 69 74 65 20 6c 6f 6e 67 0a
This is not a very interesting string, but it is quite long
Segmentation fault (core dumped)
$
```

Your task is to be more clever with the overlength byte sequences you feed CTARGET and RTARGET, so that they do something interesting, instead of crashing. These clever sequences are called *exploit strings*. You can use *any* byte value in an exploit string, not just the values that correspond to printable ASCII or Unicode—*except*, you cannot use 0a, because the targets will stop reading input when they find that byte.

3.1 Reading Exploits from Files

You will probably not want to retype your exploit strings over and over while testing them out, so CTARGET and RTARGET can take input from a file, instead of reading it from the terminal. You can specify the file to use on the command line:

```
$ cat boring.txt
54 68 69 73 20 69 73 20 6e 6f 74 20 61 20 76 65
72 79 20 69 6e 74 65 72 65 73 74 69 6e 67 20 73
74 72 69 6e 67 2c 20 62 75 74 20 69 74 20 69 73
20 71 75 69 74 65 20 6c 6f 6e 67 0a
$ ./ctarget 1 boring.txt
This is not a very interesting string, but it is quite long
Segmentation fault (core dumped)
$
```

When you run them this way, ctarget and rtarget do not print any prompts, or the cookie.

3.2 Formatting and Commentary

As you may have guessed, CTARGET and RTARGET ignore all white space in their input. You can break up your exploit string over as many lines as you like. In addition, you can write comments: if a # character appears anywhere in the input, everything from that character to the end of the line is ignored.

```
$ ./ctarget -t 999 1
Cookie: 0x599051eb
Type hex bytes: 68 65 6c 6c 6f 20 # hello SPC
Keep going:     77 6f 72 6c 64 0a # world RET
hello world
$
```

4 Part I: Code Injection Attacks

For the first three phases, your exploit strings will attack CTARGET. This program's stack is always in the same location in memory, and data on its stack can be treated as executable code. These properties make it vulnerable to attacks where the exploit strings contain the byte encodings of executable code.

4.1 Phase 1 (CTARGET, attack level 1)

In Phase 1, you will not inject new code. Instead, your exploit string will redirect the program to execute an existing procedure.

ctarget contains a function named touch1, which is normally never called. This is the source code for touch1:

```
void touch1(void) {
vlevel = 1; /* Part of validation protocol */
puts("Touch1!: You called touch1()");
validate(1, true);
exit(0);
}
```

The function decode_line is called by a function named test. This is the source code for test:

```
void test(FILE *infile) {
decode_line(infile);
exit(0);
}
```

When decode_line returns, ctarget ordinarily resumes execution within test, and proceeds to call exit, which terminates the program. Your task is to get ctarget to execute the code for touch1 when decode_line executes its return statement, rather than returning to test. Notice that touch1's last action is also to call exit. This means it is OK if your exploit corrupts the stack and makes it impossible for touch1 to return normally, because touch1 won't return.

Some Advice

- All the information you need to devise your exploit string for this level can be determined by examining a disassembled version of CTARGET. Use objdump -d to get this dissembled version.
- The idea is to position a byte representation of the starting address for touch1 so that the ret instruction at the end of the code for decode line will transfer control to touch1.
- Be careful about byte ordering. Remember, arrays (such as strings) are saved in index order, but values like integers are evaluated in little-endian.
- You might want to use GDB to step the program through the last few instructions of decode_line to make sure it is doing the right thing.
- The placement of buf within the stack frame for decode_line depends on the value of the compile-time constant BUFFER_SIZE, as well the allocation strategy used by gcc. You will need to examine the disassembled code to determine its position.

4.2 Phase 2 (CTARGET, attack level 2)

Phase 2 involves injecting a small amount of code as part of your exploit string.

CTARGET contains another function that is normally never called, named touch2. This is the source code for touch2:

```
void touch2(unsigned val) {
vlevel = 2; /* Part of validation protocol */
if (val == cookie) {
    printf("Touch2!: You called touch2(0x%.8x)\n", val);
    validate(2, true);
} else {
    printf("Misfire: You called touch2(0x%.8x)", val);
    validate(2, false);
}
validate(2, false);
exit(0);
}
```

Your task in Phase 2 is to get ctarget to execute the code for touch2 rather than returning to test. But also, you must make it appear to touch2 that you have passed a *cookie* value as its argument. The value to pass is the value printed after Cookie: when you run ctarget without a file of input. You can also find the cookie value in the file cookie.txt that was included in targetk.tar.

Some Advice

- You will want to position a byte representation of the address of your injected code in such a way that ret instruction at the end of the code for decode_line will transfer control to it.
- Recall that the first argument to a function is passed in register %rdi.

- Your injected code should set the register to your cookie, and then use a ret instruction to transfer control to the first instruction in touch2.
- It will be easiest to use ret instructions for all transfers of control, even when you are not returning from a call. The jmp and call instructions contain 32-bit *relative* destination addresses. Relative addresses are difficult to calculate, and 32 bits may not be enough.
- Appendix B explains how to use tools like gcc and objdump to generate the byte-level representations of instruction sequences. You can also refer to Table 2.

4.3 Phase 3 (CTARGET, attack level 3)

Phase 3 also involves injecting code to make it appear that you have called a function inside CTARGET and passed an argument. However, this time the argument must be a string.

A third function inside ctarget that is normally never called is named touch3. This is the source code for touch3 and its subroutine hexmatch:

```
1 /* Compare string to hex represention of unsigned value */
2 static int hexmatch(unsigned val, char *sval) {
      char *endp;
      unsigned long cval = strtoul(sval, &endp, 16);
      return (cval == (unsigned long)val && endp != sval && *endp == '\0');
6 }
8 void touch3(char *sval) {
      vlevel = 3; /* Part of validation protocol */
9
      if (hexmatch(cookie, sval)) {
10
           report_touch3("Touch3!", sval);
11
12
           validate(3, true);
      } else {
13
           report_touch3("Misfire", sval);
           validate(3, false);
15
      }
16
17
      exit(0);
18 }
```

Your task is to get CTARGET to execute the code for touch3 rather than returning to test. You must make it appear to touch3 as if you have passed a string representation of your cookie as its argument.

Some Advice

- You will need to include a string representation of your cookie in your exploit string. The string should consist of the eight hexadecimal digits of the cookie, ordered from most to least significant, without a leading "0x."
- Recall that a string is represented in C as a sequence of bytes followed by a byte with value 0. Type "man ascii" on any Linux machine to see the byte representations of the characters you need.
- Your injected code should set register %rdi to the address of this string.
- When hexmatch and strncmp are called, they push data onto the stack, overwriting portions of memory that held the buffer used by decode_line. You will need to place the string representation of your cookie somewhere that won't be damaged by this. (Hint: The attack string can be as long as you want.)

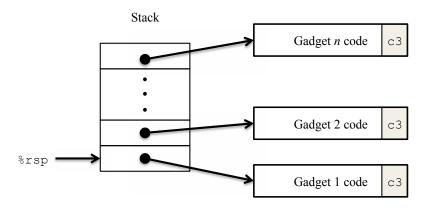


Figure 1: Setting up sequence of gadgets for execution. Byte value 0xc3 encodes the ret instruction.

5 Part II: Return-Oriented Programming

In the last two phases, your exploit strings must attack RTARGET instead of CTARGET. The main difference between the two is that RTARGET includes defenses against code injection:

- The location of the stack is randomized. Every time you run RTARGET, the stack pointer will start out at a
 different address. This means you cannot overwrite the return address from decode_line with the address of
 your injected code, because you don't know what address to use.
- The memory area holding the stack is marked as *non-executable*. (You'll learn how this is possible when I discuss virtual memory.) This means, if you somehow discovered the address of your injected code and jumped to it, the CPU would refuse to execute it. Instead RTARGET would crash with a segmentation fault.

Fortunately, clever people have devised strategies for getting useful things done in a program by executing existing code, rather than injecting new code. The most general form of this is referred to as *return-oriented programming* (ROP) [1, 2]. The strategy with ROP is to identify byte sequences within an existing program that consist of one or more instructions followed by the instruction ret. Such a segment is referred to as a *gadget*. Figure 1 illustrates how the stack can be set up to execute a sequence of *n* gadgets. In this figure, the stack contains a sequence of gadget addresses. Each gadget consists of a series of instruction bytes, with the final one being 0xc3, encoding the ret instruction. When the program executes a ret instruction starting with this configuration, it will initiate a chain of gadget executions, with the ret instruction at the end of each gadget causing the program to jump to the beginning of the next.

A gadget can make use of code corresponding to assembly-language statements generated by the compiler, especially ones at the ends of functions. However, it is unlikely for *all* the gadgets you need to be available via code actually generated by the compiler. For example, it is unlikely that a compiled function would have popq %rdi as its last instruction before ret, because %rdi is a call-clobbered register, so the compiler has no reason to restore its value before returning.

Fortunately, the x86 uses a byte-oriented instruction set, which means you may be able to find more gadgets that start in the *middle* of an instruction. For example, rtarget's gadget farm might contains the following C function:

```
void setval_210(unsigned *p)
{
    *p = 3347663060U;
}
```

The disassembled machine code for this function shows an interesting byte sequence:

```
0000000000400f15 <setval_210>:
```

400f15: c7 07 d4 48 89 c7 movl \$0xc78948d4,(%rdi)

400f1b: c3 retq

The first instruction is six bytes long, and its last three bytes are 48 89 c7. Considered by itself, this byte sequence encodes the instruction movq %rax, %rdi. (See Table 2(a) for the encodings of useful movq instructions, and Appendix B for how to generate and read disassembly listings like this.) The next byte after that sequence is c3, which encodes the ret instruction. Therefore, if I use 0x400f18—three bytes after the beginning of the function—as the starting address of a gadget, that gadget will copy the 64-bit value in register %rax to register %rdi.

RTARGET contains a number of functions similar to the setval_210 function shown above, in a region I refer to as the *gadget farm*. Your job will be to identify useful gadgets in the gadget farm and use these to perform attacks similar to those you did in Phases 2 and 3. You can see the gadget farm by using objdump -d on RTARGET.

Important: The gadget farm is in between the symbols start_farm and end_farm in your copy of RTARGET. If you try to use gadgets from other portions of RTARGET's code, your exploit string may not work when validated on Autolab.

5.1 Phase 4 (RTARGET, attack level 2)

The challenge of phase 4 is to repeat your level-2 attack on ctarget—calling touch2 with the cookie value as an integer argument—against rtarget. Since you cannot write code into the stack, you must instead use gadgets from the gadget farm in rtarget.

It is possible to do this using gadgets consisting of the following instruction types, and using only the first eight x86-64 registers (%rax-%rdi).

movq: The codes for these are shown in Table 2(a).

popq: The codes for these are shown in Table 2(b).

ret: This instruction is encoded by the single byte 0xc3.

nop: This instruction (pronounced "no op," which is short for "no operation") is encoded by the single byte 0x90. Its only effect is to cause the program counter to be incremented by 1.

Some Advice

- All the gadgets you will need can be found in the region of the code for rtarget in between the symbols start farm and mid farm.
- You can do this attack with just two gadgets.
- When a gadget uses a popq instruction, it will pop data from the stack. As a result, your exploit string will contain a combination of gadget addresses and data.
- Autolab will test Phase 4 exploit strings repeatedly. They must work every time in order to earn full credit.

5.2 Phase 5 (RTARGET, attack level 3)

Before you take on Phase 5, pause to consider what you have accomplished so far. In Phases 2 and 3, you caused a program to execute machine code of your own design. If CTARGET had been a network server, you could have injected your own code into a distant machine. In Phase 4, you circumvented two of the main devices modern systems use to thwart buffer overflow attacks. Although you did not inject your own code, you were able inject a type of program

that operates by stitching together sequences of existing code. You have also gotten 95/100 points for the lab. That's a good score. If you have other pressing obligations, consider stopping right now.

The challenge of phase 5 is to repeat your level-3 attack on CTARGET—calling touch3 with the cookie value as a string argument—against RTARGET, using gadgets from the gadget farm. Because the gadgets available to you are not really geared for string operations, phase 5 will be significantly more difficult than phase 4, and it only counts for five points. Think of it as an extra credit problem, for those who want to go beyond the normal expectations for the course.

To solve Phase 5, you will need gadgets from the region of the code for rtarget in between the symbols mid_farm and end_farm, as well as the code in between start_farm and mid_farm. Remember that using gadgets from outside the farm may make your exploit string not work when validated by Autolab.

In addition to the gadgets used in Phase 4, this expanded farm includes the encodings of different mov1 instructions, as shown in Table 2(c). The byte sequences in this part of the farm also contain 2-byte instructions that serve as *functional nops*, i.e., they do not change any register or memory values. Examples of these instructions are shown in 2(d).

Some Advice

- You'll want to review the effect a mov1 instruction has on the upper 4 bytes of a register, as is described on page 183 of the text.
- It is *possible* to solve Phase 5 using a sequence of eight gadgets. Depending on the contents of your farm, you may be able find a shorter solution.
- Remember that your exploit string cannot contain the newline character (byte value 0x0a) at any intermediate position, because decode_line will stop reading data when it finds a newline character.

A Encodings of Some x86 Instructions

Table 2: Byte encodings of instructions. All values are shown in hexadecimal.

(a) Encodings of movq instructions

movq S, D

Source	Destination D							
S	%rax	%rcx	%rdx	%rbx	%rsp	%rbp	%rsi	%rdi
%rax	48 89 c0	48 89 c1	48 89 c2	48 89 c3	48 89 c4	48 89 c5	48 89 c6	48 89 c7
%rcx	48 89 c8	48 89 c9	48 89 ca	48 89 cb	48 89 cc	48 89 cd	48 89 ce	48 89 cf
%rdx	48 89 d0	48 89 d1	48 89 d2	48 89 d3	48 89 d4	48 89 d5	48 89 d6	48 89 d7
%rbx	48 89 d8	48 89 d9	48 89 da	48 89 db	48 89 dc	48 89 dd	48 89 de	48 89 df
%rsp	48 89 e0	48 89 e1	48 89 e2	48 89 e3	48 89 e4	48 89 e5	48 89 e6	48 89 e7
%rbp	48 89 e8	48 89 e9	48 89 ea	48 89 eb	48 89 ec	48 89 ed	48 89 ee	48 89 ef
%rsi	48 89 f0	48 89 f1	48 89 f2	48 89 f3	48 89 f4	48 89 f5	48 89 f6	48 89 f7
%rdi	48 89 f8	48 89 f9	48 89 fa	48 89 fb	48 89 fc	48 89 fd	48 89 fe	48 89 ff

(b) Encodings of popq instructions

Operation	Register R							
	%rax	%rax %rcx %rdx %rbx %rsp %rbp %rsi %rdi						
popq R	58	59	5a	5b	5c	5d	5e	5£

(c) Encodings of mov1 instructions

 $\ \, \operatorname{movl} \, \, S \, \, , \, \, \, D \, \,$

Source	Destination D							
S	%eax	%ecx	%edx	%ebx	%esp	%ebp	%esi	%edi
%eax	89 c0	89 c1	89 c2	89 c3	89 c4	89 c5	89 c6	89 c7
%ecx	89 c8	89 c9	89 ca	89 cb	89 cc	89 cd	89 ce	89 cf
%edx	89 d0	89 d1	89 d2	89 d3	89 d4	89 d5	89 d6	89 d7
%ebx	89 d8	89 d9	89 da	89 db	89 dc	89 dd	89 de	89 df
%esp	89 e0	89 e1	89 e2	89 e3	89 e4	89 e5	89 e6	89 e7
%ebp	89 e8	89 e9	89 ea	89 eb	89 ec	89 ed	89 ee	89 ef
%esi	89 f 0	89 f1	89 f2	89 f3	89 f4	89 f5	89 f6	89 f7
%edi	89 f8	89 f9	89 fa	89 fb	89 fc	89 fd	89 fe	89 ff

(d) Encodings of 2-byte functional nop instructions

Opera	ation	Register R						
		%al	%cl	%dl	%bl			
andb	R, R	20 c0	20 c9	20 d2	20 db			
orb	R, R	08 c0	0 8 c9	08 d2	08 db			
cmpb	R, R	38 c0	38 c9	38 d2	38 db			
testb	R, R	84 c0	84 c9	84 d2	84 db			

B Generating Byte Codes

movl

Using GCC as an assembler and OBJDUMP as a disassembler makes it convenient to generate the byte codes for instruction sequences. For example, suppose you write a file example.s containing the following assembly code:

Copy lower 32 bits to %edx

Example of hand-written assembly code
 pushq \$0xabcdef # Push value onto stack
 addq \$17,%rax # Add 17 to %rax

The code can contain a mixture of instructions and data. Anything to the right of a '#' character is a comment. You can now assemble and disassemble this file:

```
$ gcc -c example.s
$ objdump -d example.o > example.d
```

%eax,%edx

The generated file example.d contains the following:

```
example.o: file format elf64-x86-64
```

Disassembly of section .text:

```
0000000000000000 <.text>:
```

```
0: 68 ef cd ab 00 push $0xabcdef
5: 48 83 c0 11 add $0x11,%rax
9: 89 c2 mov %eax,%edx
```

The lines at the bottom show the machine code generated from the assembly language instructions. Each line has a hexadecimal number on the left indicating the instruction's starting address (starting with 0), while the hex digits after the ':' character indicate the byte codes for the instruction. Thus, I can see that the instruction push \$0xABCDEF has hex-formatted byte code 68 ef cd ab 00.

From this file, you can get the byte sequence for the code:

```
68 ef cd ab 00 48 83 c0 11 89 c2
```

This sequence can be fed to the target programs. Alternatively, you can edit example.d down to

```
68 ef cd ab 00  # pushq $0xabcdef
48 83 c0 11  # add $0x11,%rax
89 c2  # mov %eax,%edx
```

and this is also a valid input to either of the target programs.

C Extra Reading

Buffer overflow exploits have a long history. You may find these additional readings helpful. **Caution**: Examples in these readings use *32-bit* x86 assembly language.

- http://phrack.org/issues/49/14.html
- https://blog.skullsecurity.org/2013/ropasaurusrex-a-primer-on-return-oriented-programming

If you want more information on the encoding of x86 machine instructions than was shown in Table 2, you can find it in these documents:

- http://ref.x86asm.net/
- https://www.sandpile.org/
- https://www.intel.com/content/www/us/en/developer/articles/technical/intel-sdm.html

References

- [1] R. Roemer, E. Buchanan, H. Shacham, and S. Savage. Return-oriented programming: Systems, languages, and applications. *ACM Transactions on Information System Security*, 15(1):2:1–2:34, March 2012.
- [2] E. J. Schwartz, T. Avgerinos, and D. Brumley. Q: Exploit hardening made easy. In *USENIX Security Symposium*, 2011.