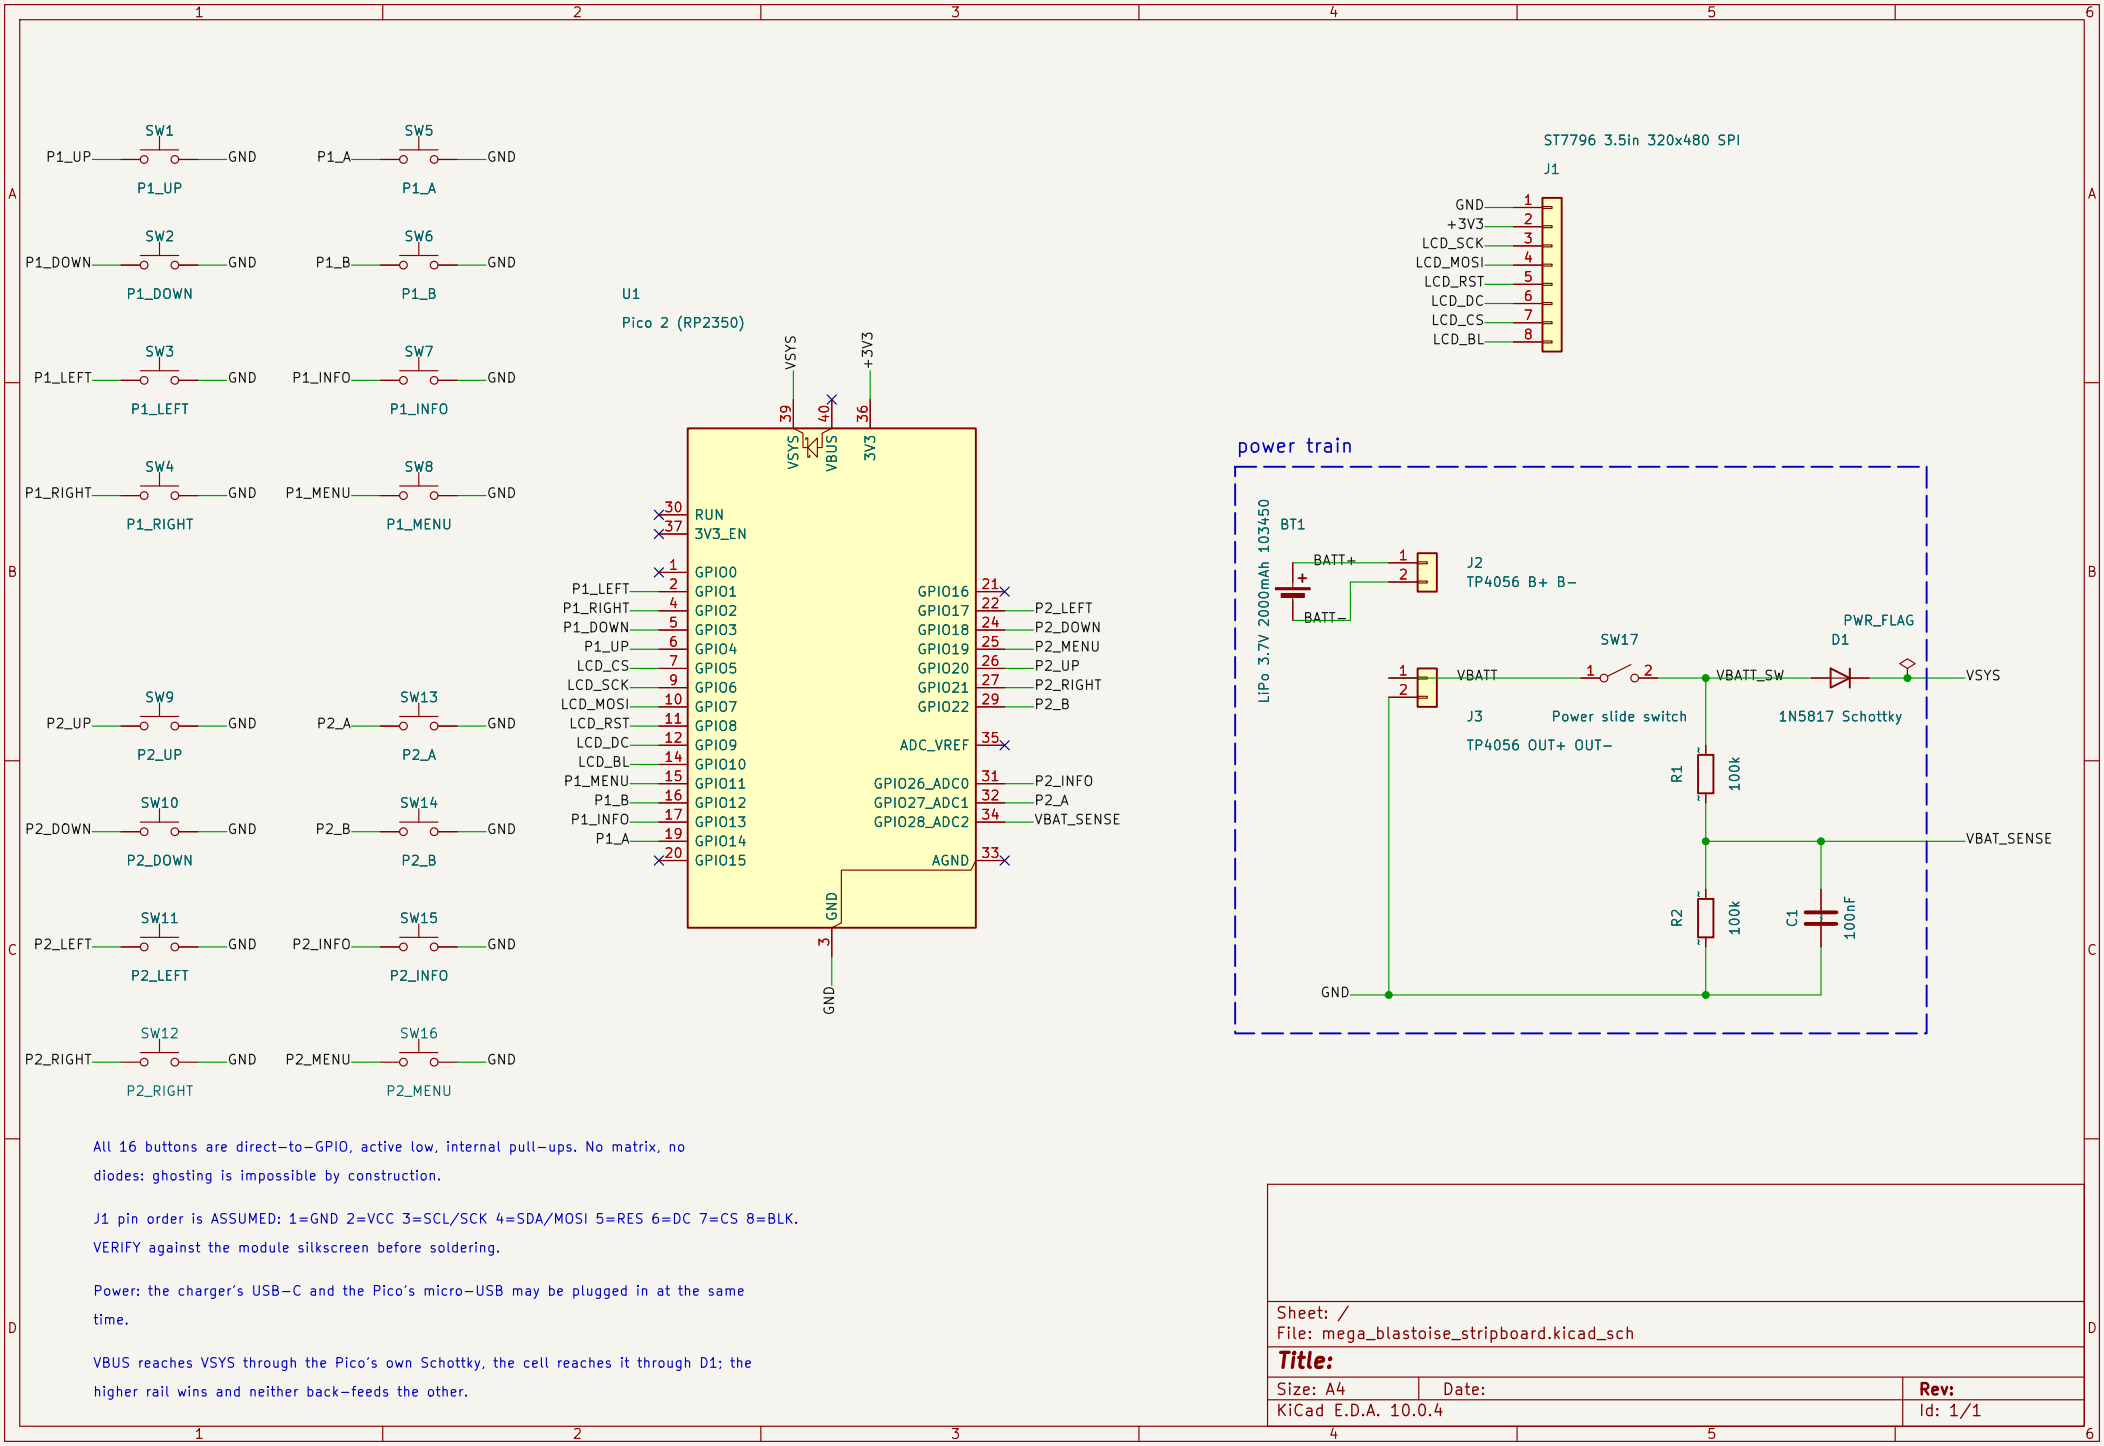


All 16 buttons are direct-to-GPIO, active low, internal pull-ups. No matrix, no diodes: ghosting is impossible by construction.

J1 pin order is ASSUMED: 1=GND 2=VCC 3=SCL/SCK 4=SDA/MOSI 5=RES 6=DC 7=CS 8=BLK. VERIFY against the module silkscreen before soldering.

Power: the charger's USB-C and the Pico's micro-USB may be plugged in at the same time.

VBUS reaches VSYS through the Pico's own Schottky, the cell reaches it through D1; the higher rail wins and neither back-feeds the other.

Sheet: /
File: mega_blastoise_stripboard.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/1