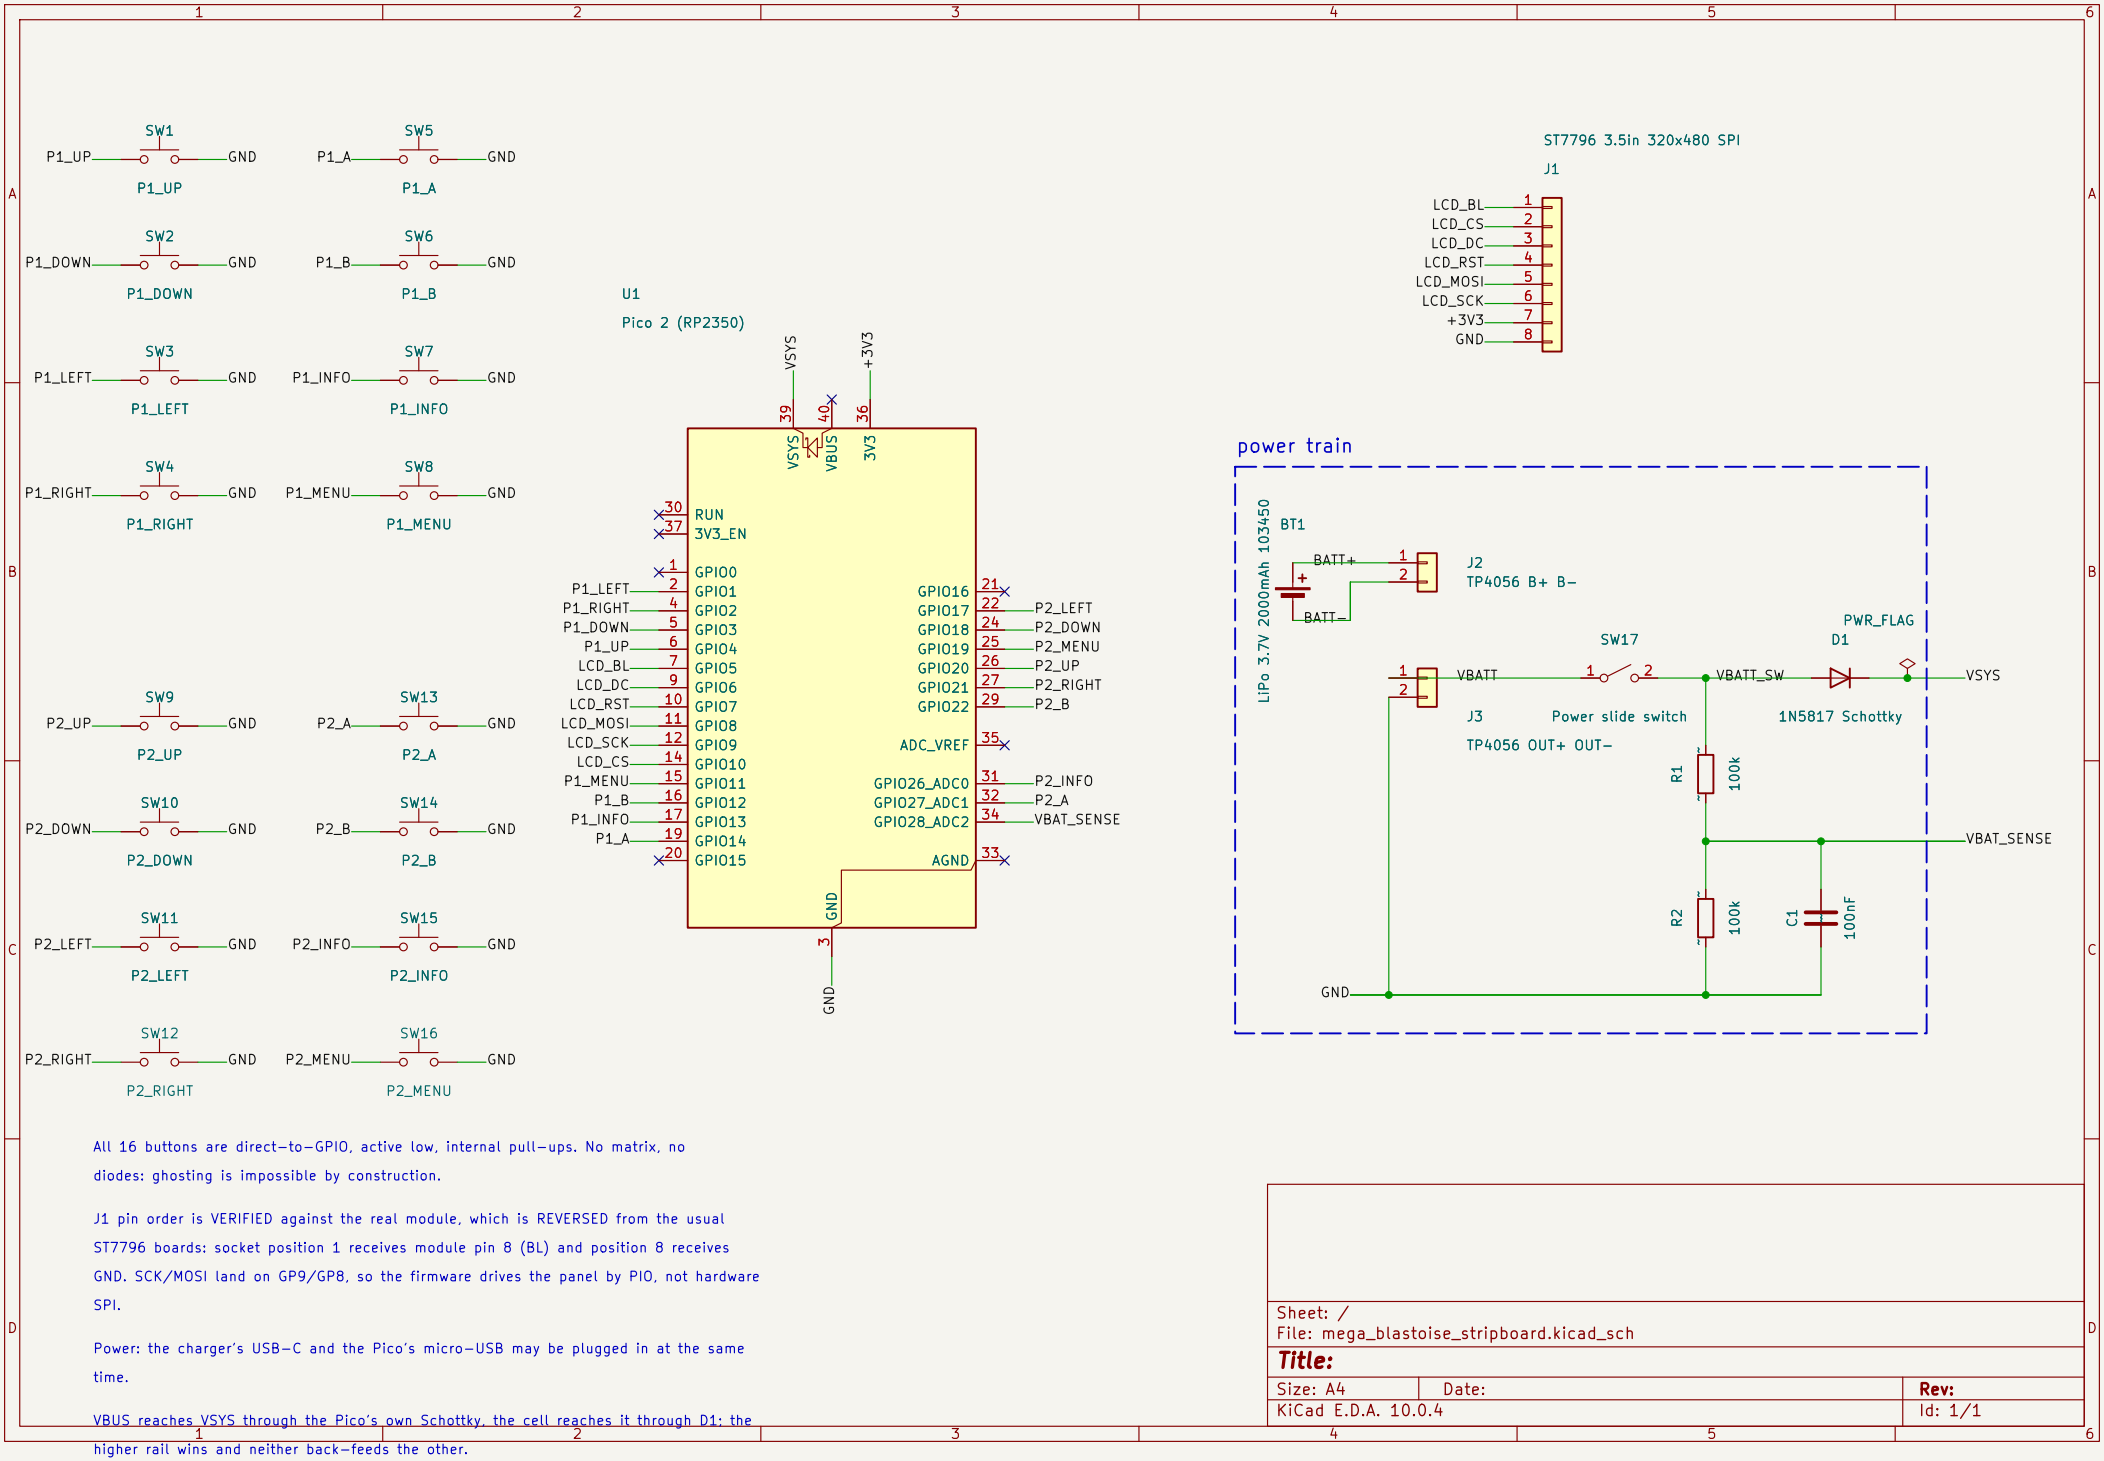


All 16 buttons are direct-to-GPIO, active low, internal pull-ups. No matrix, no diodes: ghosting is impossible by construction.

J1 pin order is VERIFIED against the real module, which is REVERSED from the usual ST7796 boards: socket position 1 receives module pin 8 (BL) and position 8 receives GND. SCK/MOSI land on GP9/GP8, so the firmware drives the panel by PIO, not hardware SPI.

Power: the charger's USB-C and the Pico's micro-USB may be plugged in at the same time.

VBUS reaches VSYS through the Pico's own Schottky, the cell reaches it through D1: the higher rail wins and neither back-feeds the other.

Sheet: /
File: mega_blastoise_stripboard.kicad_sch

Title:

Size: A4	Date:	**Rev:**
KiCad E.D.A. 10.0.4		Id: 1/1