Figure 3. Waveform Transformation Through Asymmetric Saturation
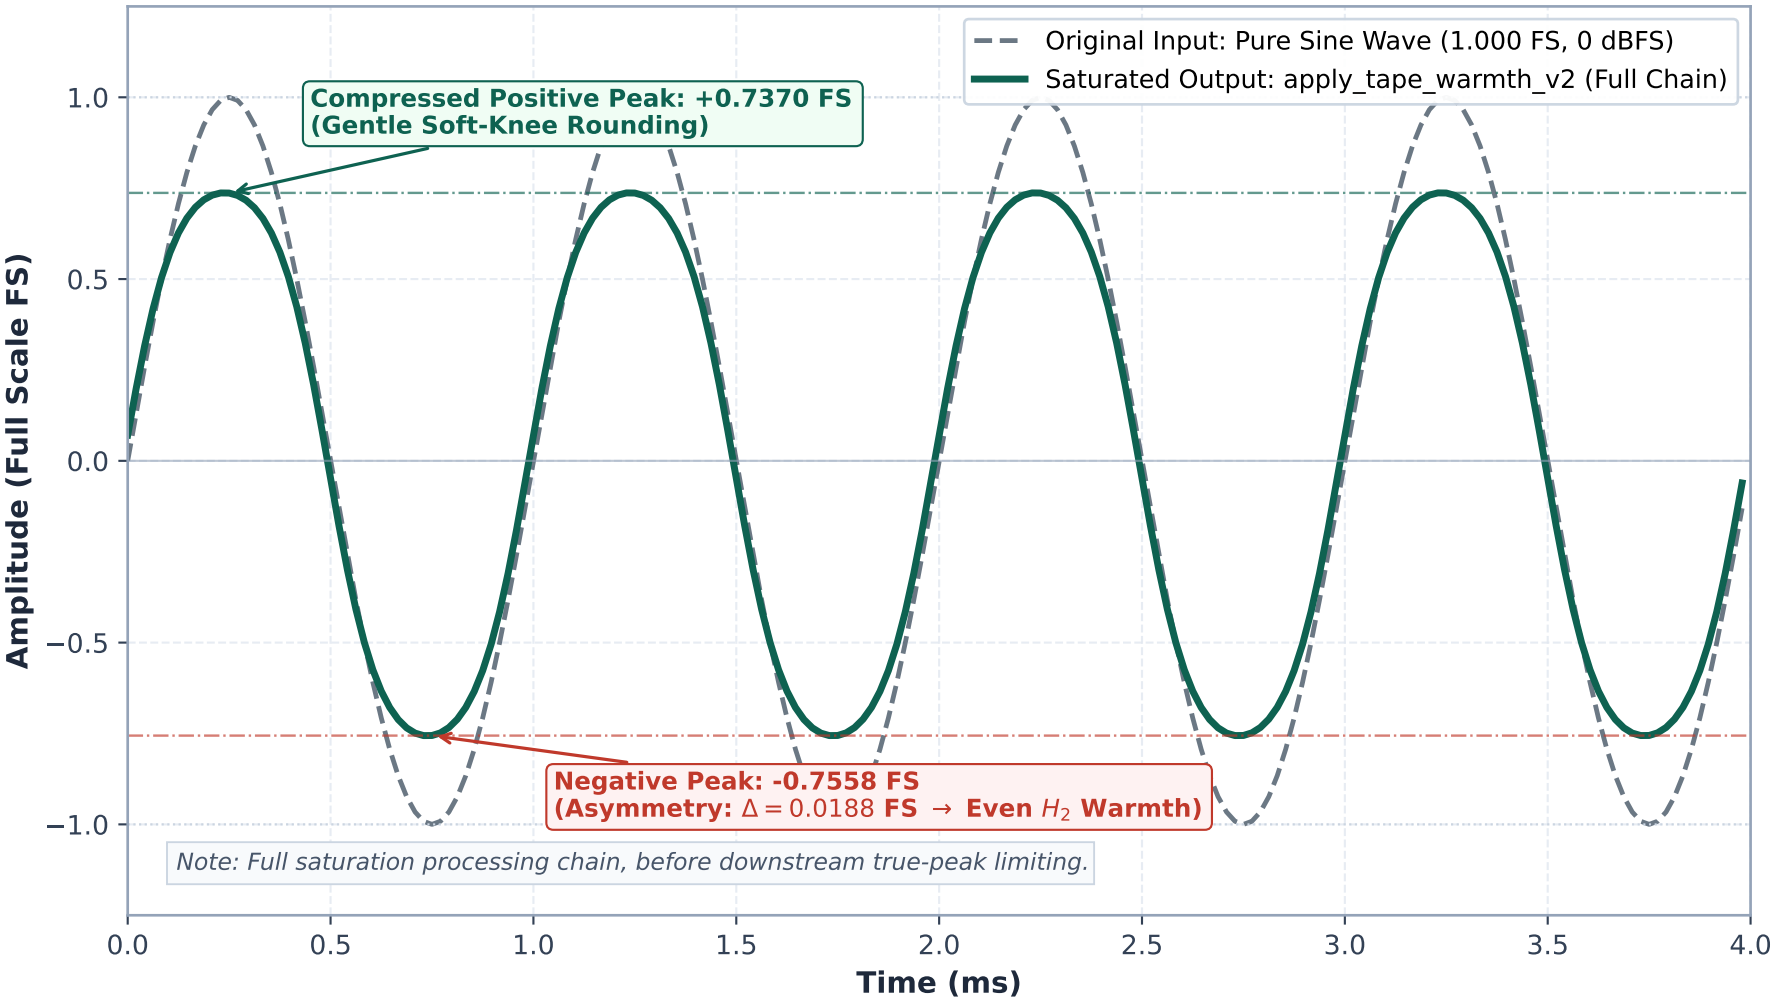
Steady-State Response (1 kHz Sine, 48 kHz, 4X Polyphase Oversampling, 10 Hz DC-Blocker)