

BARCODE: LABEL.65X65
BC2
BARCODE: LABEL.65X65

Rev.	change	type of change	change no.	date of change	auth.	checked
A	Change of (10, 20, 30 or 40 mg) to (10 mg) supply ED initial release		CN0000077 CN0000112	18-05-2023 07-30-2023	RV	CV

	Copyright reserved	Wiring modifications reserved	date	name
			created	③ 2023
			checked	③ 2023
				③ 2023

Schematic	Sheet	Sheets of	Sample
SCHEM 4010 MAIN C143	1	31	6VL

BT

PWR

UG3V3

L5700

600ohm@100MHz
0.165ohm DCR @ 500mA

220

202

100N

10P

C5703

C5706


C5700

C5712

MP5701


BT_VREG_I

100mA Max.

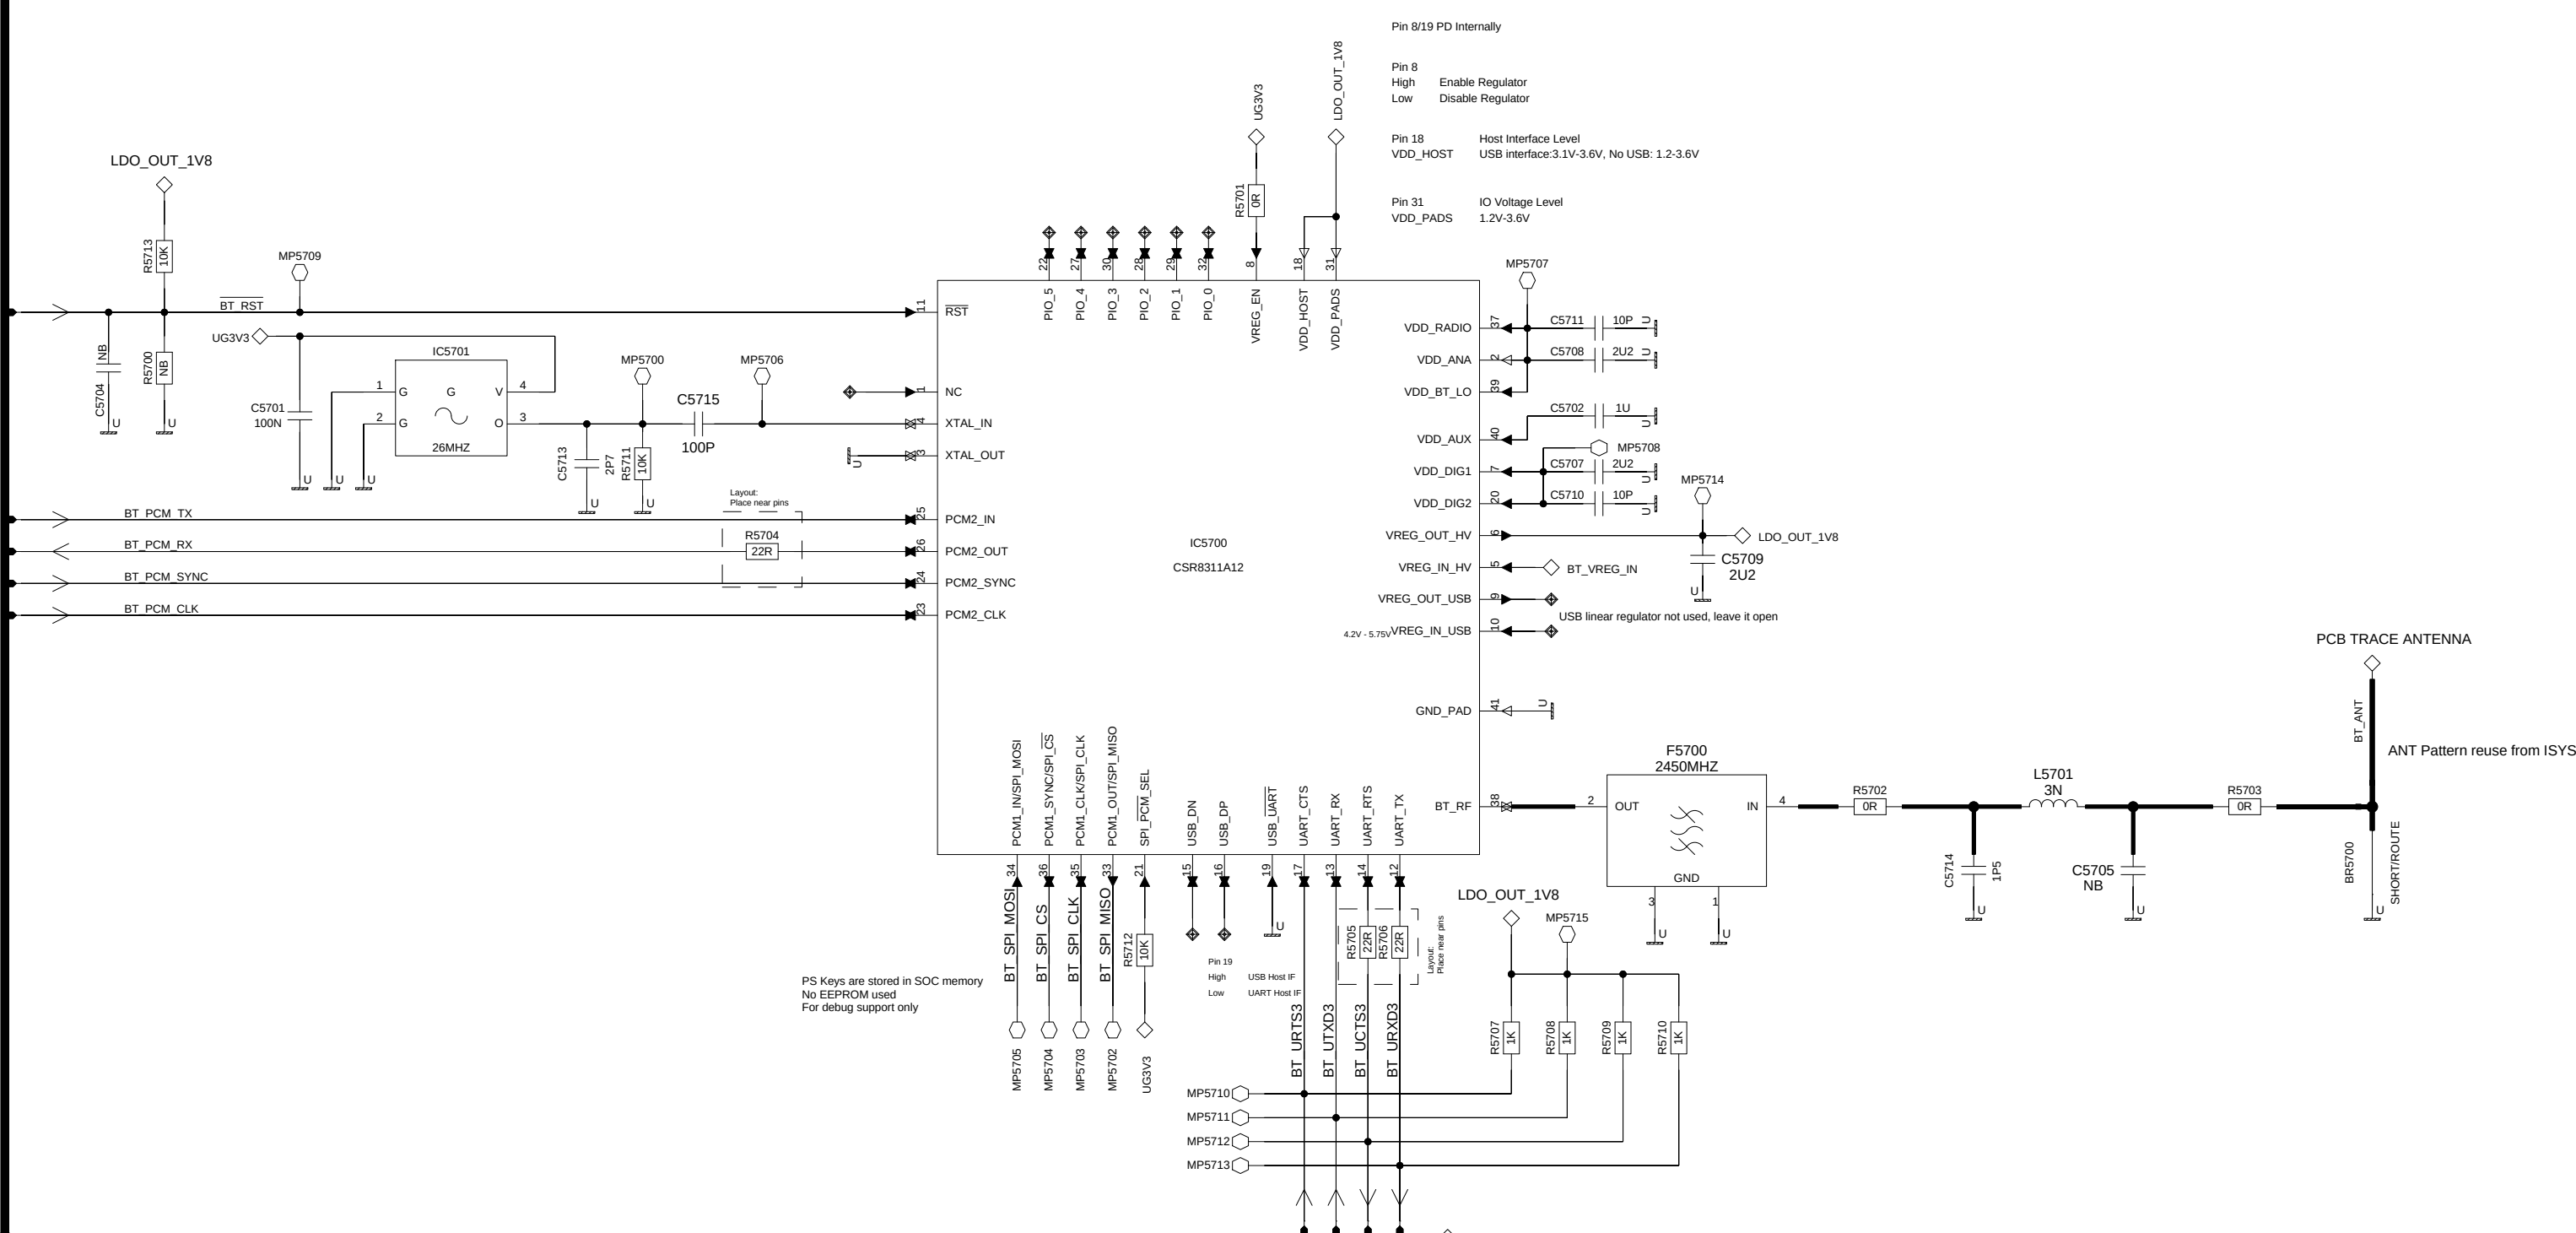


Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved		
				date name	
				created	
schematic			Sheet	Sheets of	Sample
4010_Bluetooth			2	31	
substitute for:			Type	Variant	Part Number
				C143	

CAN (2800-2899)

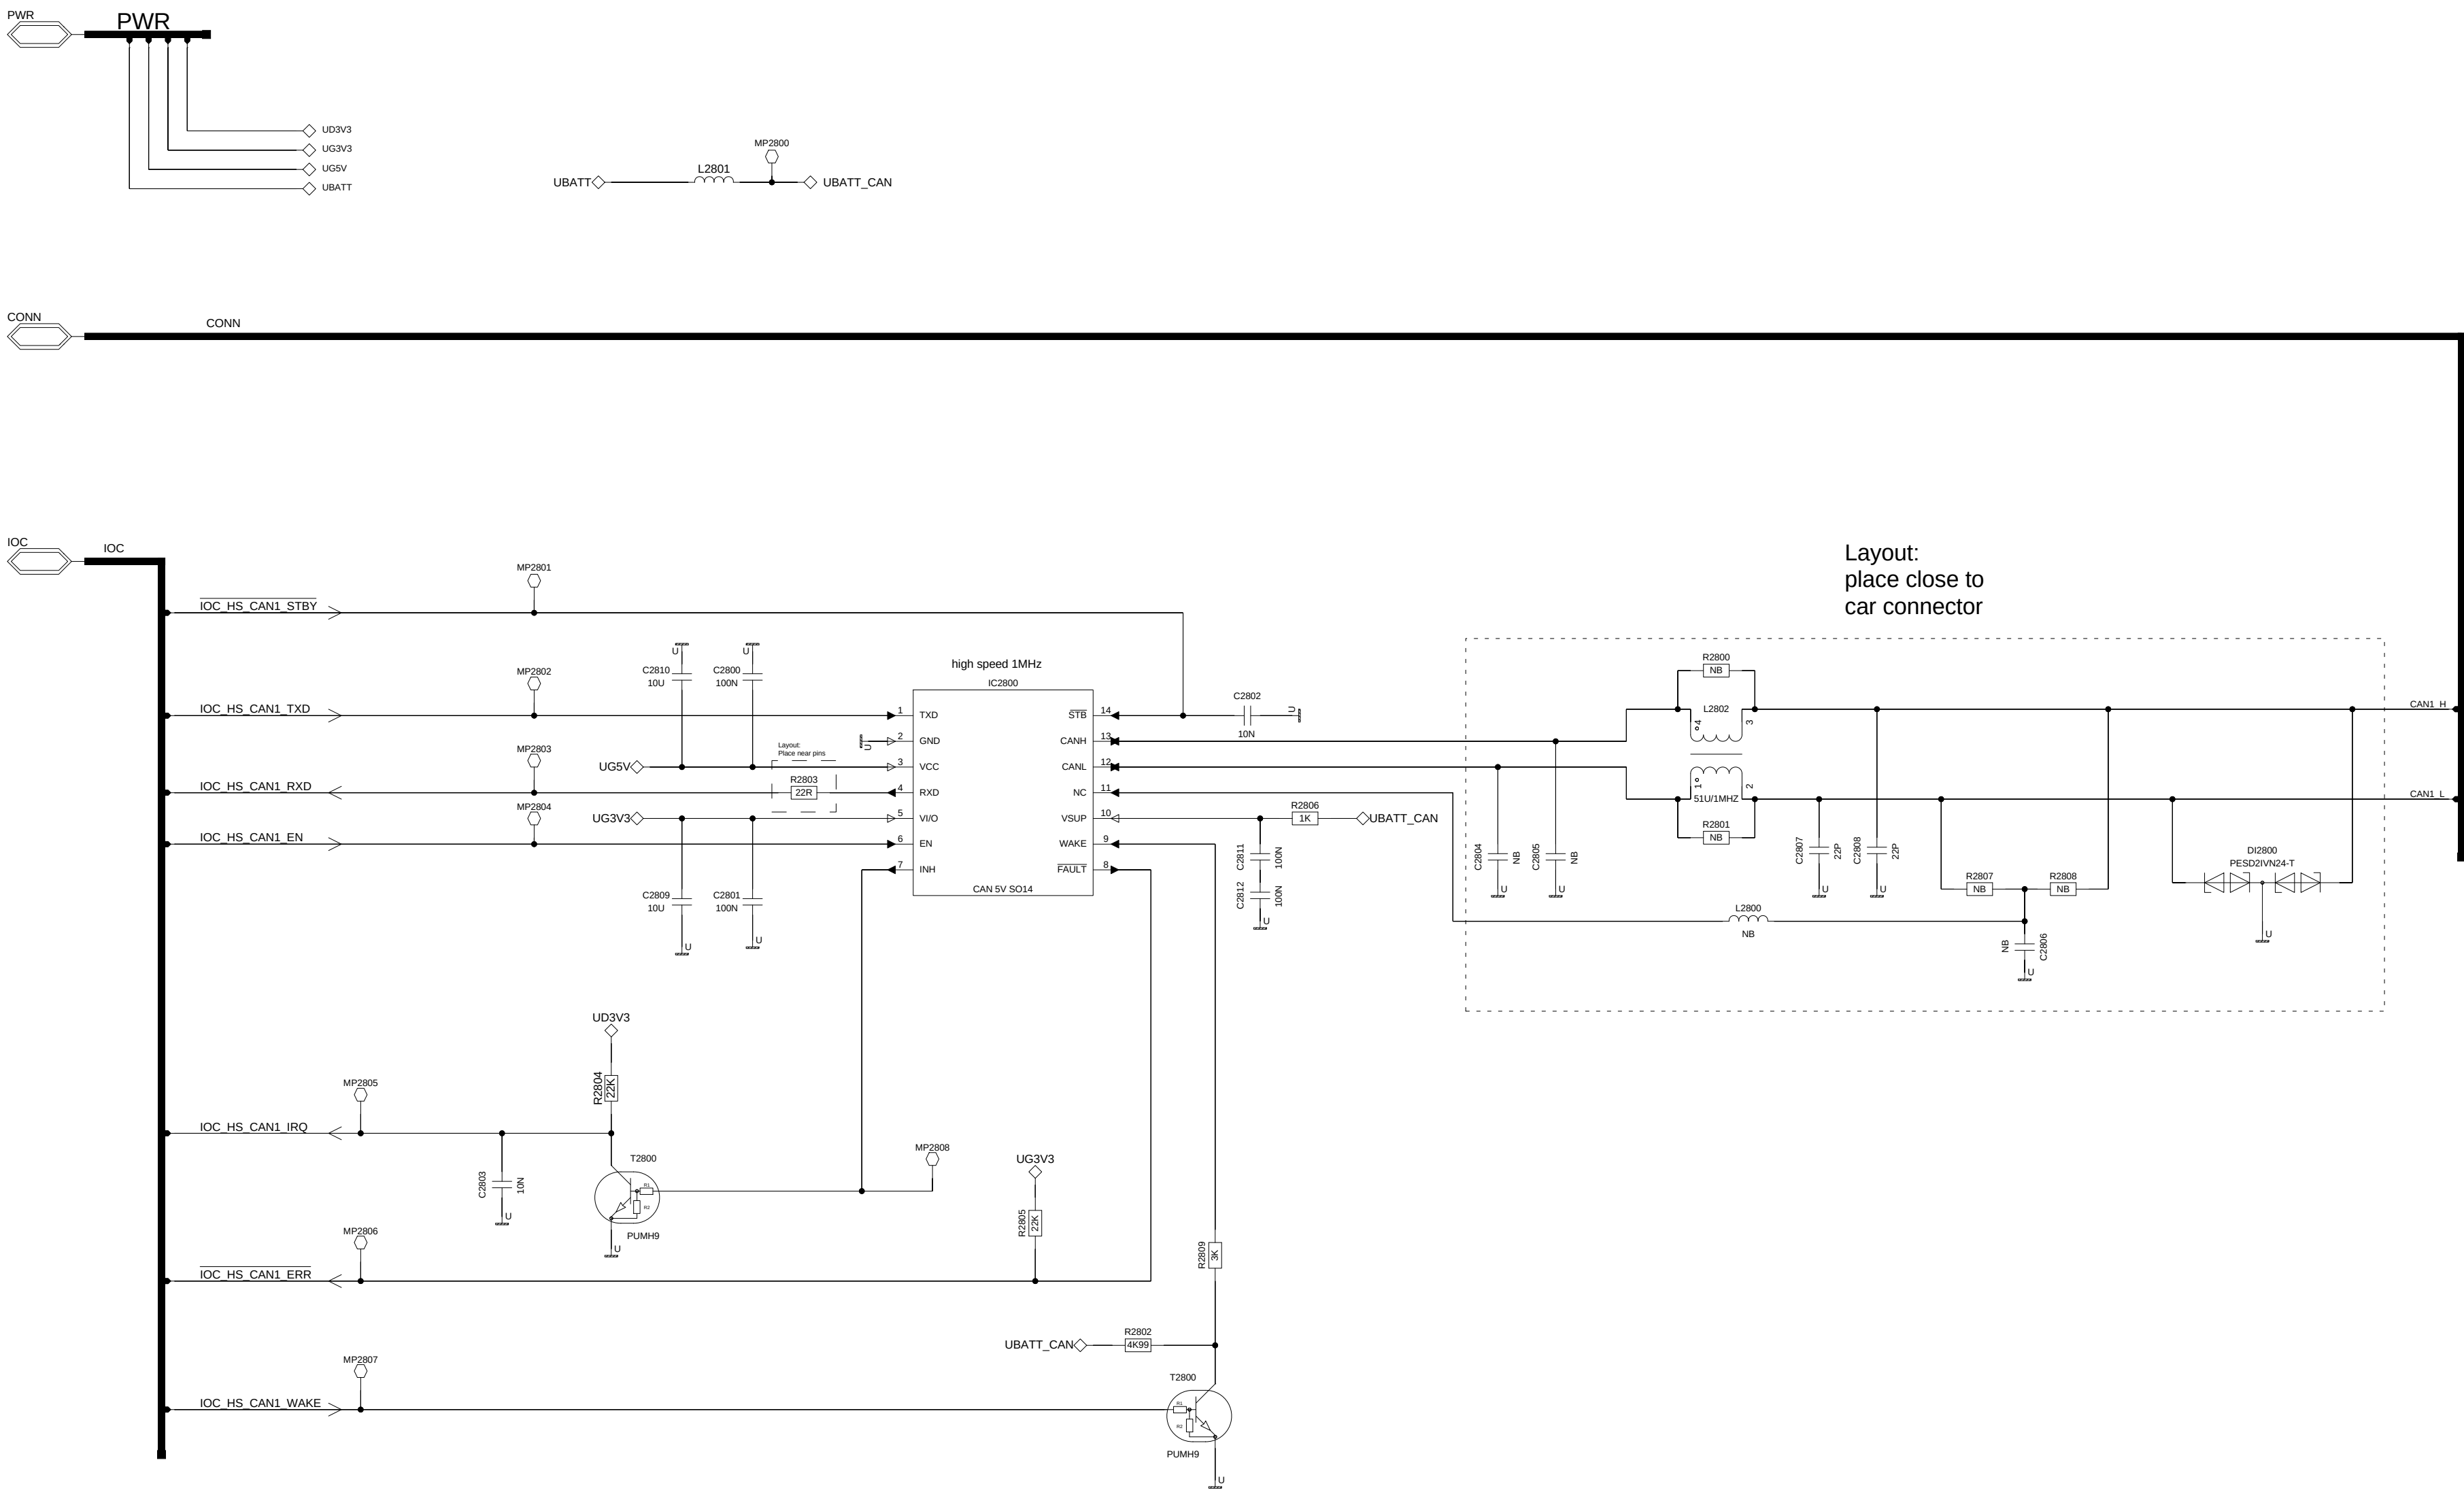


Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
				created	
				checked	
schematic			Sheet 3	Sheets of 31	Sample
4010_CAN			Type	Variant	Part Number
substitute for:		substitute by:			

CTP (7000-7099)

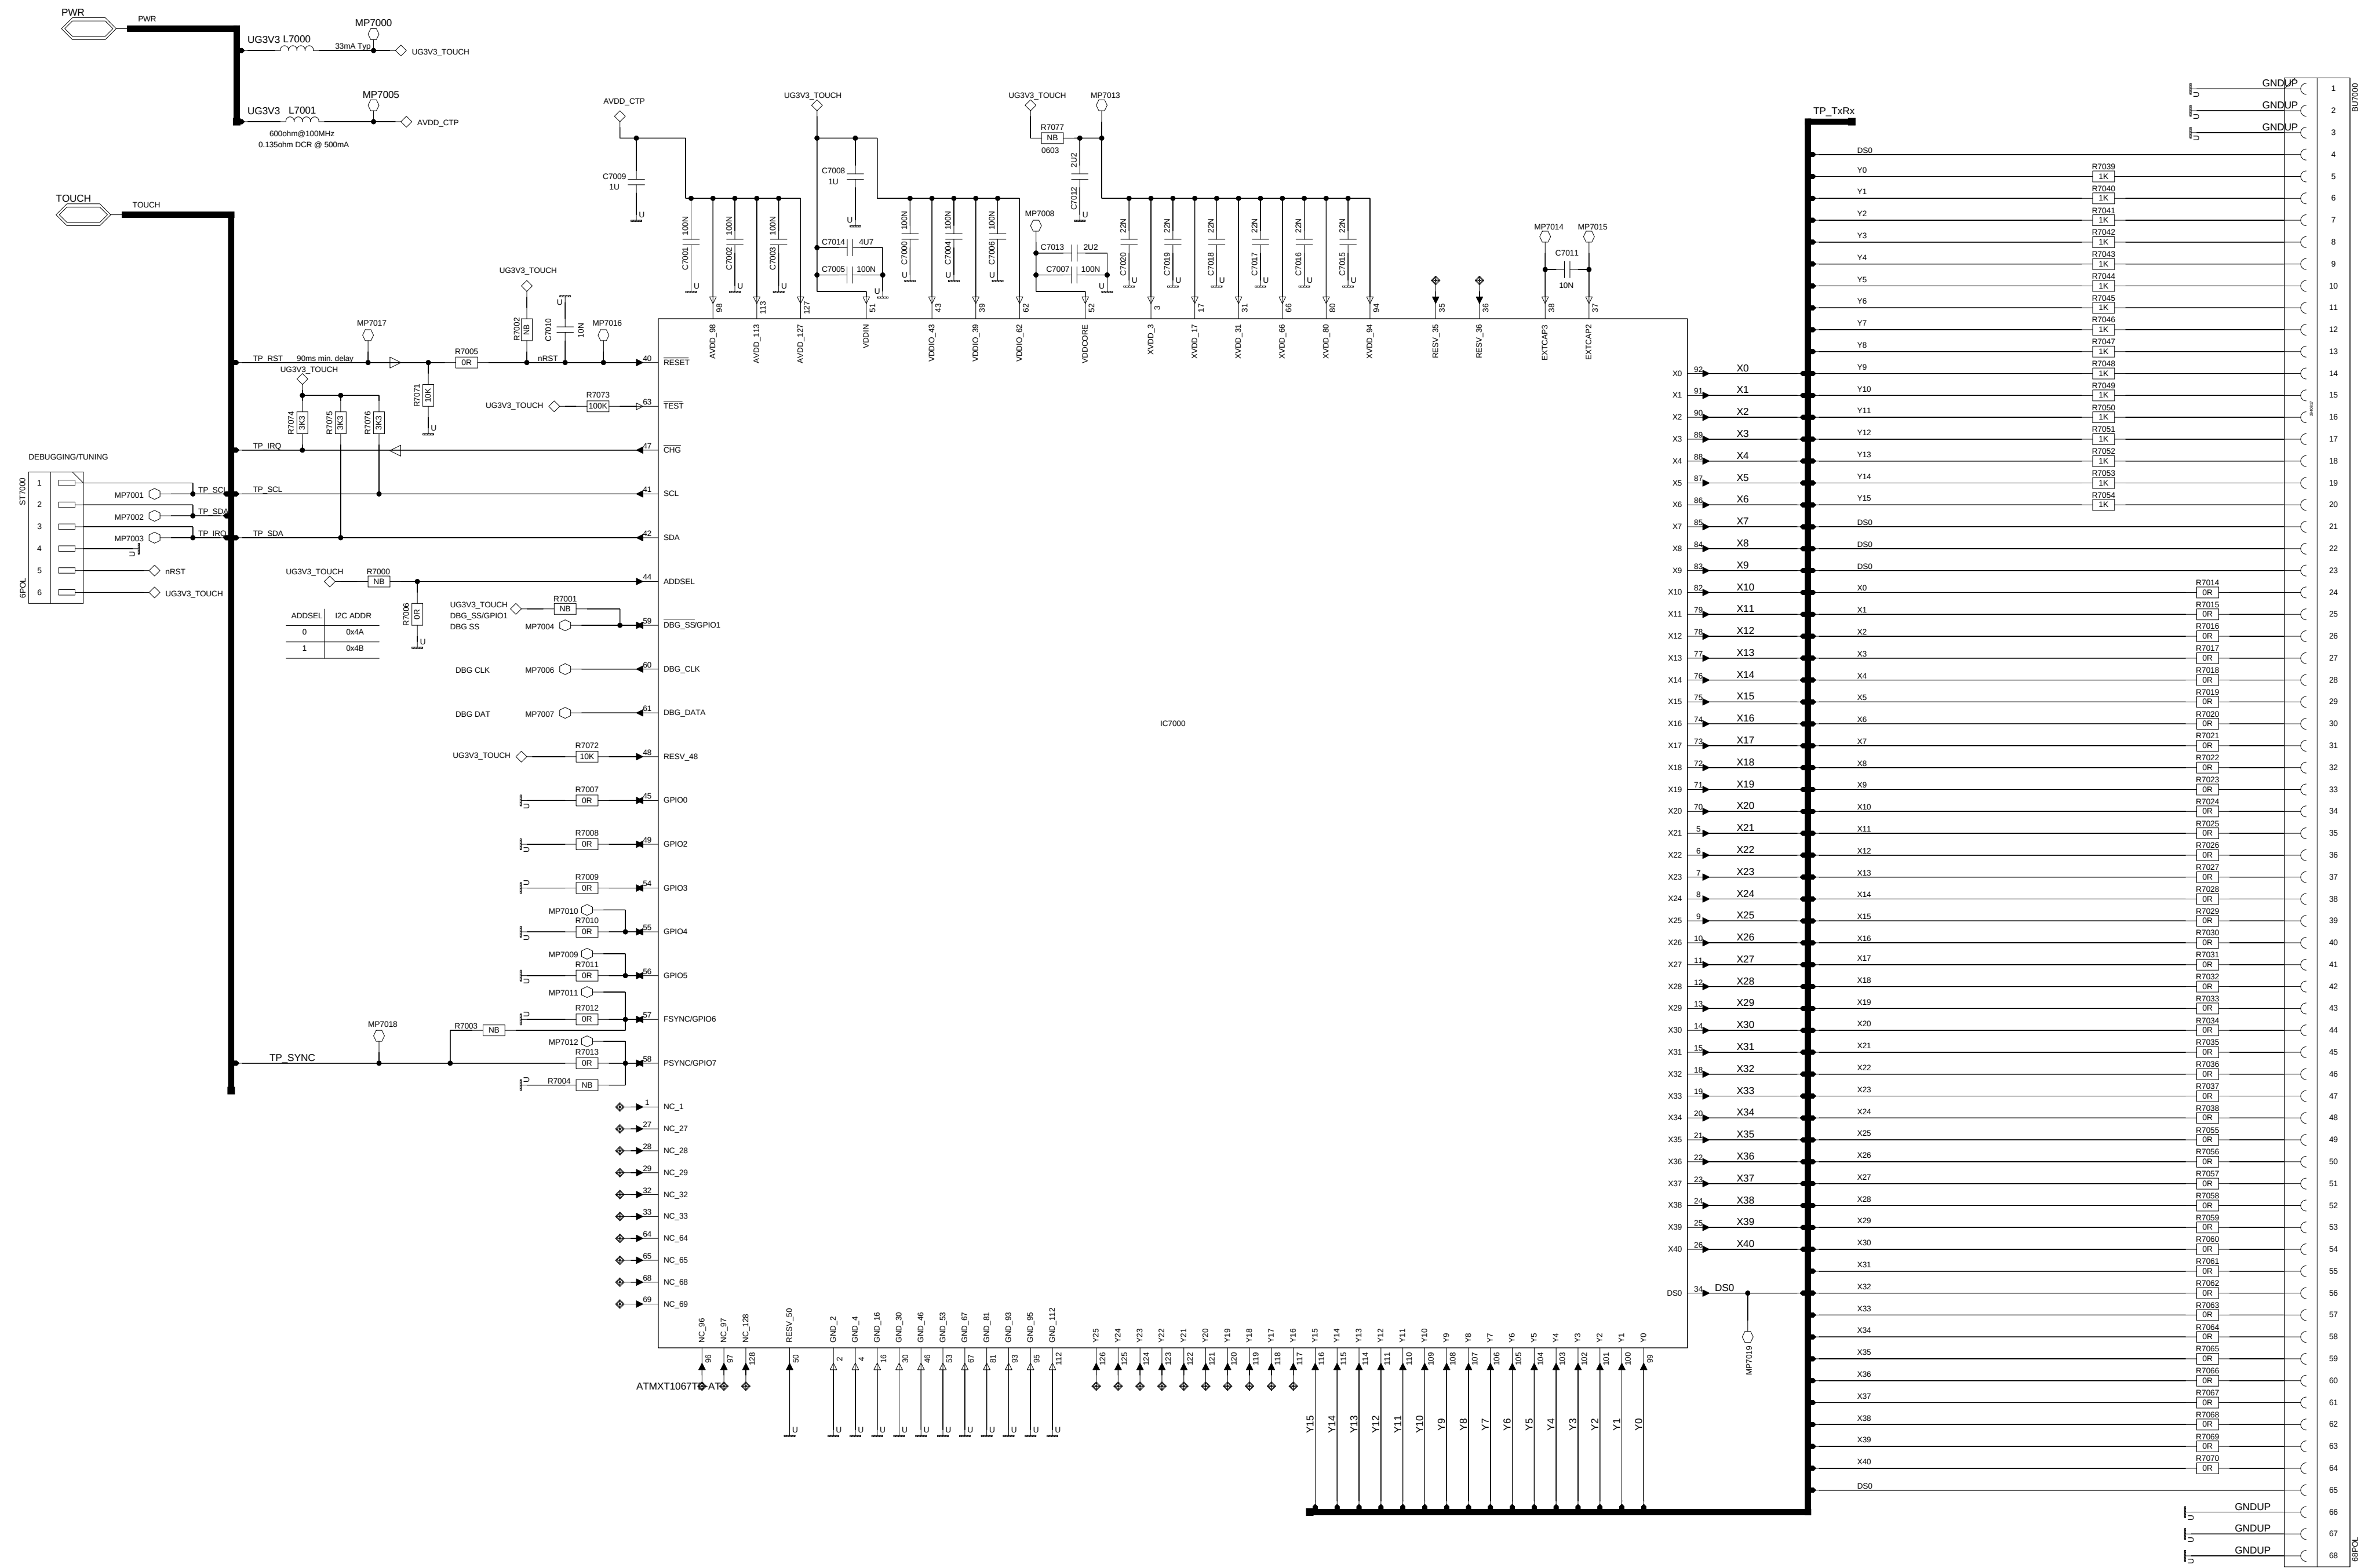

Rev.	type of change		change no.	date of change	auth. checked
 Copyright reserved			date		name
			created		
			checked		
schematic			Sheet 4	Sheets of 31	Sample
4030_CTP			Type	Variant C143	Part Number
substitute for:			substitute by:		

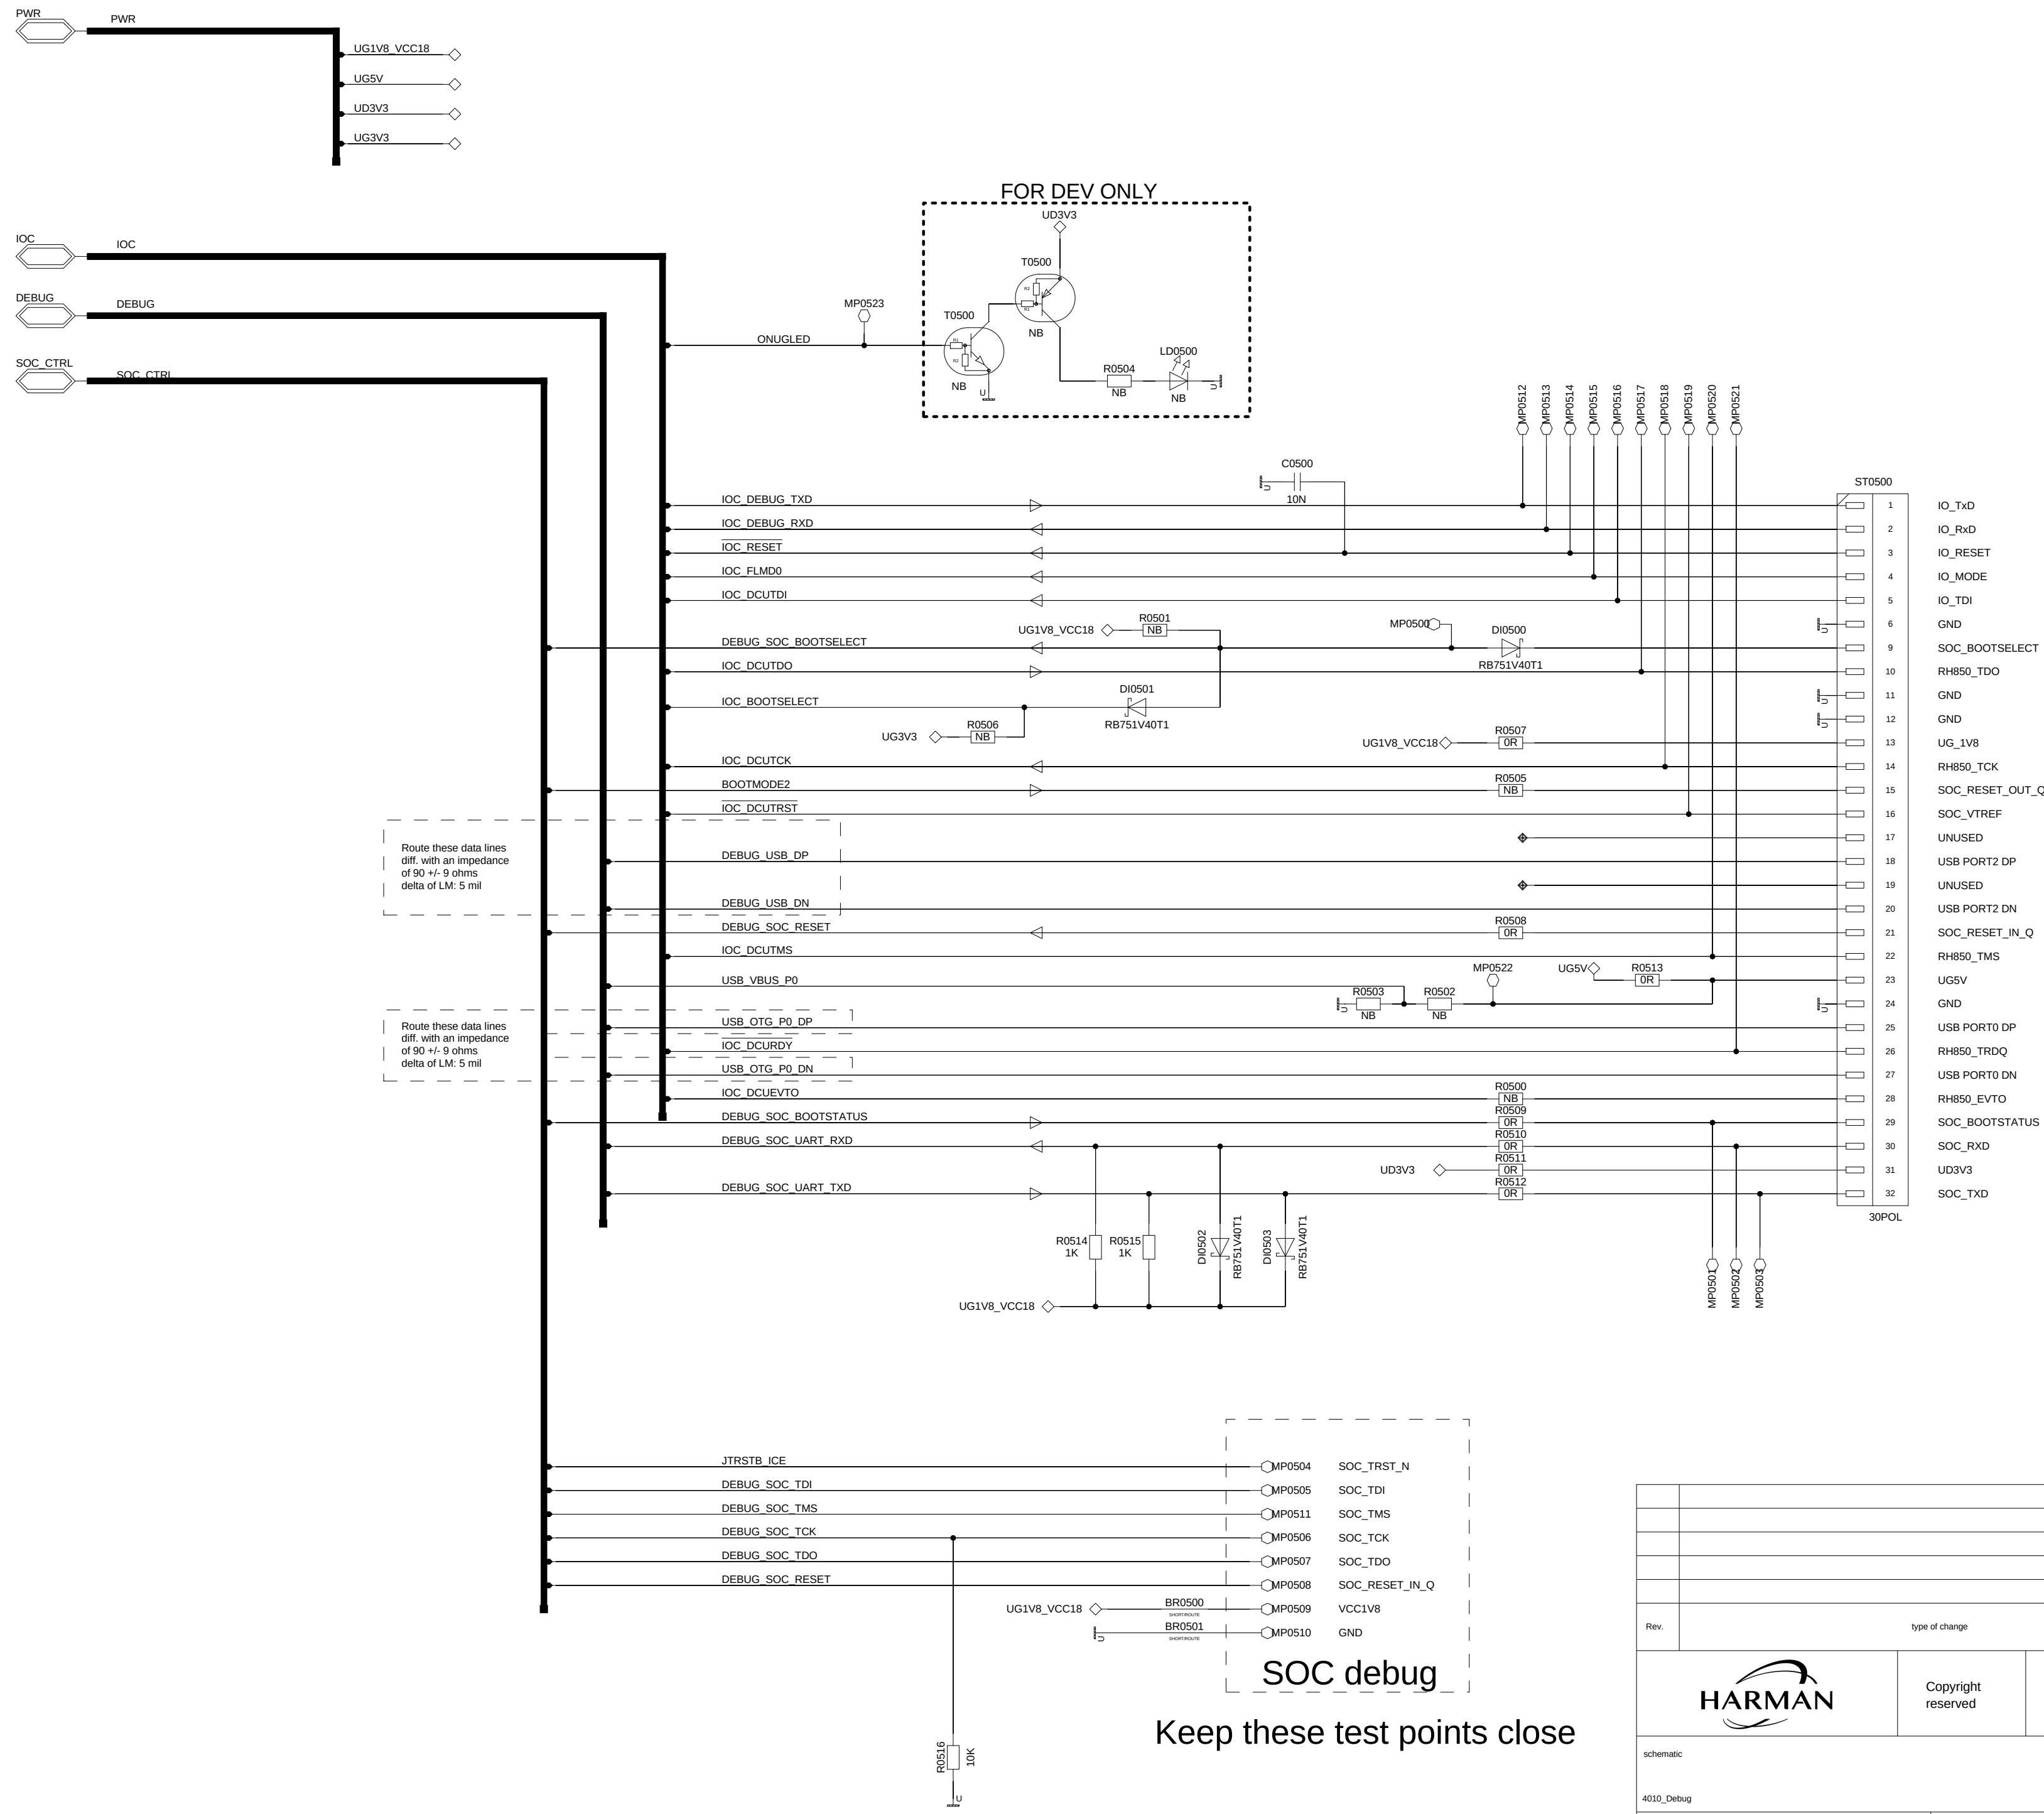

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Rev.	type of change	change-no.	date of change	auth.	checked
		created	date	name	
		checked			
schematic			Sheet	Sample	
4010_Debug			5	31	
substitute for:			Type	Variant	Part Number
		substitute by:			

1) - Route as differential pair signals.
 - Differential impedance: 100ohm (±10%)
 - Maximum intra-pair skew: 0.127mm (5mils)


Marvell recommends using Varistors for ESD protection.
 TDK part # AVR10C101KT1R1NE8

Marvell recommends using Varistors
for ESD protection.
TDK part # AVRH10C101KT1R1NE8


The four circuit diagrams show the connection of various components to a common ground (GND). Each diagram includes a 22uF capacitor (C8312, C8313, C8310, C8311) and a 1uF capacitor (C8305, C8306, C8309, C8307, C8303, C8304).

- Top Left:** UG3V3, UG3V3_ETH_1010, MP8301. Components: L8300, C8312 (22uF), C8305 (1uF), C8306 (1uF), C8309 (1uF).
- Top Right:** UG3V3, UG3V3_ETH_1010A, MP8300. Components: L8302, C8313 (22uF), C8307 (1uF).
- Bottom Left:** 1VB_1010PHY, MP8302. Components: C8310 (22uF), C8303 (1uF), C8308 (1uF).
- Bottom Right:** 1V0_1010PHY, MP8303. Components: C8311 (22uF), C8302 (1uF), C8304 (1uF).

Rev.	type of change		change-no.	date of change	auth. checked
 Copyright reserved Wiring modifications reserved			date name		
			created		
			checked		
schematic			Sheet	Sheets of	Sample
4010_ETH_PHY			6	31	
			Type	Variant	Part Number
substitute for:		substitute by:			

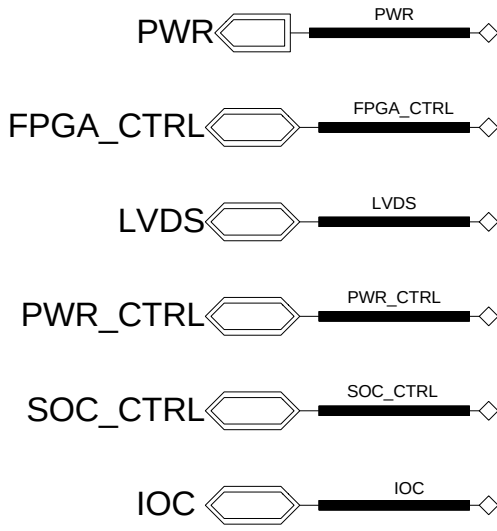


FPGA_POWER

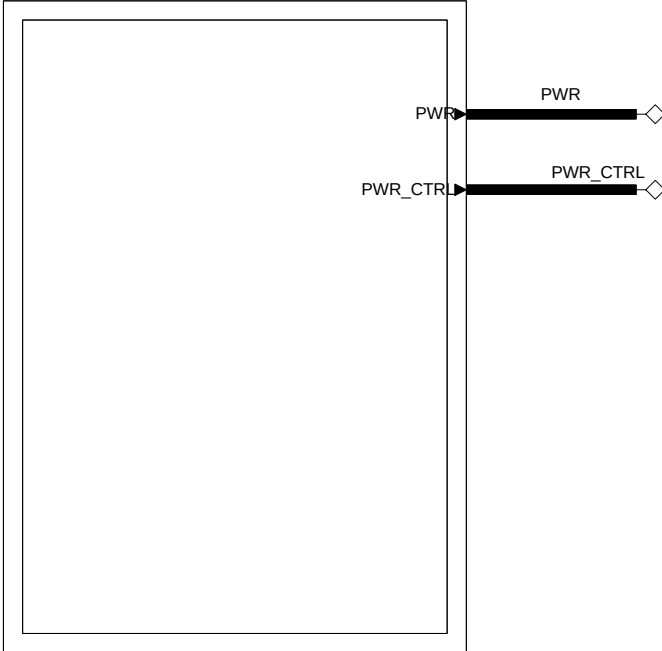

PWR

PWR_CTRL

FPGA_CONF

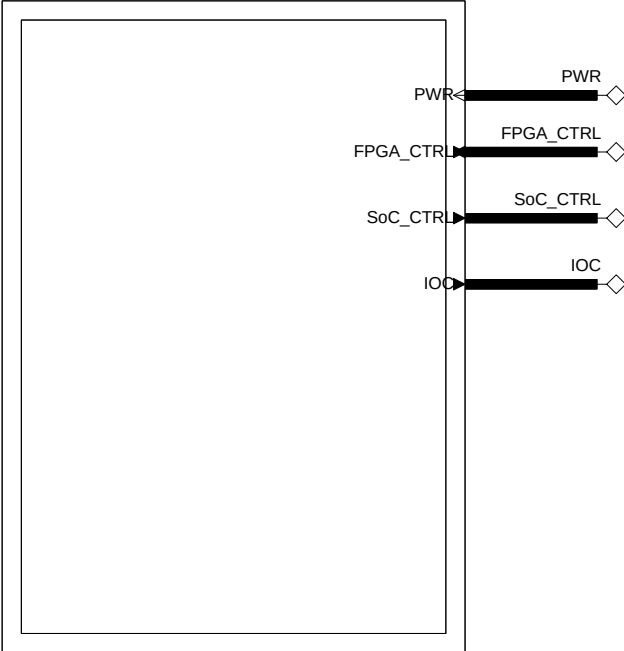


PWR

FPGA_CTRL

SOC_CTRL

IOC









FPGA_VIDEO




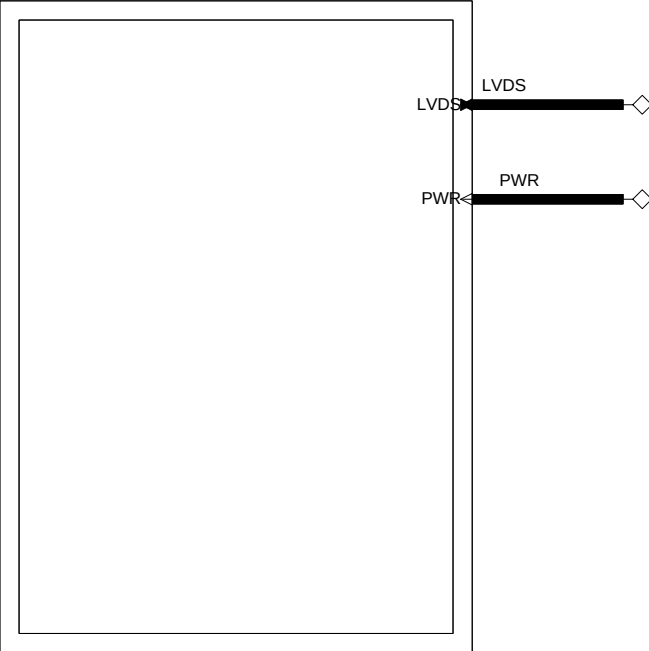


LVDS

PWR





Rev.	type of change	change no.	date of change	auth.	checked
HARMAN Copyright reserved Writing modifications reserved			date	name	
		created			
		checked			
schematic			Sheet 7	Sheets of 31	Sample
4030_FPGA			Type	Variant	Part Number
substitute for:		substitute by:		C143	

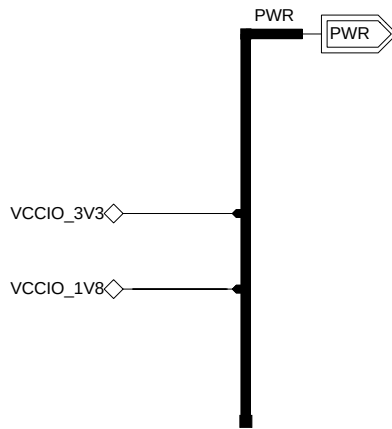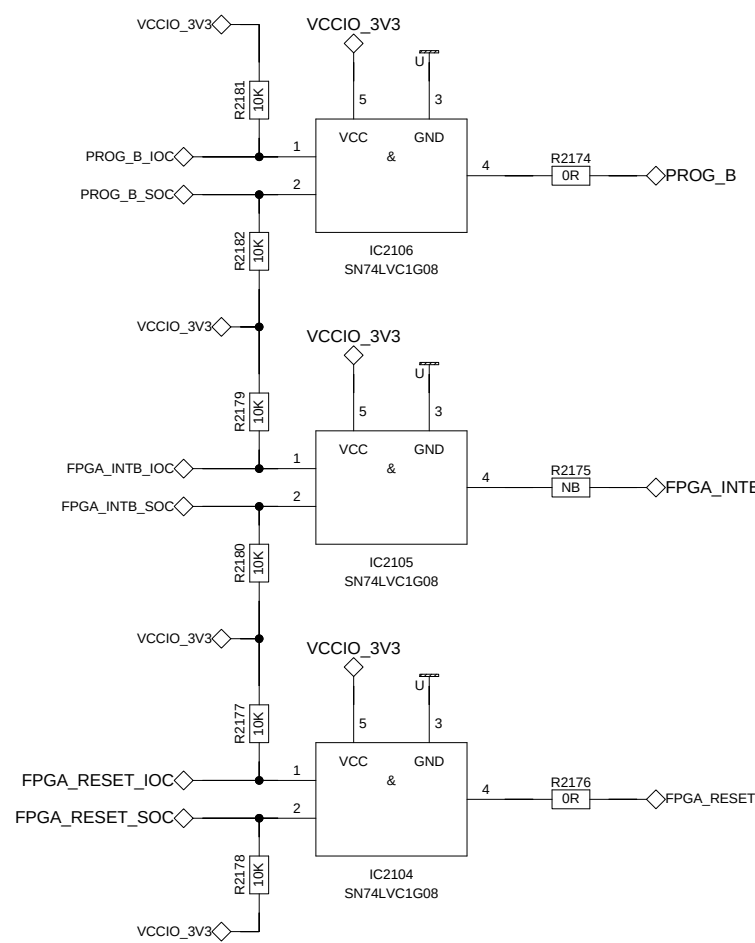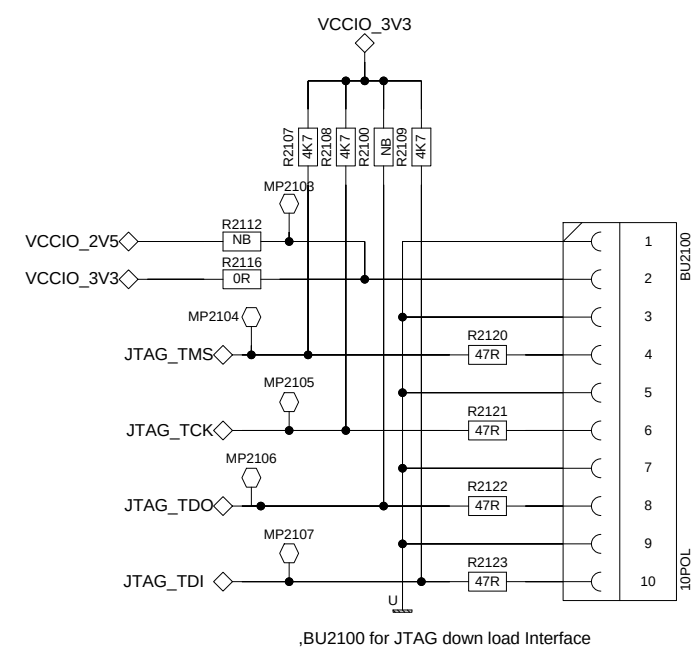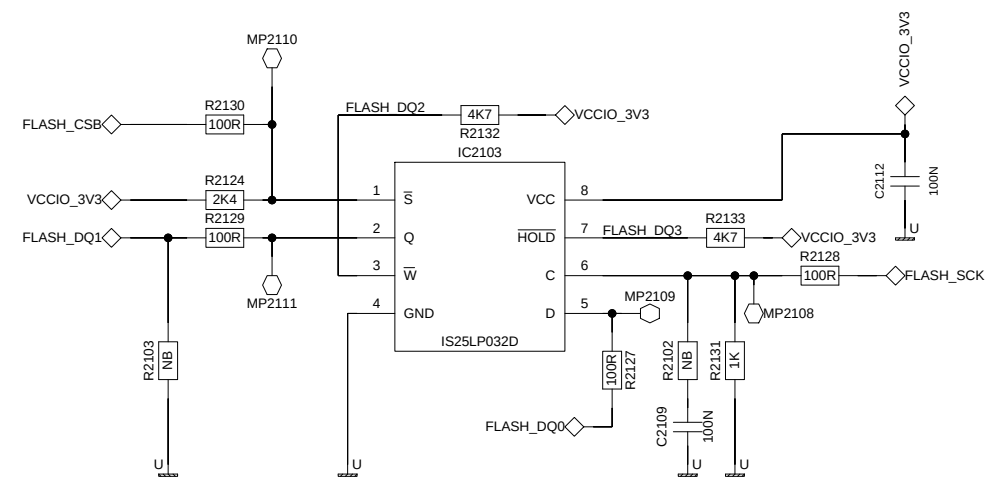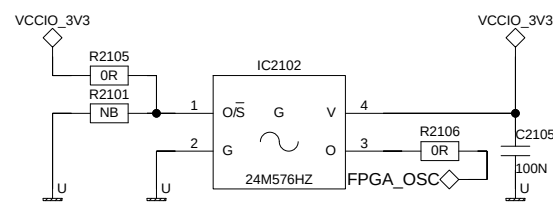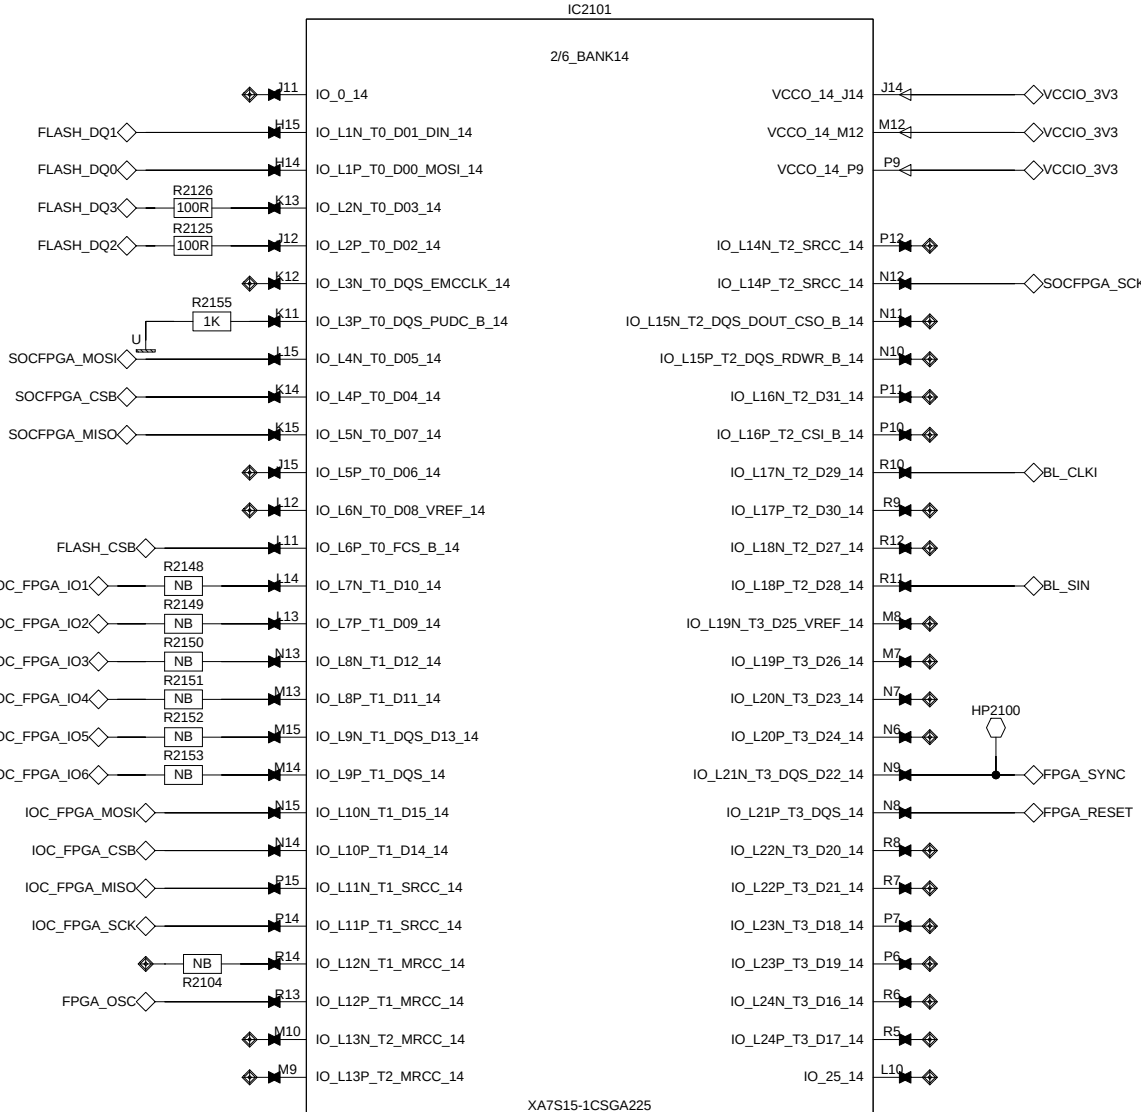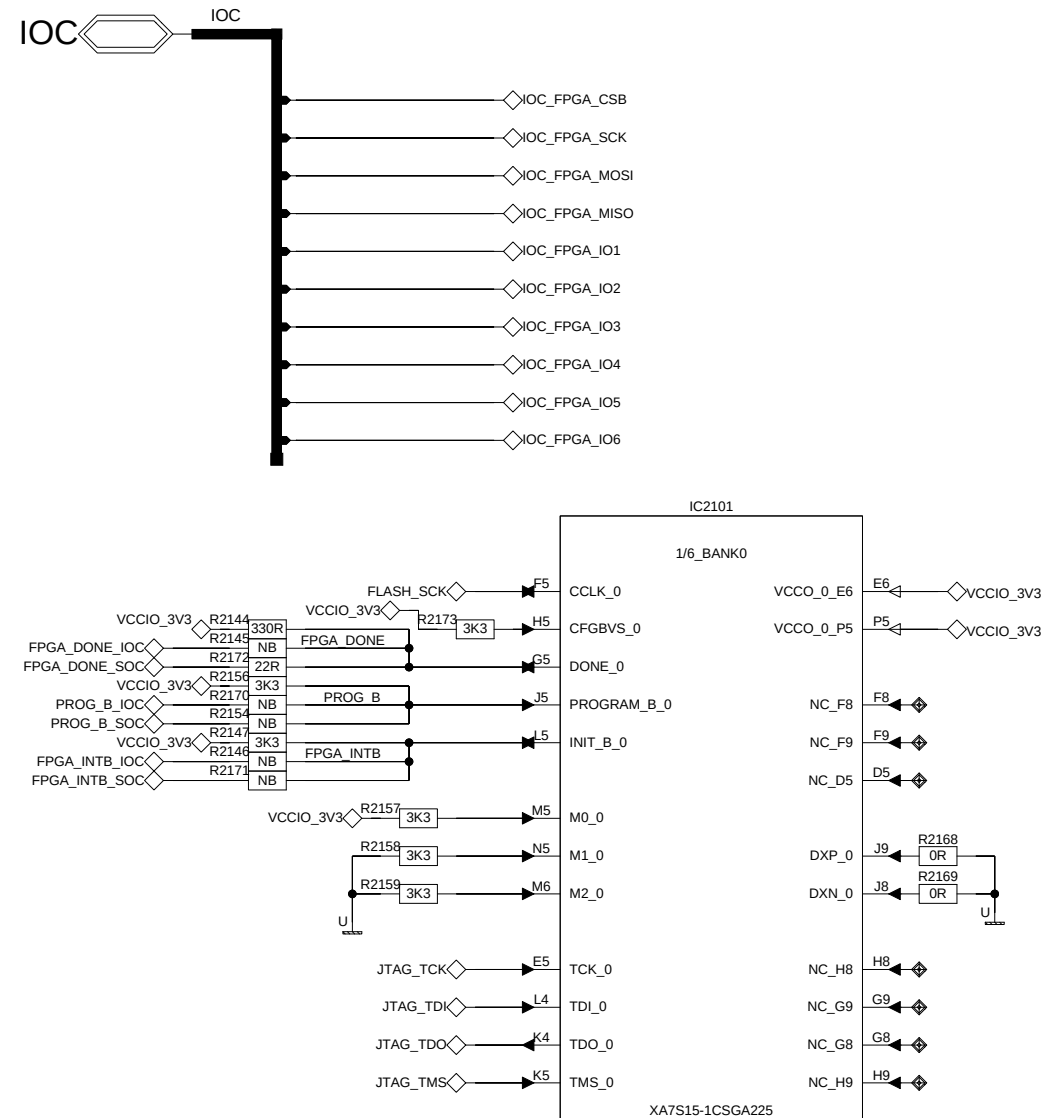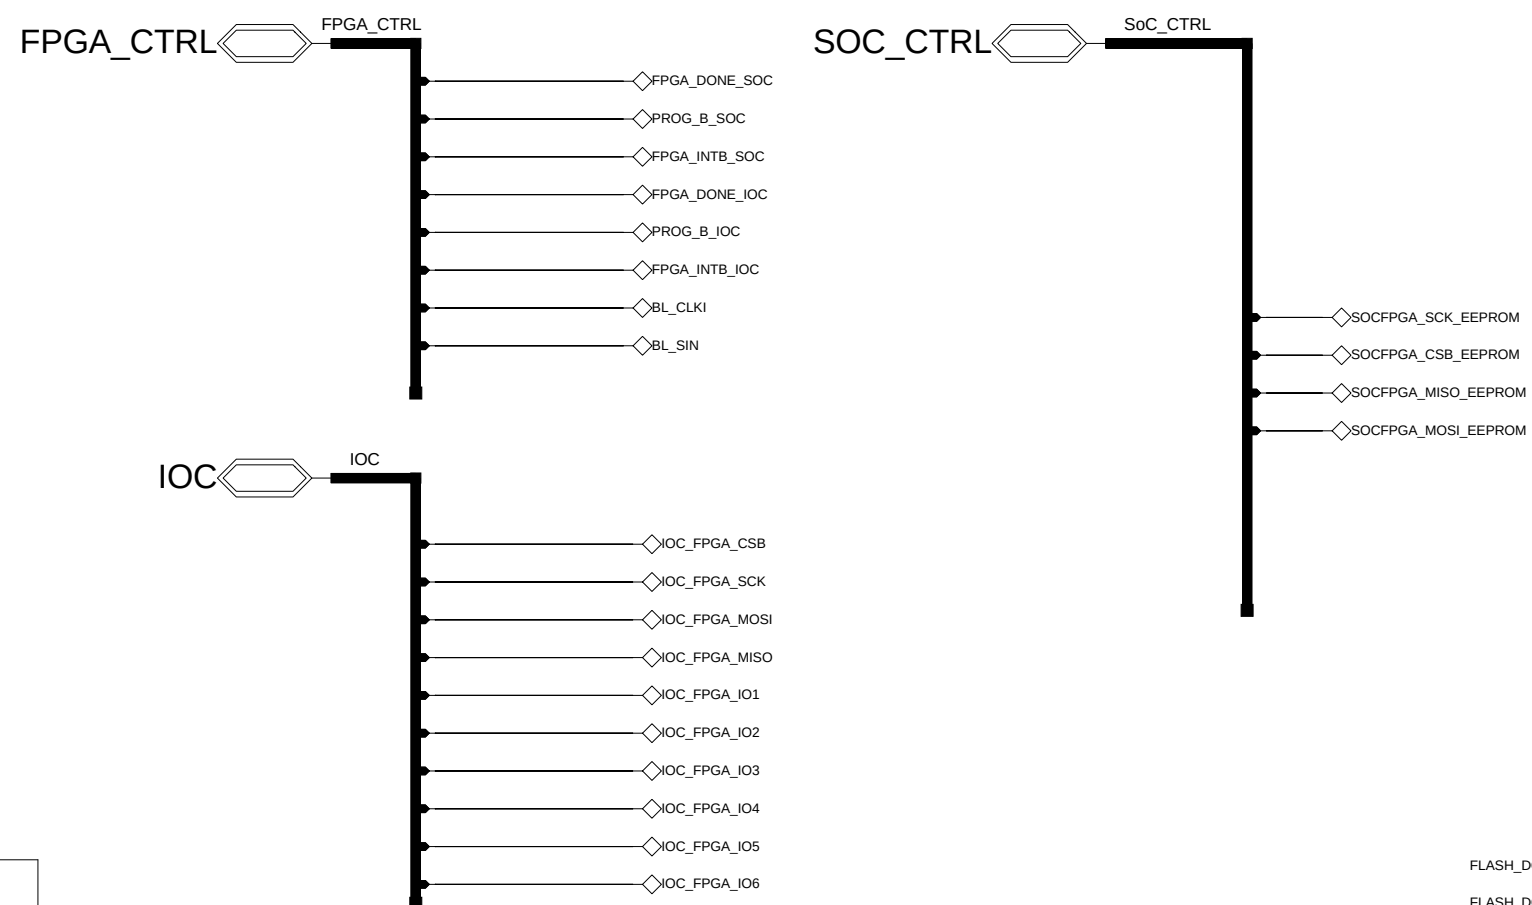

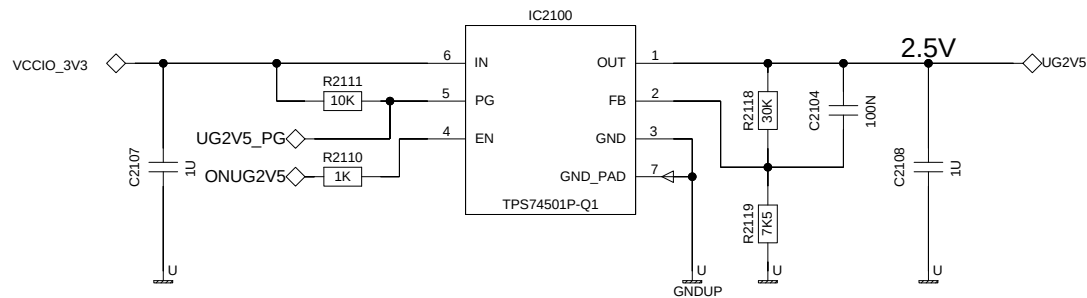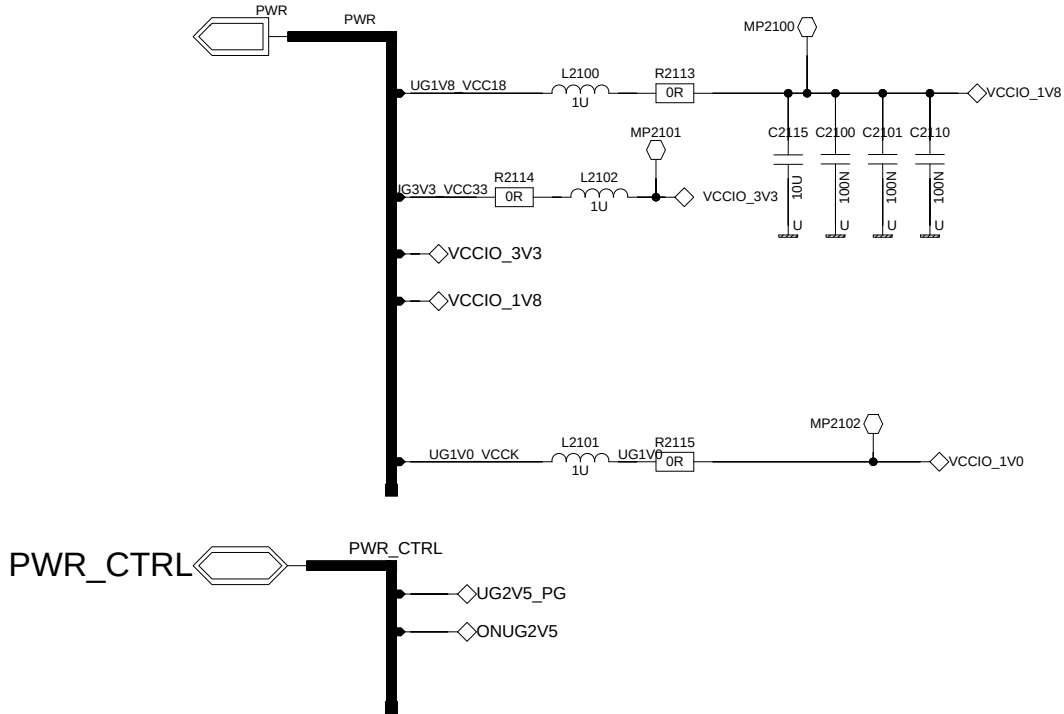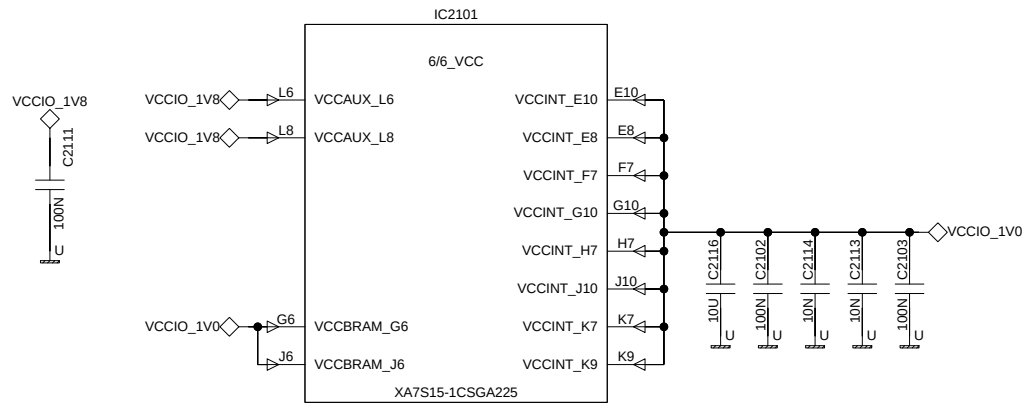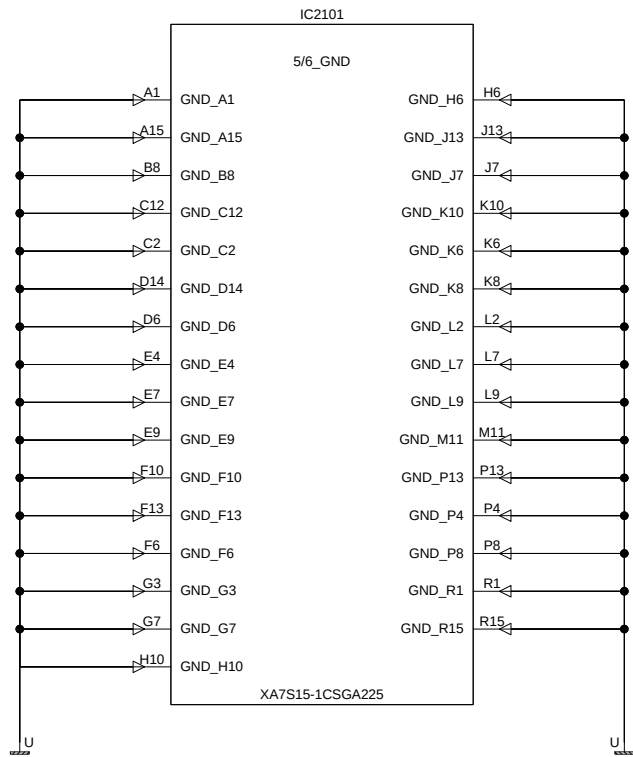


The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

Rev.	type of change		change-no.	date of change	auth. checked	
		Copyright reserved	Wiring modifications reserved	date name		
				created		
				checked		
schematic				Sheet 9	Sheets of 31	Sample
FPGA_POWER				Type	Variant	Part Number
substitute for:		substitute by:		C143		

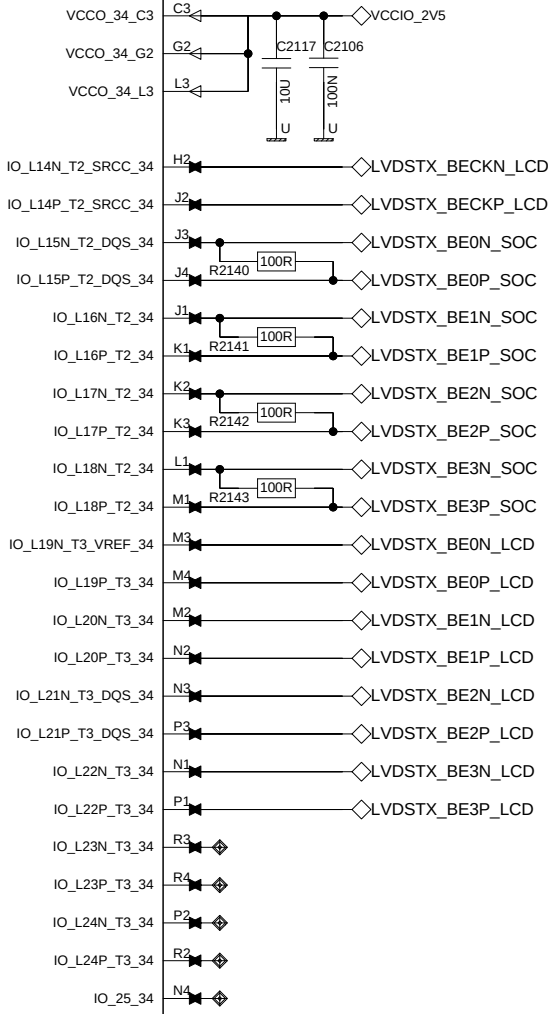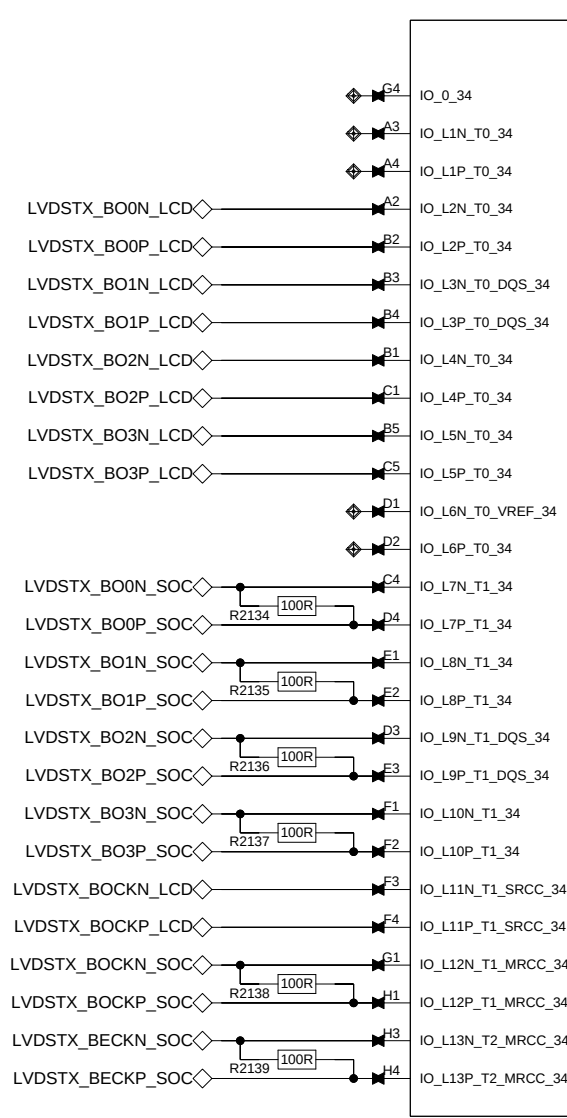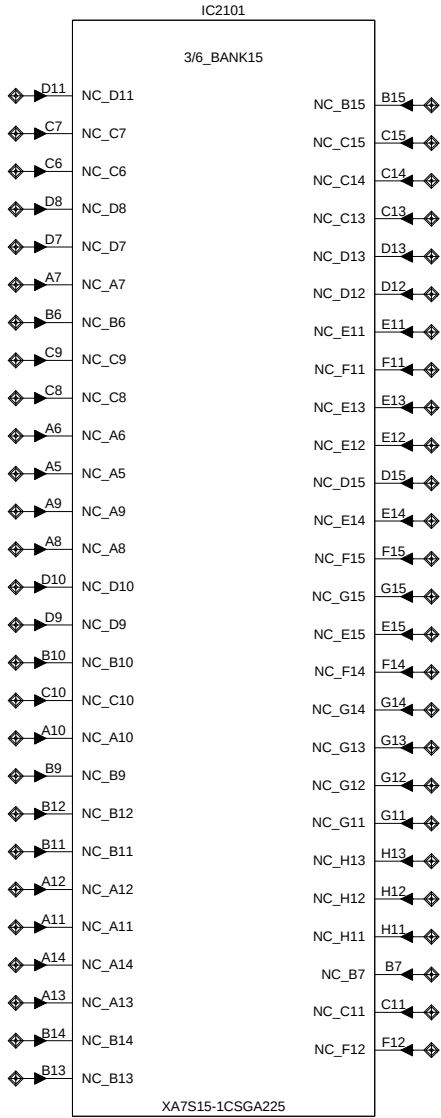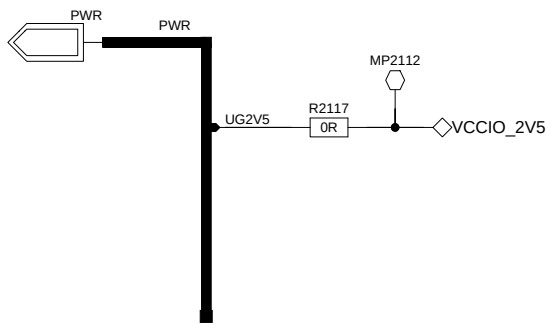

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.


Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
				created	
				checked	
schematic			Sheet 10	Sheets of 31	Sample
FPGA_VIDEO			Type	Variant	Part Number
substitute for:		substitute by:		C143	

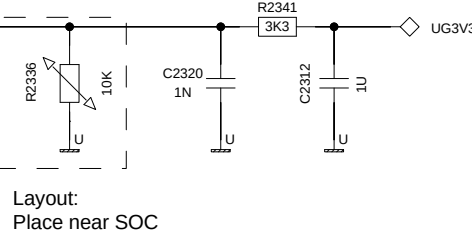

INTP0	AWO	IOC_BKLT_FAULT
INTP1	ISO	
INTP2	ISO	
INTP3	ISO	HS_CAN1_RXD
INTP4	ISO	-----
INTP5	AWO	-----
INTP6	AWO	-----
INTP7	AWO	
INTP8	AWO	HS_CAN1_IRQ
INTP9	AWO	
INTP10	ISO	IOC_SOC_IPC_IRQ
INTP11	AWO	-----
INTP12	AWO	-----
INTP13	AWO	
INTP14	AWO	DEBUG_RX
INTP15	AWO	

Rev.	type of change					change no.	date of change		auth.	checked	
						date				name	
						created					
						checked					
schematic						Sheet 11	Sheets of 31	Sample			
4010_IDC						Type	Variant C143	Part Number			
substitute for:				substitute by:							


MAIN CONNECTOR (5300-5399)

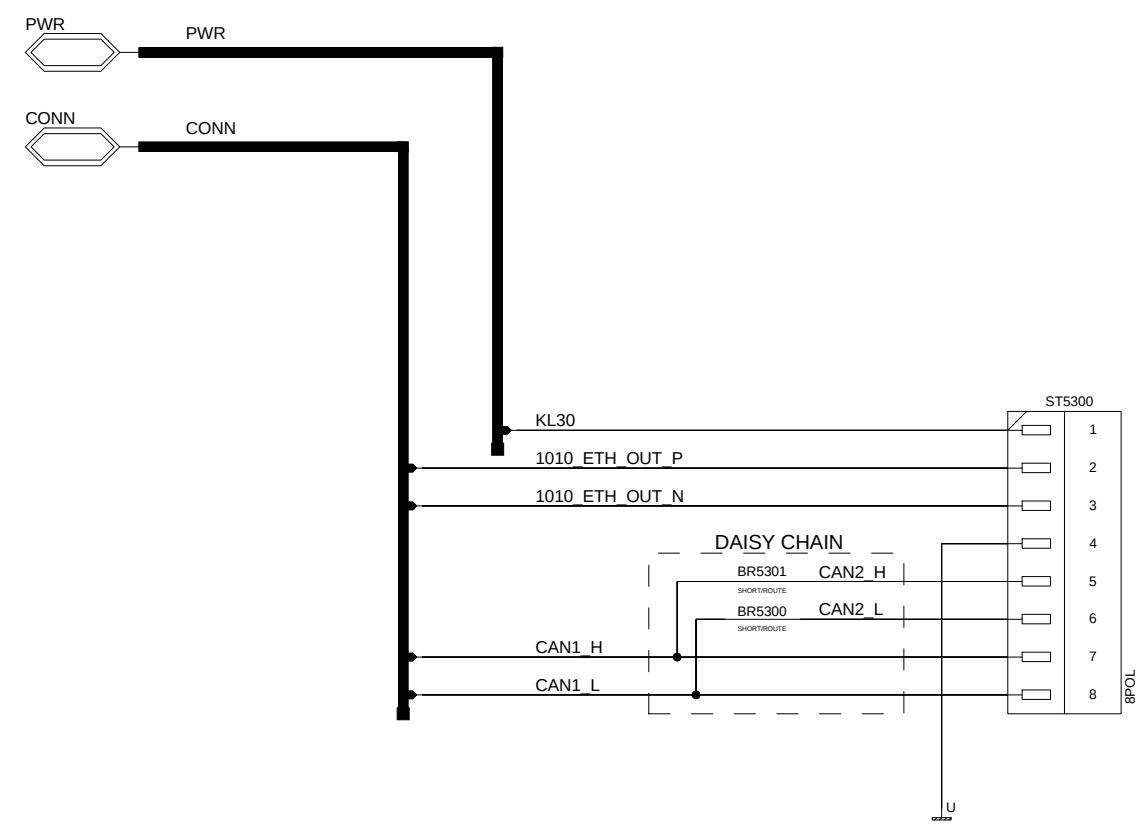

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.


Rev.	type of change		change-no.	date of change	auth.	checked
		Copyright reserved	Wiring modifications reserved	date		name
				created		
				checked		
schematic			Sheet	Sheets of		Sample
4010_Main_Connector			12	31		
substitute for:			Type	Variant		Part Number
substitute by:						

PMIC1 (14200-14299)

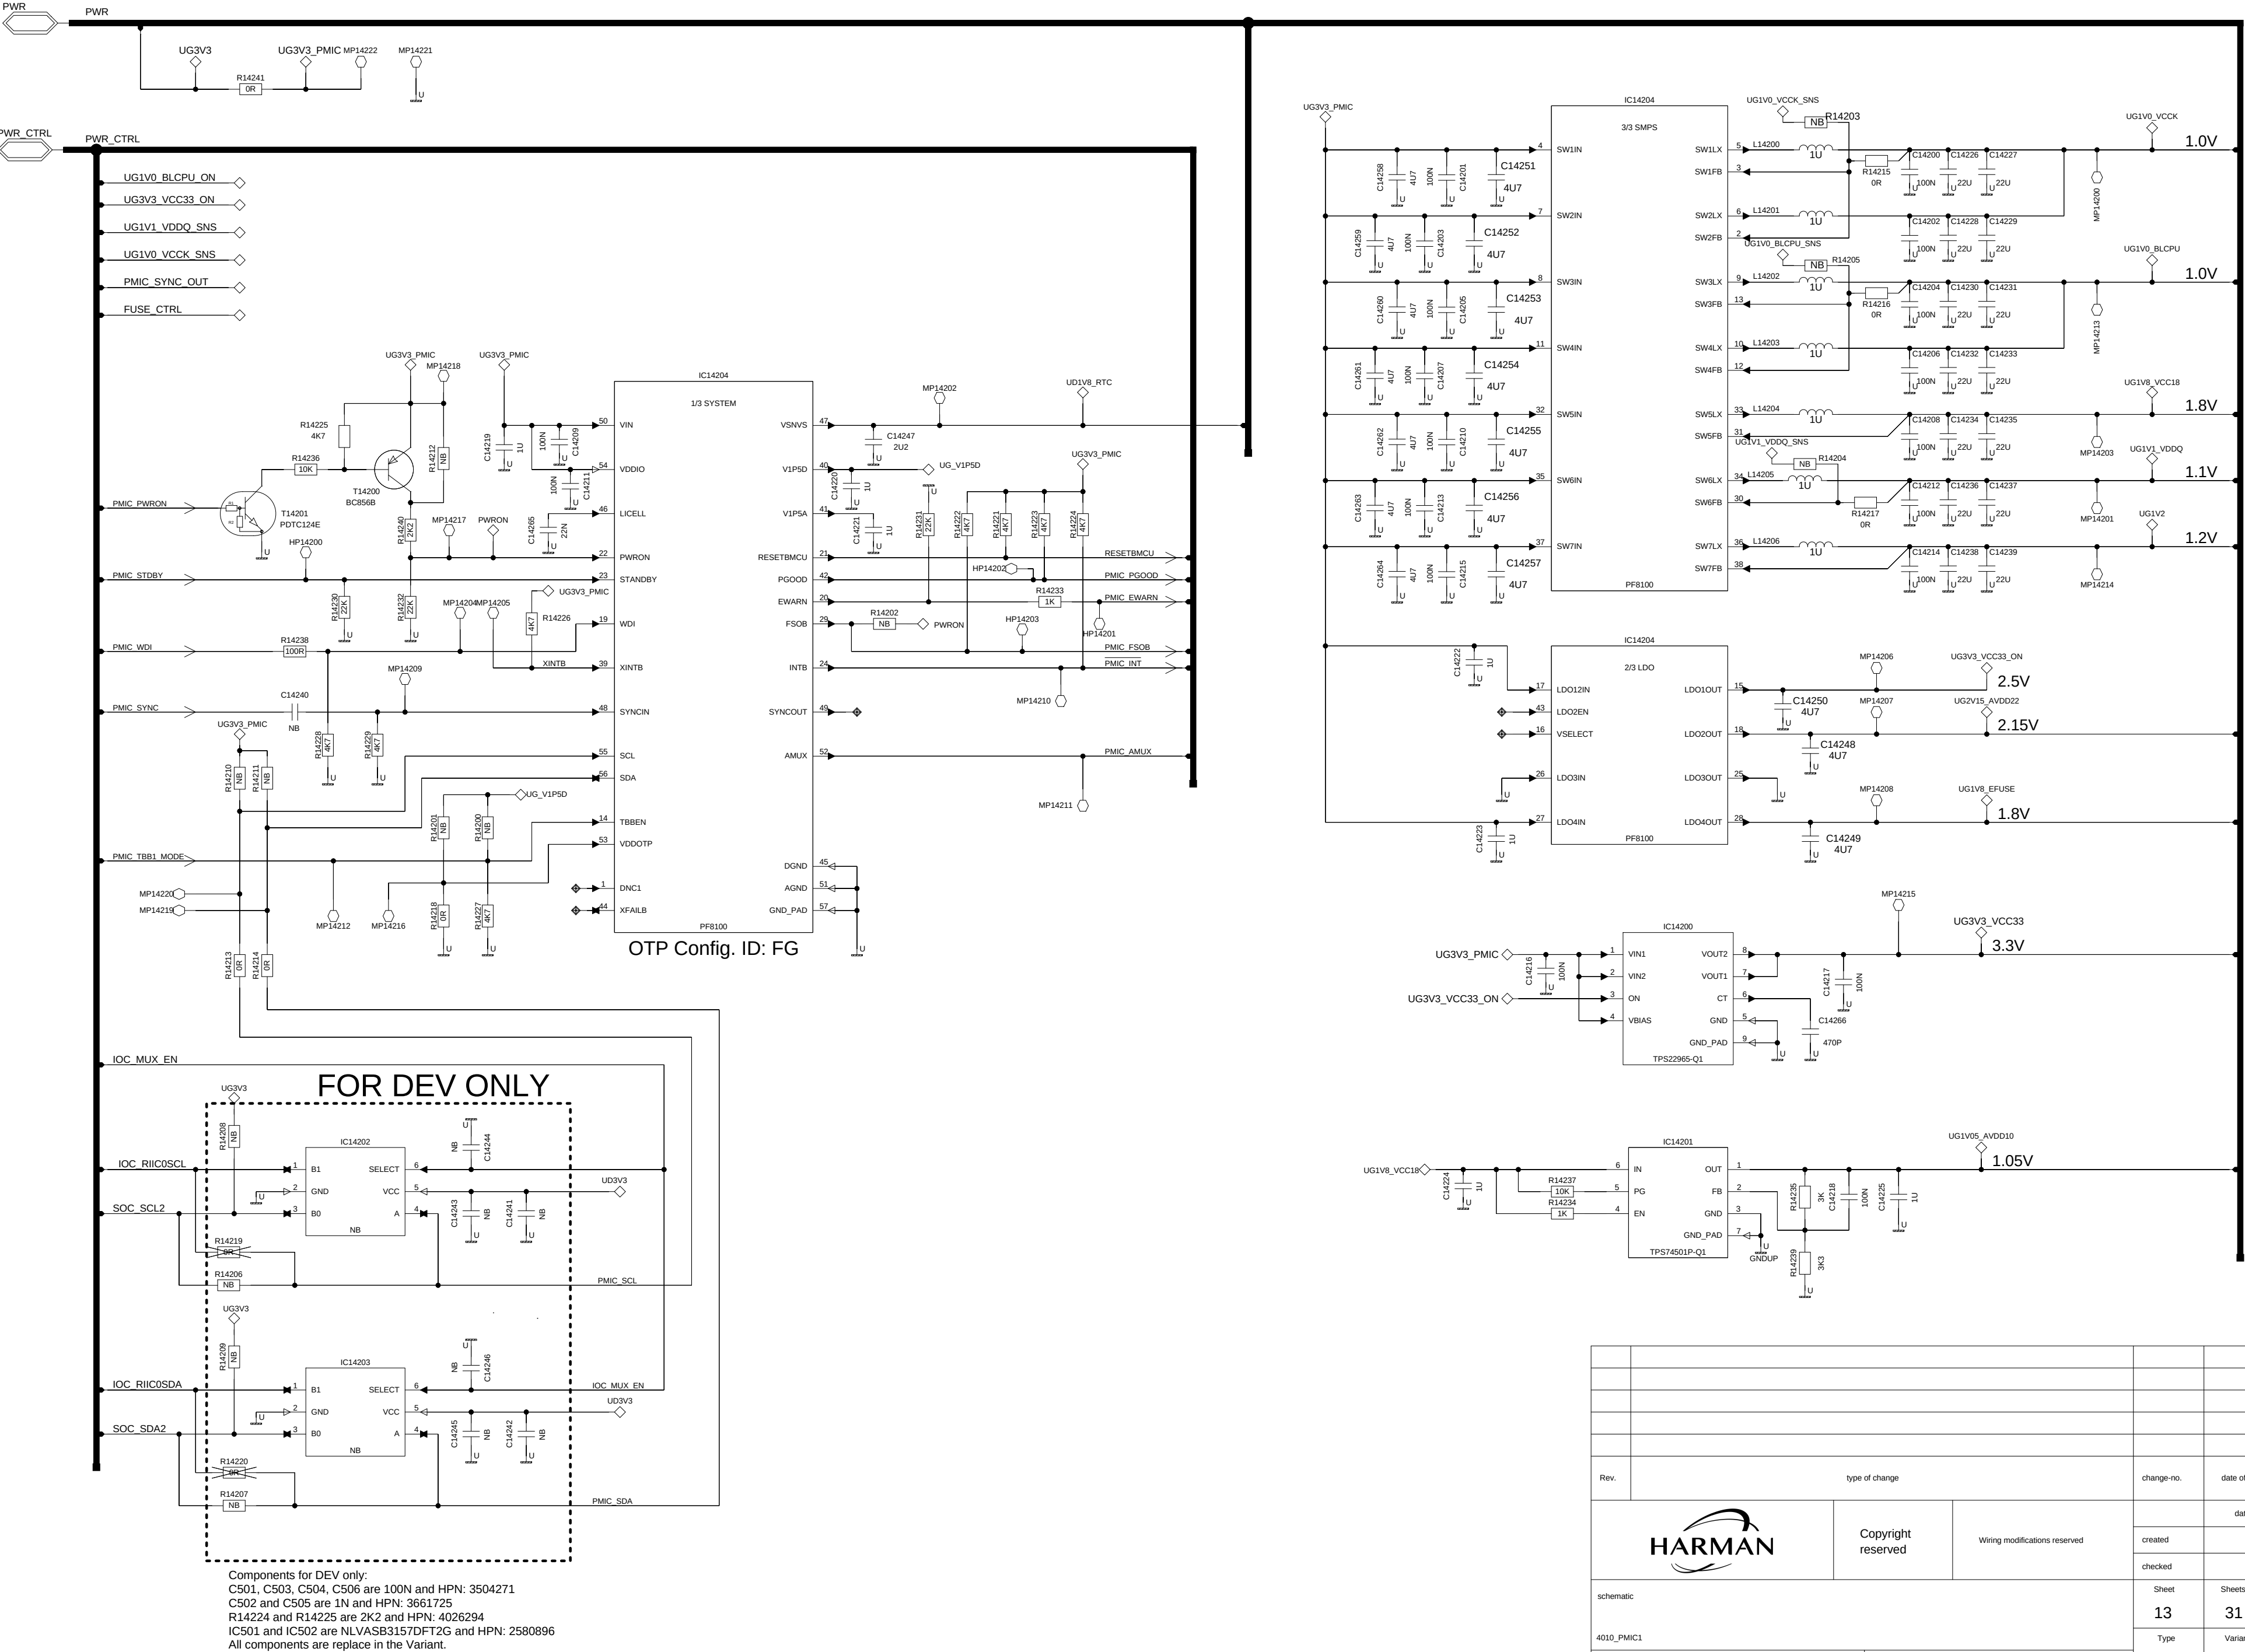


Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
schematic			Sheet	Sheets of	Sample
4010_PMIC1			13	31	
substitute for:		substitute by:	Type	Variant	Part Number

SOC (10000-10999)

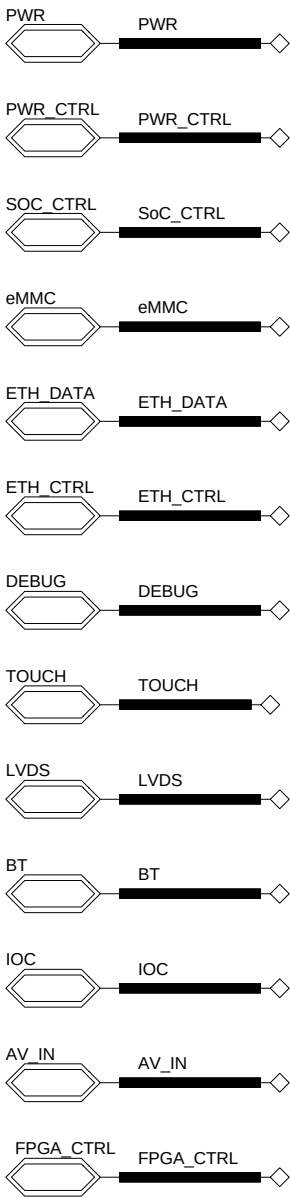


4010 SoC Power

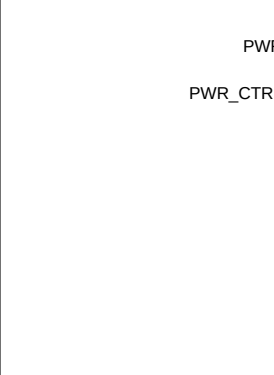


10500 - 10599

4010 SoC_CTRL

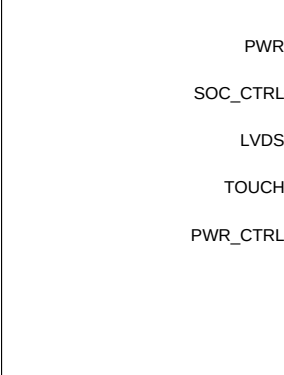


10600 - 10699

4010 SoC Video

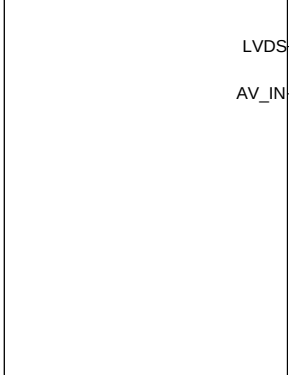


10700 - 10799

4010 SoC LPDDR4

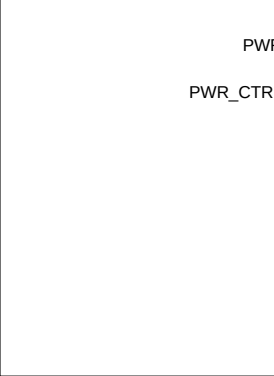


10400 - 10499

4010 SoC_ETH_PCIE_USB

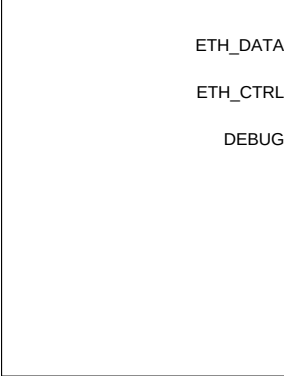


10300 - 10399

4010 SoC Audio

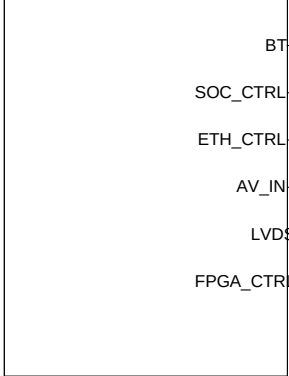


10800 - 10899

4010 SoC_eMMC_NAND_SD

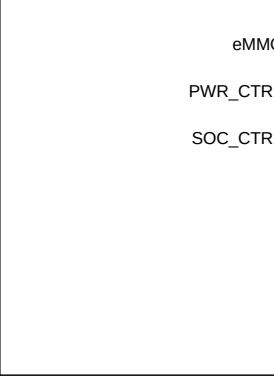

10100 - 10199

4010 SoC_Serial_IF

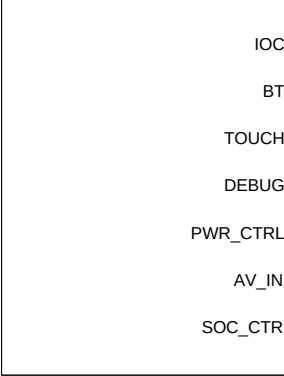


10200 - 10299

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.


Rev.	type of change		change-no.	date of change	auth.	checked
		Copyright reserved	Wiring modifications reserved	date		name
				created		
				checked		
schematic			Sheet	Sheets of		Sample
4010_SoC			15	31		
substitute for:			Type	Variant		Part Number
substitute by:						

SOC_AUDIO (10800-10899)

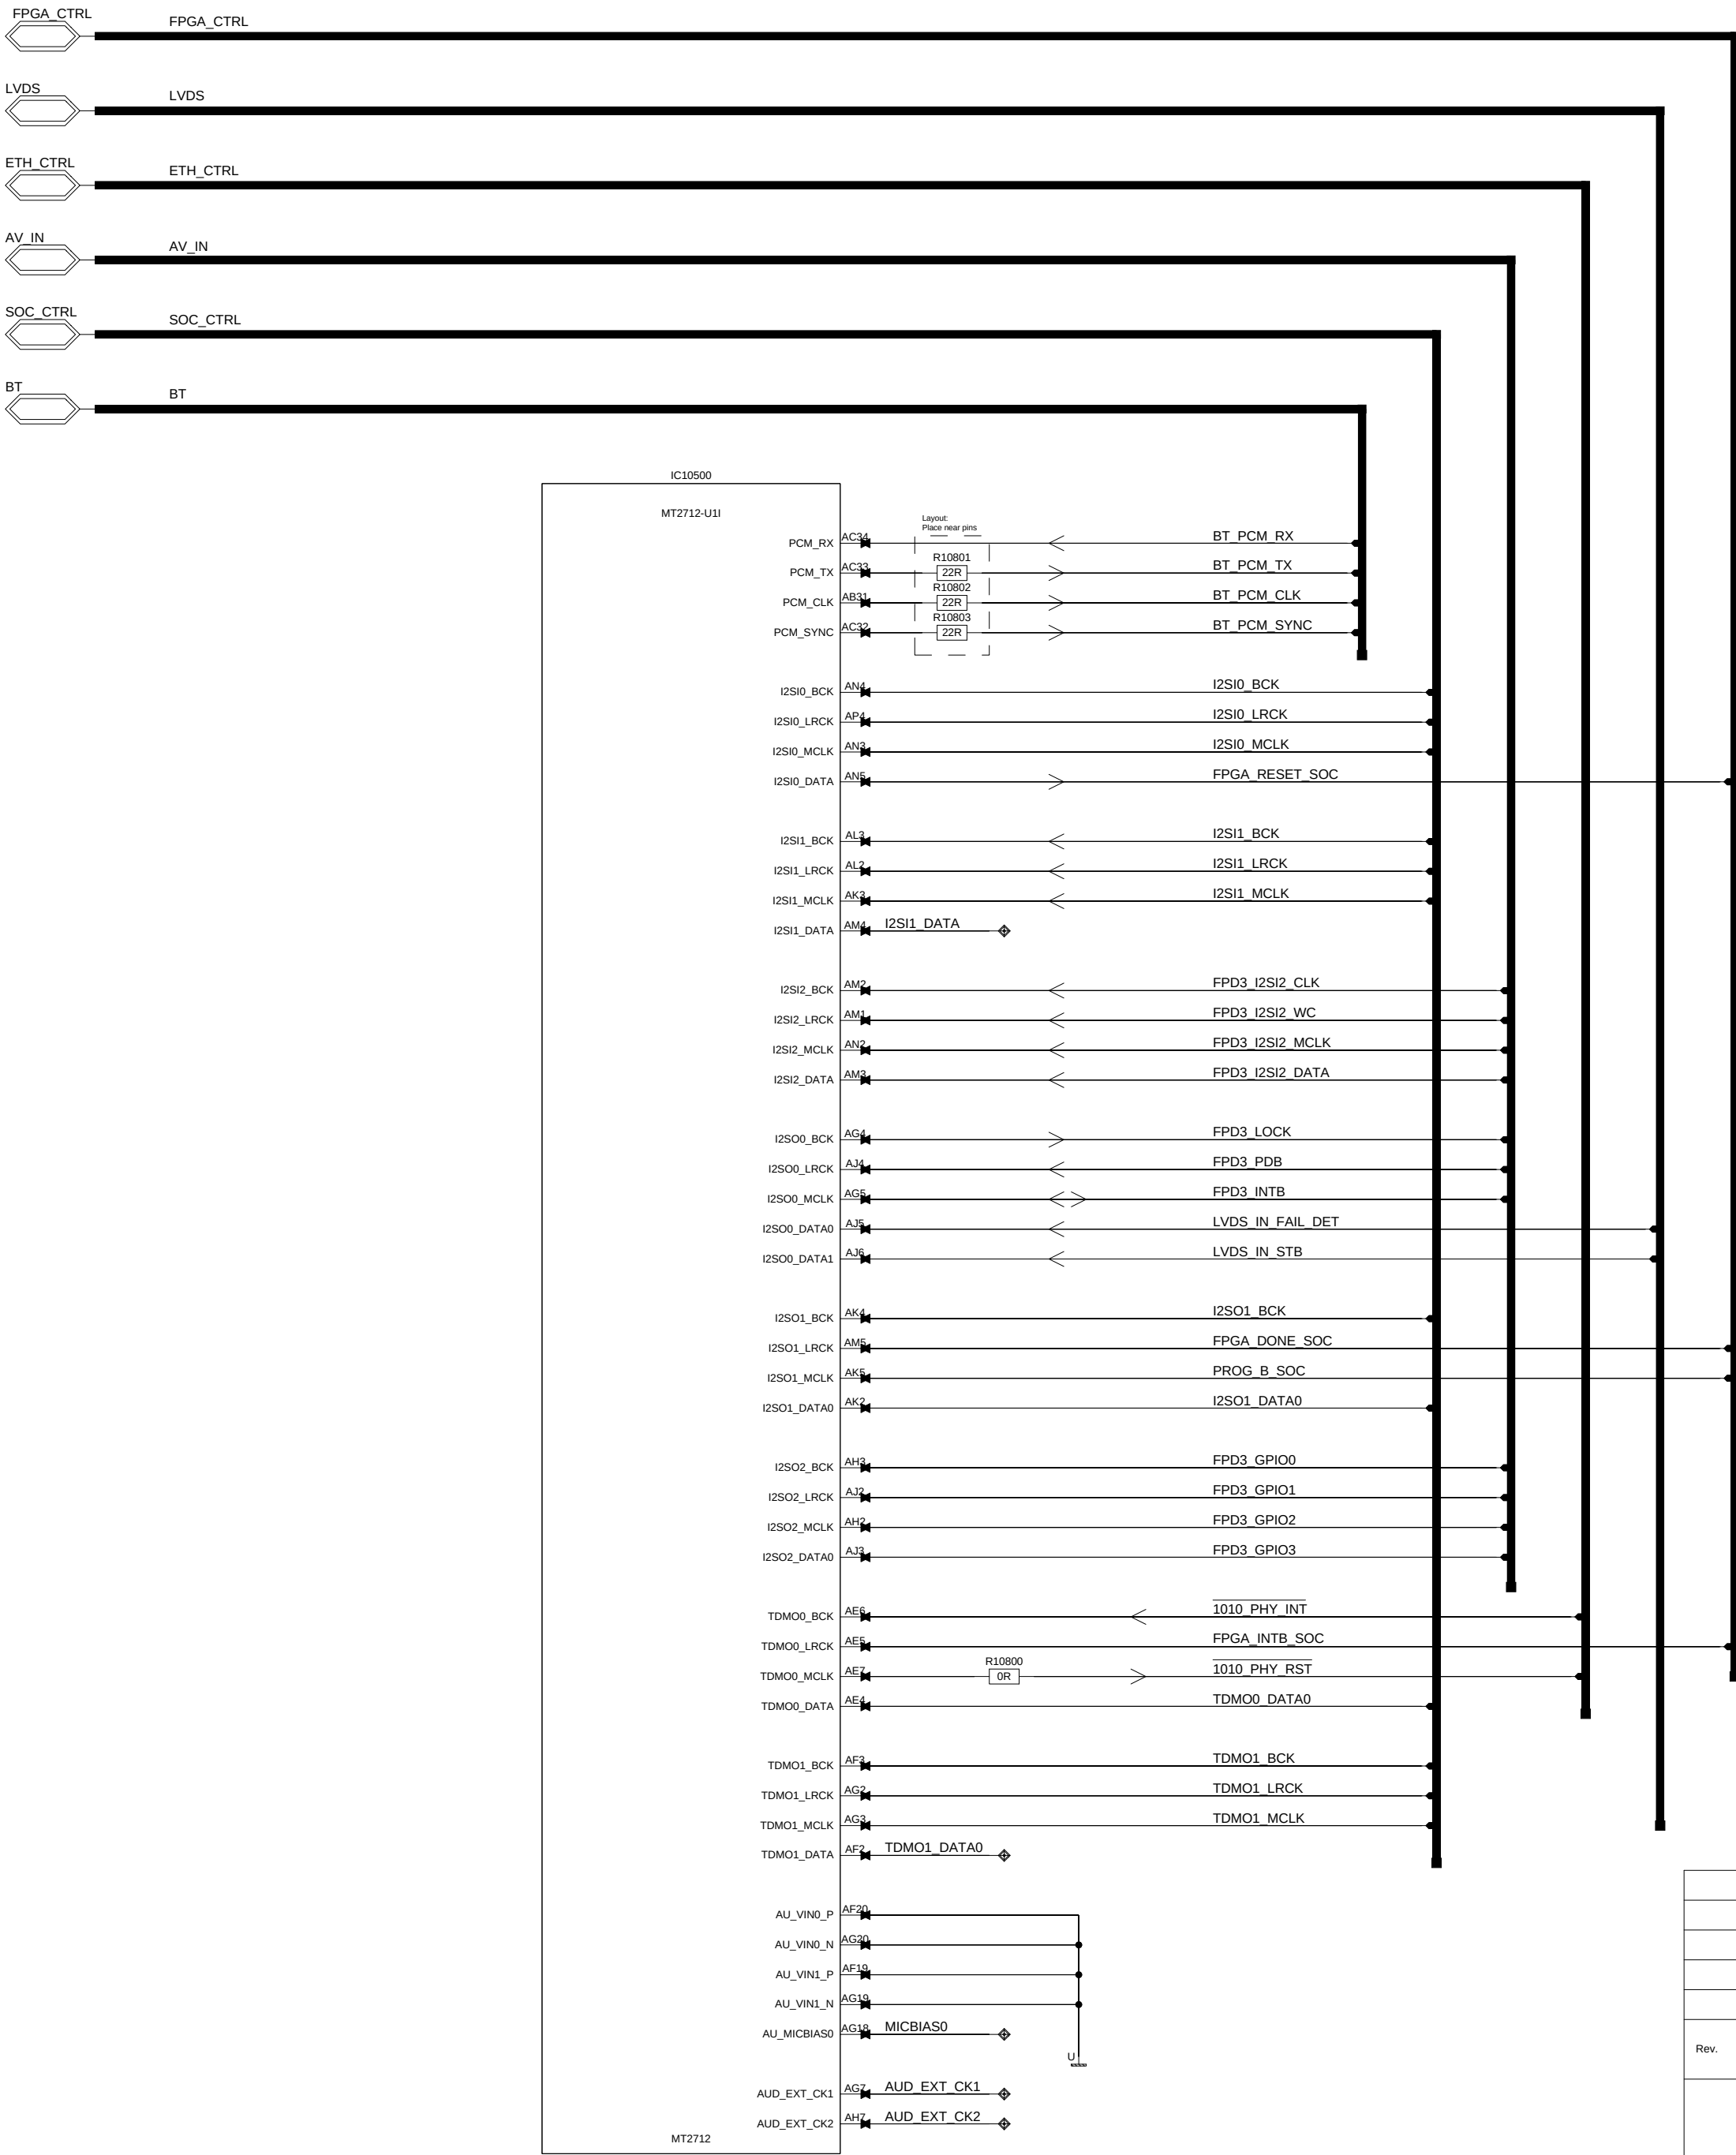

Rev.	type of change	change-no.	date of change	auth.	checked
	Copyright reserved	Writing modifications reserved		date	name
		created			
		checked			
schematic			Sheet	Sheets of	
4010_SoC_Audio			16	31	
substitute for:				Type	Variant
				Part Number	

SOC_CTRL (10600-10699)

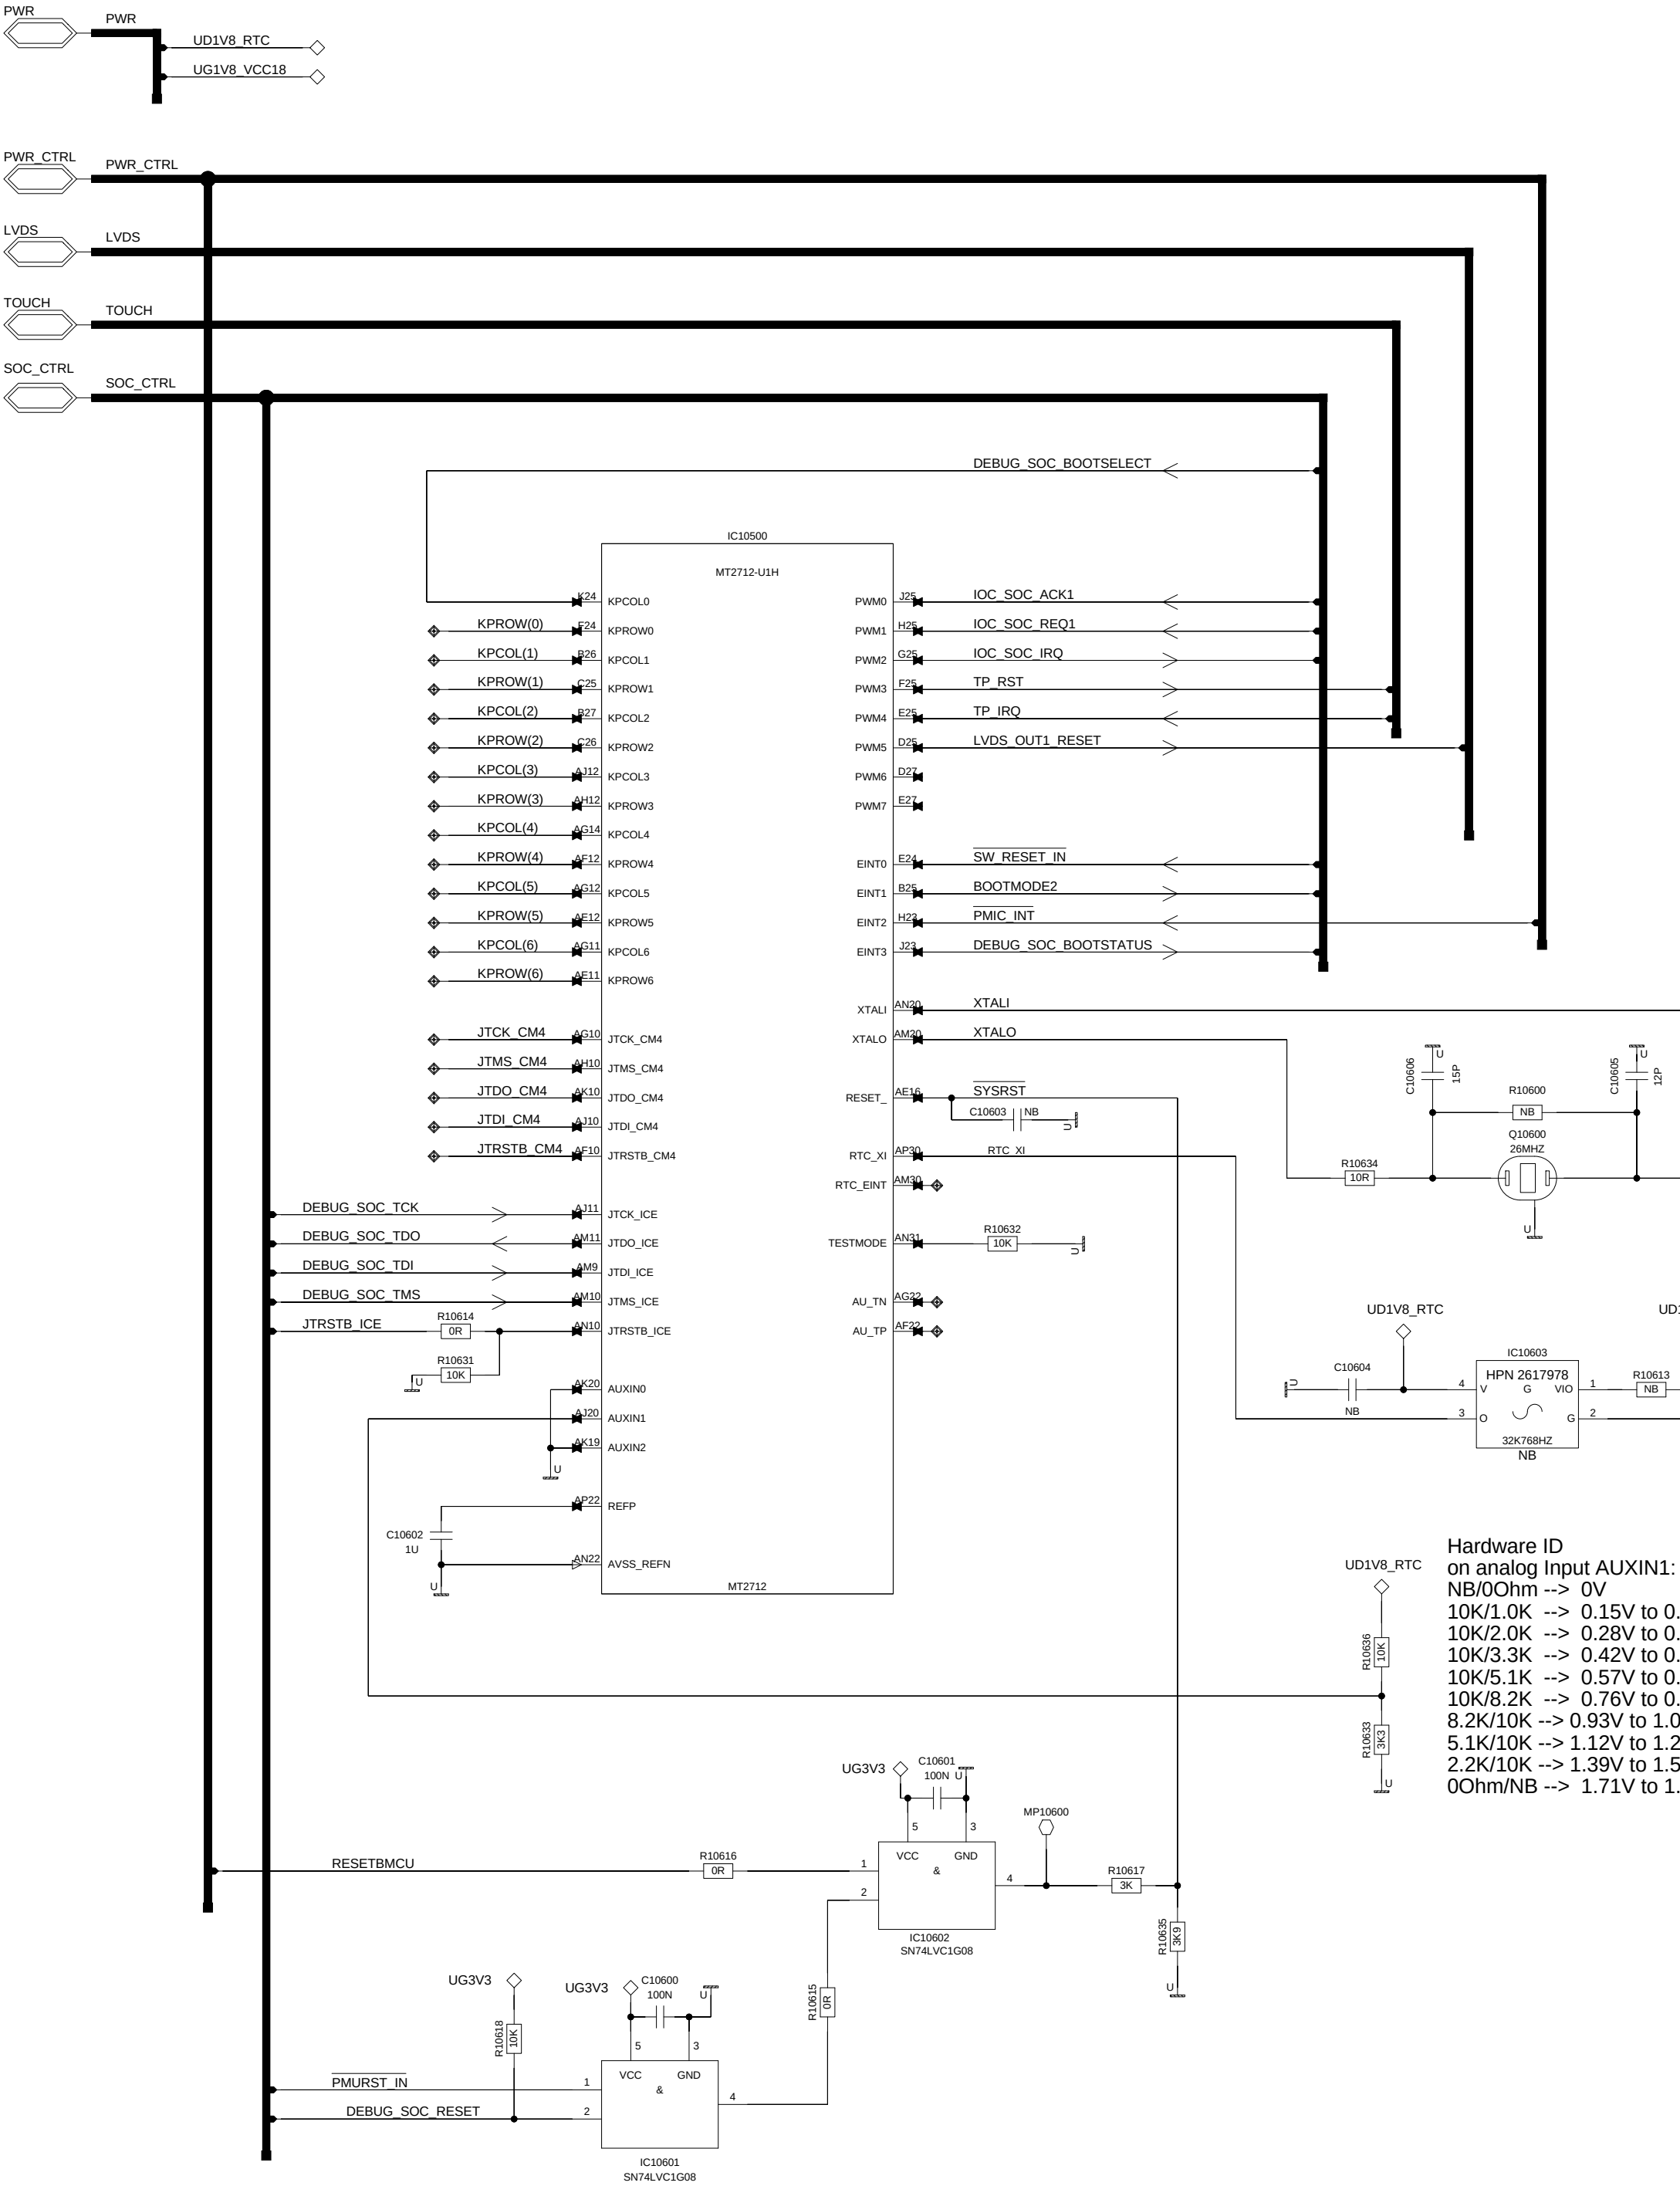


Mode	multi-used		multi-used		multi-used	
	I2SI0_LRCK	I2SI0_MCLK	I2SI0_BCK	I2SI1_BCK	I2SI1_LRCK	I2SI1_MCLK
Combo PHY0 for USB	X	X	X	X	X	1
Combo PHY0 for PCIe	X	X	X	X	X	0
Combo PHY1 for USB	X	X	X	X	1	X
Combo PHY1 for PCIe	X	X	X	X	0	X
PCIIE Port0 for RC	X	X	X	1	X	X
PCIIE Port0 for EP	X	X	X	0	X	X
PCIIE Port1 for RC	X	X	1	X	X	X
PCIIE Port1 for EP	X	X	0	X	X	X
Rom Boot	X	0	X	X	X	X
Nor-flash bypass rom boot	X	1	X	X	X	X
CPU32 default on	0	X	X	X	X	X
CPU64 default on	1	1	X	X	X	X

IPC1POR/Boot Mode					
I2SO1_DATA0 status[1]	L	L	H	H	H
I2SO1_BCK status[0]	L	H	L	L	H
1	EMMC	NAND	NOR	SD	
2	SD	EMMC	NAND	NOR	
3	NOR	SD	EMMC	NAND	
4	NAND	NOR	SD	EMMC	

Trapping Mode	TDMO1_LRCK	TDMO1_BCK	TDMO1_MCLK	TDMO0_DATA0
Slowest Boot device speed configuration	1	X	X	X
Fastest Boot device speed configuration	0	X	X	X
NAND randomizer: disable	X	0	X	X
NAND randomizer: enable	X	1	X	X
NOR flash address mode: 3-byte	X	X	0	X
NOR flash address mode: 4-byte	X	X	1	X
Alternative boot loader: disable	X	X	X	0
Alternative boot loader: enable	X	X	X	1

Pin Strapping

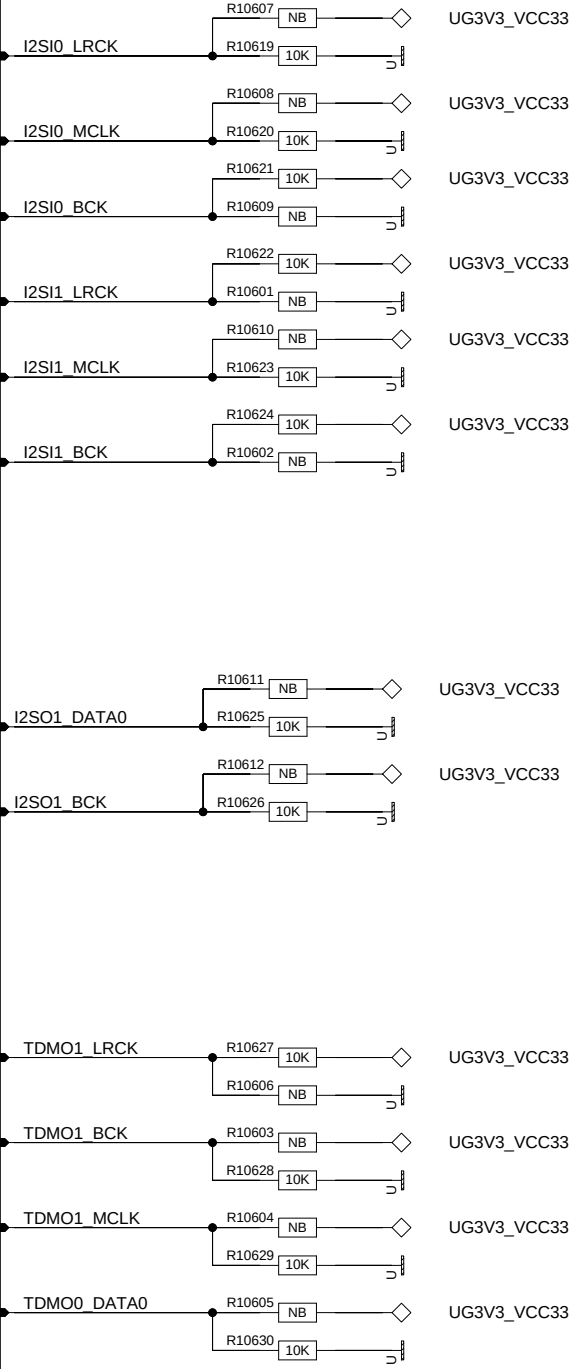


Combo PHY0 for PCIe
PCIIE Port0 for RC
Rom Boot
CPU32 default on

Hardware ID
on analog Input AUXIN1:
NB/OOhm --> 0V
10K/1.0K --> 0.15V to 0.18V
10K/2.0K --> 0.28V to 0.32V
10K/3.3K --> 0.42V to 0.47V
10K/5.1K --> 0.57V to 0.65V
10K/8.2K --> 0.76V to 0.86V
8.2K/10K --> 0.93V to 1.05V
5.1K/10K --> 1.12V to 1.26V
2.2K/10K --> 1.39V to 1.55V
0Ohm/NB --> 1.71V to 1.89V

ED1 HW
ED2 HW
ED3 HW
DV HW
PV HW
PV2 HW
PV3 HW




Rev.	type of change		change-no.	date of change	auth.	checked		
		Copyright reserved	Wiring modifications reserved					
					date		name	
					created			
			checked					
schematic				Sheet	Sheets of	Sample		
4010_Soc_CTRL				17	31			
substitute for:		substitute by:		Type	Variant	Part Number		

SOC_ETH_PCl_e_USB (10300-10399)

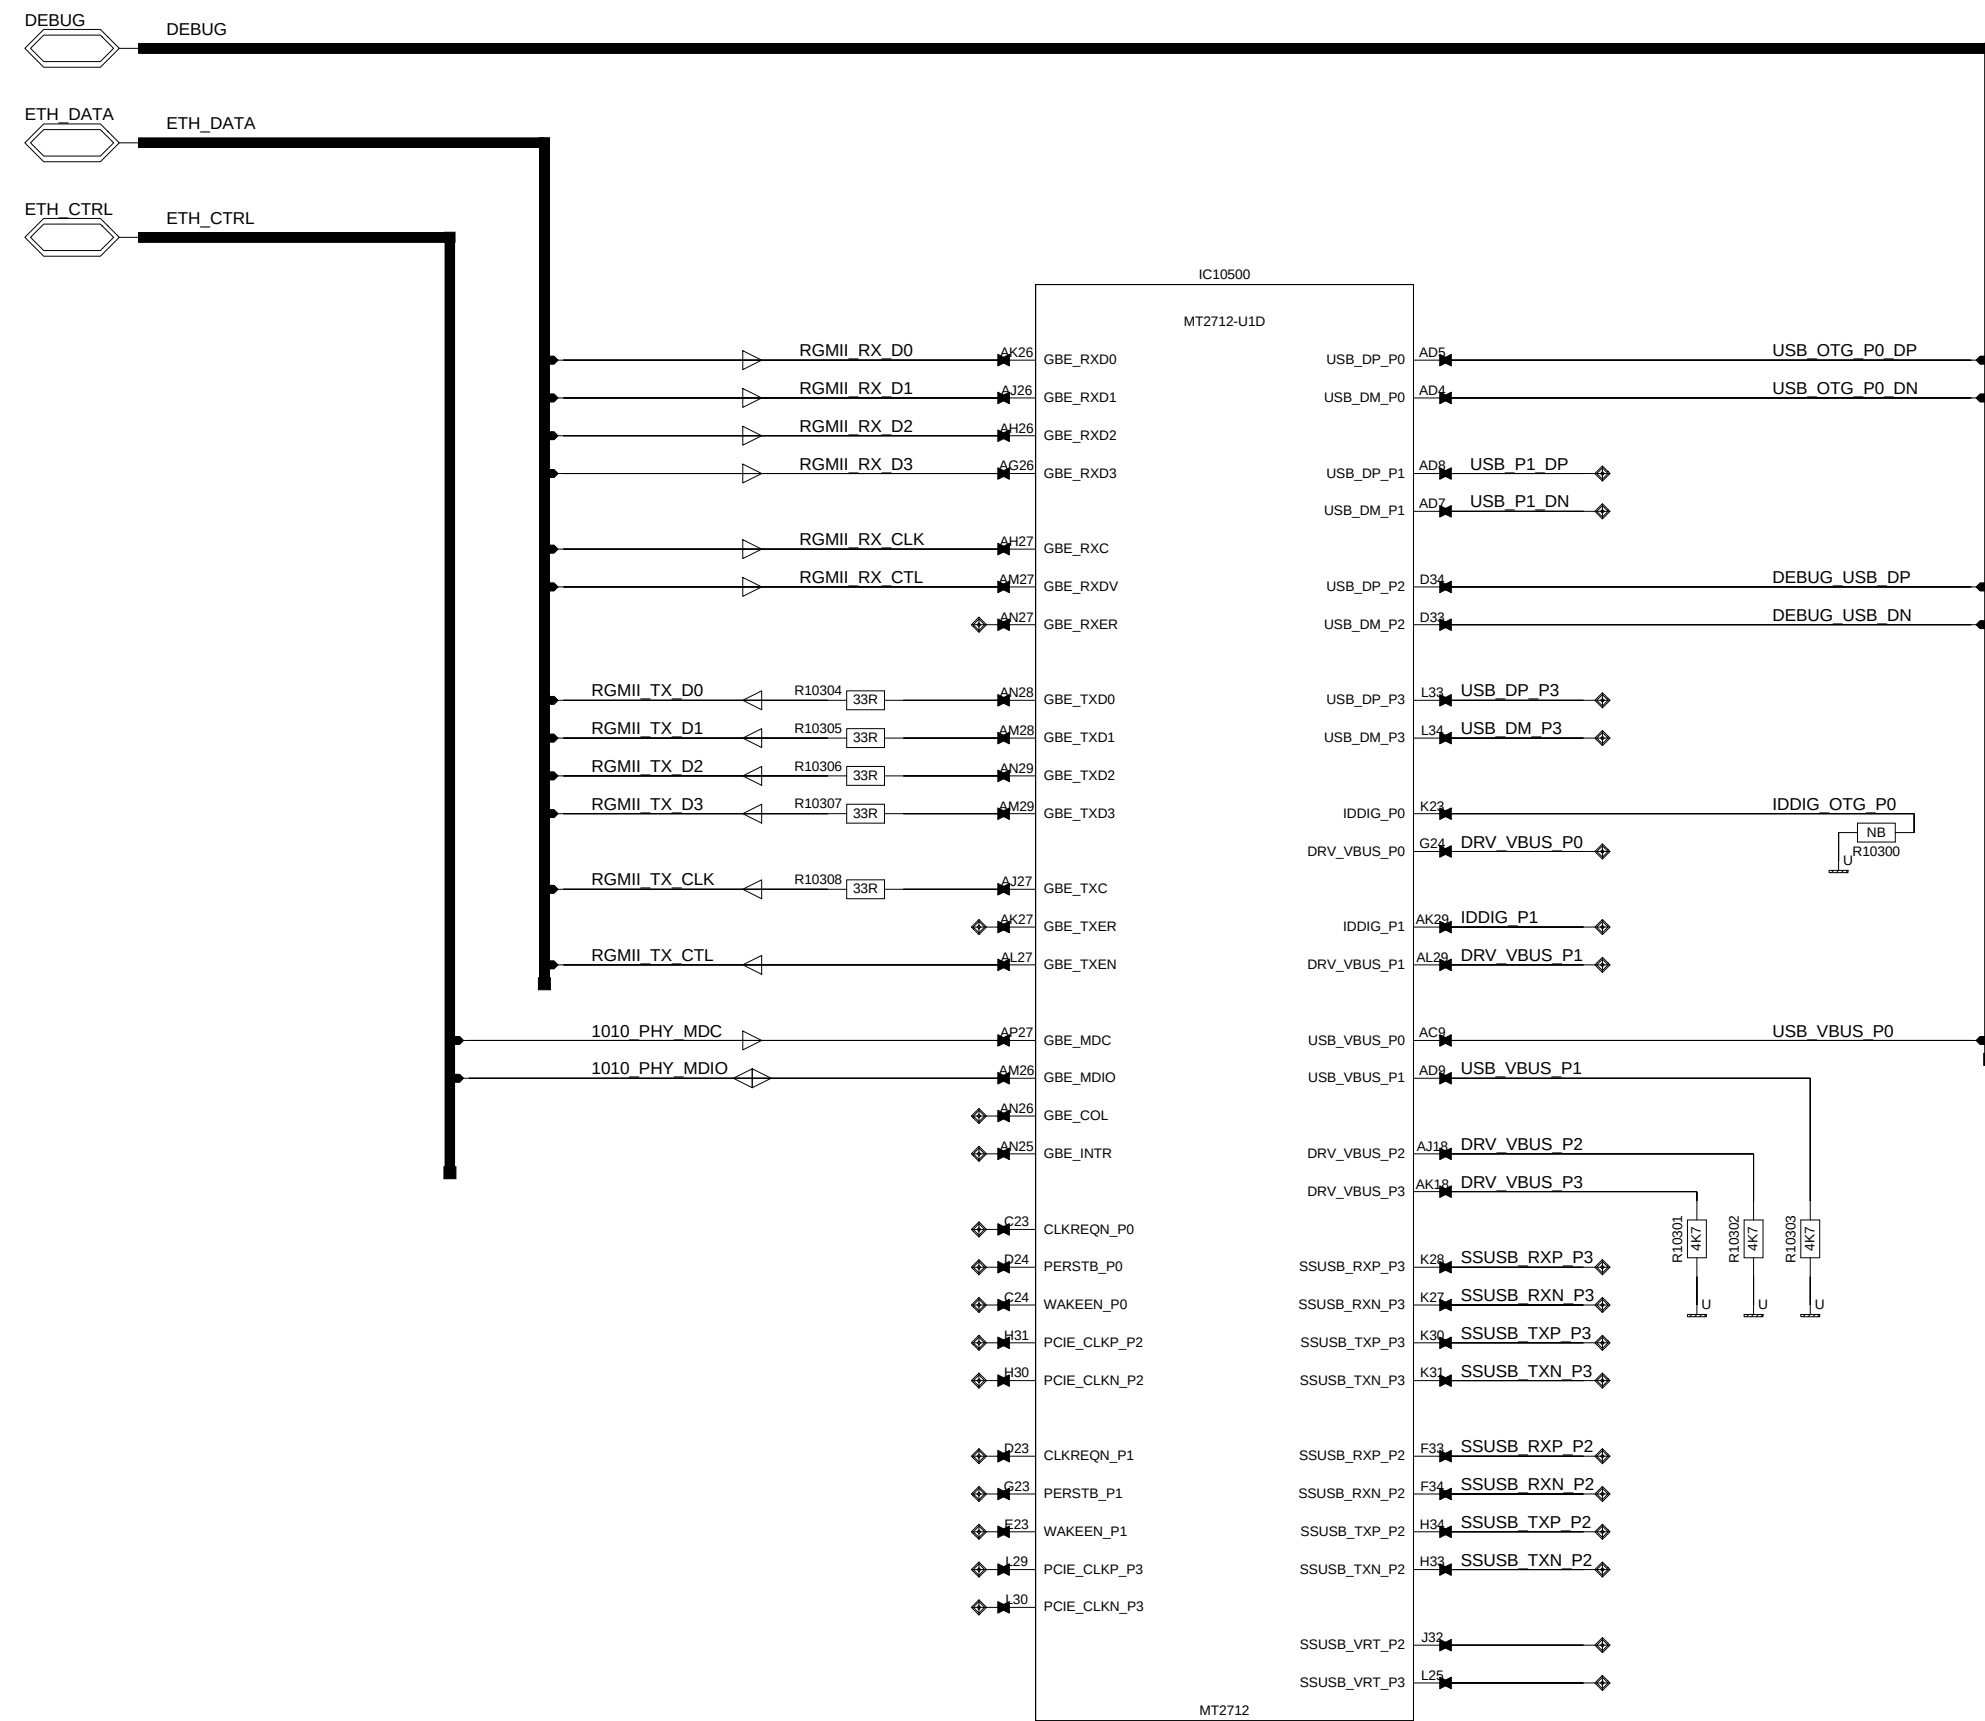


Rev.	type of change				change-no.	date of change	auth.	checked	
		Copyright reserved	Wiring modifications reserved		date	name			
				created					
				checked					
schematic					Sheet 18	Sheets of 31	Sample		
4010_Soc_ETH_PCIE_USB					Type	Variant	Part Number		
substitute for:			substitute by:						

SOC_LPDDR4 (10400-10499)

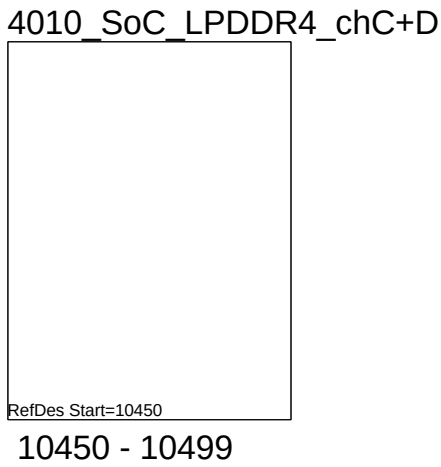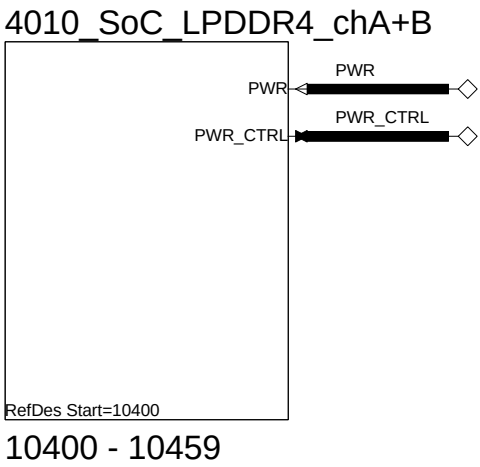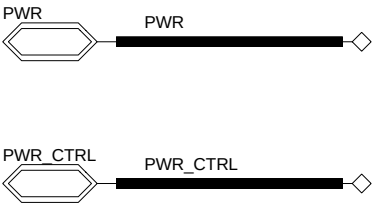

Rev.	type of change		change-no.	date of change	auth.	checked
		Copyright reserved	Wiring modifications reserved	date		name
				created		
				checked		
schematic			Sheet	Sheets of		Sample
4010_SoC_LPDDR4			19	31		
substitute for:			Type	Variant		Part Number
substitute by:						


SOC_LPDDR4 (10400-10449)

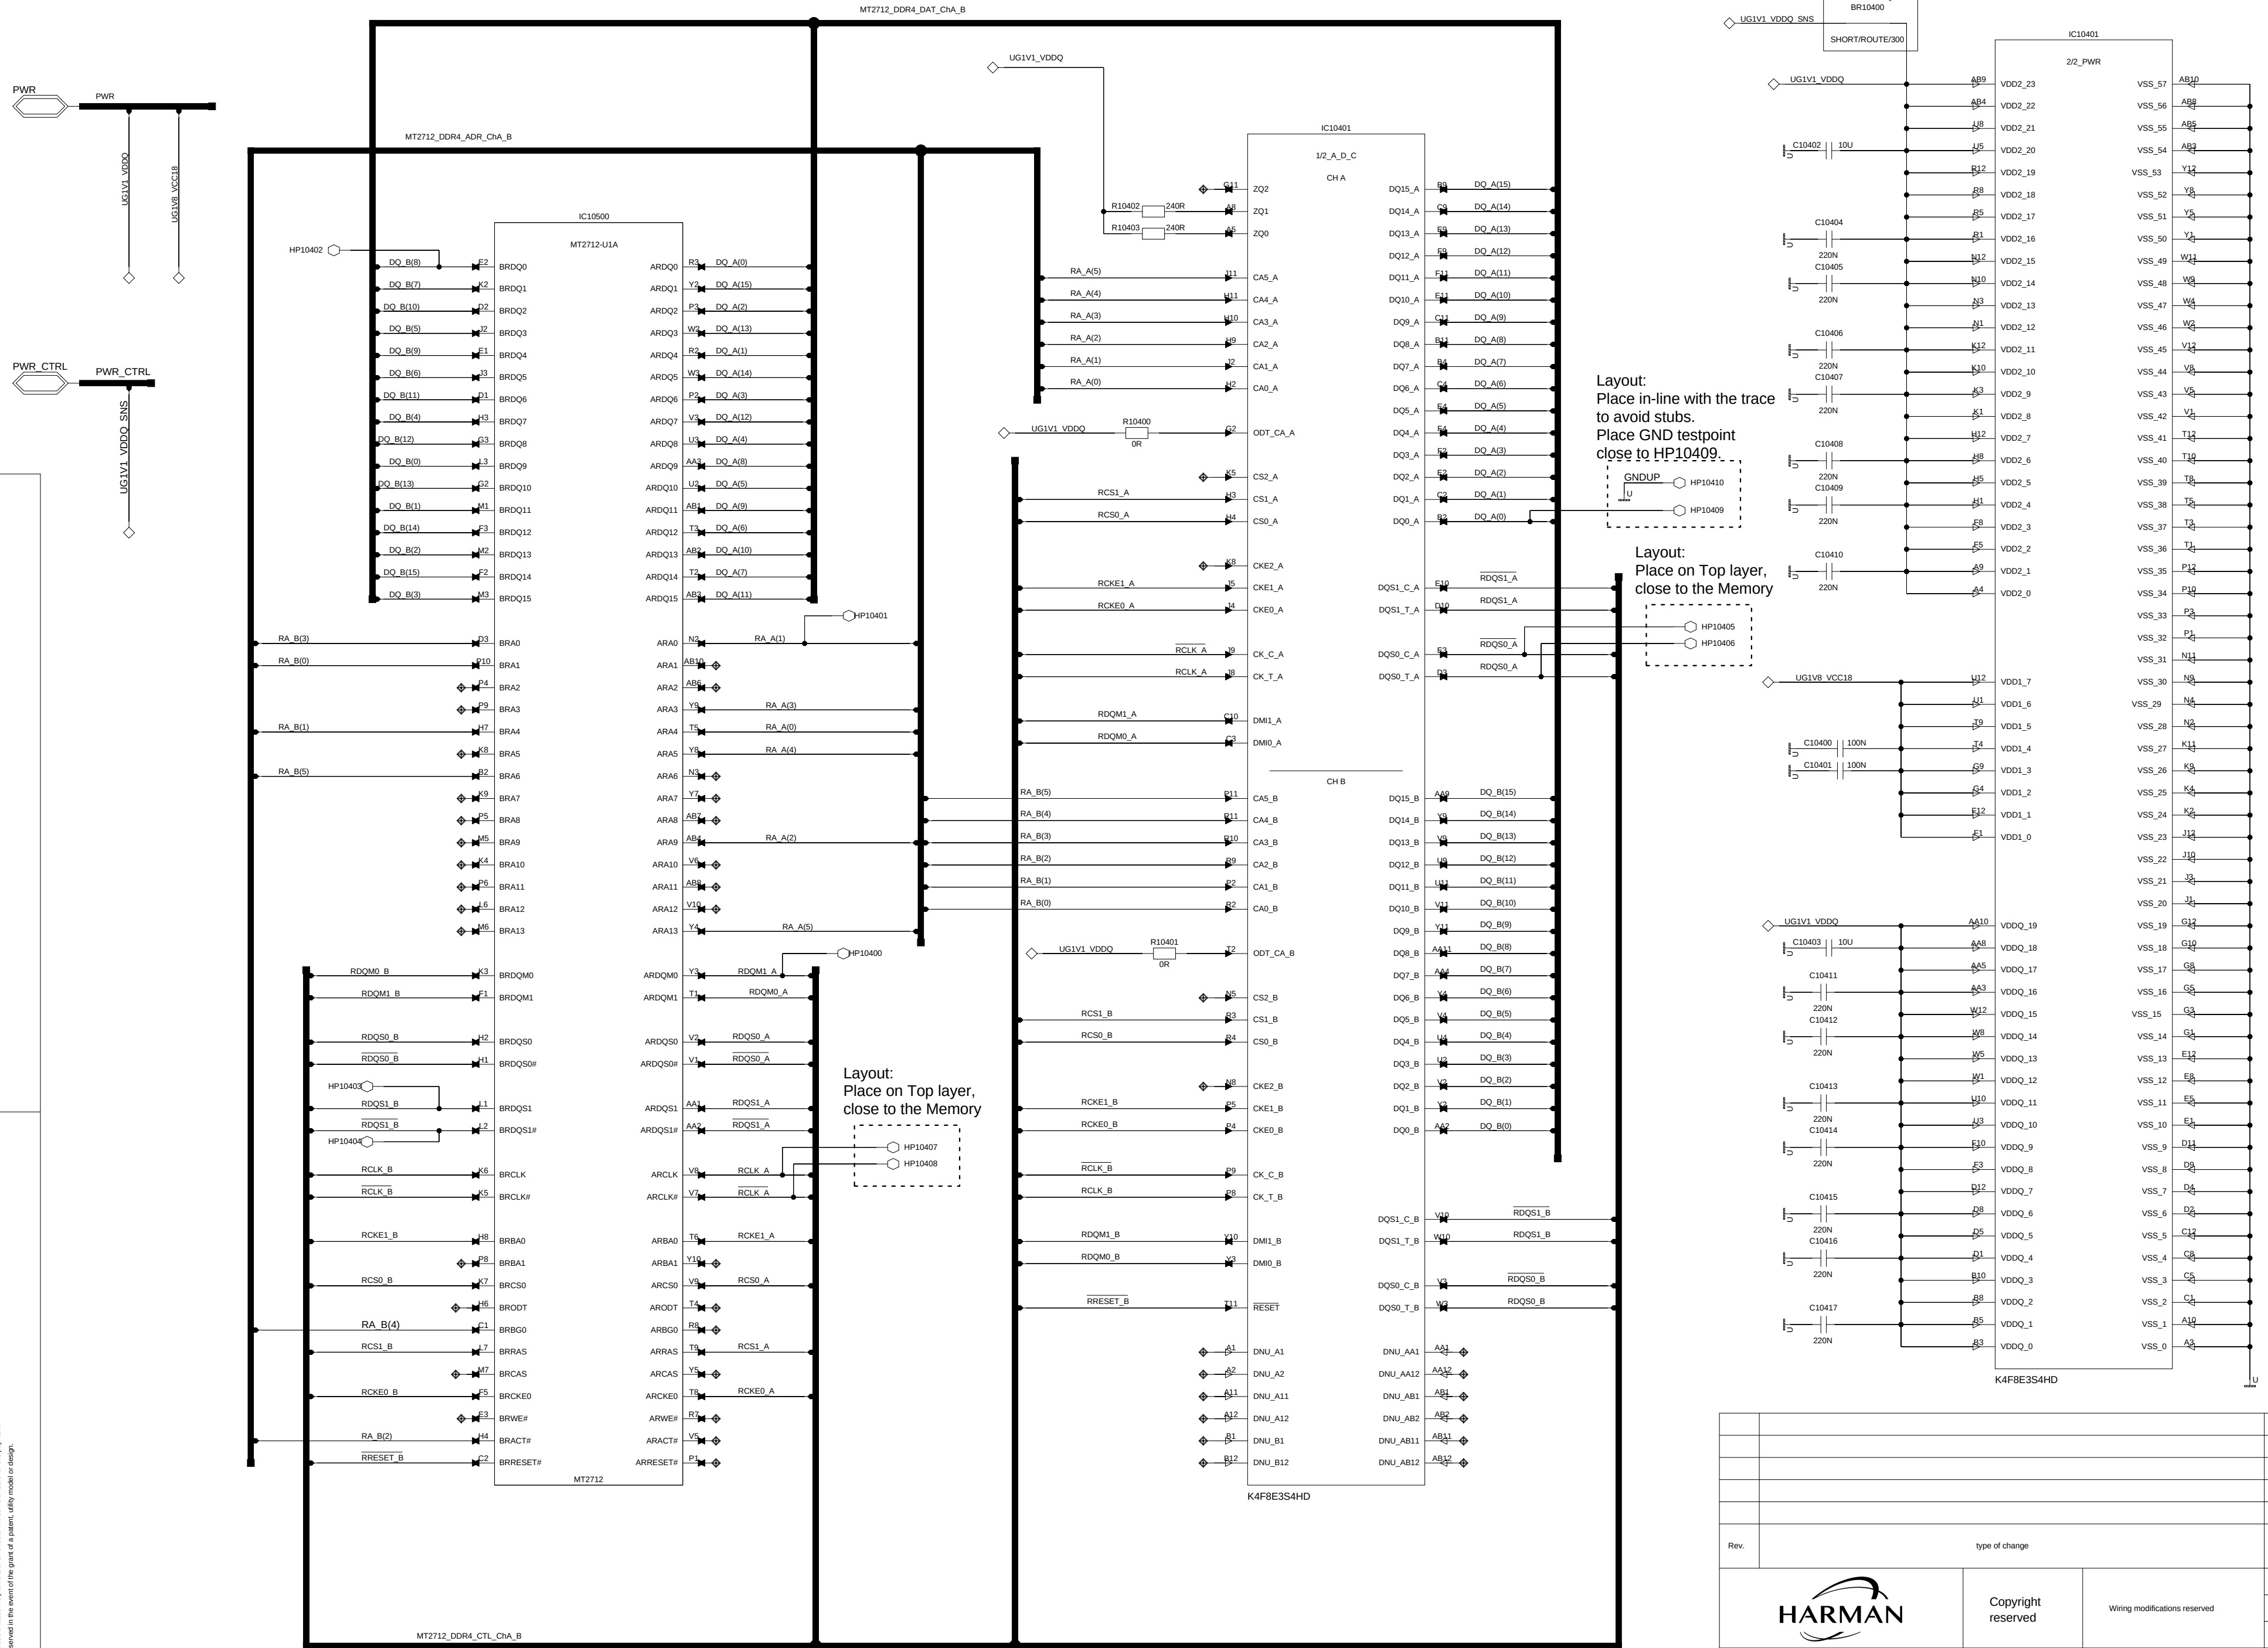

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.


Rev.	type of change		change-no.	date of change	auth. checked	
	Copyright reserved	Wiring modifications reserved	date		name	
			created			
			checked			
schematic			Sheet 20	Sheets of 31	Sample	
4010_SoC_LPDDR4_chA+B			Type	Variant	Part Number	
substitute for:		substitute by:				

SOC_LPDDR4 (10450-10499)


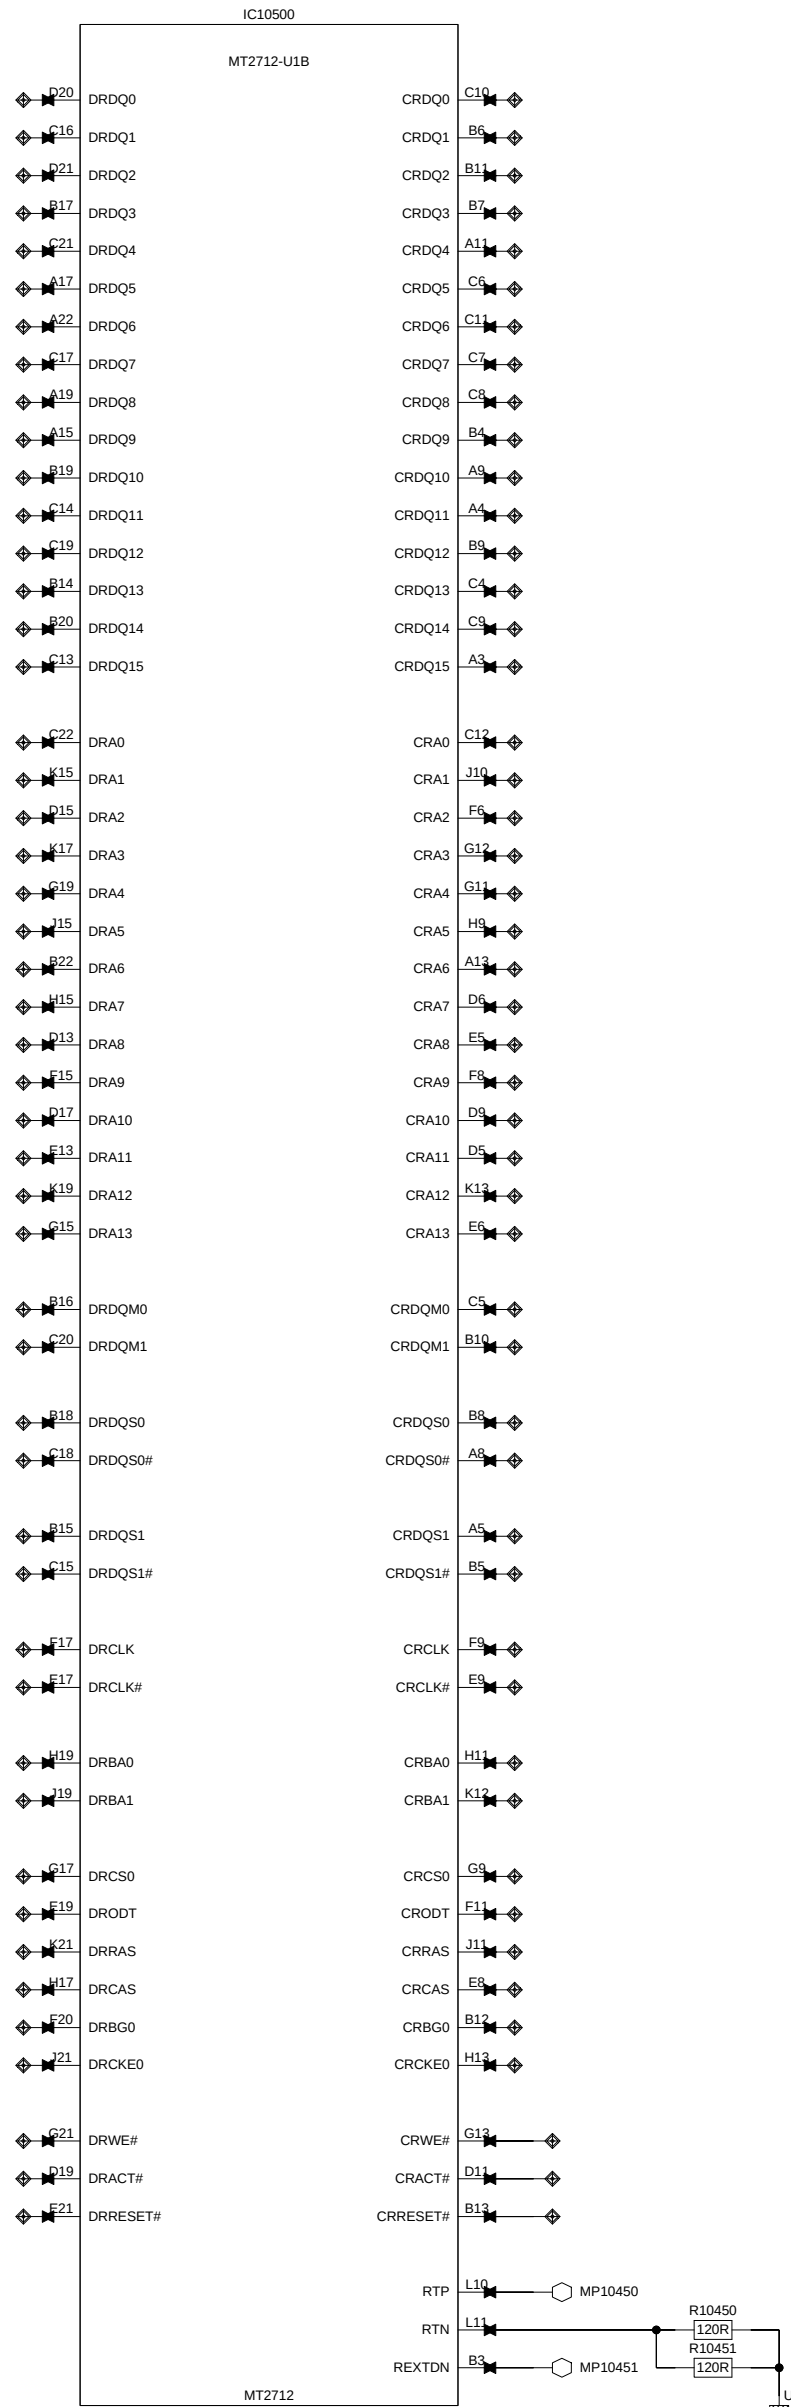


Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
				created	
				checked	
schematic			Sheet	Sheets of	Sample
4010_SoC_LPDDR4_chC+D			21	31	
substitute for:		substitute by:	Type	Variant	Part Number

SOC_POWER (10500-10599)

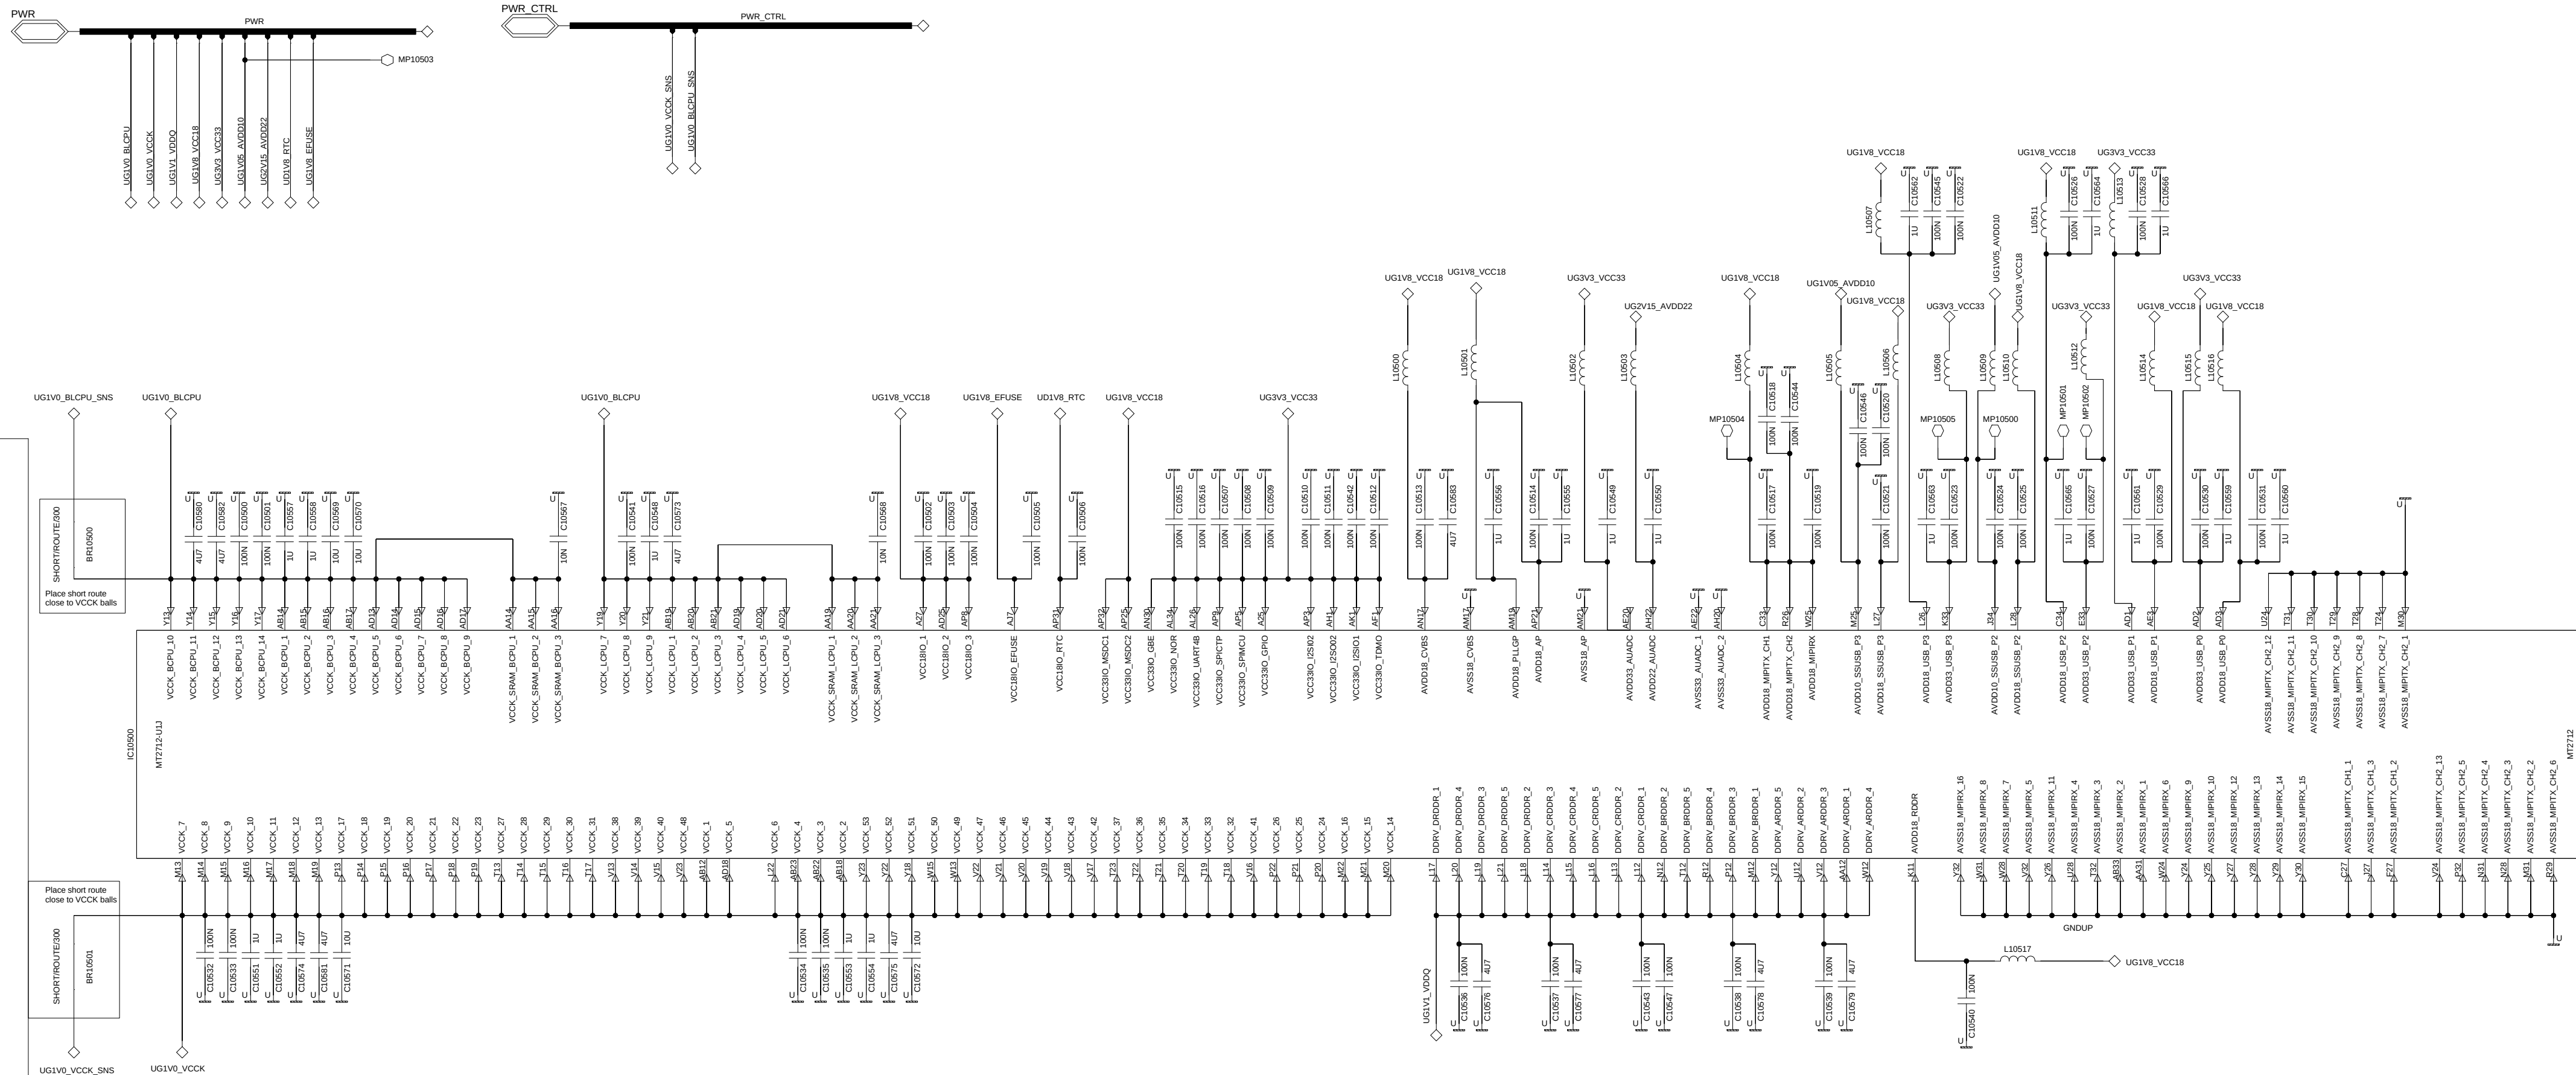


4010 SoC GND

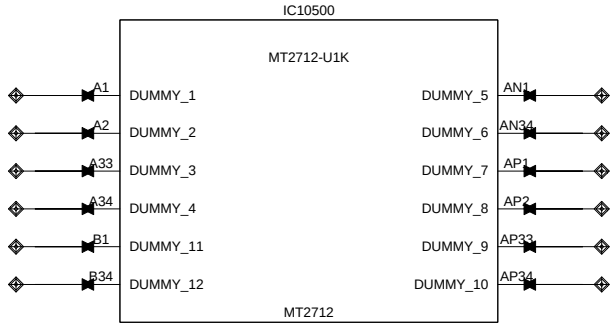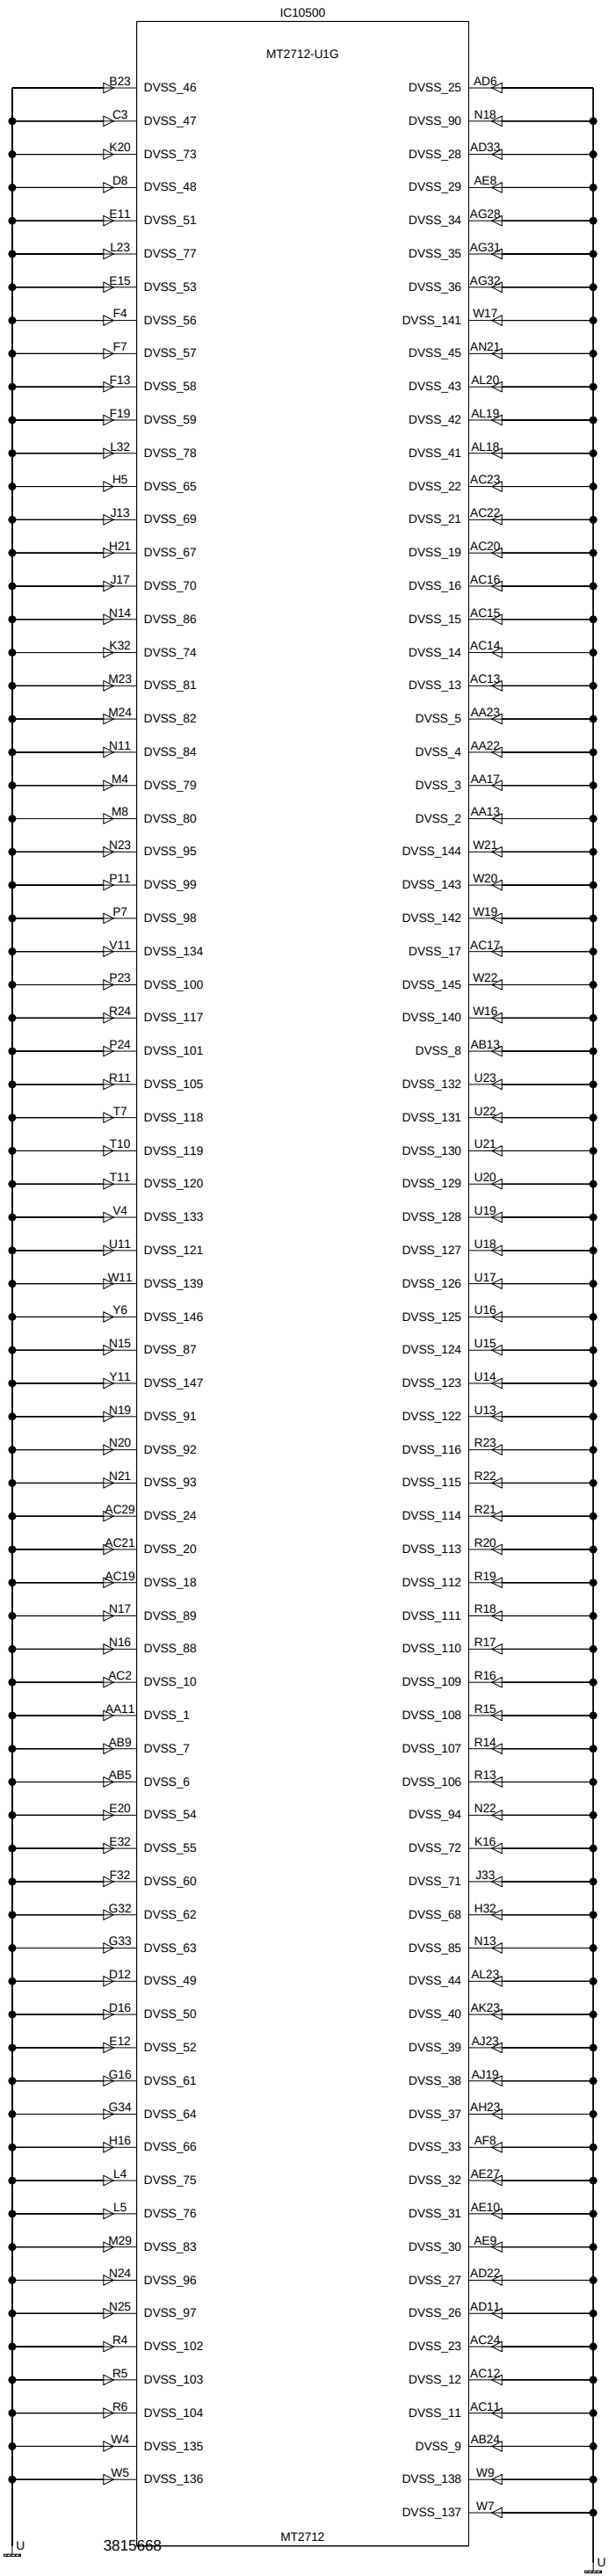

Rev.	type of change		change-no.	date of change	auth.	checked
		Copyright reserved	Wiring modifications reserved	date		name
				created		
				checked		
schematic			Sheet	Sheets of	Sample	
4010_SoC_GND			23	31		
substitute for:			Type	Variant	Part Number	
substitute by:						

SOC_SERIAL_IF (10200-10299)

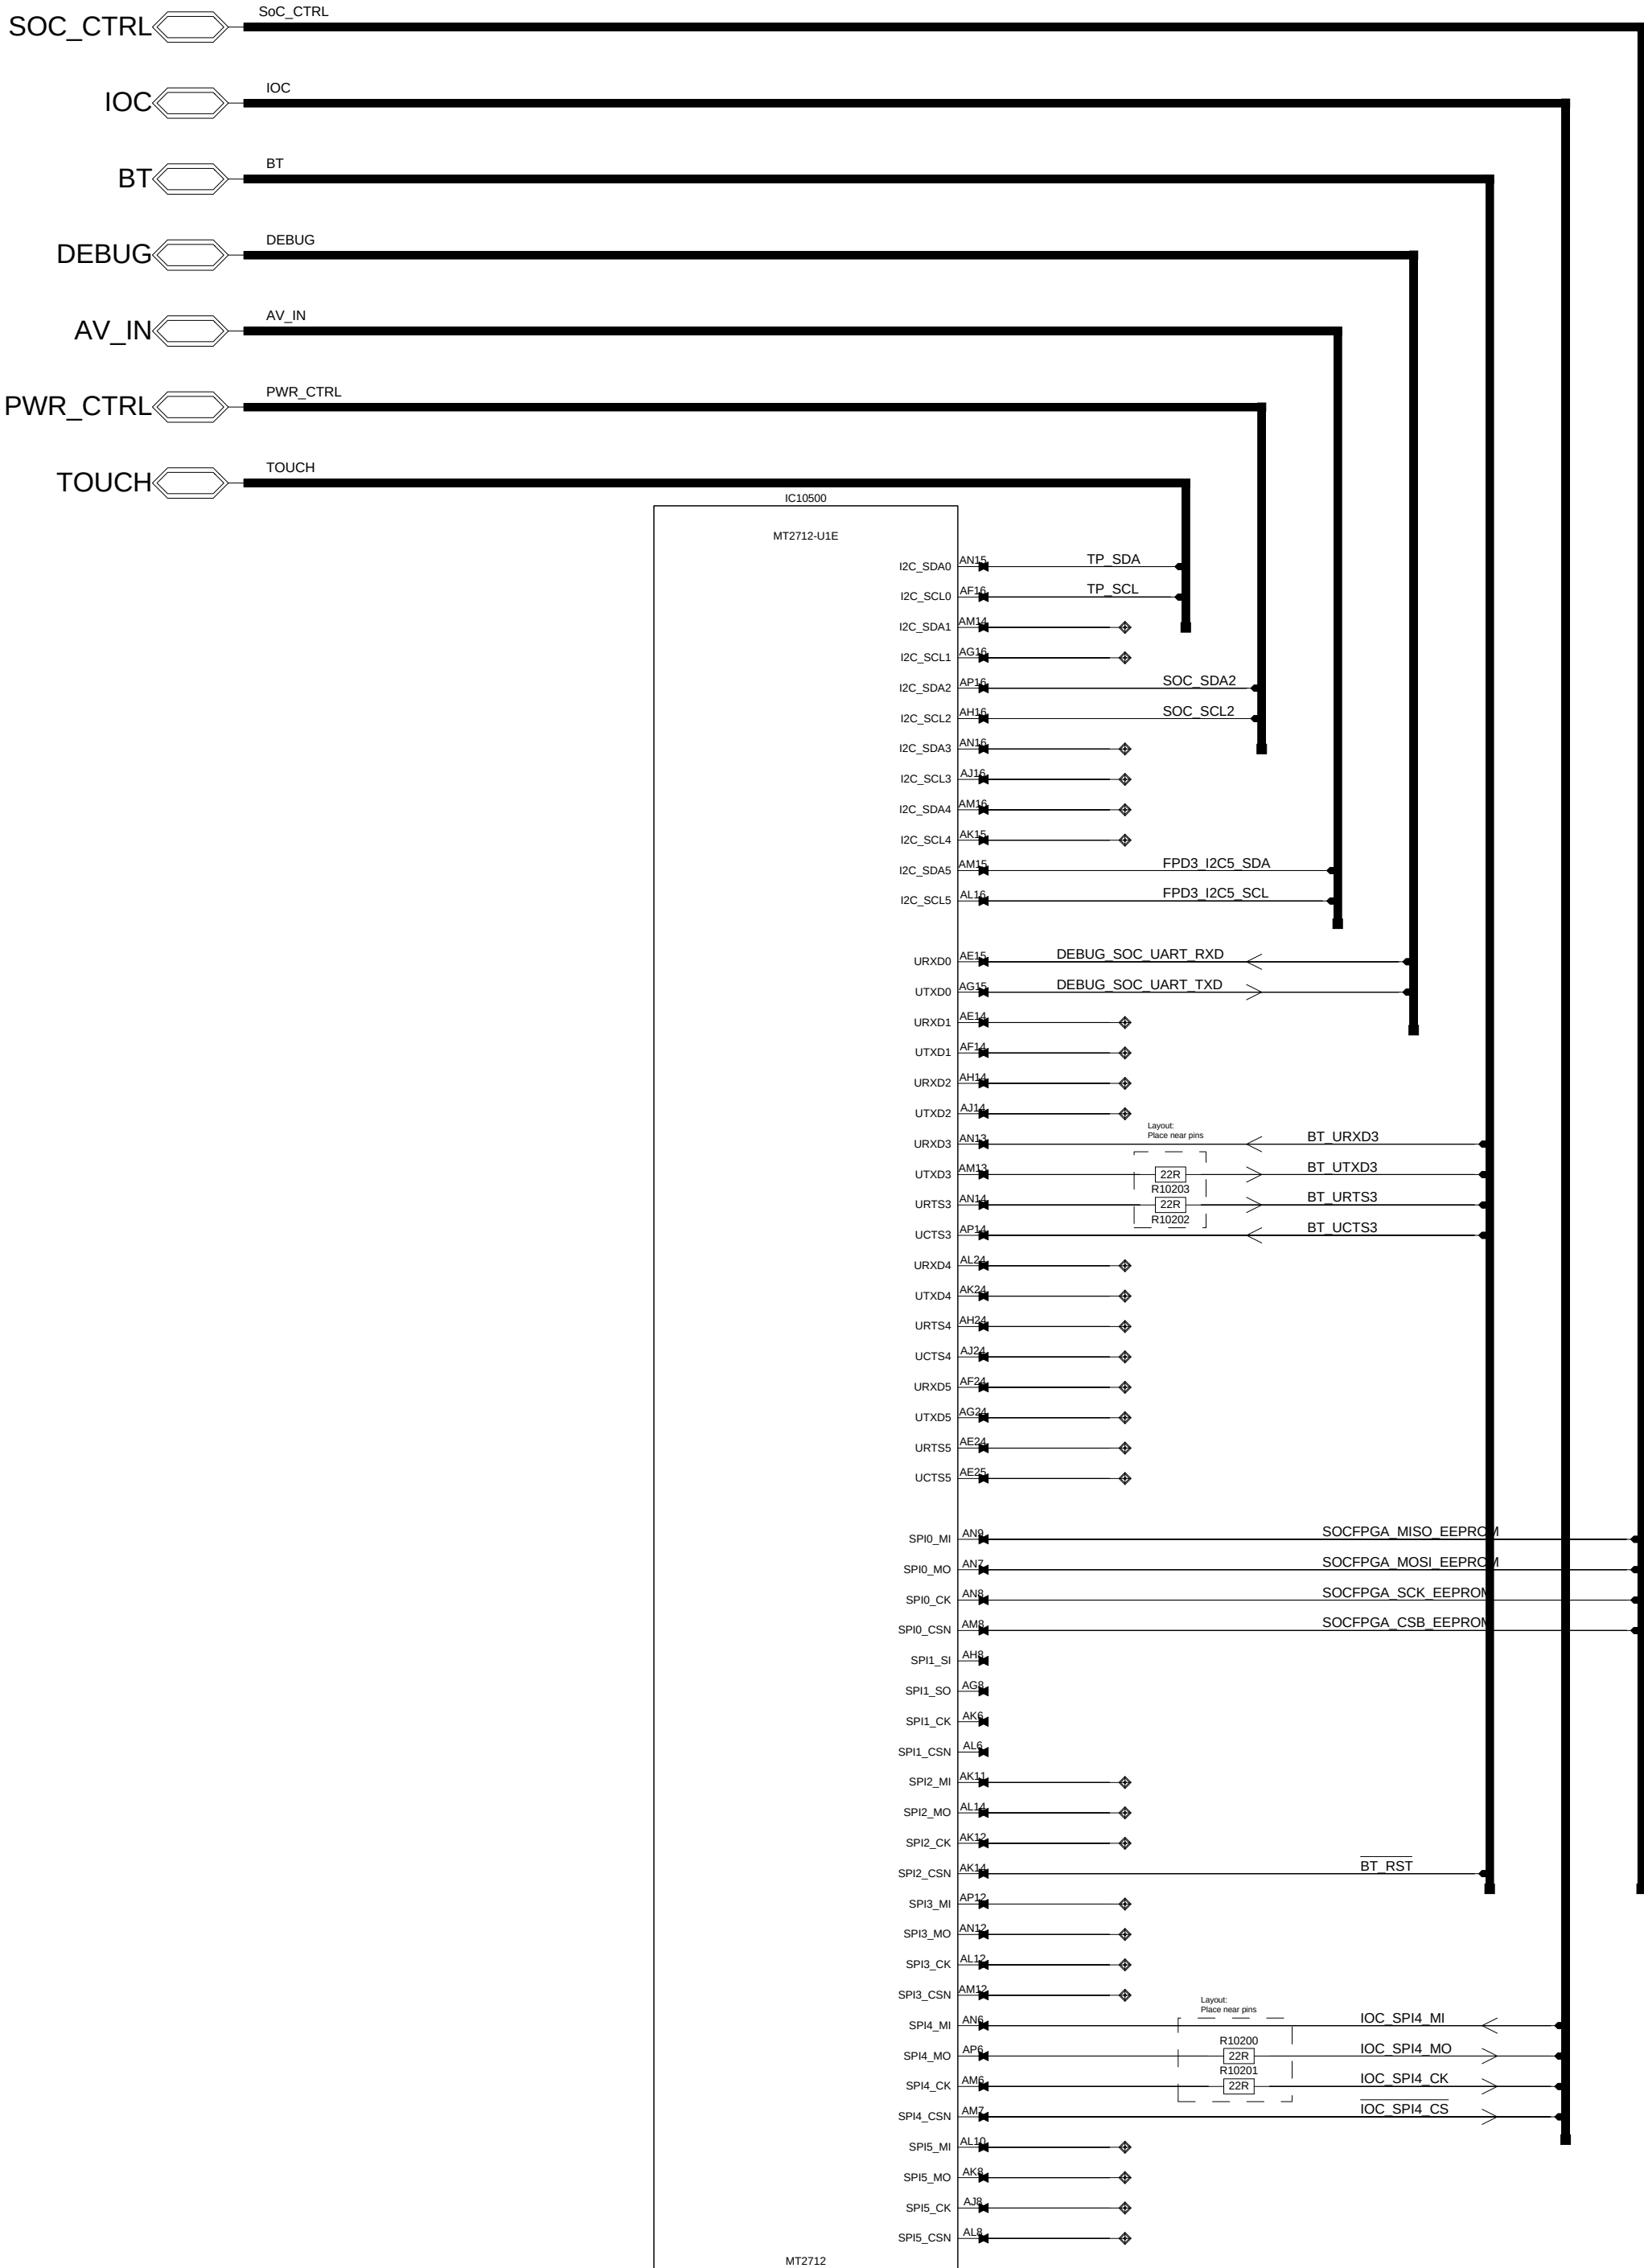


Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
				created	
				checked	
schematic			Sheet 24	Sheets of 31	Sample
4010_SoC_Serial_IF			Type	Variant	Part Number
substitute for:		substitute by:			

- 2) - Route as differential pair signals.
- Differential impedance: 100ohm ($\pm 10\%$)
- Maximum intra-pair skew: 0.127mm (5mils)
- Maximum skew from clock (BECK) to data (BE[0-3]): 5mm





Rev.	type of change					change-no.	date of change	auth.	checked
			Copyright reserved	Writing modifications reserved	date		name		
					created				
					checked				
schematic						Sheet	Sheets of	Sample	
4010_Soc_Video						25	31		
substitute for:				substitute by:		Type	Variant	Part Number	

SOC_eMMC_NAND_SID (10100-10199)

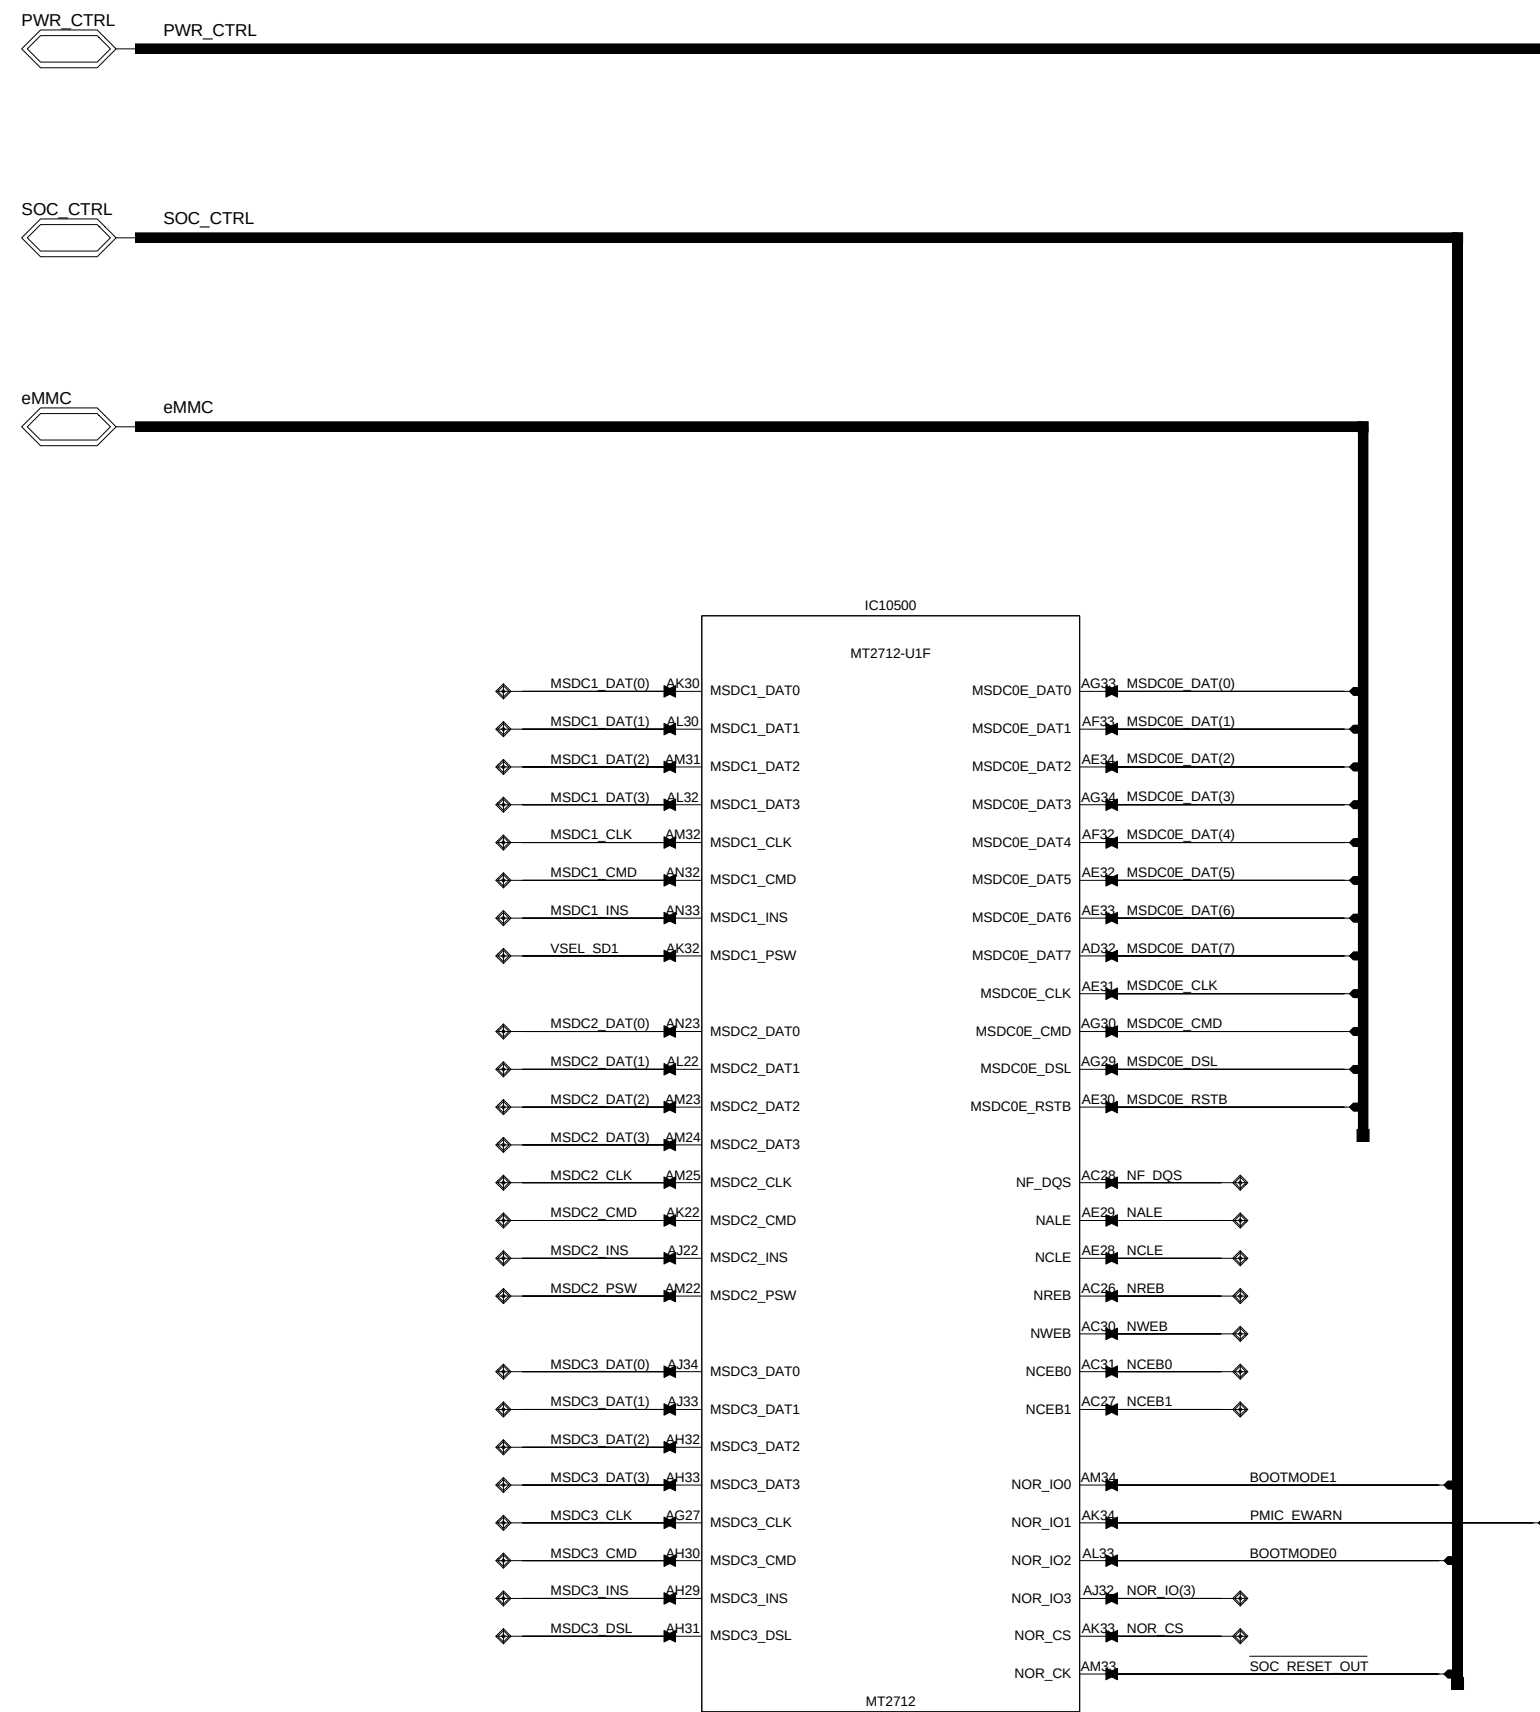



Rev.	type of change					change-no.	date of change		auth.	checked
			Copyright reserved	Wiring modifications reserved		date		name		
					created					
					checked					
schematic						Sheet	Sheets of		Sample	
4010_Soc_eMMC_NAND_SD						26	31			
substitute for:				substitute by:		Type	Variant		Part Number	

TFT BL (6900-6999)

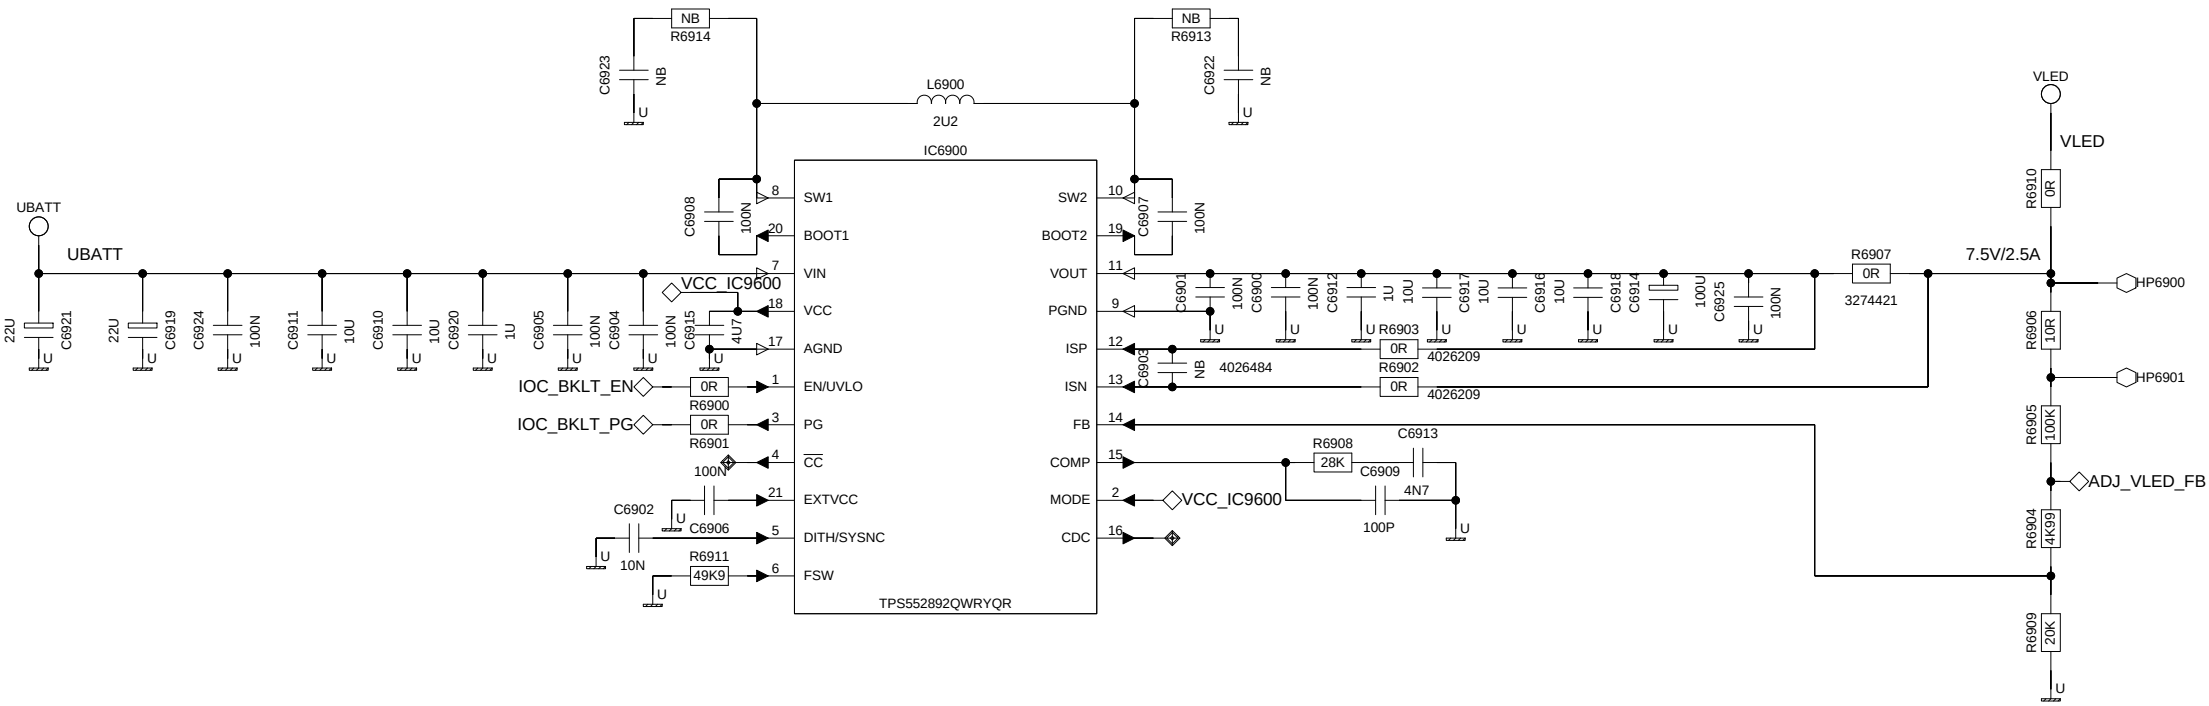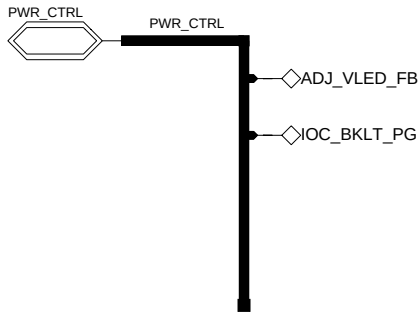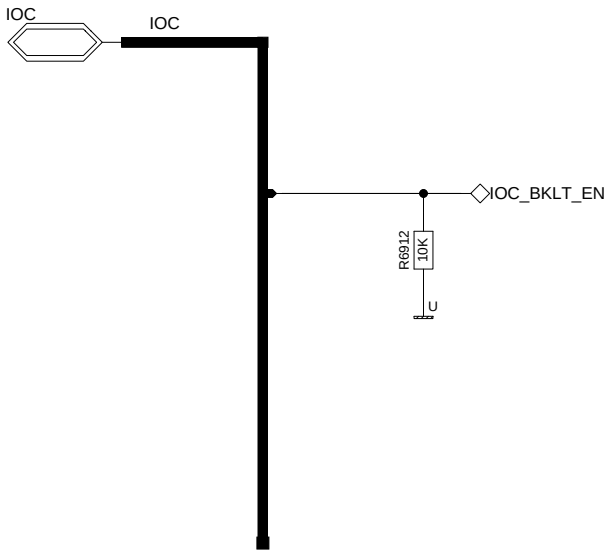
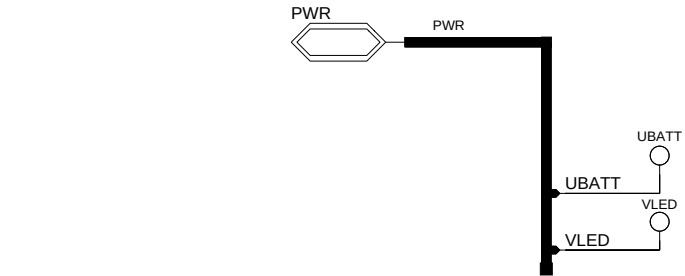


Rev.	type of change	change-no.	date of change	auth.	checked
			date	name	
		created			
		checked			
schematic		Sheet	Sheets of	Sample	
4010_TFT_BL		Type	Variant	Part Number	
substitute for:	substitute by:		C143		

The reproduction, distribution and utilization of this document as well as the communication of its contents to others without explicit authorization is prohibited. Offenders will be held liable for the payment of damages. All rights reserved in the event of the grant of a patent, utility model or design.

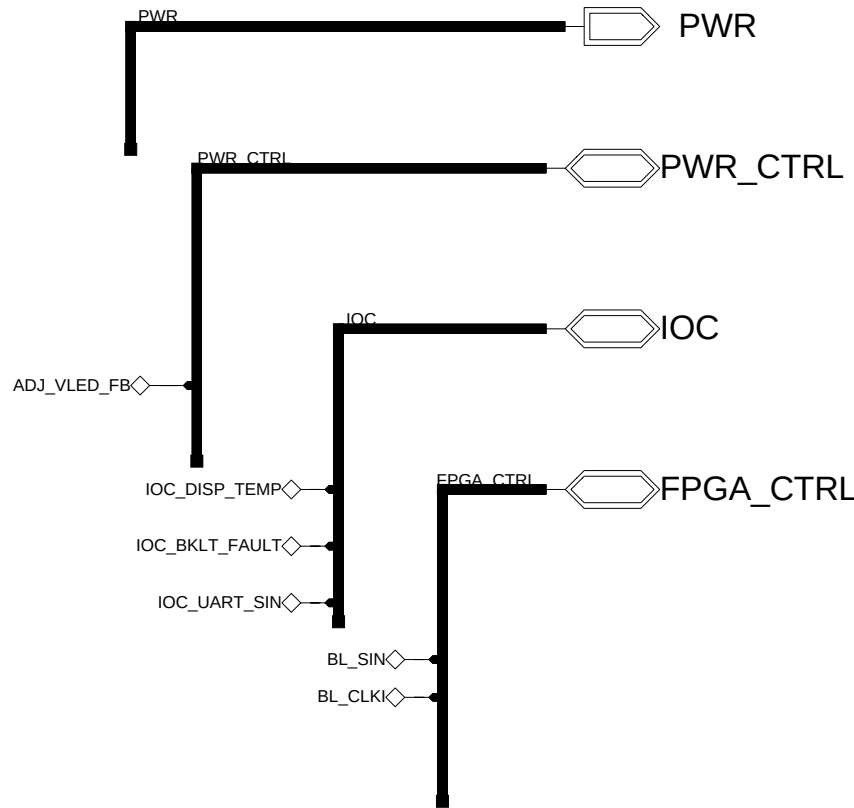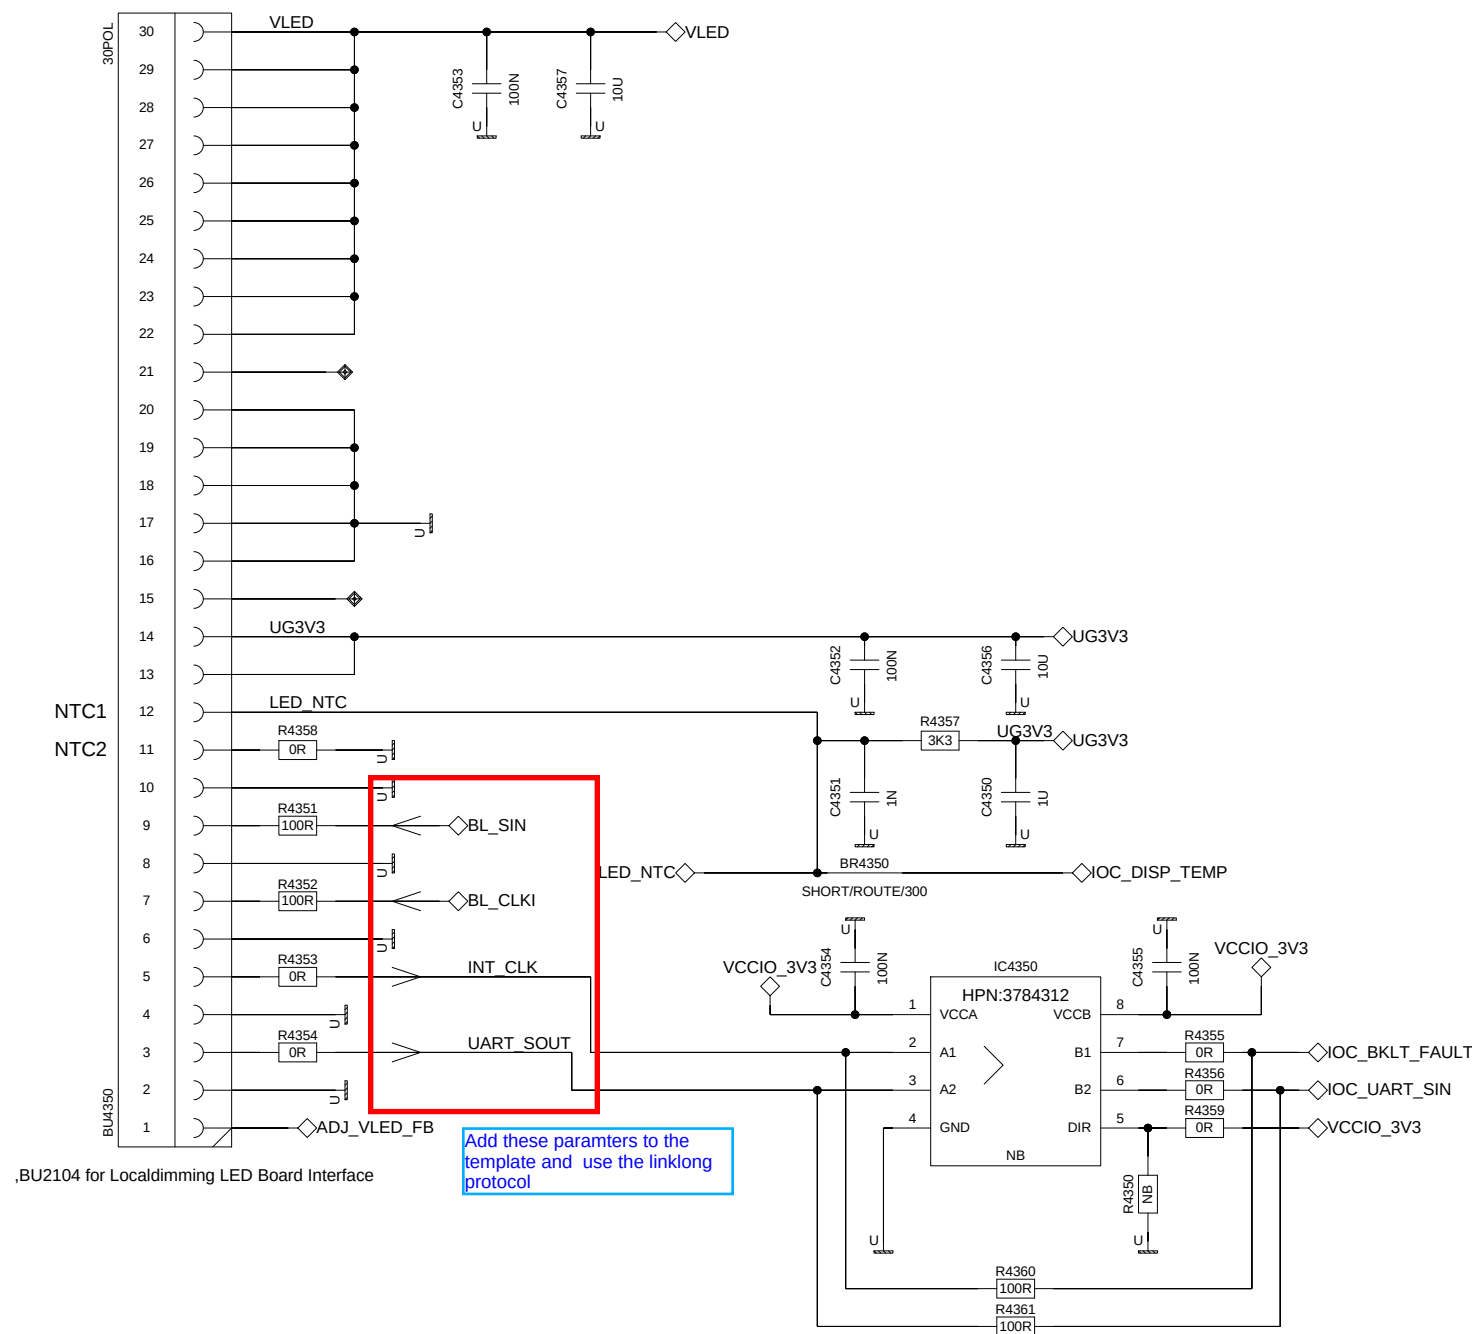

Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
				created	
				checked	
schematic			Sheet 28	Sheets of 31	Sample
4010_TFT_BL_Conn			Type	Variant	Part Number
substitute for:		substitute by:		C143	

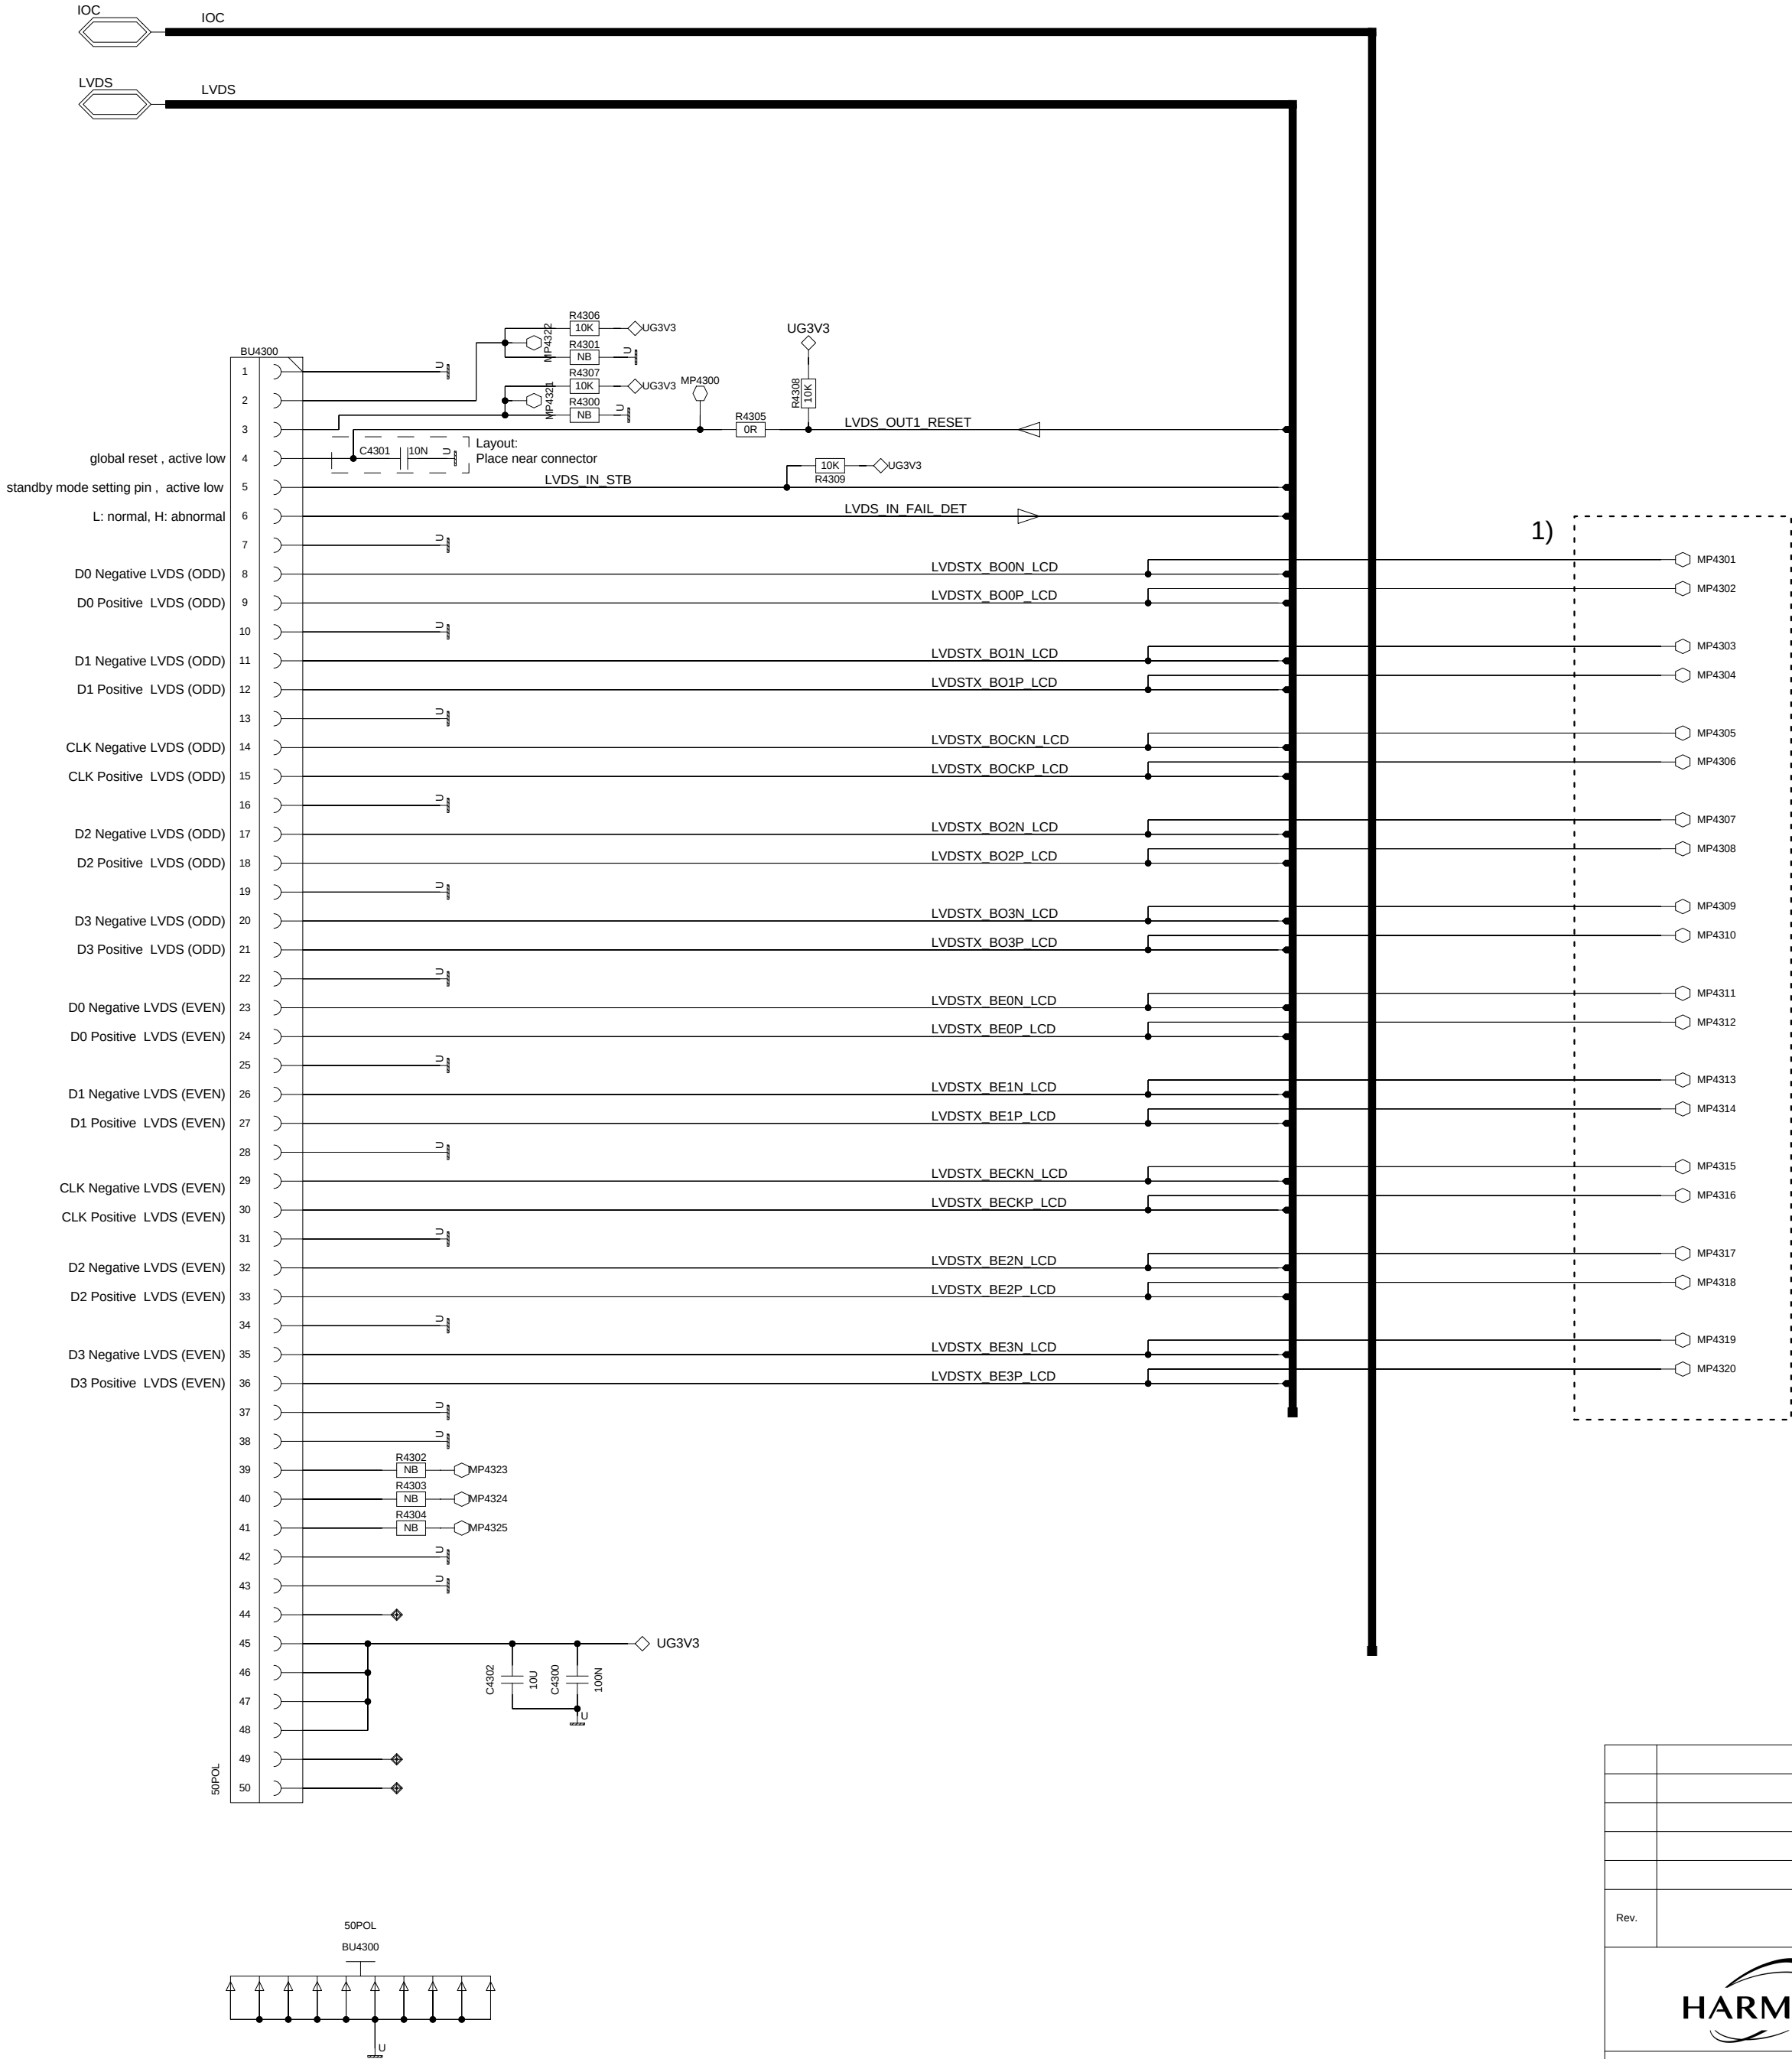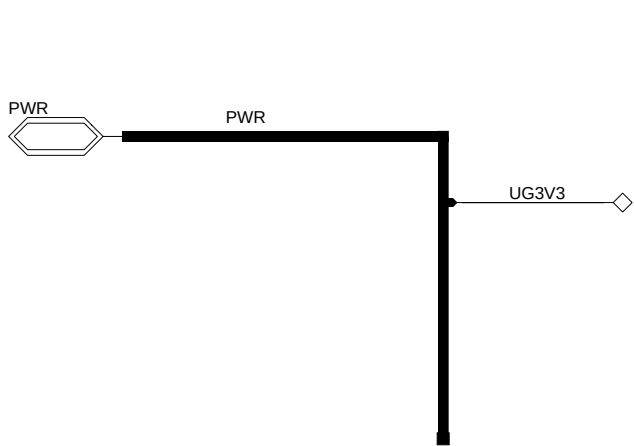


Verify pin out during layout


1) Testpoints should be placed as close as possible to an existing VIA

Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
				created	
				checked	
schematic			Sheet 29	Sheets of 31	Sample
4010_TFT_Conn			Type	Variant C143	Part Number
substitute for:		substitute by:			

The schematic diagram illustrates the input sections of the MP4105. The AV_IN section features a 6mA MAX @ 1-lane FPD-Link III Input connected to VDDIO_DES. This input is decoupled by a series of capacitors: C4130 (100pF), C4112 (1uF), C4100 (100nF), C4118 (10nF), and C4105 (10nF). The PWR section features a 122mA MAX @ 1-lane FPD-Link III Input connected to VDD33_DES, decoupled by capacitors C4131 (100pF), C4113 (1uF), C4101 (100nF), and C4119 (10nF). A BU41100 component is also shown, connected to the PWR input line. The diagram includes various components such as capacitors (C4130, C4112, C4100, C4118, C4105, C4131, C4113, C4101, C4119), inductors (L4104, L4105), and resistors (UG1V2, UG3V3, UG1V3, UG3V4, UG1V4, UG3V5, UG1V5, UG3V6, UG1V6, UG3V7, UG1V7, UG3V8, UG1V8, UG3V9, UG1V9, UG3V10, UG1V10, UG3V11, UG1V11, UG3V12, UG1V12, UG3V13, UG1V13, UG3V14, UG1V14, UG3V15, UG1V15, UG3V16, UG1V16, UG3V17, UG1V17, UG3V18, UG1V18, UG3V19, UG1V19, UG3V20, UG1V20, UG3V21, UG1V21, UG3V22, UG1V22, UG3V23, UG1V23, UG3V24, UG1V24, UG3V25, UG1V25, UG3V26, UG1V26, UG3V27, UG1V27, UG3V28, UG1V28, UG3V29, UG1V29, UG3V30, UG1V30, UG3V31, UG1V31, UG3V32, UG1V32, UG3V33, UG1V33, UG3V34, UG1V34, UG3V35, UG1V35, UG3V36, UG1V36, UG3V37, UG1V37, UG3V38, UG1V38, UG3V39, UG1V39, UG3V40, UG1V40, UG3V41, UG1V41, UG3V42, UG1V42, UG3V43, UG1V43, UG3V44, UG1V44, UG3V45, UG1V45, UG3V46, UG1V46, UG3V47, UG1V47, UG3V48, UG1V48, UG3V49, UG1V49, UG3V50, UG1V50, UG3V51, UG1V51, UG3V52, UG1V52, UG3V53, UG1V53, UG3V54, UG1V54, UG3V55, UG1V55, UG3V56, UG1V56, UG3V57, UG1V57, UG3V58, UG1V58, UG3V59, UG1V59, UG3V60, UG1V60, UG3V61, UG1V61, UG3V62, UG1V62, UG3V63, UG1V63, UG3V64, UG1V64, UG3V65, UG1V65, UG3V66, UG1V66, UG3V67, UG1V67, UG3V68, UG1V68, UG3V69, UG1V69, UG3V70, UG1V70, UG3V71, UG1V71, UG3V72, UG1V72, UG3V73, UG1V73, UG3V74, UG1V74, UG3V75, UG1V75, UG3V76, UG1V76, UG3V77, UG1V77, UG3V78, UG1V78, UG3V79, UG1V79, UG3V80, UG1V80, UG3V81, UG1V81, UG3V82, UG1V82, UG3V83, UG1V83, UG3V84, UG1V84, UG3V85, UG1V85, UG3V86, UG1V86, UG3V87, UG1V87, UG3V88, UG1V88, UG3V89, UG1V89, UG3V90, UG1V90, UG3V91, UG1V91, UG3V92, UG1V92, UG3V93, UG1V93, UG3V94, UG1V94, UG3V95, UG1V95, UG3V96, UG1V96, UG3V97, UG1V97, UG3V98, UG1V98, UG3V99, UG1V99, UG3V100, UG1V100, UG3V101, UG1V101, UG3V102, UG1V102, UG3V103, UG1V103, UG3V104, UG1V104, UG3V105, UG1V105, UG3V106, UG1V106, UG3V107, UG1V107, UG3V108, UG1V108, UG3V109, UG1V109, UG3V110, UG1V110, UG3V111, UG1V111, UG3V112, UG1V112, UG3V113, UG1V113, UG3V114, UG1V114, UG3V115, UG1V115, UG3V116, UG1V116, UG3V117, UG1V117, UG3V118, UG1V118, UG3V119, UG1V119, UG3V120, UG1V120, UG3V121, UG1V121, UG3V122, UG1V122, UG3V123, UG1V123, UG3V124, UG1V124, UG3V125, UG1V125, UG3V126, UG1V126, UG3V127, UG1V127, UG3V128, UG1V128, UG3V129, UG1V129, UG3V130, UG1V130, UG3V131, UG1V131, UG3V132, UG1V132, UG3V133, UG1V133, UG3V134, UG1V134, UG3V135, UG1V135, UG3V136, UG1V136, UG3V137, UG1V137, UG3V138, UG1V138, UG3V139, UG1V139, UG3V140, UG1V140, UG3V141, UG1V141, UG3V142, UG1V142, UG3V143, UG1V143, UG3V144, UG1V144, UG3V145, UG1V145, UG3V146, UG1V146, UG3V147, UG1V147, UG3V148, UG1V148, UG3V149, UG1V149, UG3V150, UG1V150, UG3V151, UG1V151, UG3V152, UG1V152, UG3V153, UG1V153, UG3V154, UG1V154, UG3V155, UG1V155, UG3V156, UG1V156, UG3V157, UG1V157, UG3V158, UG1V158, UG3V159, UG1V159, UG3V160, UG1V160, UG3V161, UG1V161, UG3V162, UG1V162, UG3V163, UG1V163, UG3V164, UG1V164, UG3V165, UG1V165, UG3V166, UG1V166, UG3V167, UG1V167, UG3V168, UG1V168, UG3V169, UG1V169, UG3V170, UG1V170, UG3V171, UG1V171, UG3V172, UG1V172, UG3V173, UG1V173, UG3V174, UG1V174, UG3V175, UG1V175, UG3V176, UG1V176, UG3V177, UG1V177, UG3V178, UG1V178, UG3V179, UG1V179, UG3V180, UG1V180, UG3V181, UG1V181, UG3V182, UG1V182, UG3V183, UG1V183, UG3V184, UG1V184, UG3V185, UG1V185, UG3V186, UG1V186, UG3V187, UG1V187, UG3V188, UG1V188, UG3V189, UG1V189, UG3V190, UG1V190, UG3V191, UG1V191, UG3V192, UG1V192, UG3V193, UG1V193, UG3V194, UG1V194, UG3V195, UG1V195, UG3V196, UG1V196, UG3V197, UG1V197, UG3V198, UG1V198, UG3V199, UG1V199, UG3V200, UG1V200, UG3V201, UG1V201, UG3V202, UG1V202, UG3V203, UG1V203, UG3V204, UG1V204, UG3V205, UG1V205, UG3V206, UG1V206, UG3V207, UG1V207, UG3V208, UG1V208, UG3V209, UG1V209, UG3V210, UG1V210, UG3V211, UG1V211, UG3V212, UG1V212, UG3V213, UG1V213, UG3V214, UG1V214, UG3V215, UG1V215, UG3V216, UG1V216, UG3V217, UG1V217, UG3V218, UG1V218, UG3V219, UG1V219, UG3V220, UG1V220, UG3V221, UG1V221, UG3V222, UG1V222, UG3V223, UG1V223, UG3V224, UG1V224, UG3V225, UG1V225, UG3V226, UG1V226, UG3V227, UG1V227, UG3V228, UG1V228, UG3V229, UG1V229, UG3V230, UG1V230, UG3V231, UG1V231, UG3V232, UG1V232, UG3V233, UG1V233, UG3V234, UG1V234, UG3V235, UG1V235, UG3V236, UG1V236, UG3V237, UG1V237, UG3V238, UG1V238, UG3V239, UG1V239, UG3V240, UG1V240, UG3V241, UG1V241, UG3V24

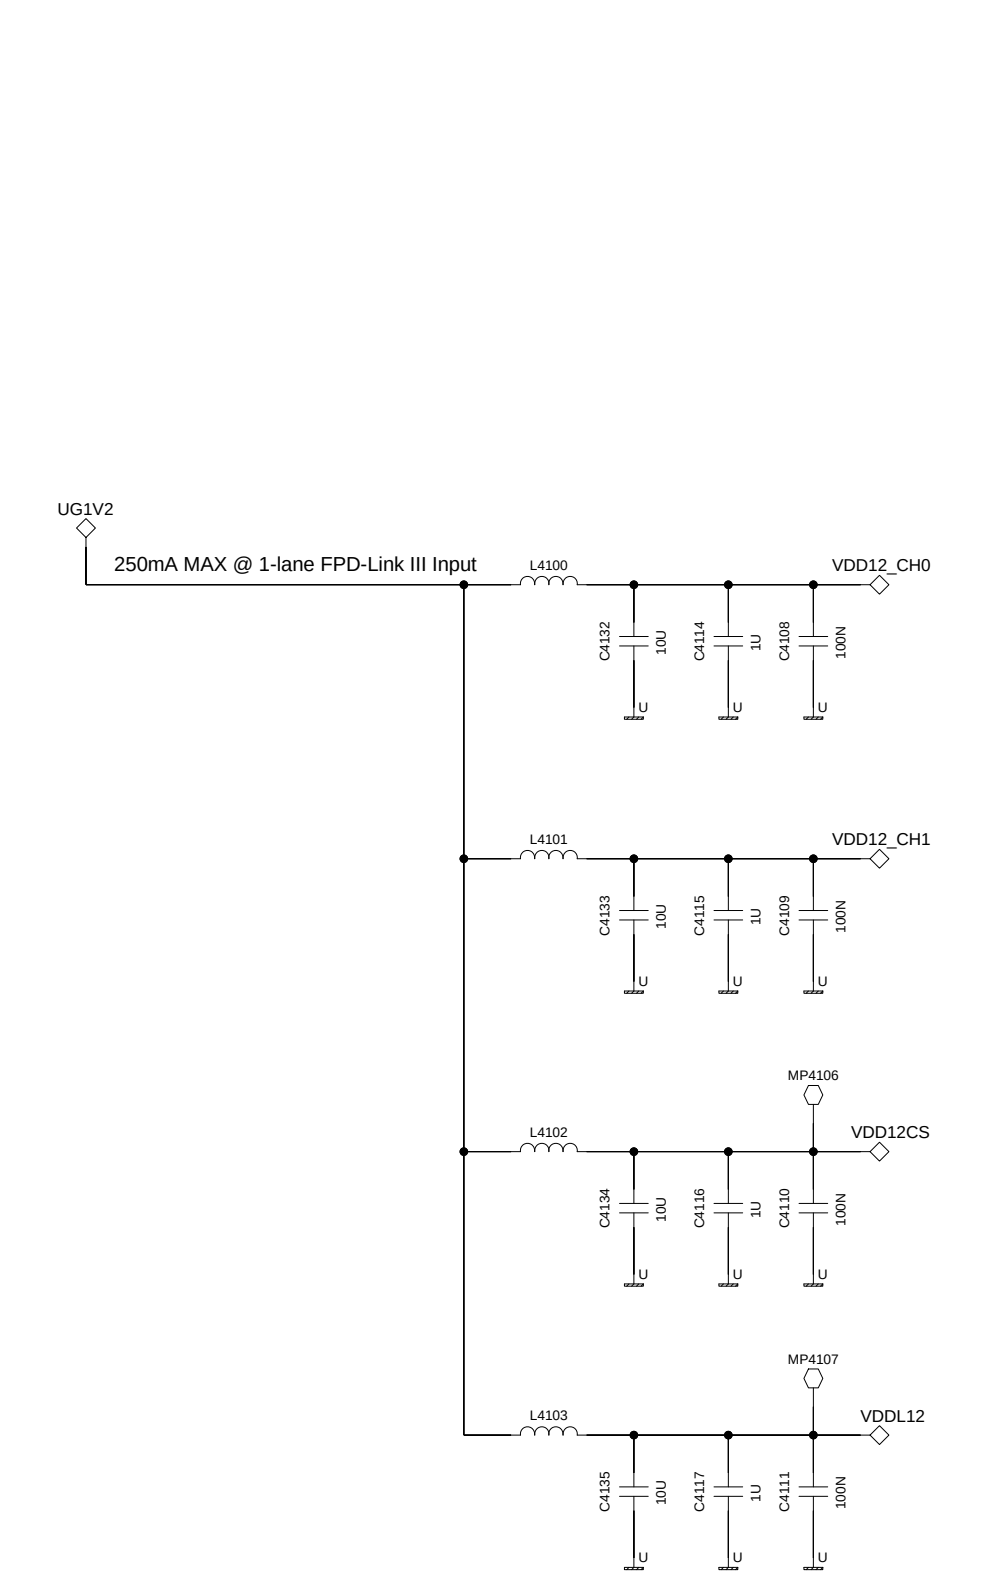


- 2) - Route as differential pair signals.
- Differential impedance: 100ohm ($\pm 10\%$)
- Maximum intra-pair skew: 0.127mm (5mils)
- Maximum inter-pair skew: 1.27mm (50mils)

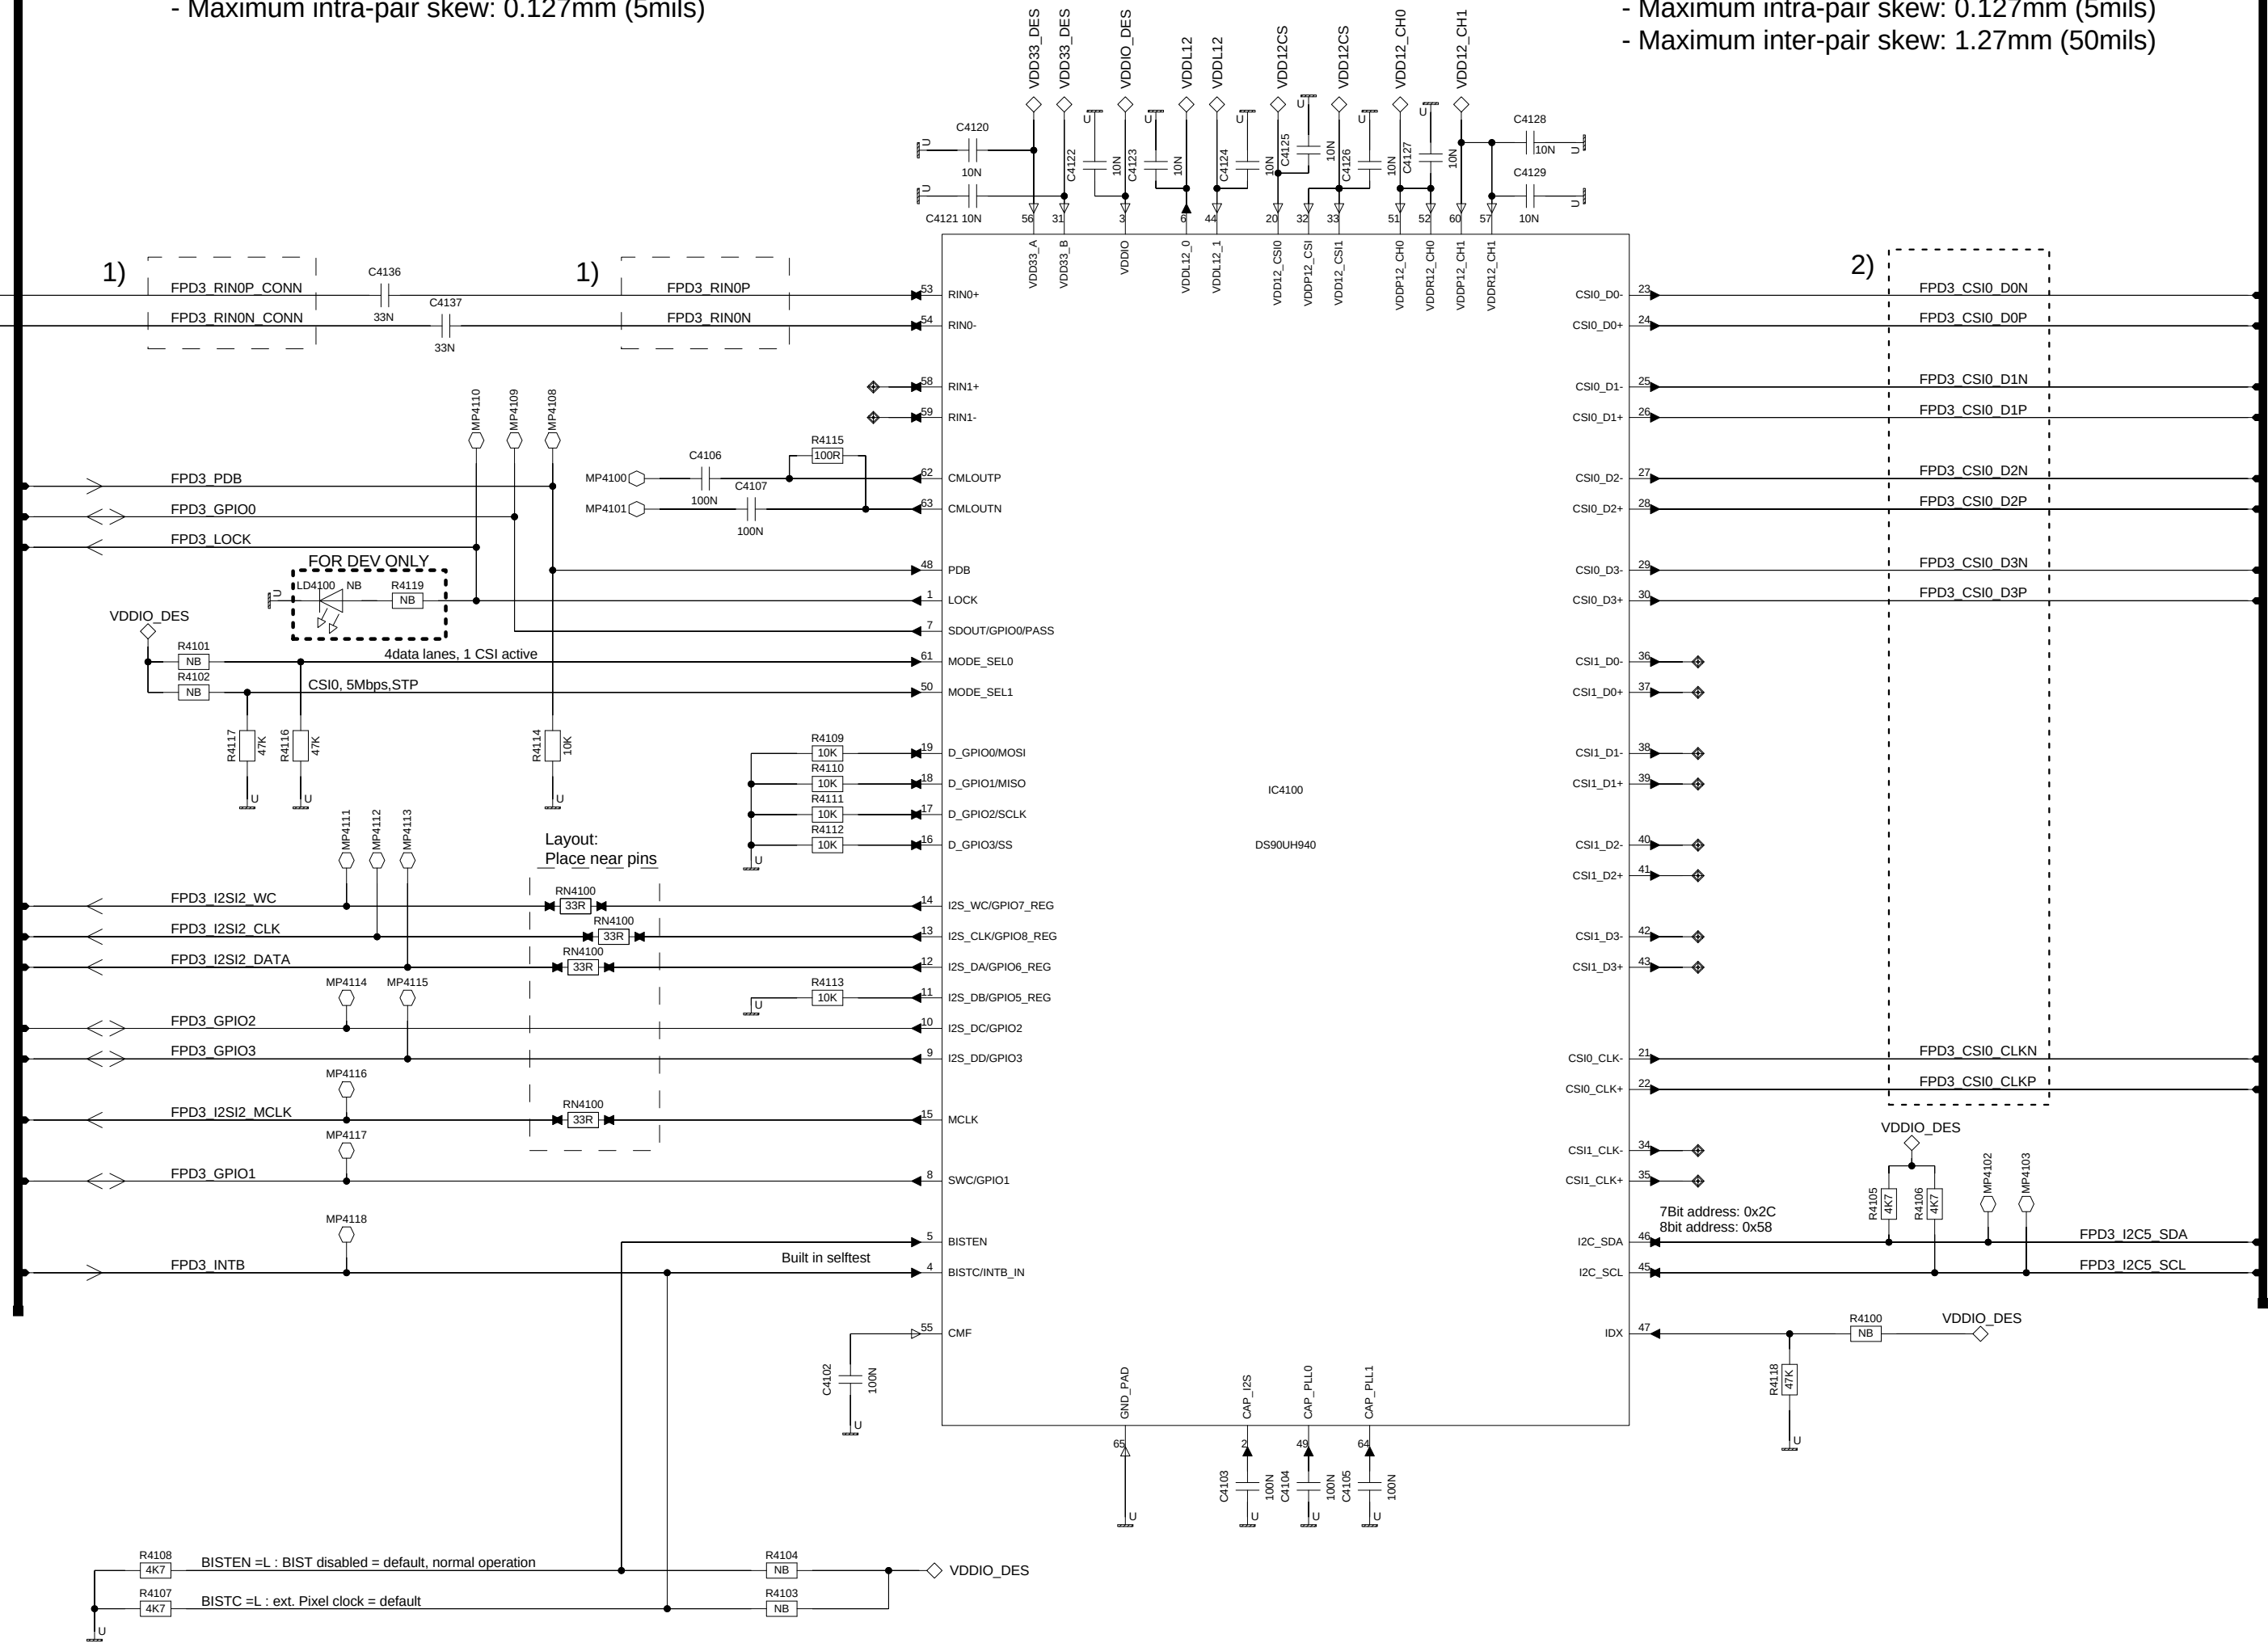

Rev.	type of change		change-no.	date of change	auth. checked
		Copyright reserved	Wiring modifications reserved	date name	
				created	
				checked	
schematic			Sheet 30	Sheets of 31	Sample
4010_VIDEO_DES			Type	Variant	Part Number
substitute for:		substitute by:		C143	

eMMC (2250-2299)

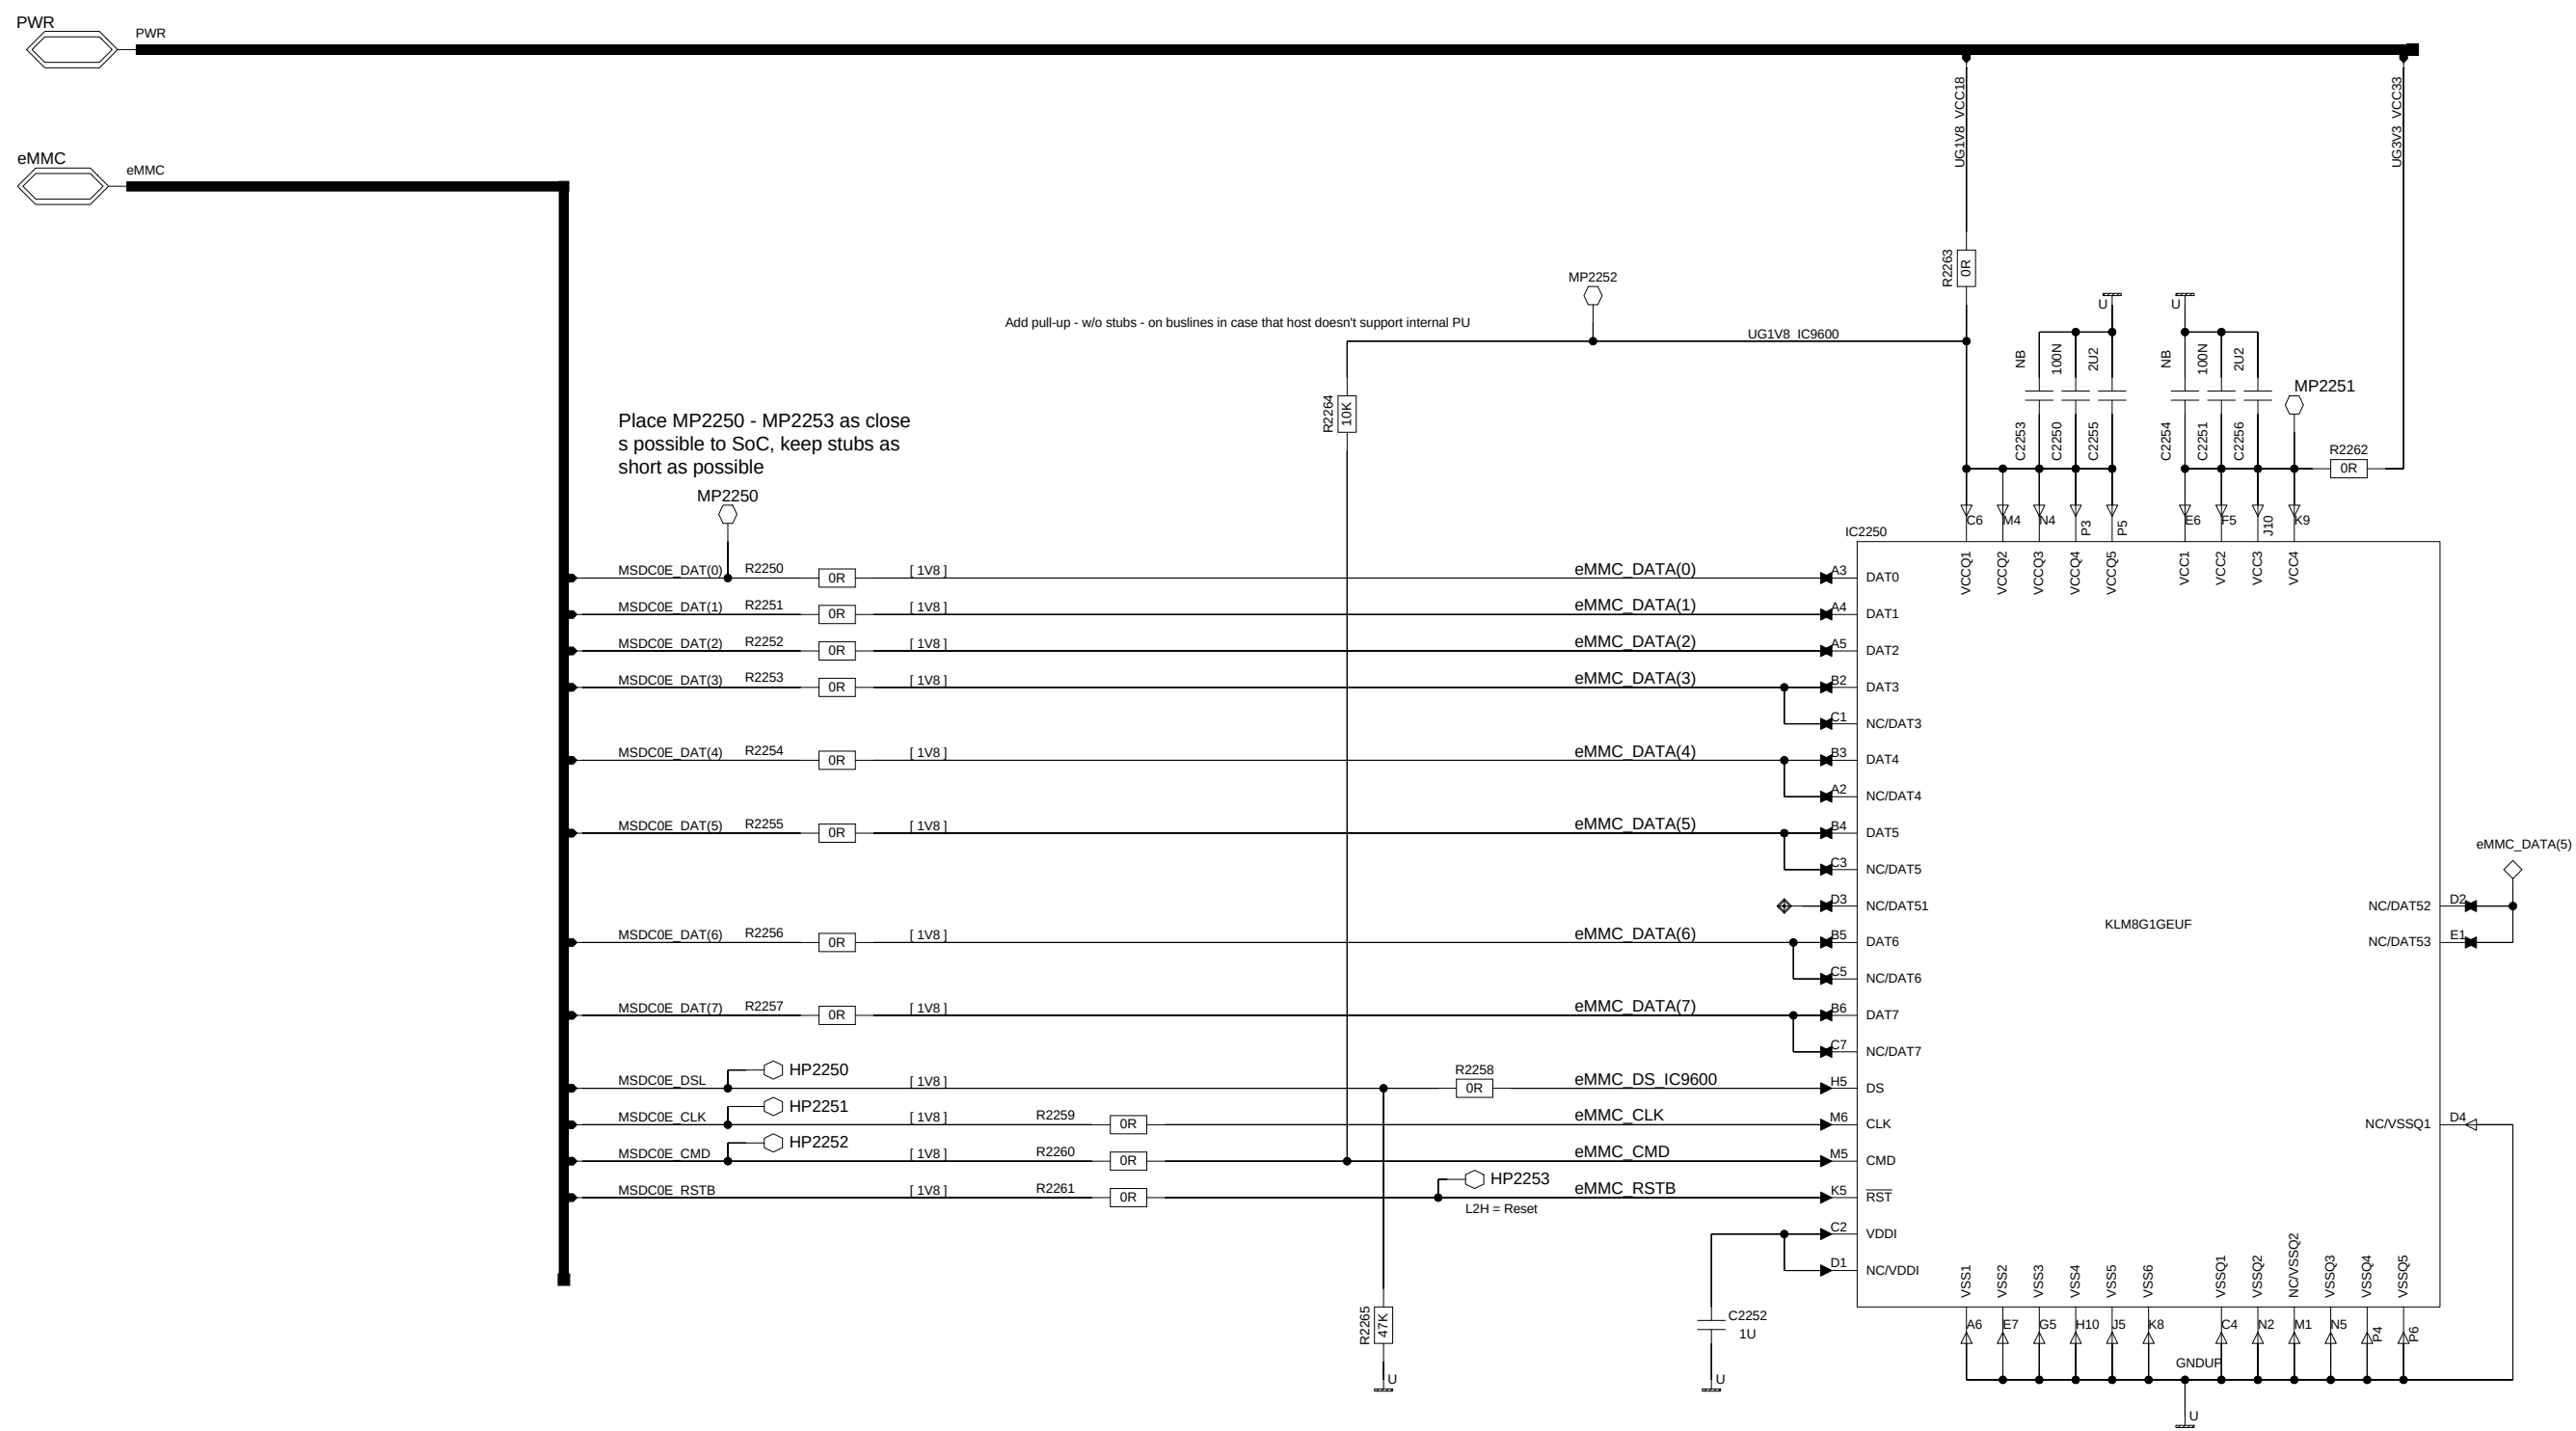

eMMC	Density	Part Number
Micron (-40 to 105°C)	8 GB	3881466
Micron (-40 to 85°C)	8 GB	3543617