

Reax[®] 100M

Dispersant and complexing agent

Reax 100M
CAS Registry No.: 68512-34-5

Revised: 07/09/2019

Description and typical applications

Reax 100M is a modified kraft lignin with a high degree of sulfonation. It is used as a complexing agent of trace metals in micronutrient formulations and as a dispersant in dry and water-based formulations of agricultural chemicals. It is recommended for use in water dispersible granules made by extrusion, spray drying or fluid bed agglomeration. Reax 100M is also recommended for use in aqueous suspensions with high ionic strength.

Typical properties


Physical form	Free-flowing brown powder
Bulk density, lb/ft ³ (kg/L)	Loose 24 (0.386) Packed 30 (0.482)
Cation	Sodium
Degree of sulfonation*	3.4
Moisture, %	7.0
Na ₂ SO ₃ , %	3.0
pH (15% aqueous, 25°C)	8.8
Solubility in water	Complete
Stability	Stable under ordinary conditions
Surface tension (1% aqueous), mN/m	48.9
Total sulfur, %	12.3
Weight average molecular weight	2,000

* Moles of sulfonic acid groups per 1,000 unit weight of lignin

Shipping

Freight classification	Lignin pitch
Availability	55 lb (25 kg) net bags
Production site	Charleston, SC, USA

Viscosity of aqueous solutions at 25°C

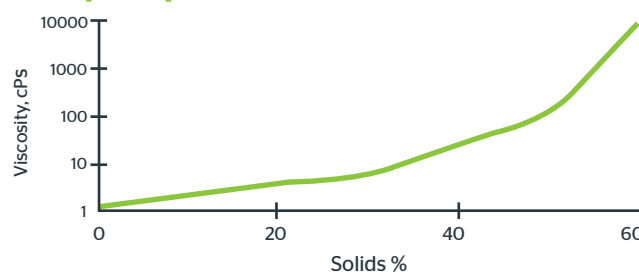

Regulatory status

Reax 100M is exempt under 40 CFR 180.910 and 180.930.

Safety: Always refer to the Safety Data Sheet for detailed information on shipping, handling, storage, and use.

Important: The information provided herein is believed to be accurate and reliable, but is presented without guarantee on the part of Ingevity. Furthermore, nothing contained herein shall be taken as an inducement to violate any patent rights.

