




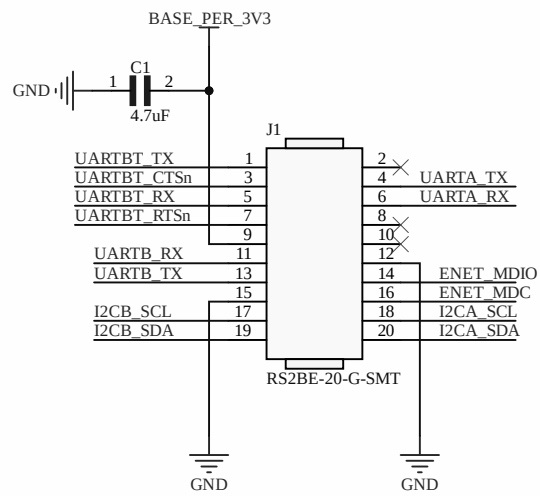


Bottom Header

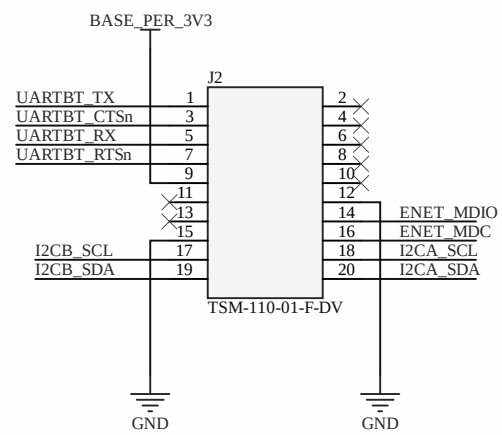

Top Header

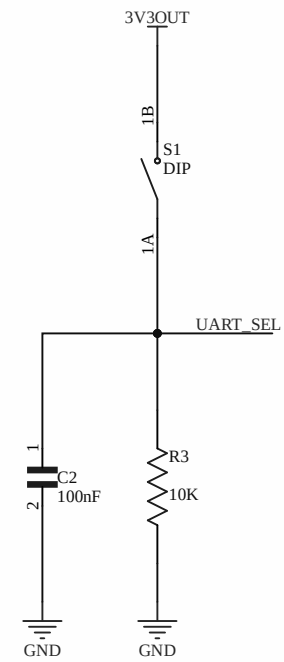


UART A/B Selection

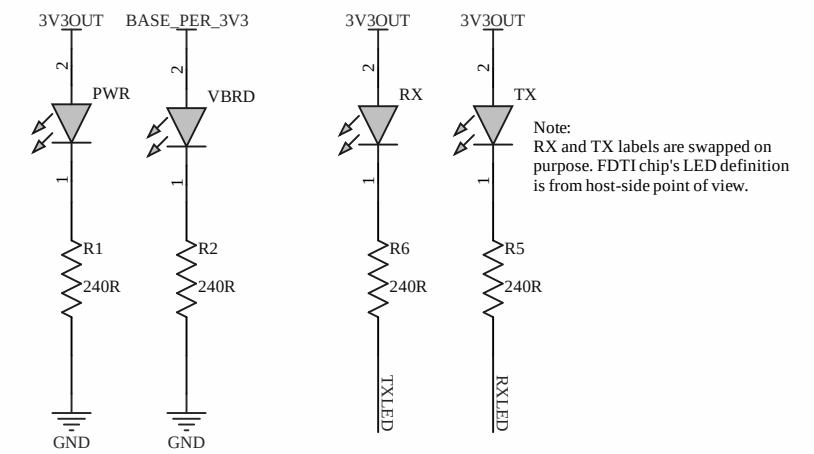

LEDs

HEADERs BOTTOM/TOP

USB to UART 2:1 MUX

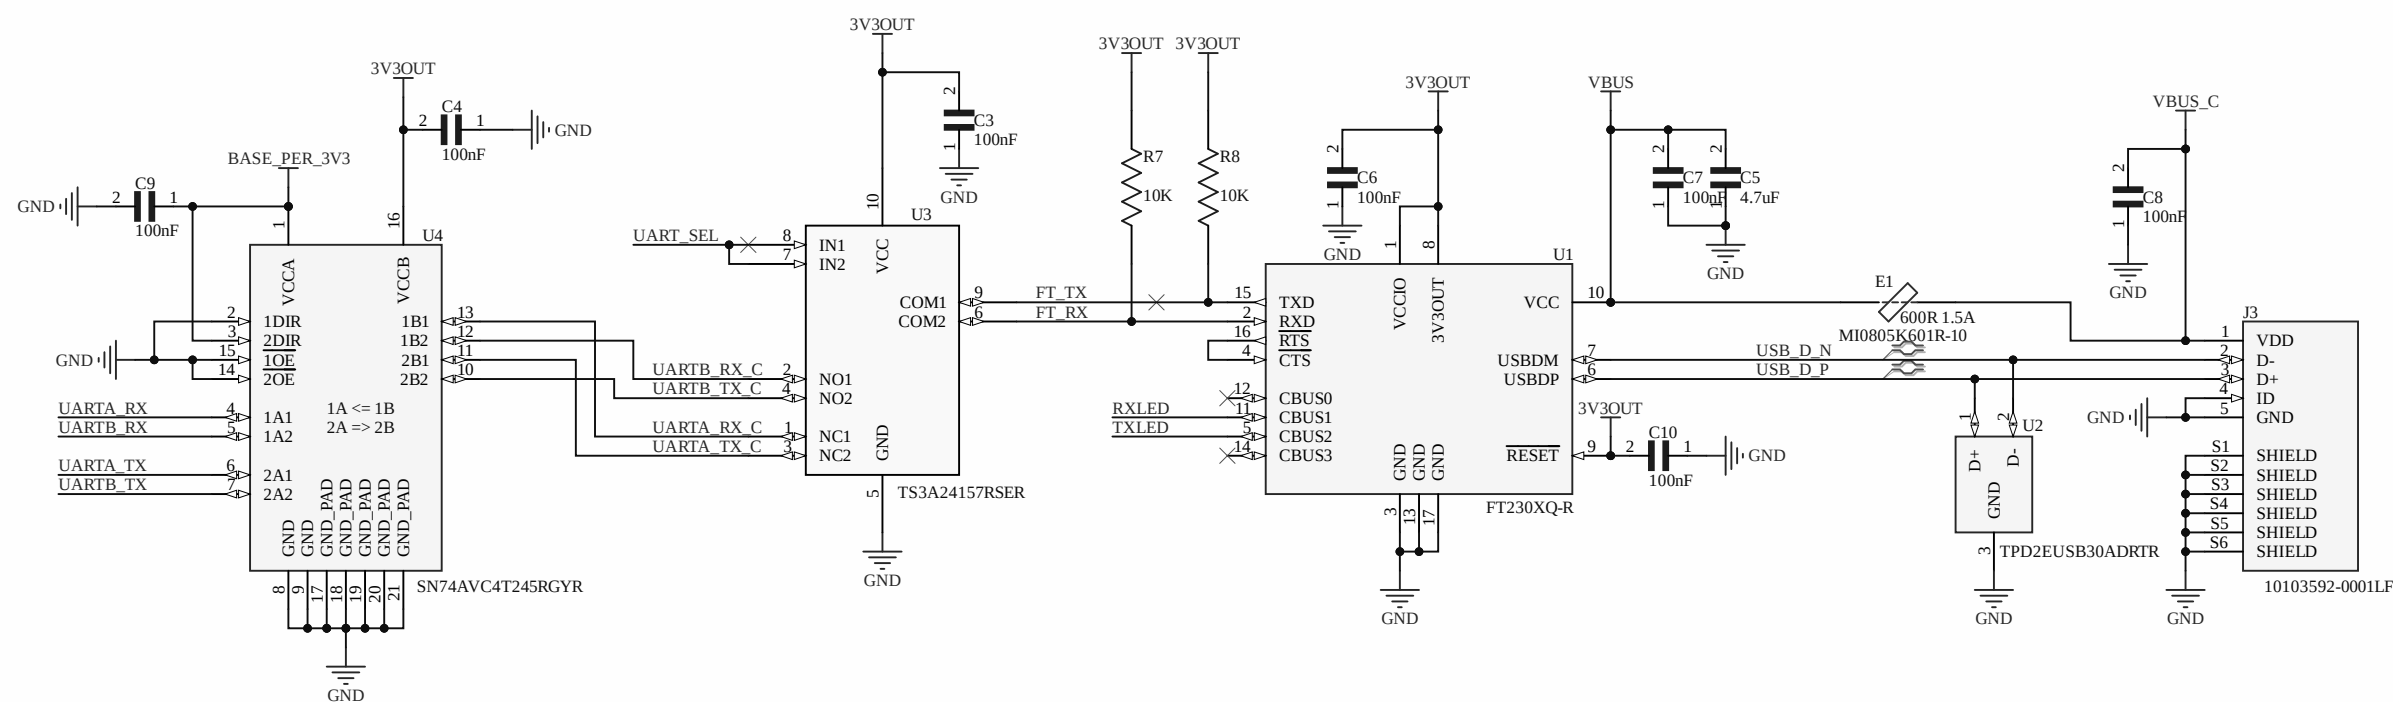

Revision History

Document	Product	
1.0	0.1	Initial
	0.2	- Drop UARTA_CTSn and UARTA_RTSn from headers - Change Vias hole size from 0.3mm to 0.2mm - Set clearance to almost 10 mil - Tweaks on Power, Ground and Signal Layout - Update Layer Stackup to JLC04161H-3313 - Tweak USB diff pair lines to 90 Ohm impedance - Swap RX/TX label to change point of view definition - Vias Bottom and Top side tented - Tweaks on Solder Mask - Add passive component values - Correct LED part to IG5, use 240R (2.5mA) - Tweaking symbols and comments

Title VAR-DT8M-DBG-EXT		
Size A2	Number	Revision 0.2
Date: 12.23.2025	Sheet of 1	
File: C:\Users\...\ExtensionBoard.SchDoc	Drawn By: Alexander H.	