
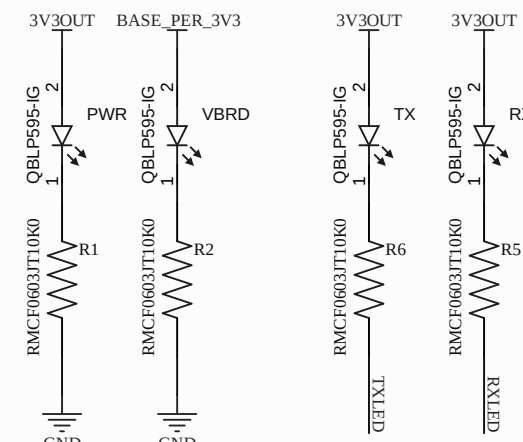
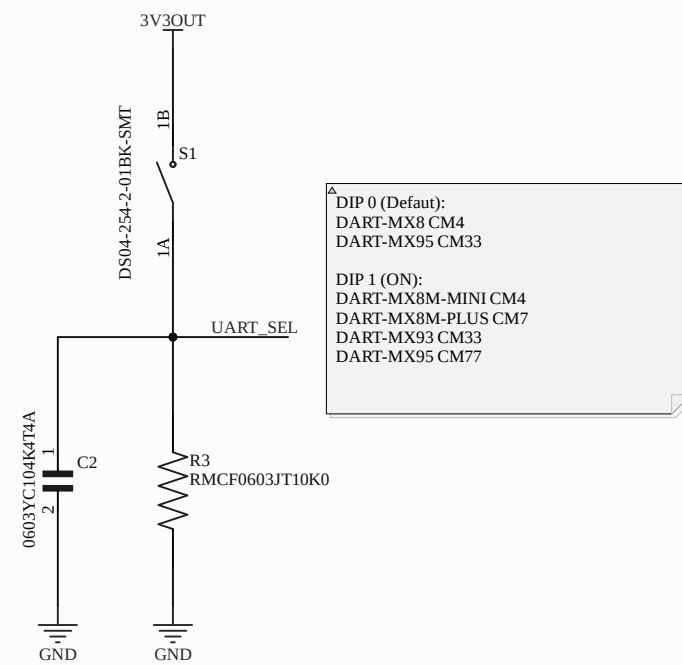


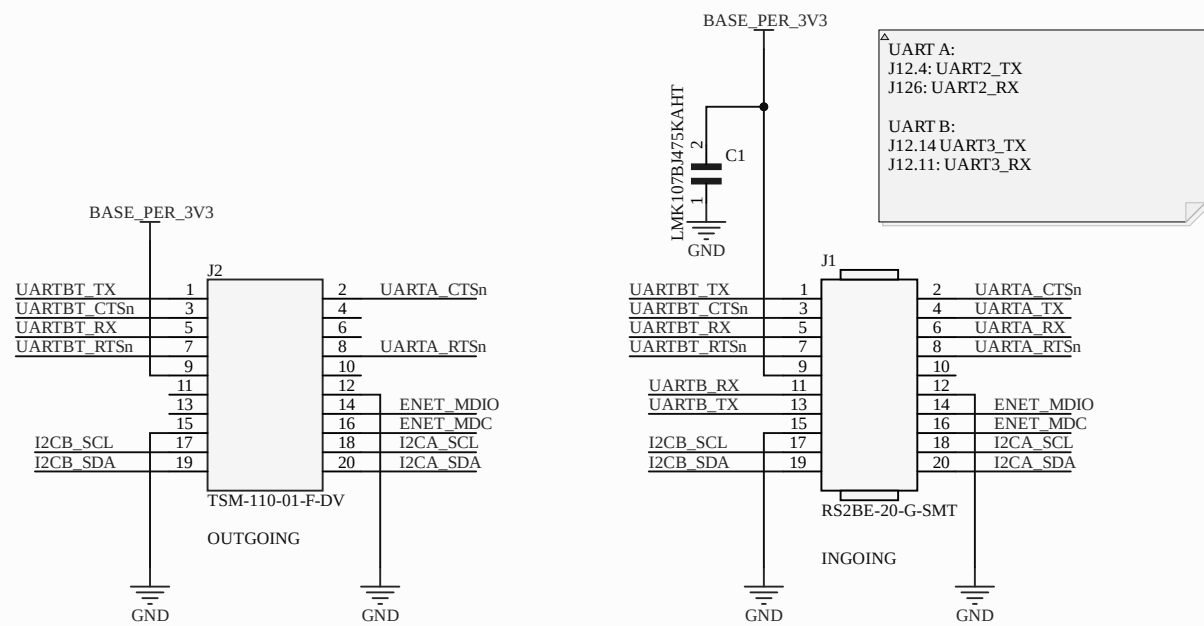


HEADER BOTTOM/TOP (STACKABLE)

UART A/B Selection

LED Indications

USB to UART converter (2:1)

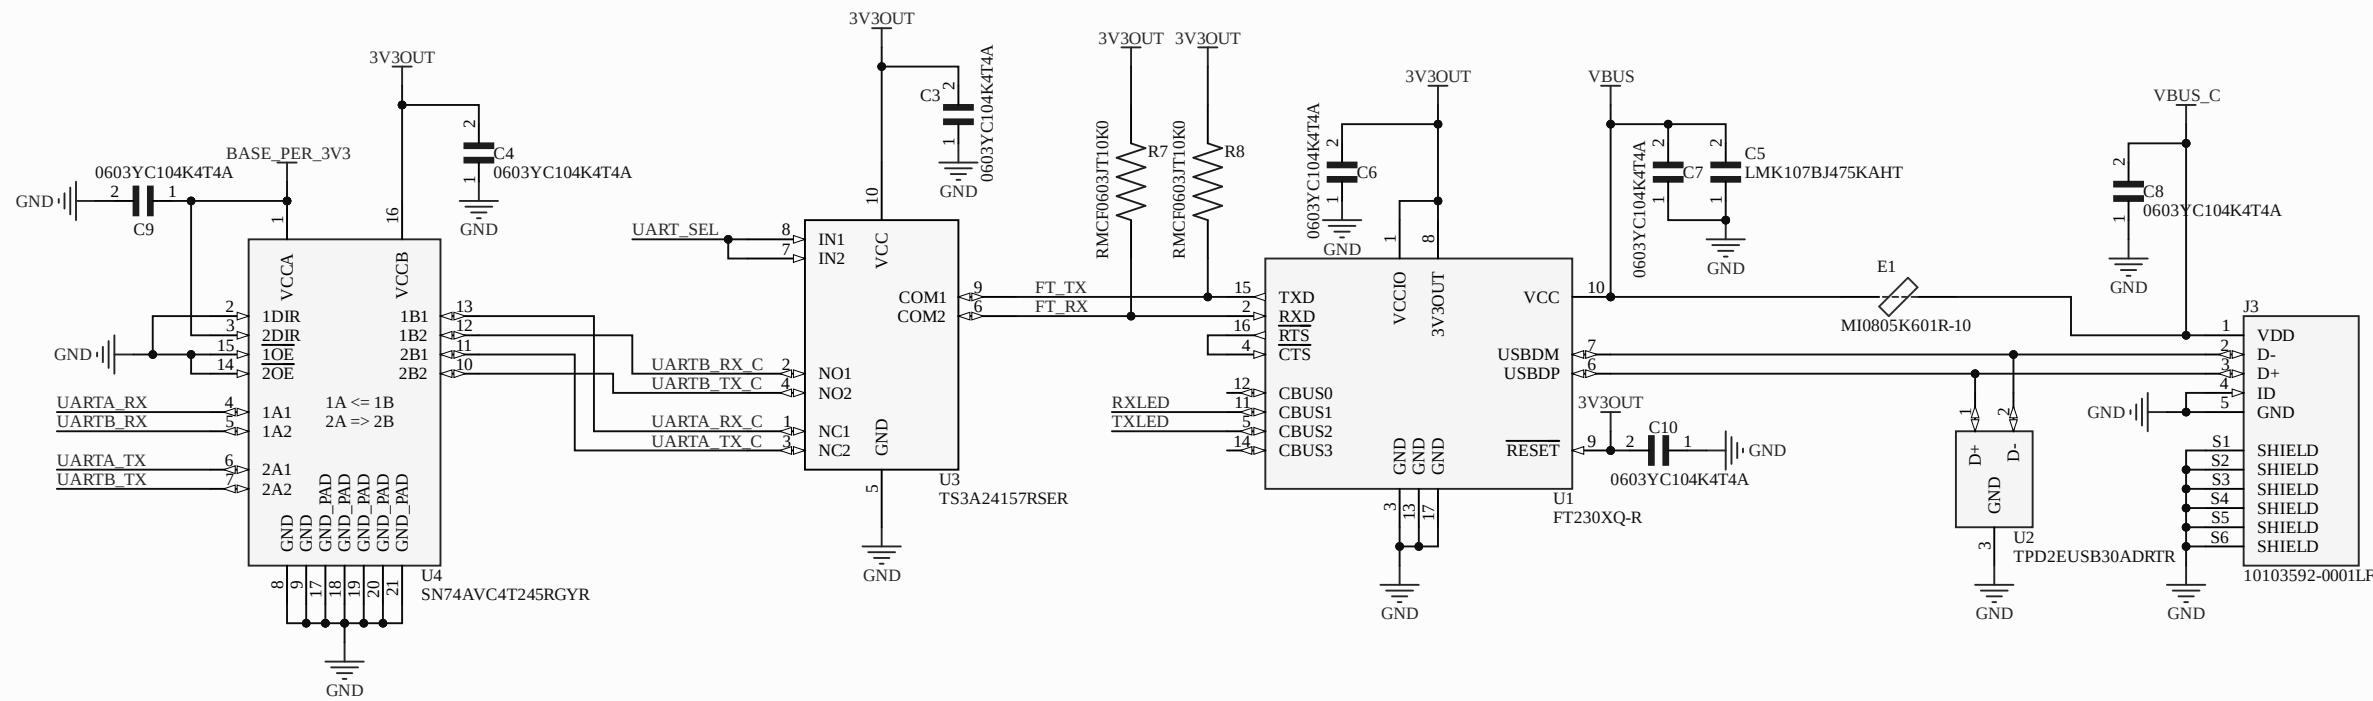

TODO:

1. Use BASE_PER_3V3 as VCCIO

Then U4 can be dropped. From the FT230 documentation, this should be possible, and should not lead to damage when only one side is powered.

- ## 2. Use TI chip TXU0204

Fix direction, Ioff support.

- ### 3. Mask for U4 on the vias

Needs to be corrected. Currently the mask will be on top of the vias

- #### 4. Swap TX/RX labels

Now, it's from the host view:
TX -> Data from target to host
RX -> Data from host to target

- ### 5. Make resistor symbol smaller

6. Use 0402 wherever possible

To relax the space available

- ## 7. Impedance for USB lines

- ## 8. Layer Stackup adjustments

- ## 9. Via Sticking

Title		
Size A2	Number	Revision
Date:	1.12.2025	Sheet of
File:	C:\Users\...\ExtensionBoard.SchDoc	Drawn By: