intertek
Total Quality. Assured.

Shen Zhen MTC Co., LTD

TEST REPORT

SCOPE OF WORK
EMC Testing–MHDV4080-T9503-S2, MHDV4080-T9503, MHDV40****- T9503-##, MHDV40****- T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40********(* can from 0 to 9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25

REPORT NUMBER
260508019SZN-001

ISSUE DATE **[REVISED DATE]**
20 May 2026 [-------------------]

PAGES
46

DOCUMENT CONTROL NUMBER
EN55032/35_MMEa

intertek
Total Quality. Assured.

TEST REPORT

No.101&201, Building B, No.308, Wuhe Avenue, Zhangkengjing, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Tel: (86 755) 8601 6288
Fax: (86 755) 8601 6751
www.intertek.com

EMC VERIFICATION SUMMARY

Report No.: 260508019SZN-001

☒ATV ☒DVB-T/T2 ☒DVB-C ☒DVB-S/S2 ☒AV In ☒USB Play ☒HDMI In ☒HDMI (ARC) ☒ IPTV

Model: MHDV4080-T9503-S2 MHDV4080-T9503, MHDV40****- T9503-##, MHDV40****- T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40********(* can from 0 to 9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25 Product Description: TV/LED TV Test Conducted Date: 14 January 2025 to 12 February 2025	Applicant: Shen Zhen MTC Co., LTD MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan Street, Longgang district, Shenzhen, China Sample Receipt Date: 14 January 2025
☒ 1st TEST ☐ 2nd TEST	ALL TESTS WERE CONDUCTED IN ACCORDANCE WITH: *EN 55032: 2015+A11:2020 *EN IEC 61000-3-2: 2019+A1:2021 *EN 61000-3-3: 2013+A2:2021 *EN 55035: 2017+A11:2020
Test Site and Location:	Intertek Testing Services Shenzhen Ltd. No.101&201, Building B, No.308, Wuhe Avenue, Zhangkengjing, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Test Result	Pass	Fail	See Remark
*EN 55032: 2015+A11:2020	☒	☐	☐
*EN IEC 61000-3-2: 2019+A1:2021	☒	☐	☐
*EN 61000-3-3: 2013+A2:2021	☒	☐	☐
*EN 55035: 2017+A11:2020	☒	☐	☐

When determining the test conclusion, the Measurement Uncertainty of test has been considered.
Note: The highest frequency of the internal sources of the EUT is 5.8 GHz, the measurement shall be made up to 6 GHz.

Prepared and Checked By:

_________________ ***Signature***

Bruce Zheng
Project Engineer
20 May 2026 ***Date***

Approved By:

_________________ ***Signature***

Rode Liu
Project Engineer
20 May 2026 ***Date***

EMC Results Conclusion
(with Justification)

RE: EMC Testing Pursuant to EMC Directive 2014/30/EU Performed on the TV/LED TV,
Model: MHDV4080-T9503-S2
MHDV4080-T9503, MHDV40****- T9503-##, MHDV40****- T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40********(* can from 0 to 9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25

We tested the TV/LED TV, Model: MHDV4080-T9503-S2, to determine if it was in compliance with the relevant EN standards as marked on the EMC Verification Summary. We found that the unit met the requirement of EN 55032, EN IEC 61000-3-2, EN 61000-3-3, EN 55035 standards when tested as received.

The Model: MHDV4080-T9503, MHDV40****- T9503-##, MHDV40****- T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40********(* can from 0 to 9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25 are the same as the Model: MHDV4080-T9503-S2 in hardware aspect. The difference in model number serves as marketing strategy.

This report bases on the previous report with report number 251219031SZN-001 Dated 09 January 2026 (original signature by Bruce Zheng, Rode Liu on file). Owing to adding the models, no test was required after evaluation.

The production units are required to conform to the initial sample as received when the units are placed on the market.

.

LABORATORY MEASUREMENTS

Configuration Information

Equipment Under Test (EUT):	TV/LED TV
Model:	MHDV4080-T9503-S2
Brand Name(s):	AMTC, SHARP, Polariod, VITADO, JVC, Logik
Serial No.:	N/A
Support Equipment:	TV Signal Generator (Fluke 54200M01) DTV Multisignal Generator(EIDEN MSD5000A) USB Memory (TOSHIBA UHYBS-004G-BL) Laptop (Dell 5420) (Provided by Intertek)
Cables:	HDMI Cable: Shield, 120cm*2 AV Cable: un-shield, 120cm (Provided by Intertek)
Adaptor:	N/A
Rated Voltage:	220-240V~, 50/60Hz, 70W or 90W
Test System:	PAL BG

Performance Criteria for Immunity

The performance criteria are referred to the test standard: EN 55035

Performance criteria A

The equipment shall continue to operate as intended without operator intervention. No degradation of performance, loss of function or change of operating state is allowed below a performance level specified by the manufacturer when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance. If the minimum performance level or the permissible performance loss is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Evaluation of Audio Quality
The measured acoustic interference ratio and/or the measured electrical interference ratio during the test shall be –20 dB or better.

Evaluation of Video Quality
In the evaluation of picture interference the wanted test signal produces a standard picture (in the case of video tape equipment on the screen of the test-TV-set) and the unwanted signal produces a degradation of the picture. The degradation may be in a number of forms, such as a superposed pattern, positional disturbance of synchronization, geometrical distortion, loss of picture contrast or brightness, artefacts, freezing or disturbance of motion, image loss, video data or decoding errors, etc.

Performance criteria B

During the application of the disturbance, degradation of performance is allowed. However, no unintended change of actual operating state or stored data is allowed to persist after the test.

After the test, the equipment shall continue to operate as intended without operator intervention; no degradation of performance or loss of function is allowed, below a performance level specified by the manufacturer, when the equipment is used as intended. The performance level may be replaced by a permissible loss of performance.

If the minimum performance level (or the permissible performance loss), or recovery time, is not specified by the manufacturer, then either of these may be derived from the product description and documentation, and by what the user may reasonably expect from the equipment if used as intended.

Performance criteria C

Loss of function is allowed, provided the function is self-recoverable, or can be restored by the operation of the controls by the user in accordance with the manufacturer's instructions. A reboot or re-start operation is allowed.

Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

Radiated Disturbance
Pursuant to EN 55032: Emissions Requirement

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-04	EMI Receiver	R&S	ESR7	2024-11-10	2025-11-10
SZ056-03	Spectrum Analyzer	R&S	FSP30	2024-04-22	2025-04-22
SZ061-13	Biconilog Antenna	ETS	3142E	2022-07-13	2025-07-13
SZ061-09	Horn Antenna	ETS	3115	2022-10-14	2025-10-14
SZ181-04	Preamplifier	Agilent	8449B	2024-04-22	2025-04-22
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-22	2026-12-22

Notes:
1. Peak detector quick scan is showed on the graph and final quasi-peak detector data is measured corresponding to relevant limit and recorded in the data table. Only the worst-case data is recorded in the report.
2. Frequency range scanned: 30MHz to 6000MHz.
3. Only emissions significantly above equipment noise floor is reported.
4. Uncertainty: 4.8dB at a level of confidence of 95%.

Test Setup Diagram:

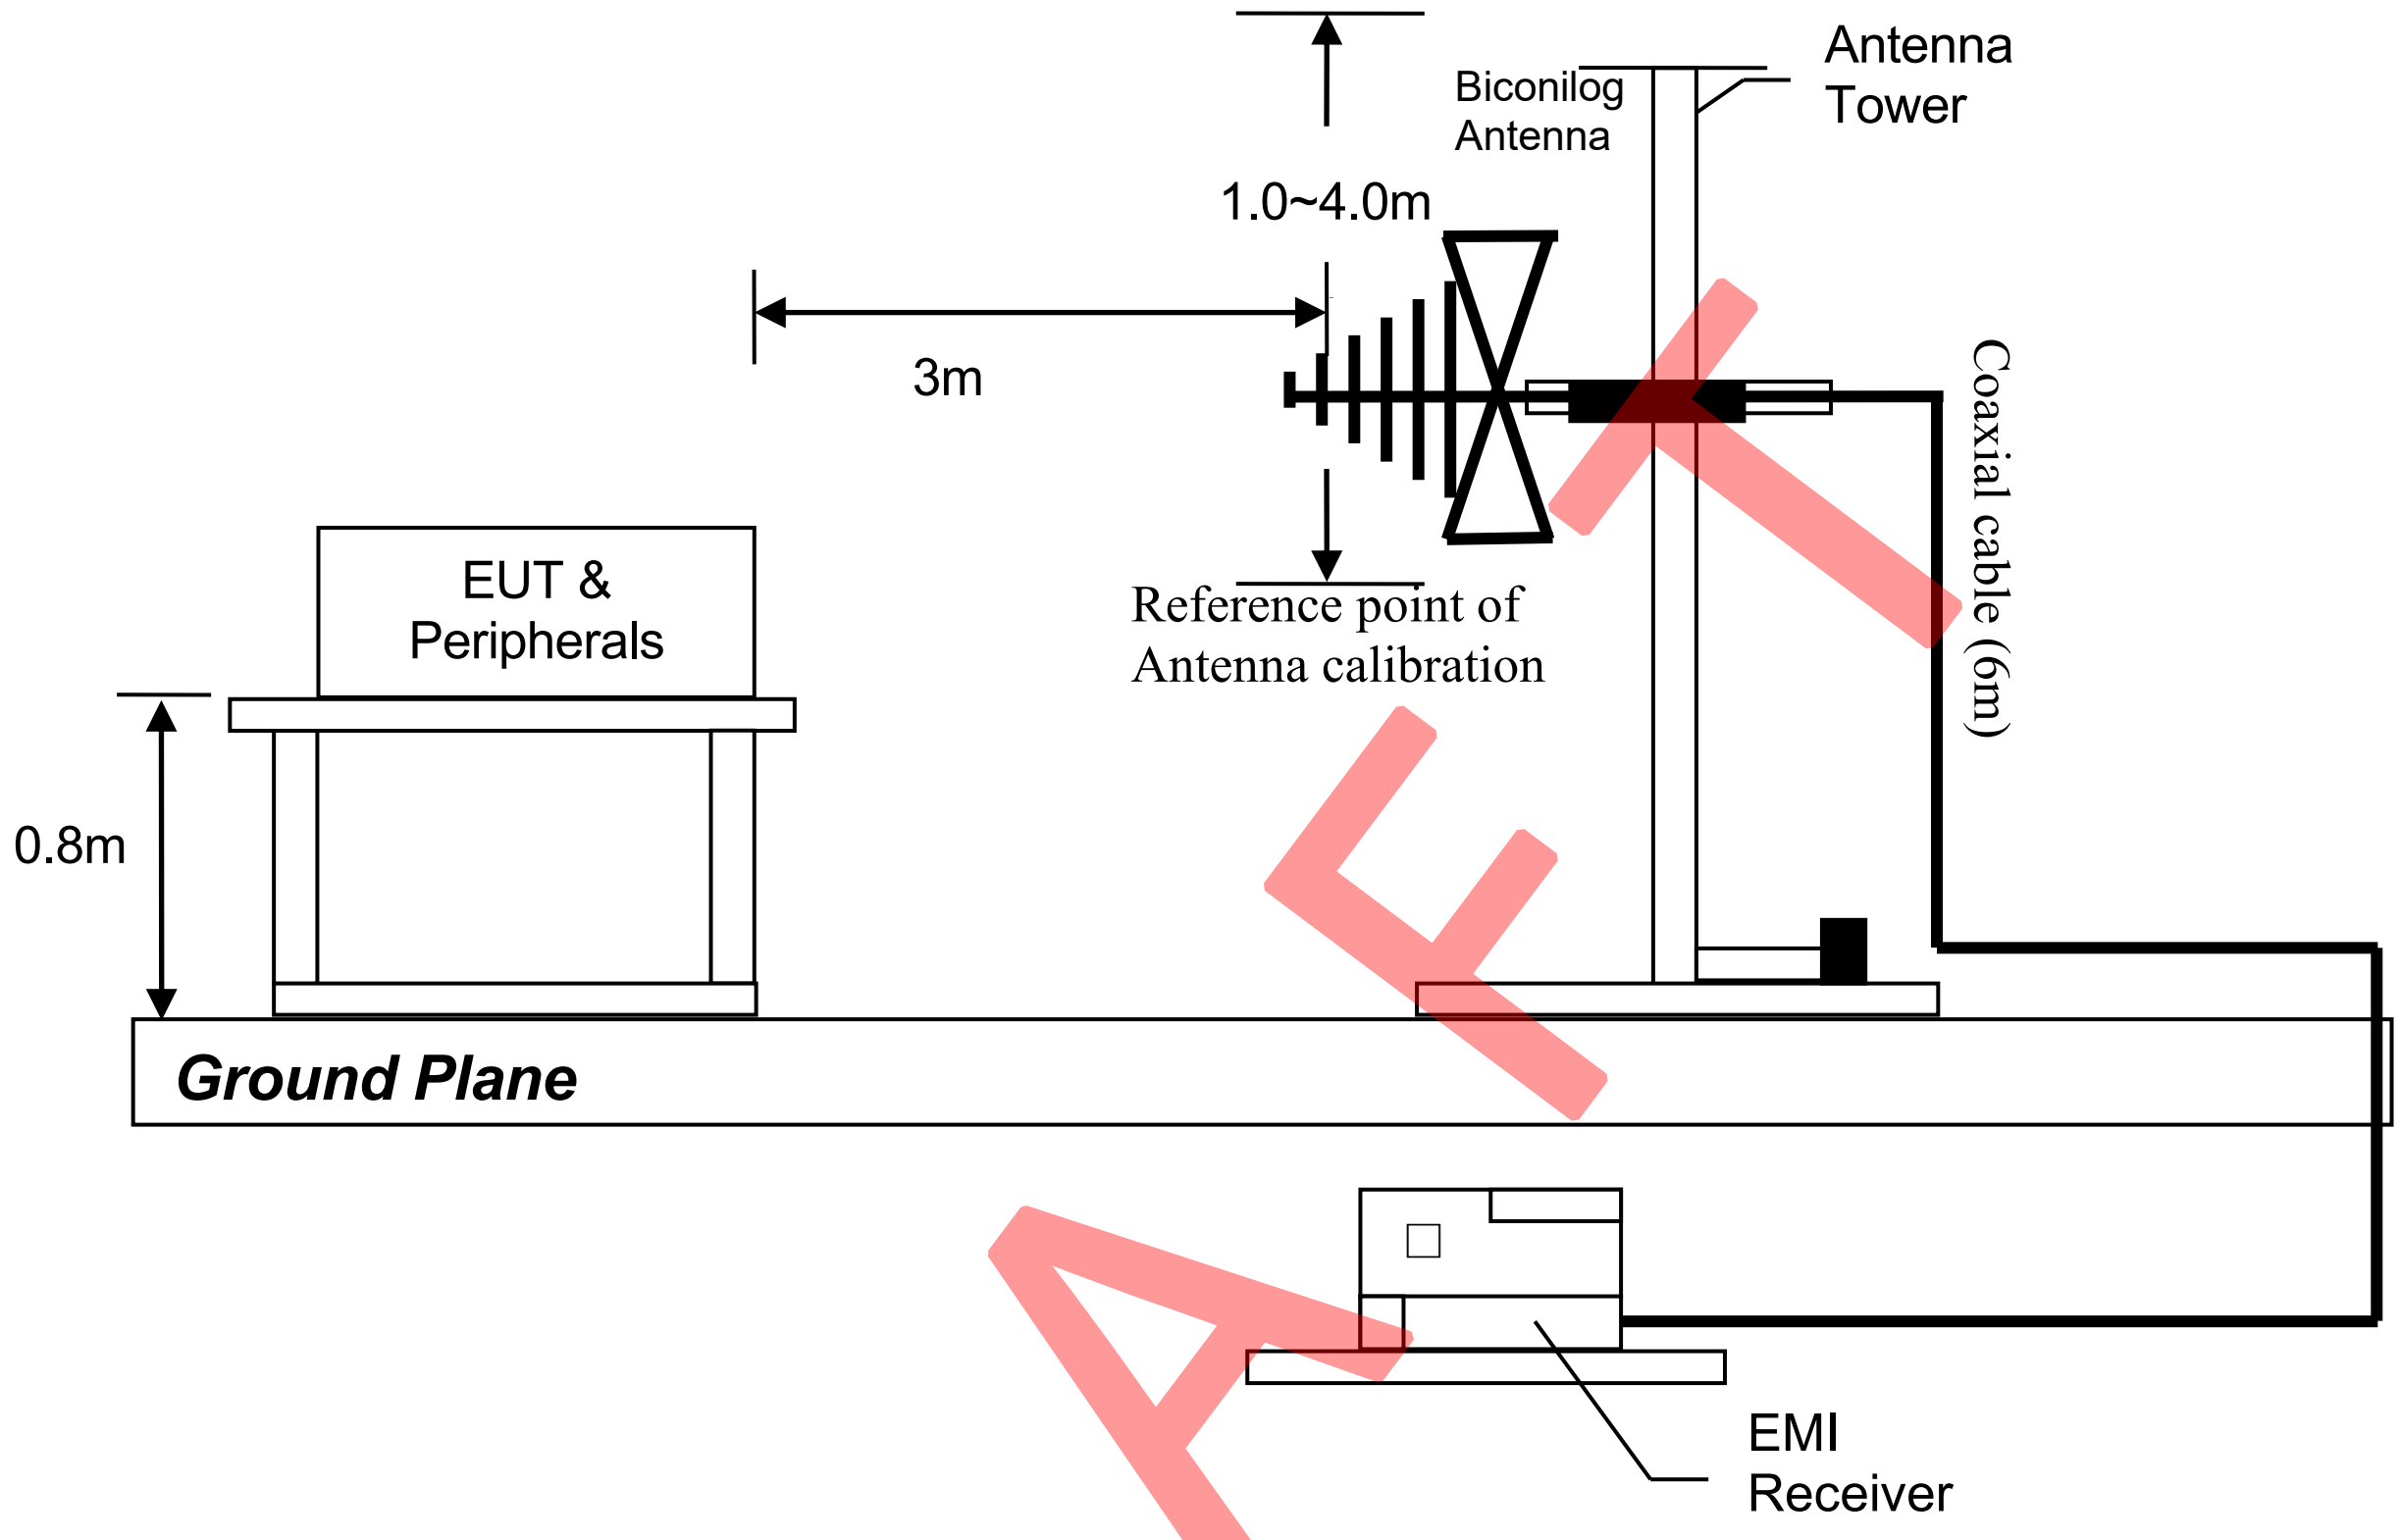

(Radiated Emission Measurements Test Setup for 30MHz to 1GHz)

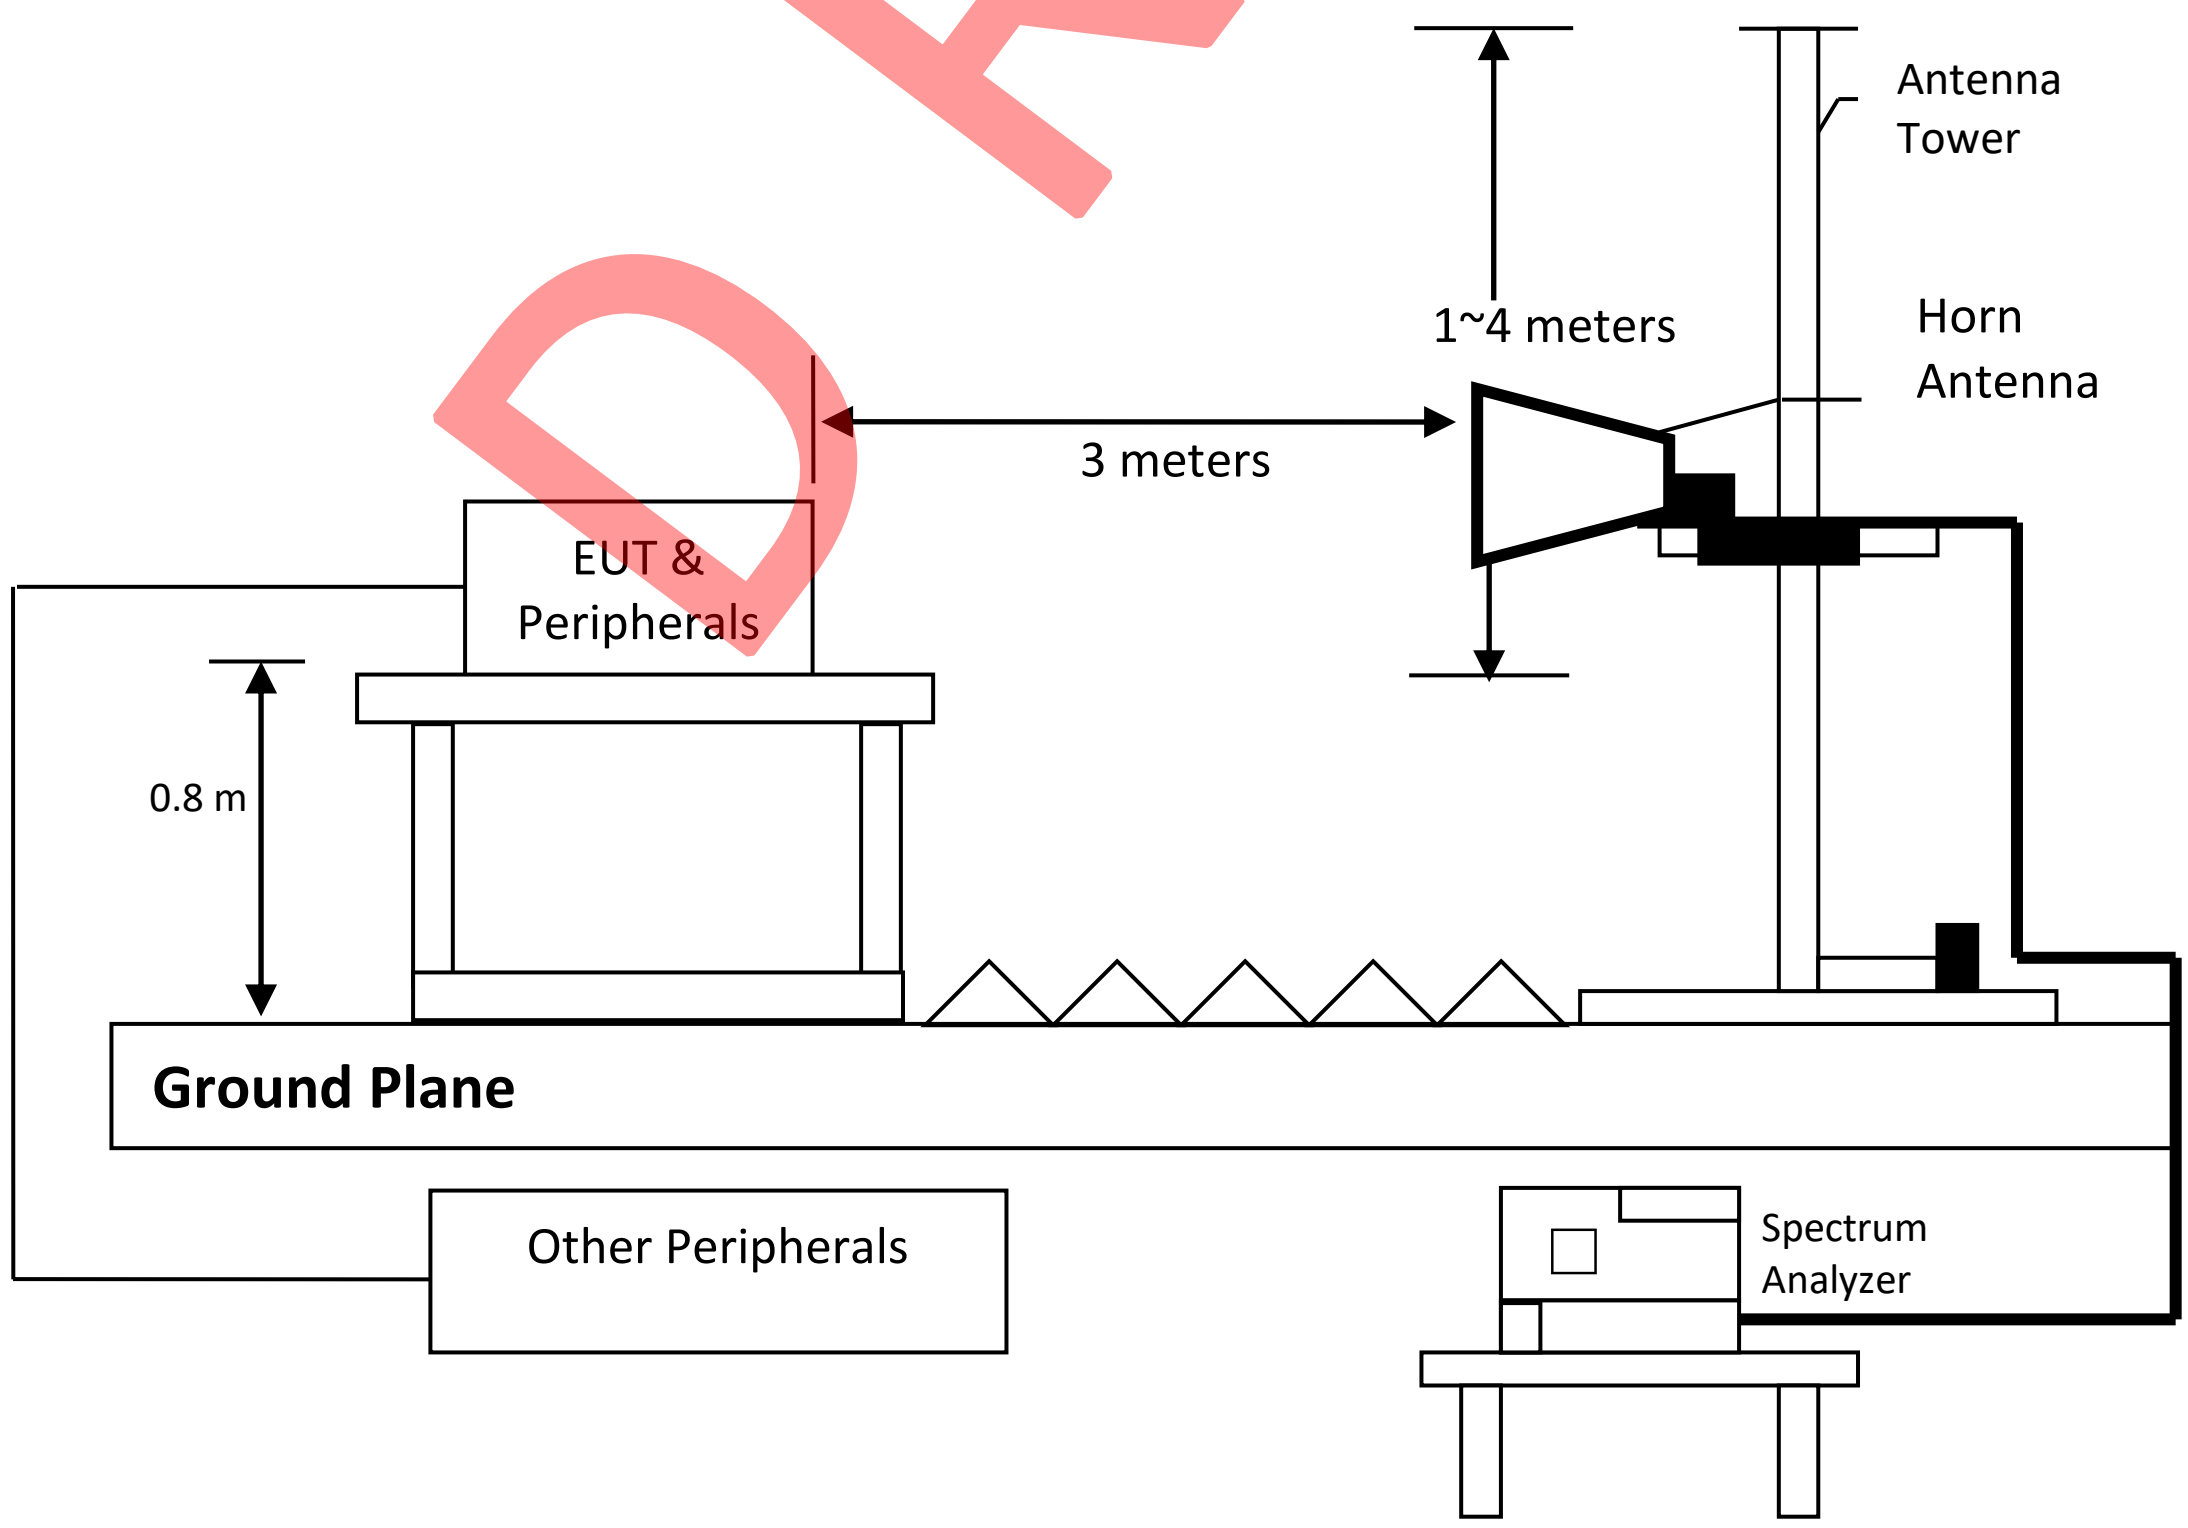

(Radiated Emission Measurements Test Setup for 1GHz to 6GHz)

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001
Worst Case Operating Mode: DVB-T
Worst Case Testing Voltage: AC 230V, 50Hz

Test Data

Radiated Disturbance
Pursuant to EN 55032: Emissions Requirement

Horizontal

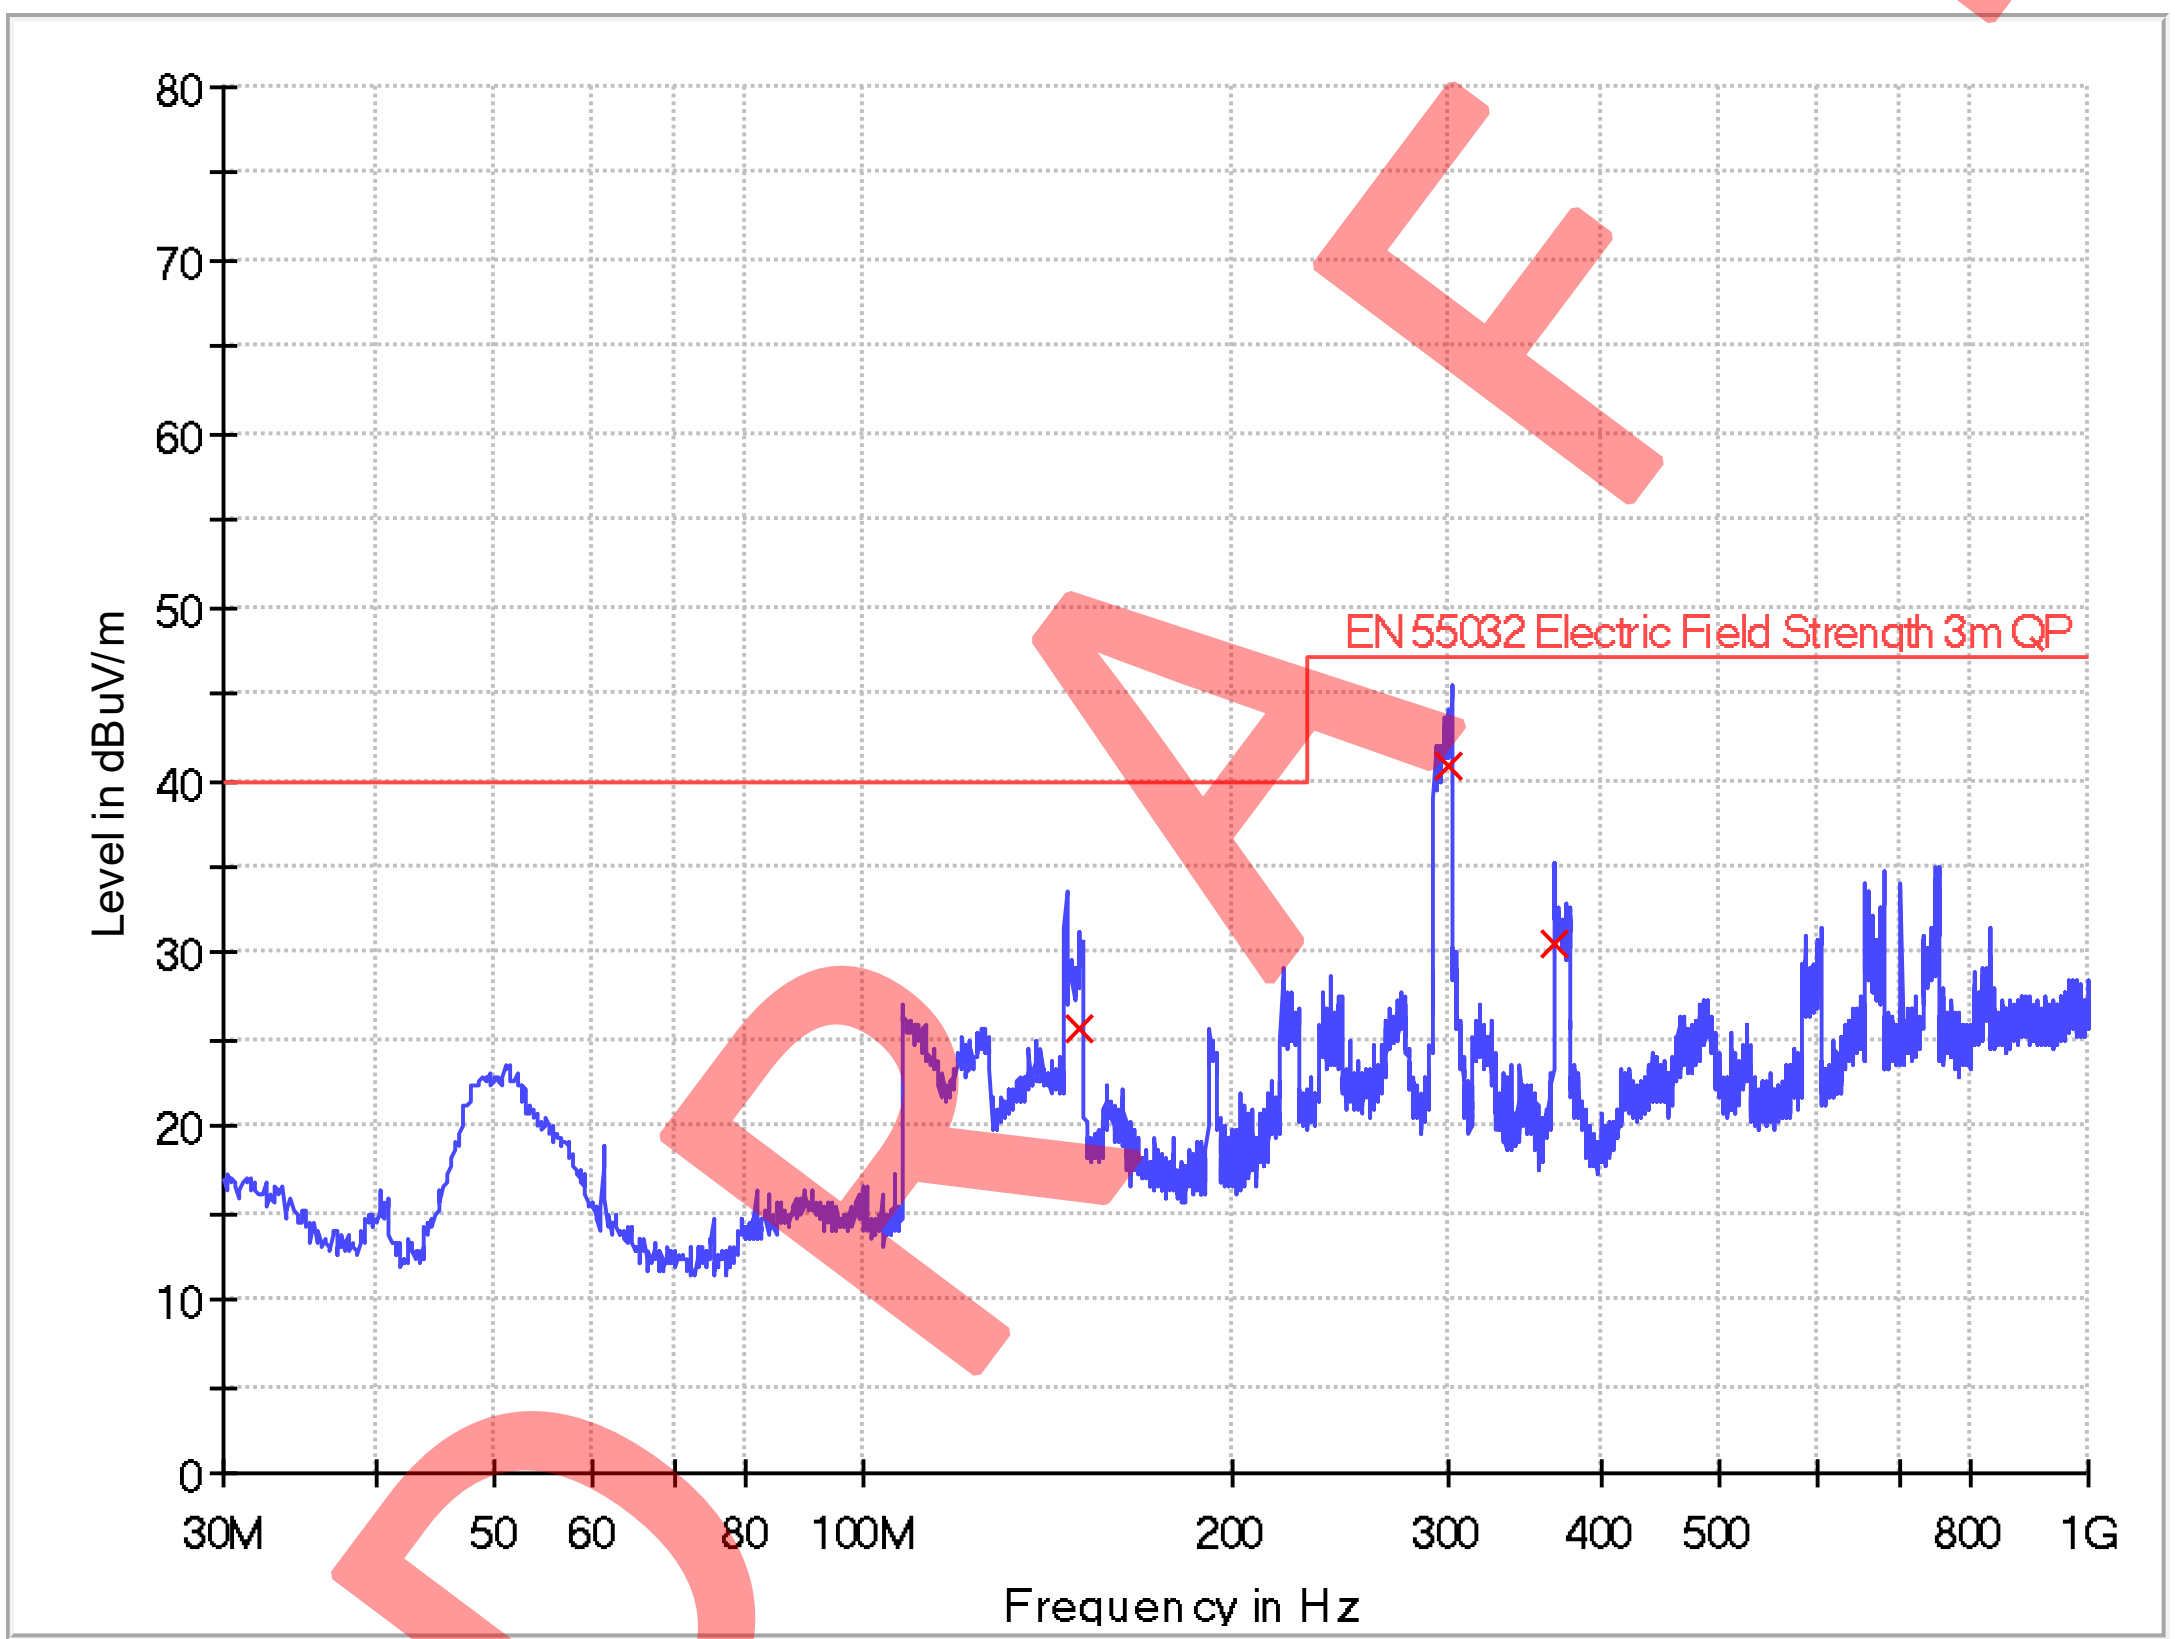

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
149.916250	25.7	1000.0	120.000	H	9.8	14.3	40.0
300.266250	40.9	1000.0	120.000	H	15.2	6.1	47.0
366.711250	30.6	1000.0	120.000	H	16.9	16.4	47.0

Remark:
1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBµV/m) = Corr. (dB/m) + Read Level (dBµV)
3. Margin (dB) = Limit QPK (dBµV/m) – QuasiPeak (dBµV/m)

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001
Worst Case Operating Mode: DVB-T
Worst Case Testing Voltage: AC 230V, 50Hz

Test Data

Radiated Disturbance
Pursuant to EN55032: Emissions Requirement

Horizontal

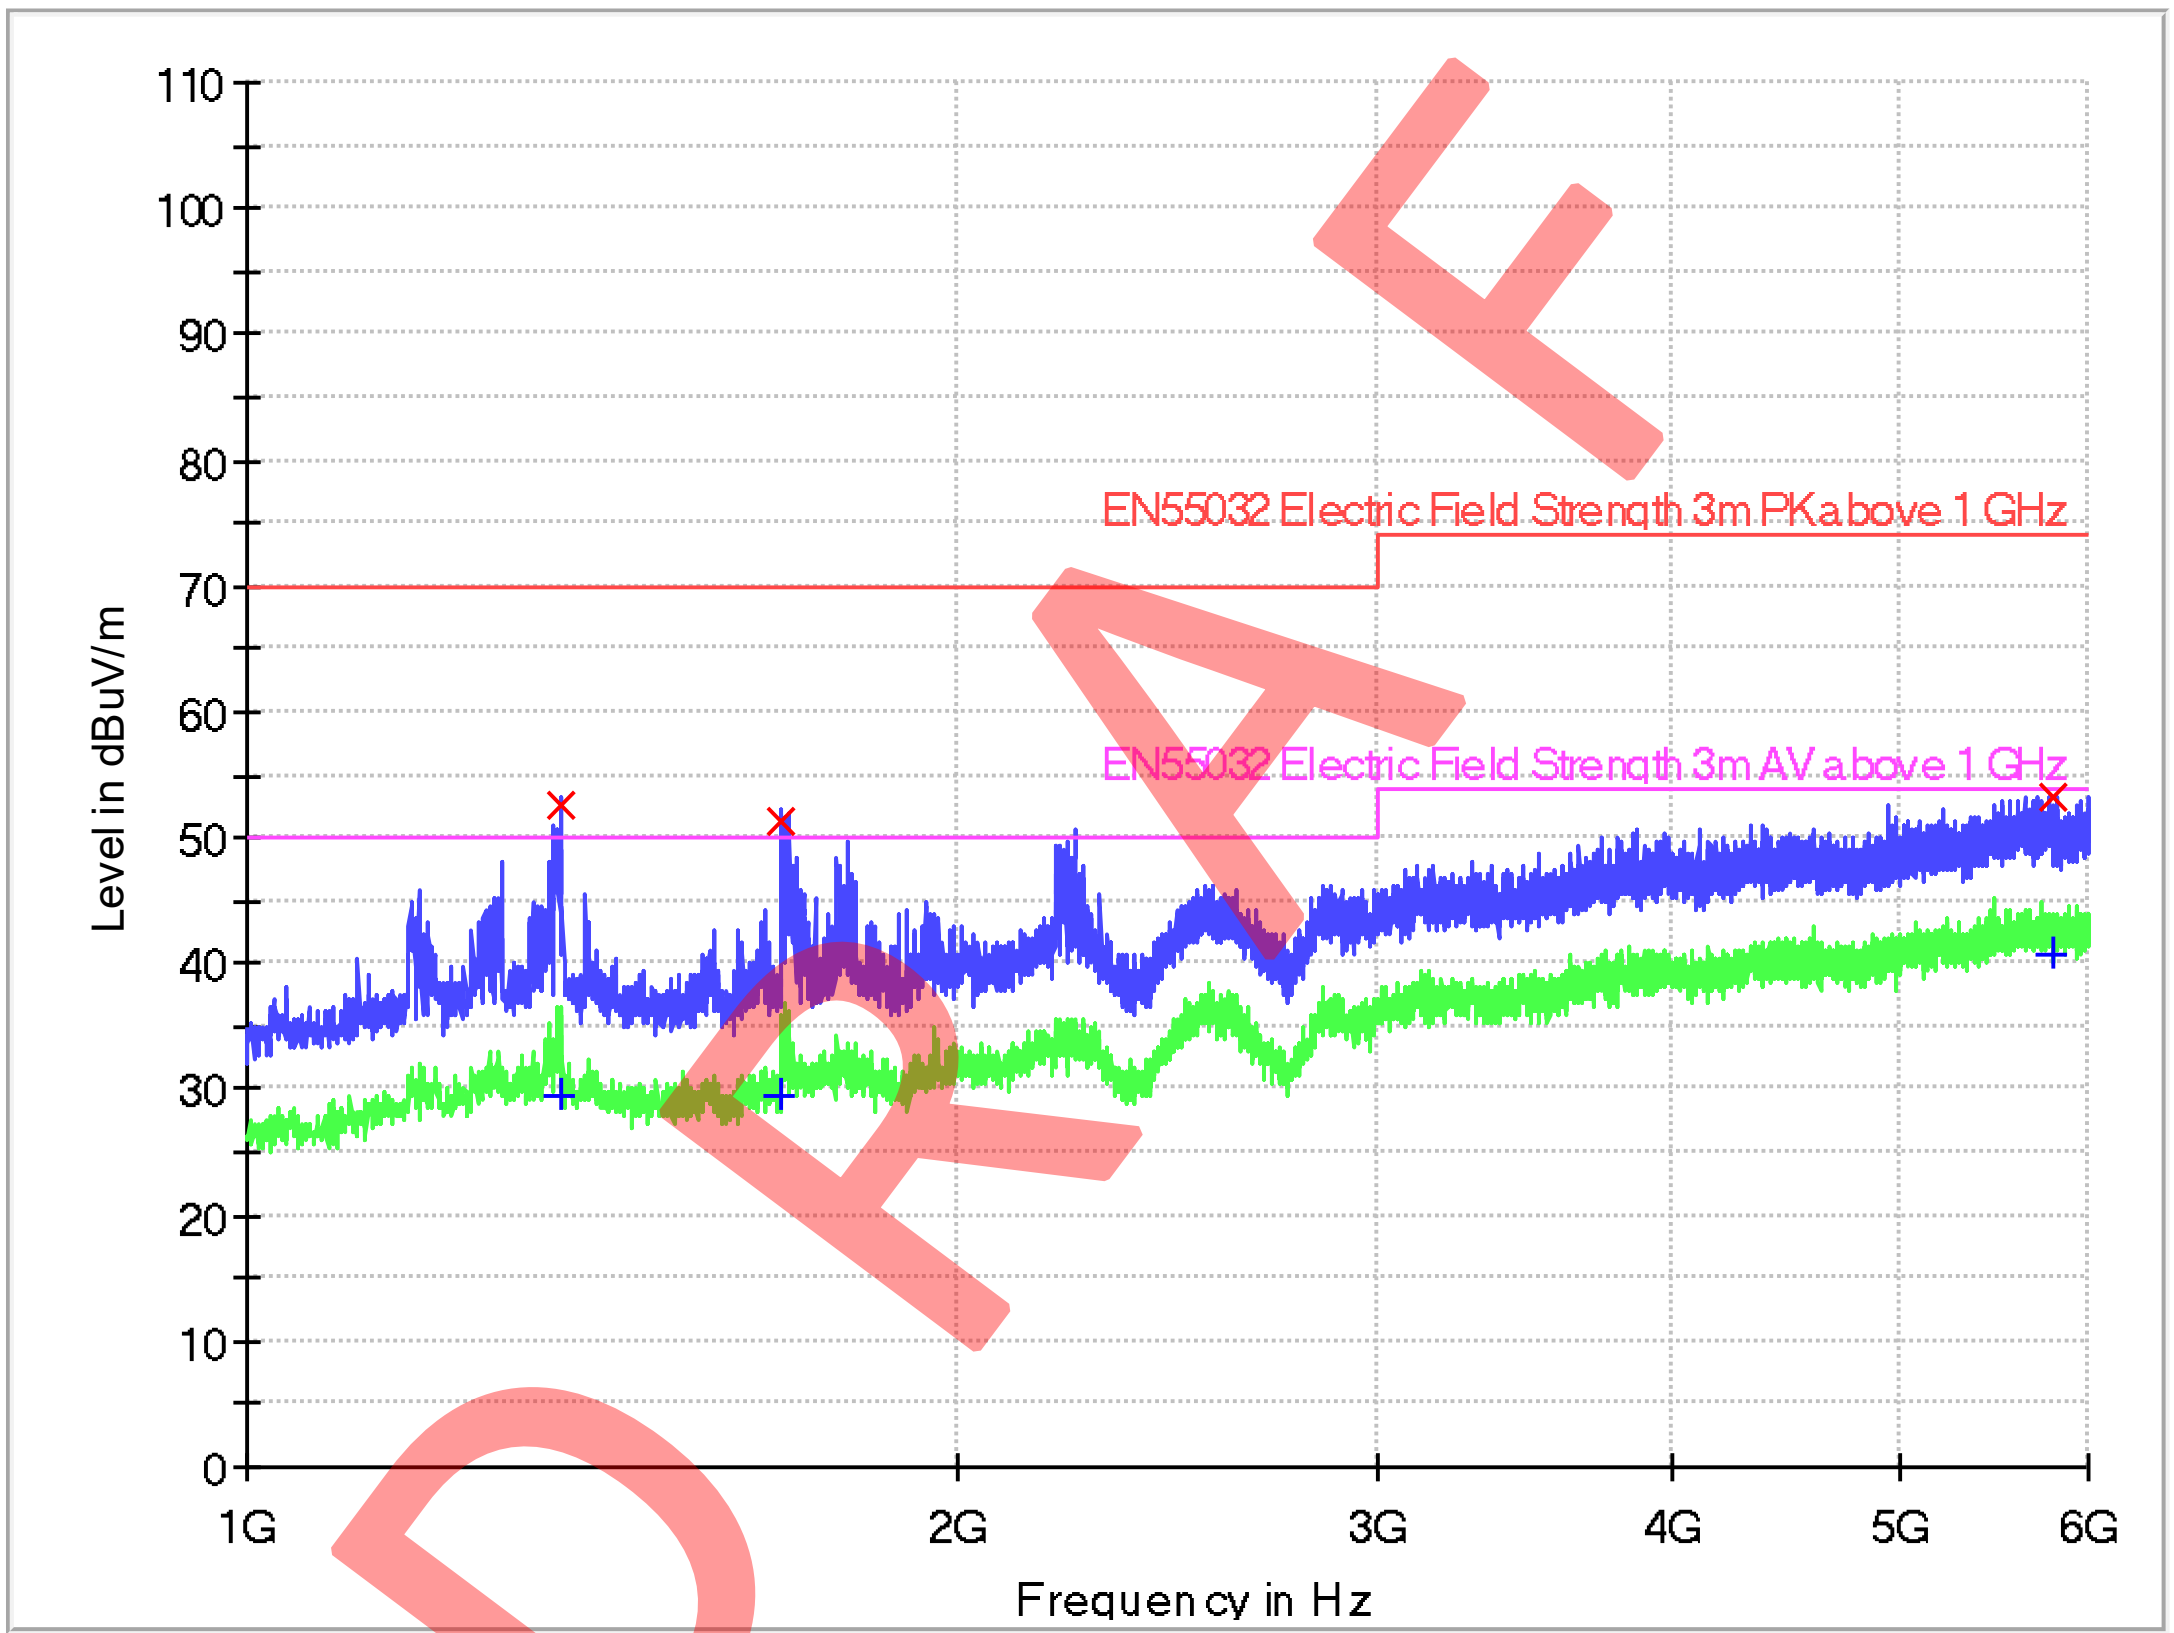

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1358.750000	52.6	1000.0	1000.000	H	-7.3	17.4	70.0
1683.750000	51.2	1000.0	1000.000	H	-6.7	18.8	70.0
5788.125000	53.2	1000.0	1000.000	H	9.7	20.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1358.750000	29.5	1000.0	1000.000	H	-7.3	20.5	50.0
1683.750000	29.5	1000.0	1000.000	H	-6.7	20.5	50.0
5788.125000	40.6	1000.0	1000.000	H	9.7	13.4	54.0

Remark:
1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBµV/m) = Corr. (dB/m) + Read Level (dBµV)
3. Margin (dB) = Limit (dBµV) – Max peak/Average (dBµV)

Model: MHDV4080-T9503-S2
Worst Case Operating Mode: DVB-T
Worst Case Testing Voltage: AC 230V, 50Hz

Intertek Report No.: 260508019SZN-001

Test Data

Radiated Disturbance
Pursuant to EN 55032: Emissions Requirement

Vertical

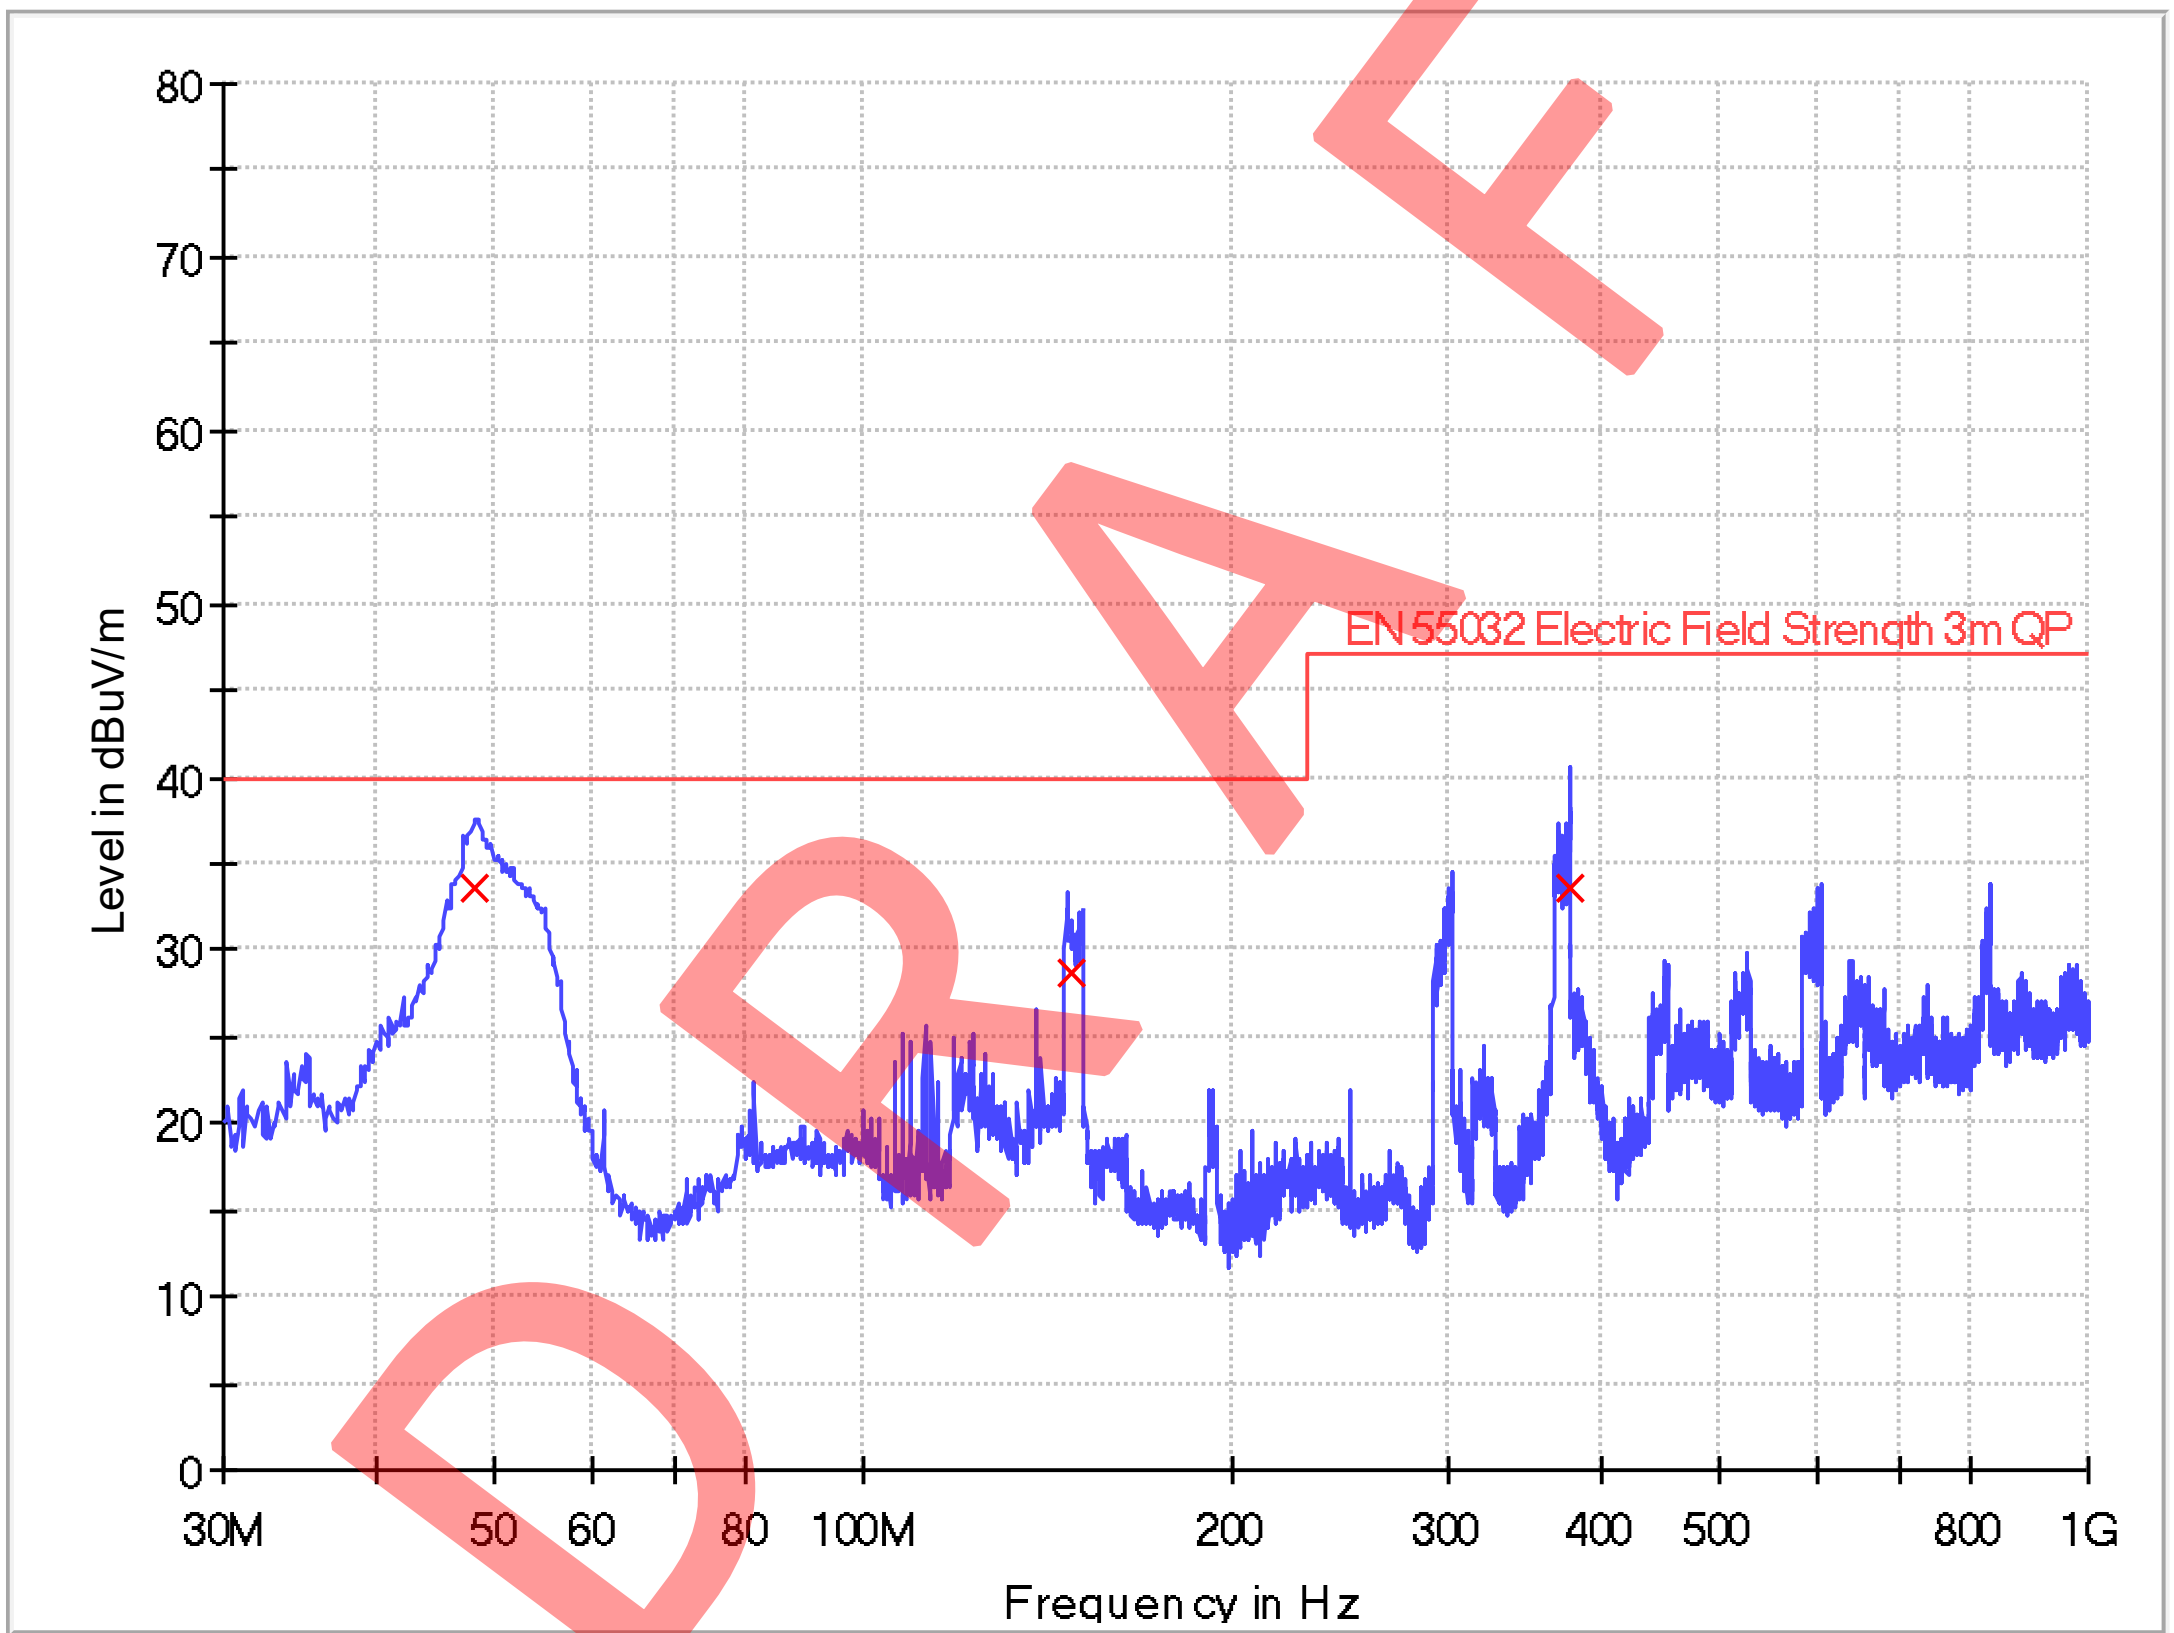

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBuV/m)
48.187500	33.7	1000.0	120.000	V	8.5	6.3	40.0
148.218750	28.7	1000.0	120.000	V	9.7	11.3	40.0
377.138750	33.7	1000.0	120.000	V	17.2	13.3	47.0

Remark:
1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBµV/m) = Corr. (dB/m) + Read Level (dBµV)
3. Margin (dB) = Limit QPK (dBµV/m) – QuasiPeak (dBµV/m)

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001
Worst Case Operating Mode: DVB-T
Worst Case Testing Voltage: AC 230V, 50Hz

Test Data

Radiated Disturbance
Pursuant to EN55032: Emissions Requirement

Vertical

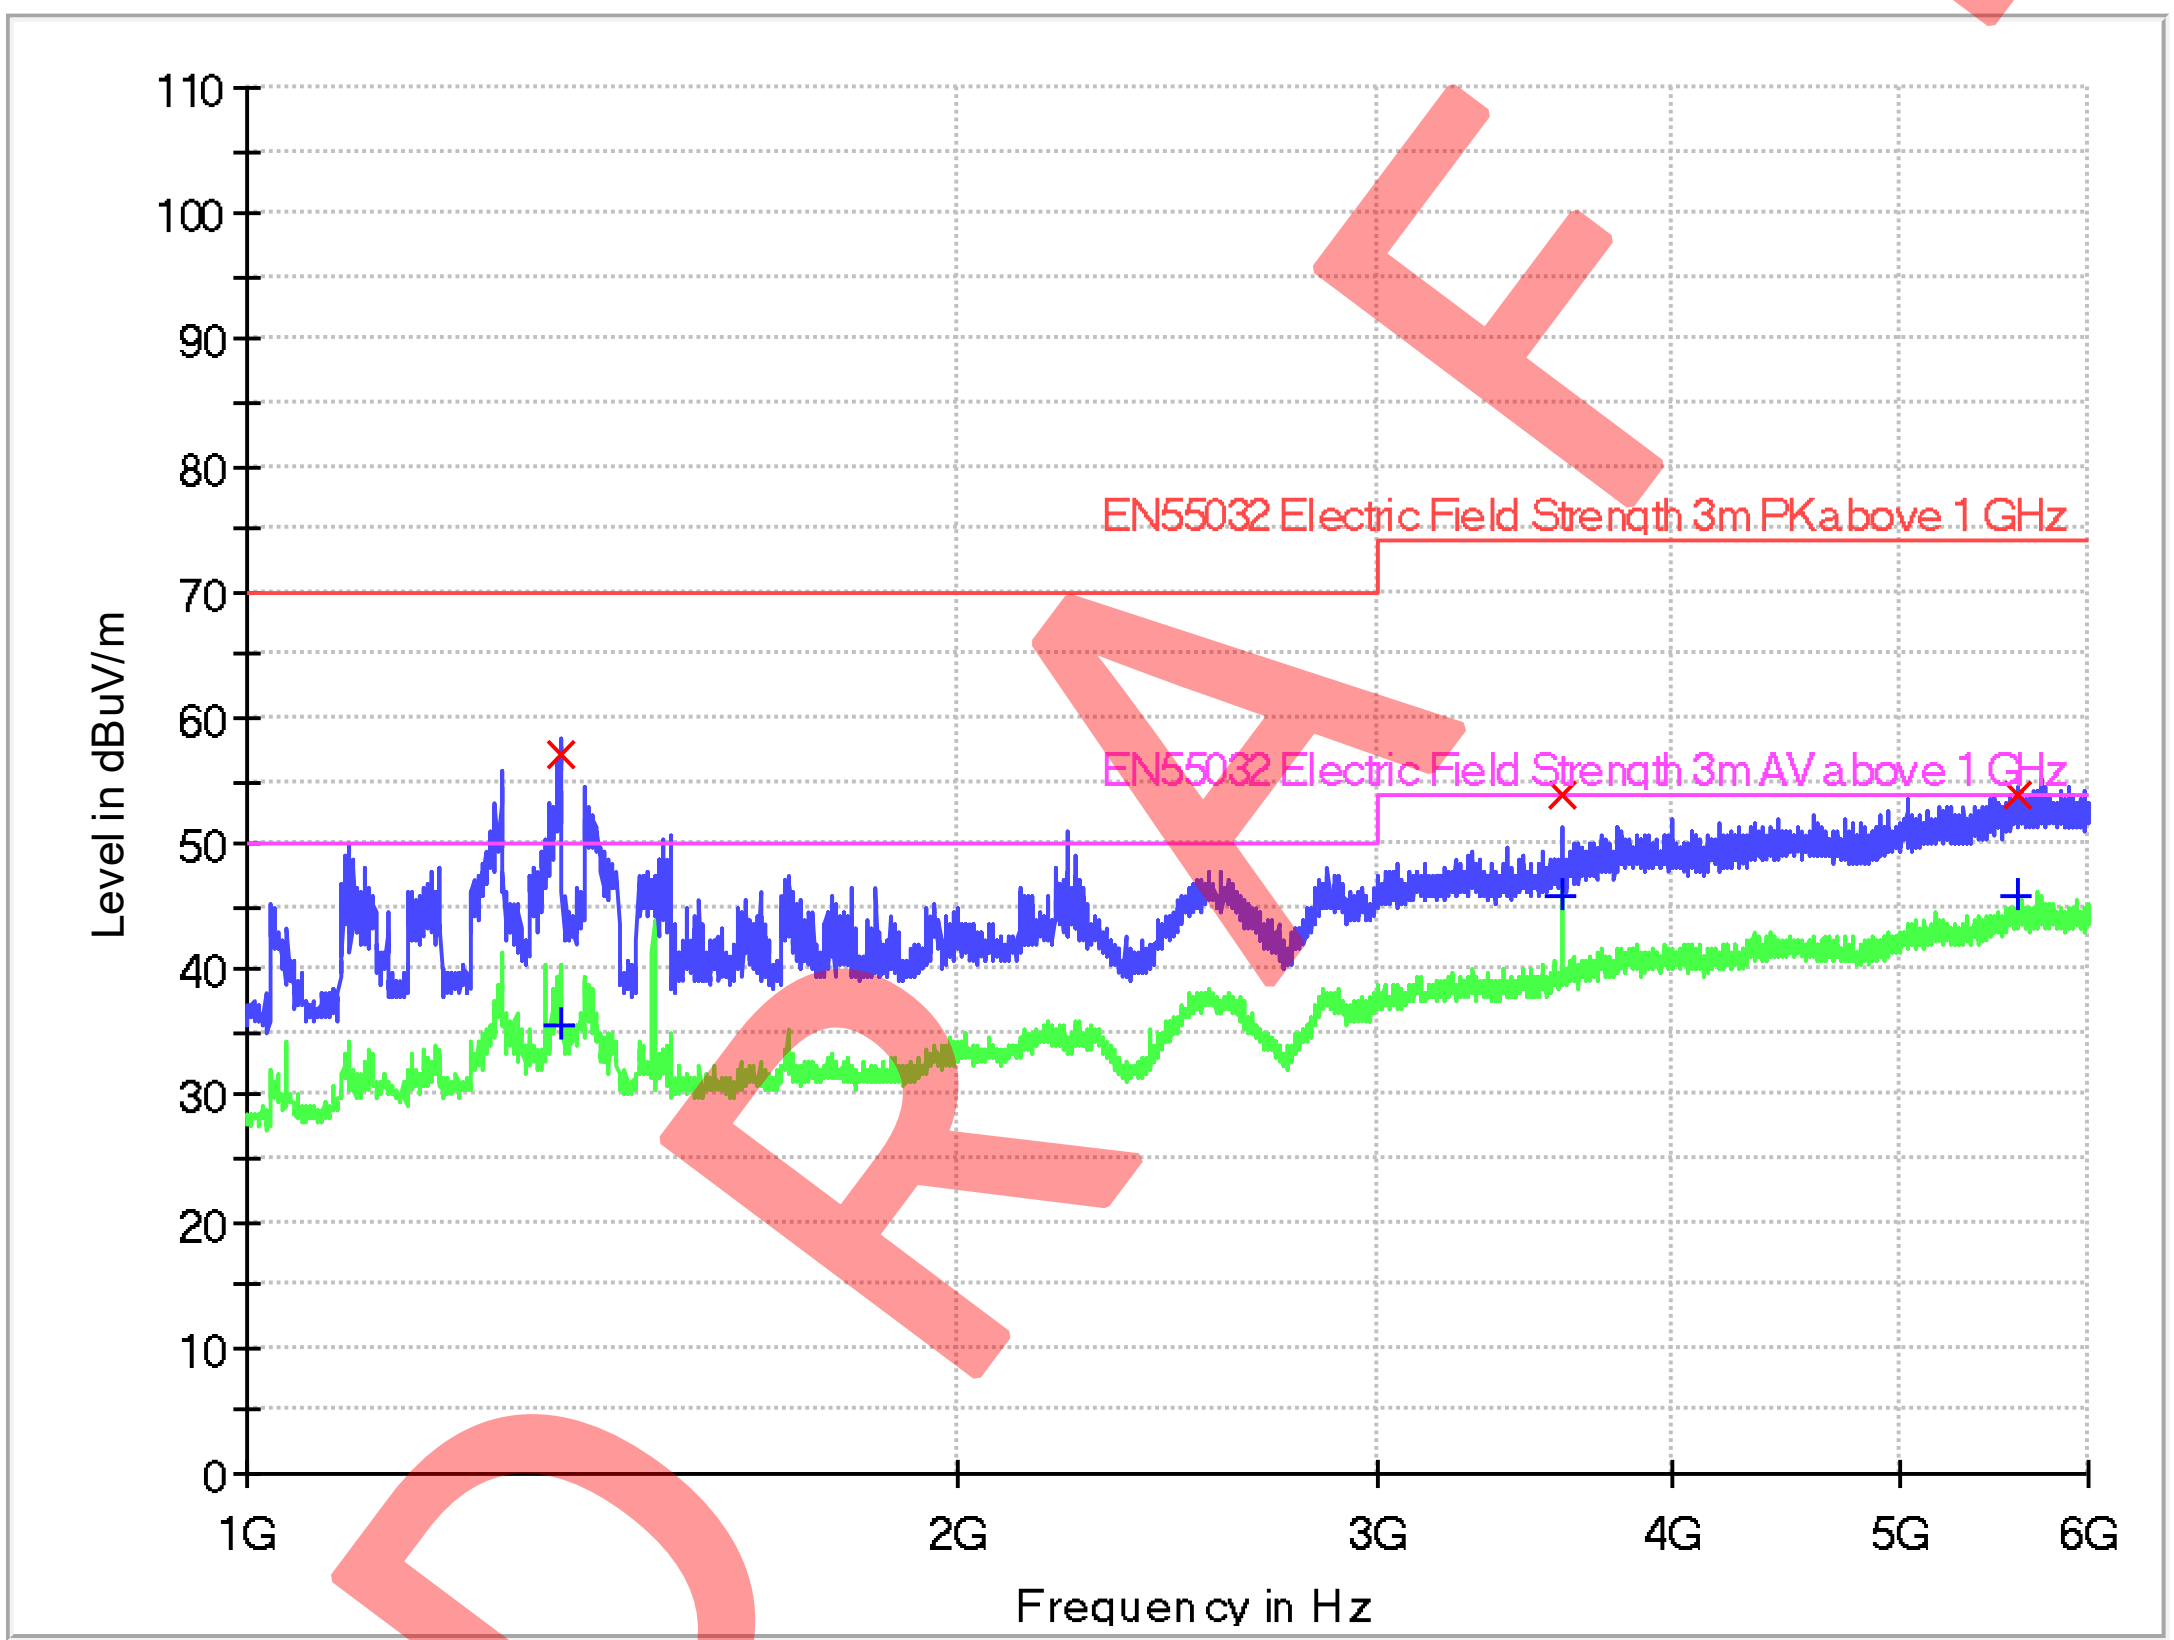

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1356.875000	57.2	1000.0	1000.000	V	-7.3	12.8	70.0
3600.000000	53.8	1000.0	1000.000	V	3.9	20.2	74.0
5608.750000	53.9	1000.0	1000.000	V	9.6	20.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1356.875000	35.6	1000.0	1000.000	V	-7.3	14.4	50.0
3600.000000	45.7	1000.0	1000.000	V	3.9	8.3	54.0
5608.750000	45.7	1000.0	1000.000	V	9.6	8.3	54.0

Remark:
1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV) – Max peak/Average (dBμV)

RFI Voltage Test
Pursuant to EN55032: Emissions Requirement

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2024-07-09	2025-07-09
SZ187-01	Two-Line V-Network	R & S	ENV216	2024-10-24	2025-10-24
SZ187-02	Two-Line V-Network	R & S	ENV216	2024-04-23	2025-04-23
SZ188-03	Shielding Room	ETS	RFD-100	2022-12-20	2025-12-20

Notes:
1. Peak and average detector quick scan are showed on the graph and final quasi-peak and average detector data are measured, the worst-case is recorded in the following graph and table.
2. Frequency range scanned: 150kHz to 30MHz.
3. Only emissions significantly above equipment noise floor is reported.
4. Uncertainty: 3.2dB at a level of confidence of 95%.

Test Setup Diagram

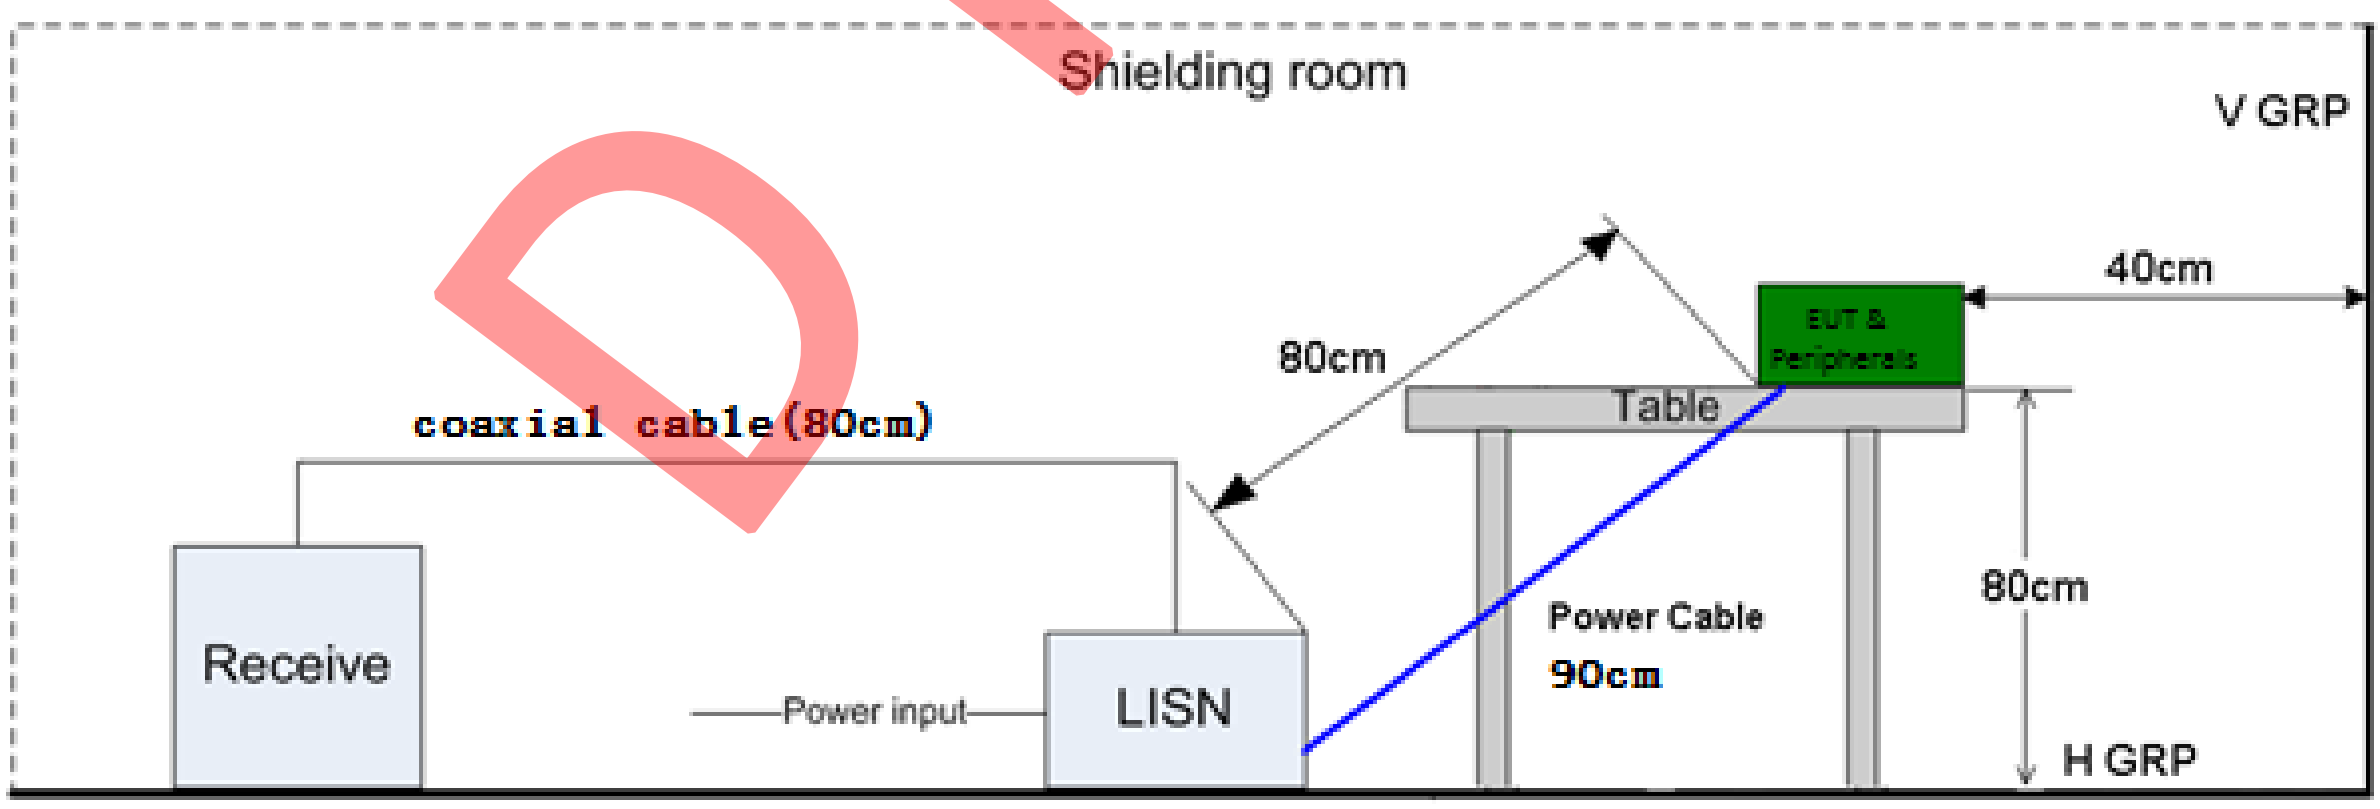

Test set-up of conducted disturbance for Power port

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001
Worst Case Operating Mode: DVB-T(506MHz) with antenna grounded
Phase: Live
Worst Case Testing Voltage: AC 230V, 50Hz

Test Data
RFI Voltage Test
Pursuant to EN 55032: Emissions Requirement

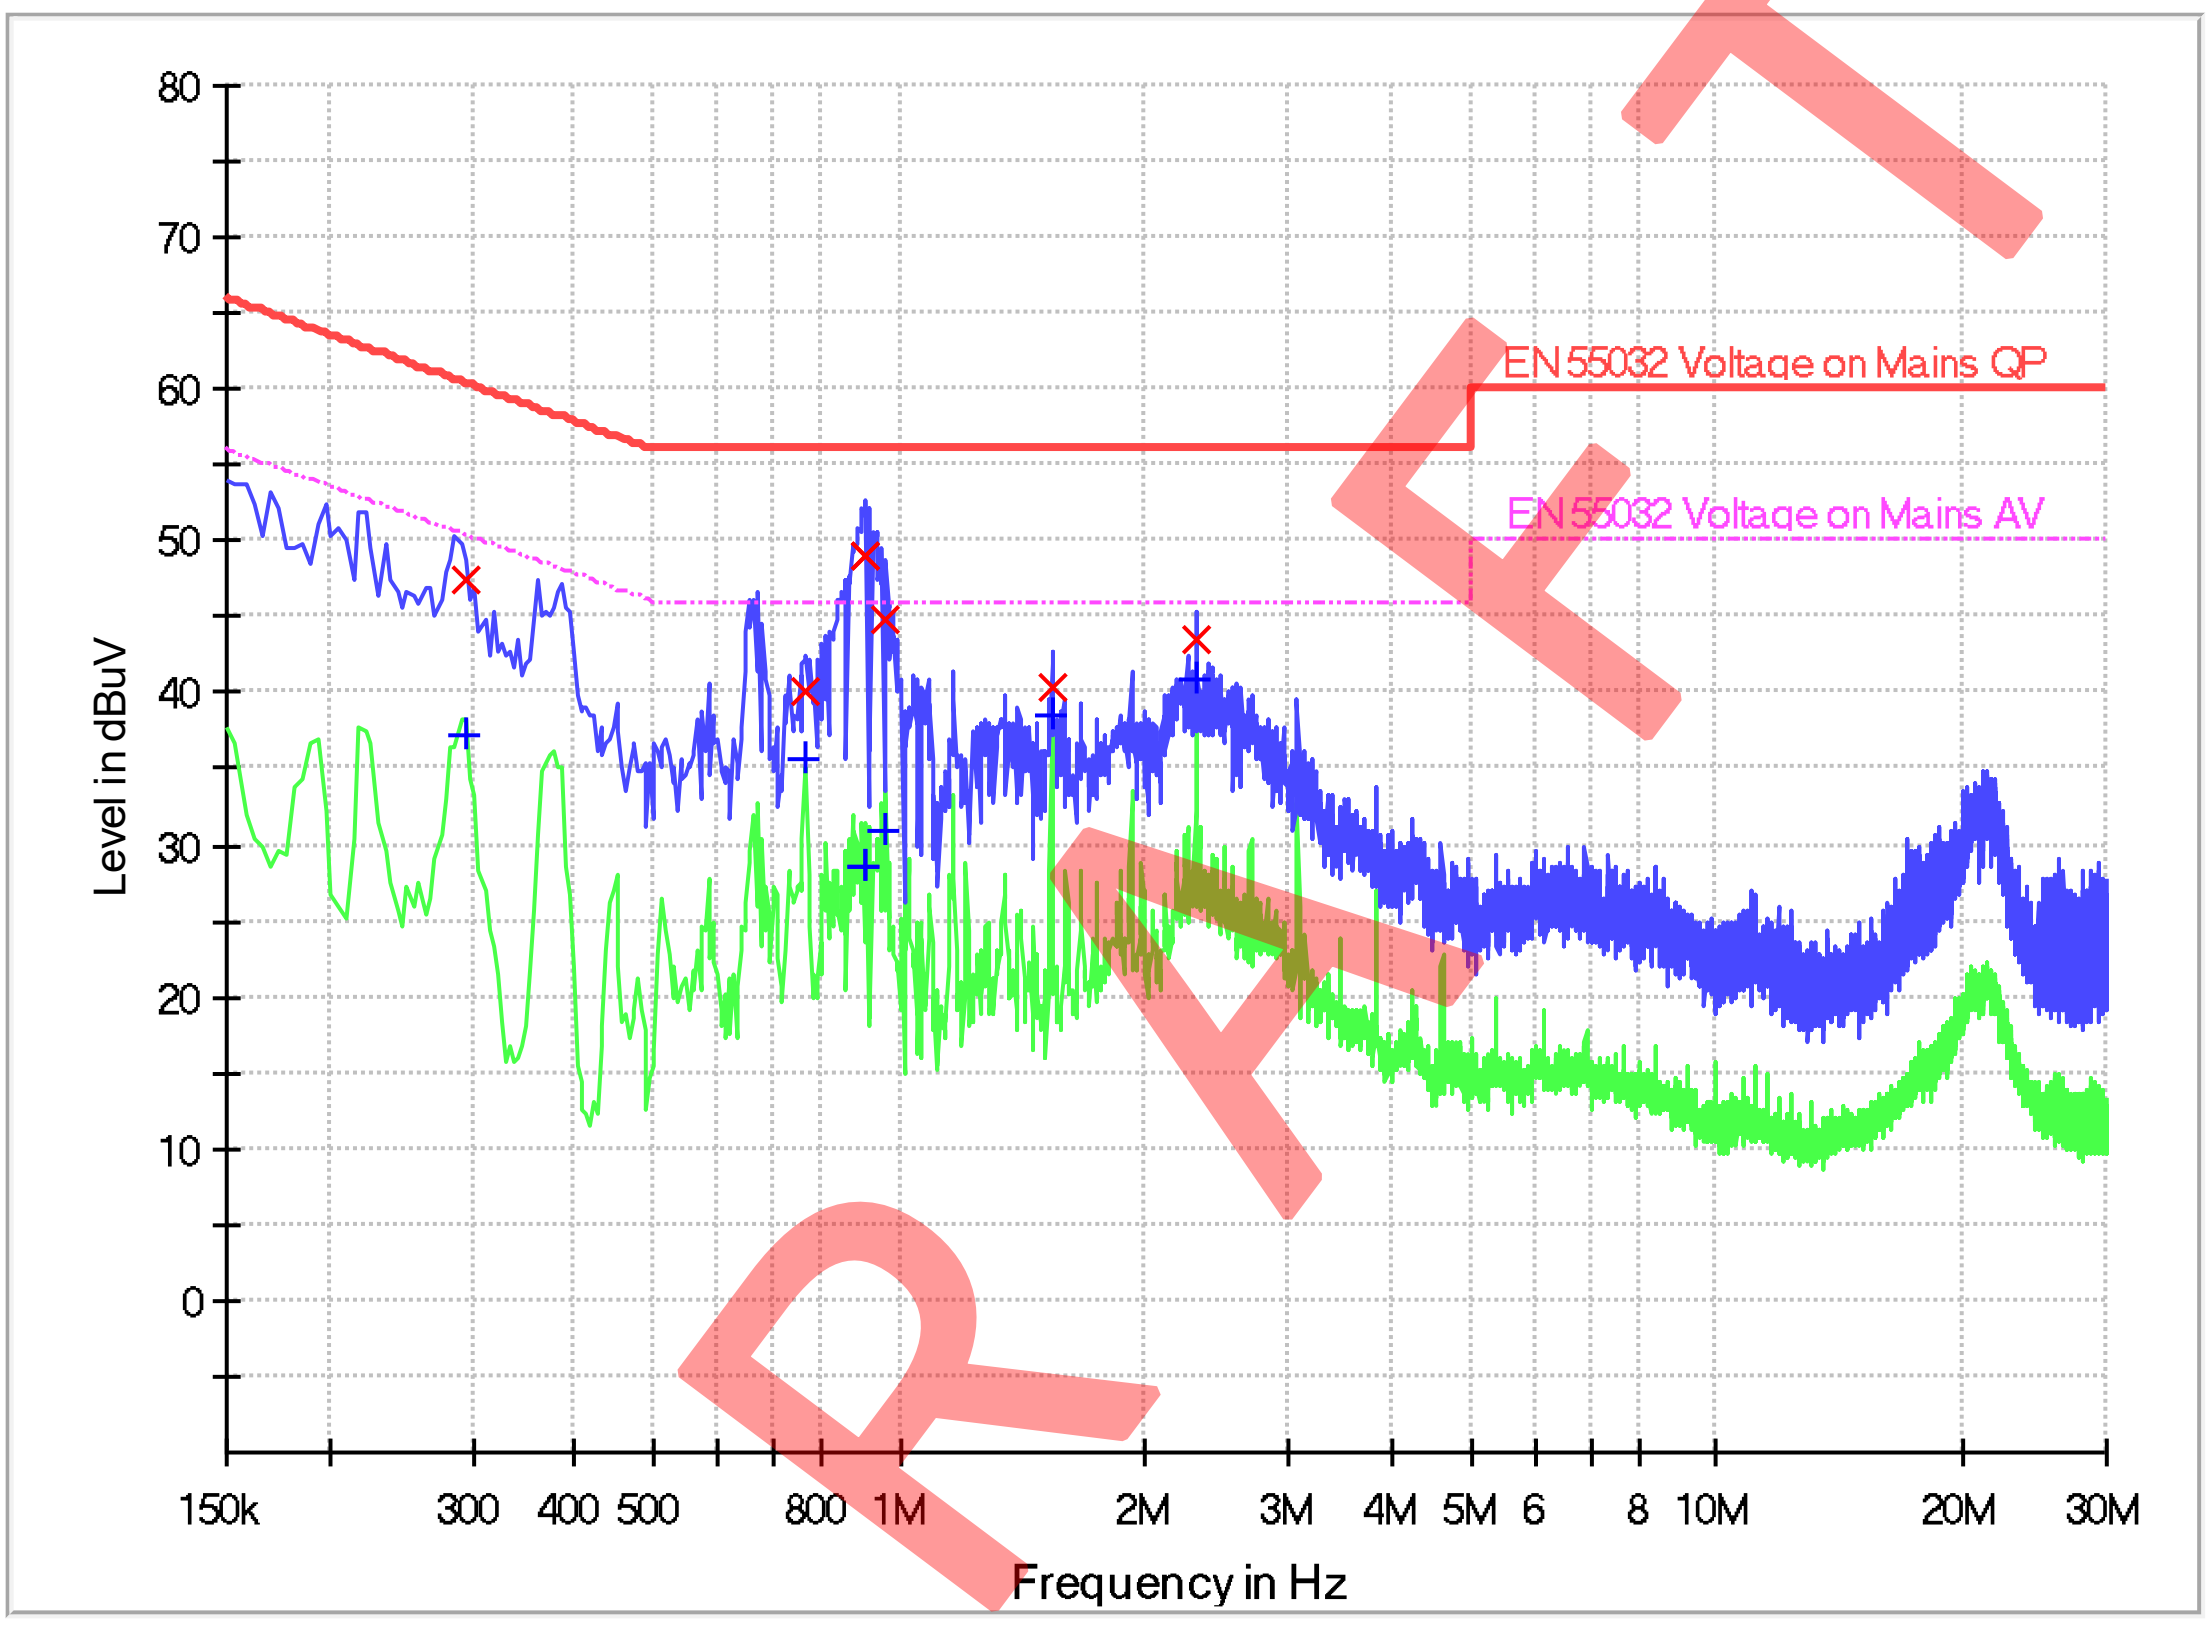

Limit and Margin QP

Frequency (MHz)	Quasi Peak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.294000	47.4	9.000	L1	9.6	13.0	60.4
0.770000	40.0	9.000	L1	9.6	16.0	56.0
0.910000	49.1	9.000	L1	9.6	6.9	56.0
0.962000	44.9	9.000	L1	9.6	11.1	56.0
1.538000	40.4	9.000	L1	9.6	15.6	56.0
2.302000	43.4	9.000	L1	9.7	12.6	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.294000	37.3	9.000	L1	9.6	13.1	50.4
0.770000	35.6	9.000	L1	9.6	10.4	46.0
0.910000	28.5	9.000	L1	9.6	17.5	46.0
0.962000	30.9	9.000	L1	9.6	15.1	46.0
1.538000	38.5	9.000	L1	9.6	7.5	46.0
2.302000	41.0	9.000	L1	9.7	5.0	46.0

Remark:
1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001

Worst Case Operating Mode: DVB-T(506MHz) with antenna grounded

Phase: Neutral

Worst Case Testing Voltage: AC 230V, 50Hz

Test Data

RFI Voltage Test

Pursuant to EN 55032: Emissions Requirement

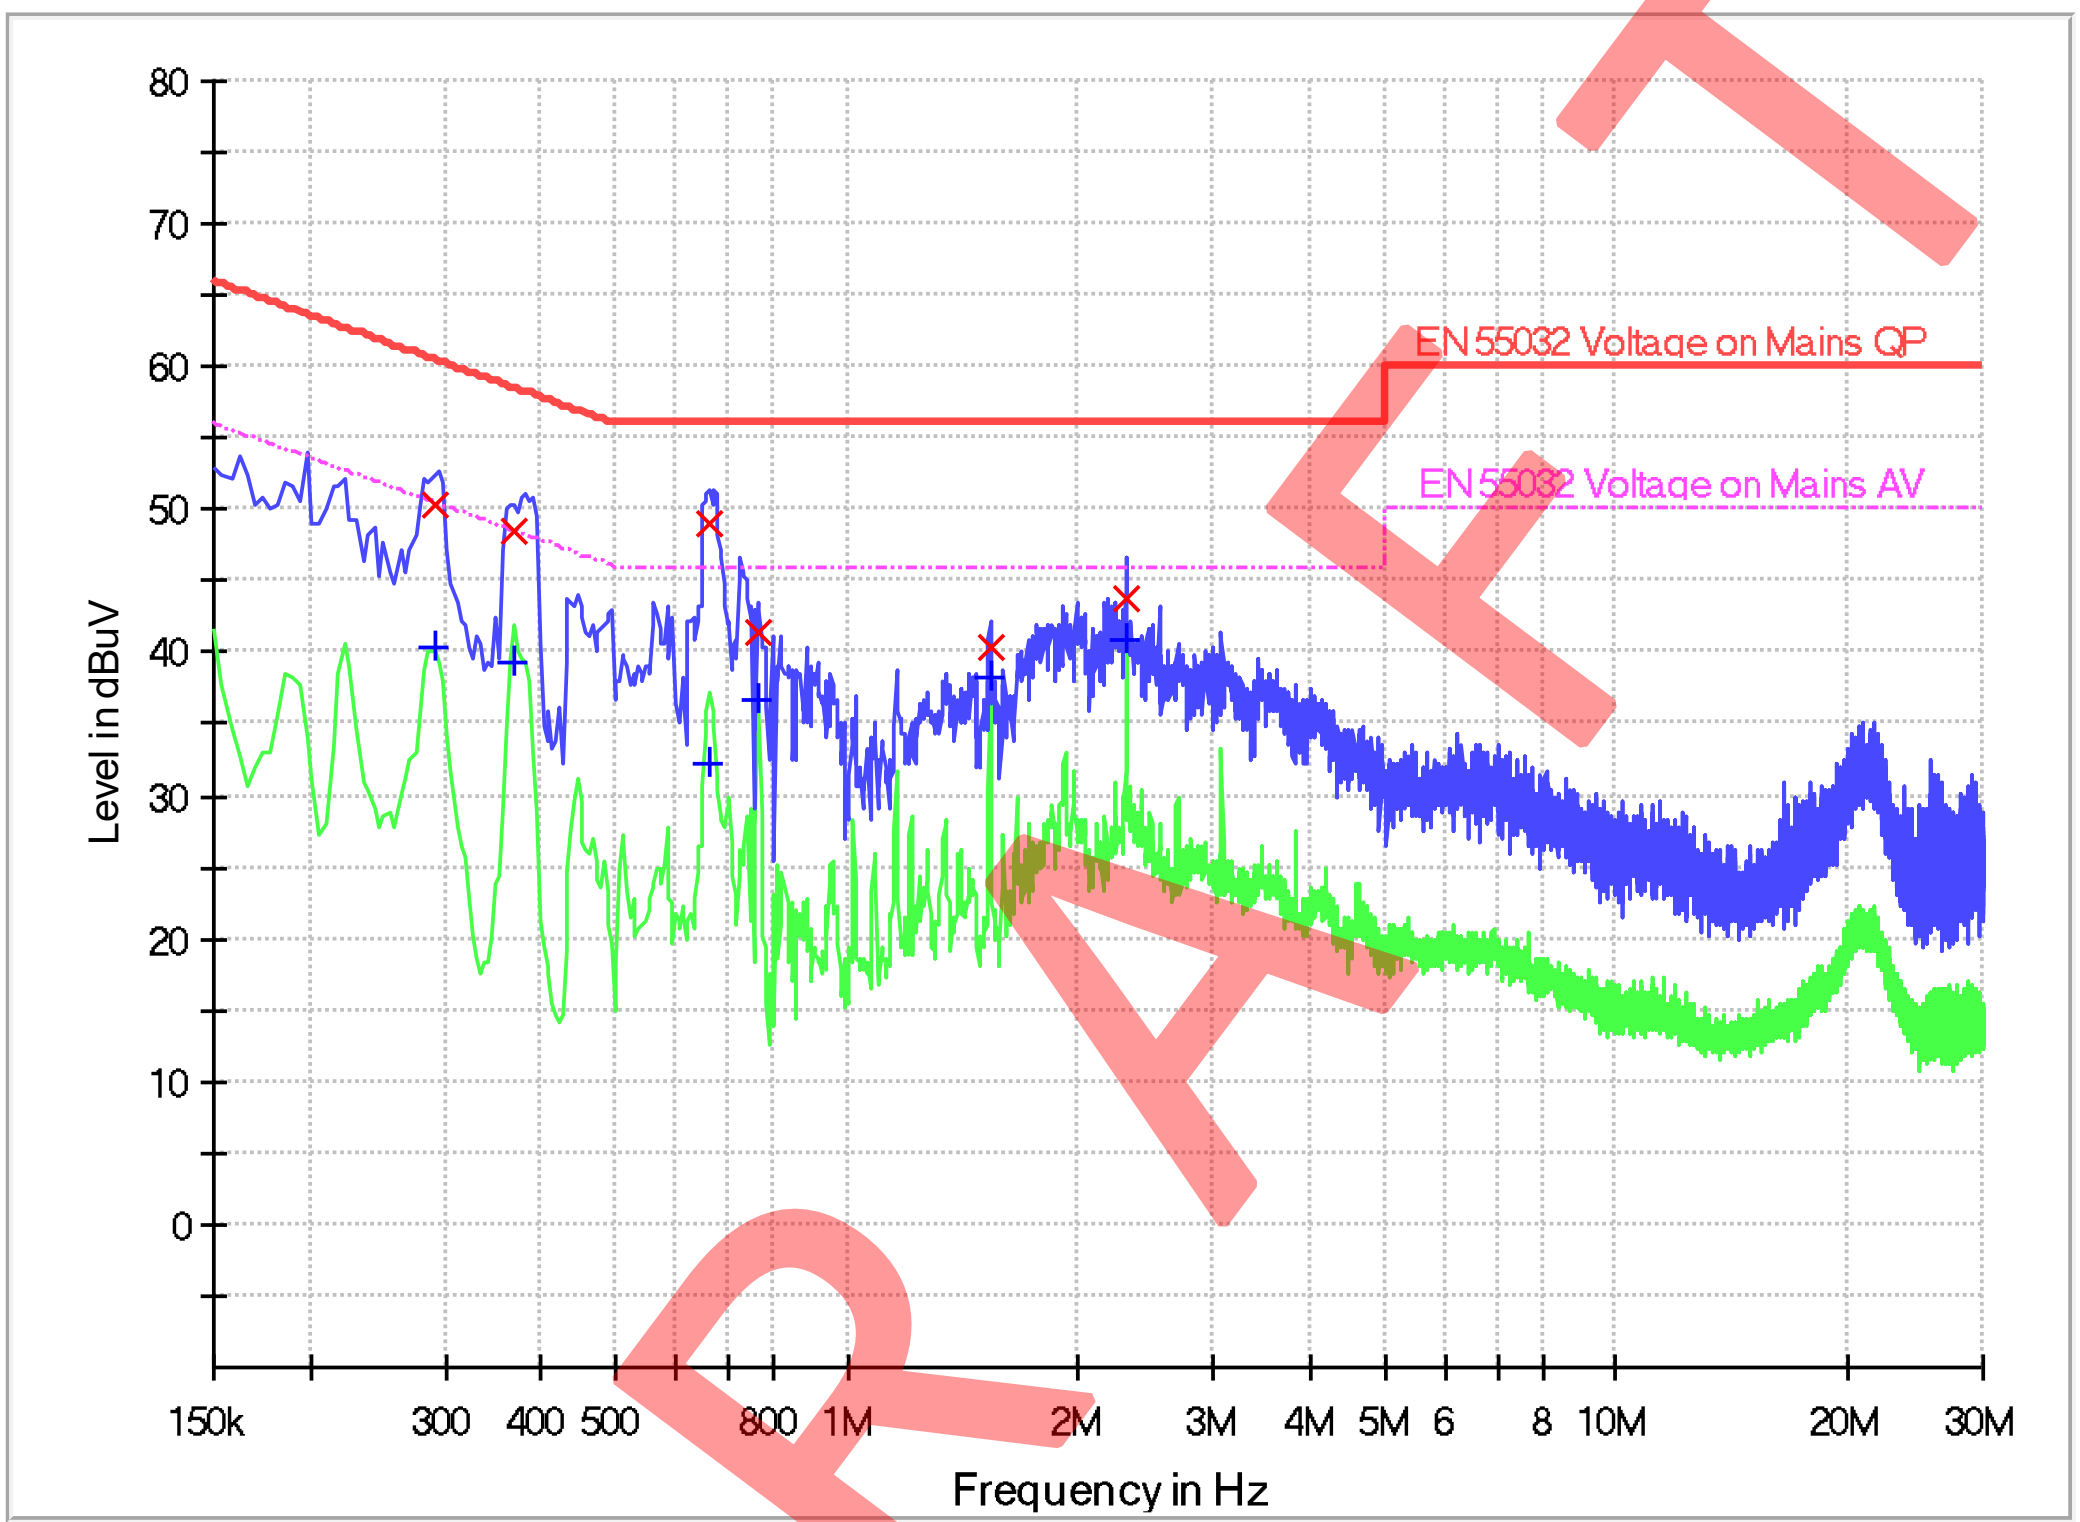

Limit and Margin QP

Frequency (MHz)	Quasi Peak (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.290000	50.2	9.000	N	9.6	10.3	60.5
0.370000	48.6	9.000	N	9.6	9.9	58.5
0.662000	49.1	9.000	N	9.6	6.9	56.0
0.766000	41.5	9.000	N	9.6	14.5	56.0
1.534000	40.3	9.000	N	9.6	15.7	56.0
2.306000	43.8	9.000	N	9.7	12.2	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBµV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBµV)
0.290000	40.4	9.000	N	9.6	10.1	50.5
0.370000	39.3	9.000	N	9.6	9.2	48.5
0.662000	32.3	9.000	N	9.6	13.7	46.0
0.766000	36.6	9.000	N	9.6	9.4	46.0
1.534000	38.4	9.000	N	9.6	7.6	46.0
2.306000	41.0	9.000	N	9.7	5.0	46.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

Asymmetric Mode Conducted Emissions
Pursuant to EN55032: Emissions Requirement

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2024-07-09	2025-07-09
SZ183-05	Current Transformer	SCHWARZBECK	SW 9605	2024-07-10	2025-07-10
SZ187-01	Two-Line V-Network	R & S	ENV216	2024-10-24	2025-10-24
SZ187-02	Two-Line V-Network	R & S	ENV216	2024-04-23	2025-04-23
SZ184-04	Impedance Stabilization Network	Teseq	ISN T8	2024-07-10	2025-07-10
SZ184-05	Calibration Kit for ISN	Teseq	CAS ISN	2024-07-10	2025-07-10
SZ188-03	Shielding Room	ETS	RFD-100	2022-12-20	2025-12-20

Notes:
1. Peak and average detector quick scan are showed on the graph and final quasi-peak and average detector data are measured, the worst-case is recorded in the following graph and table.
2. Frequency range scanned: 150 KHz to 30MHz.
3. Only emissions significantly above equipment noise floor is reported.
4. Uncertainty: ±3.2dB at a level of confidence of 95%.

Test Setup Diagram

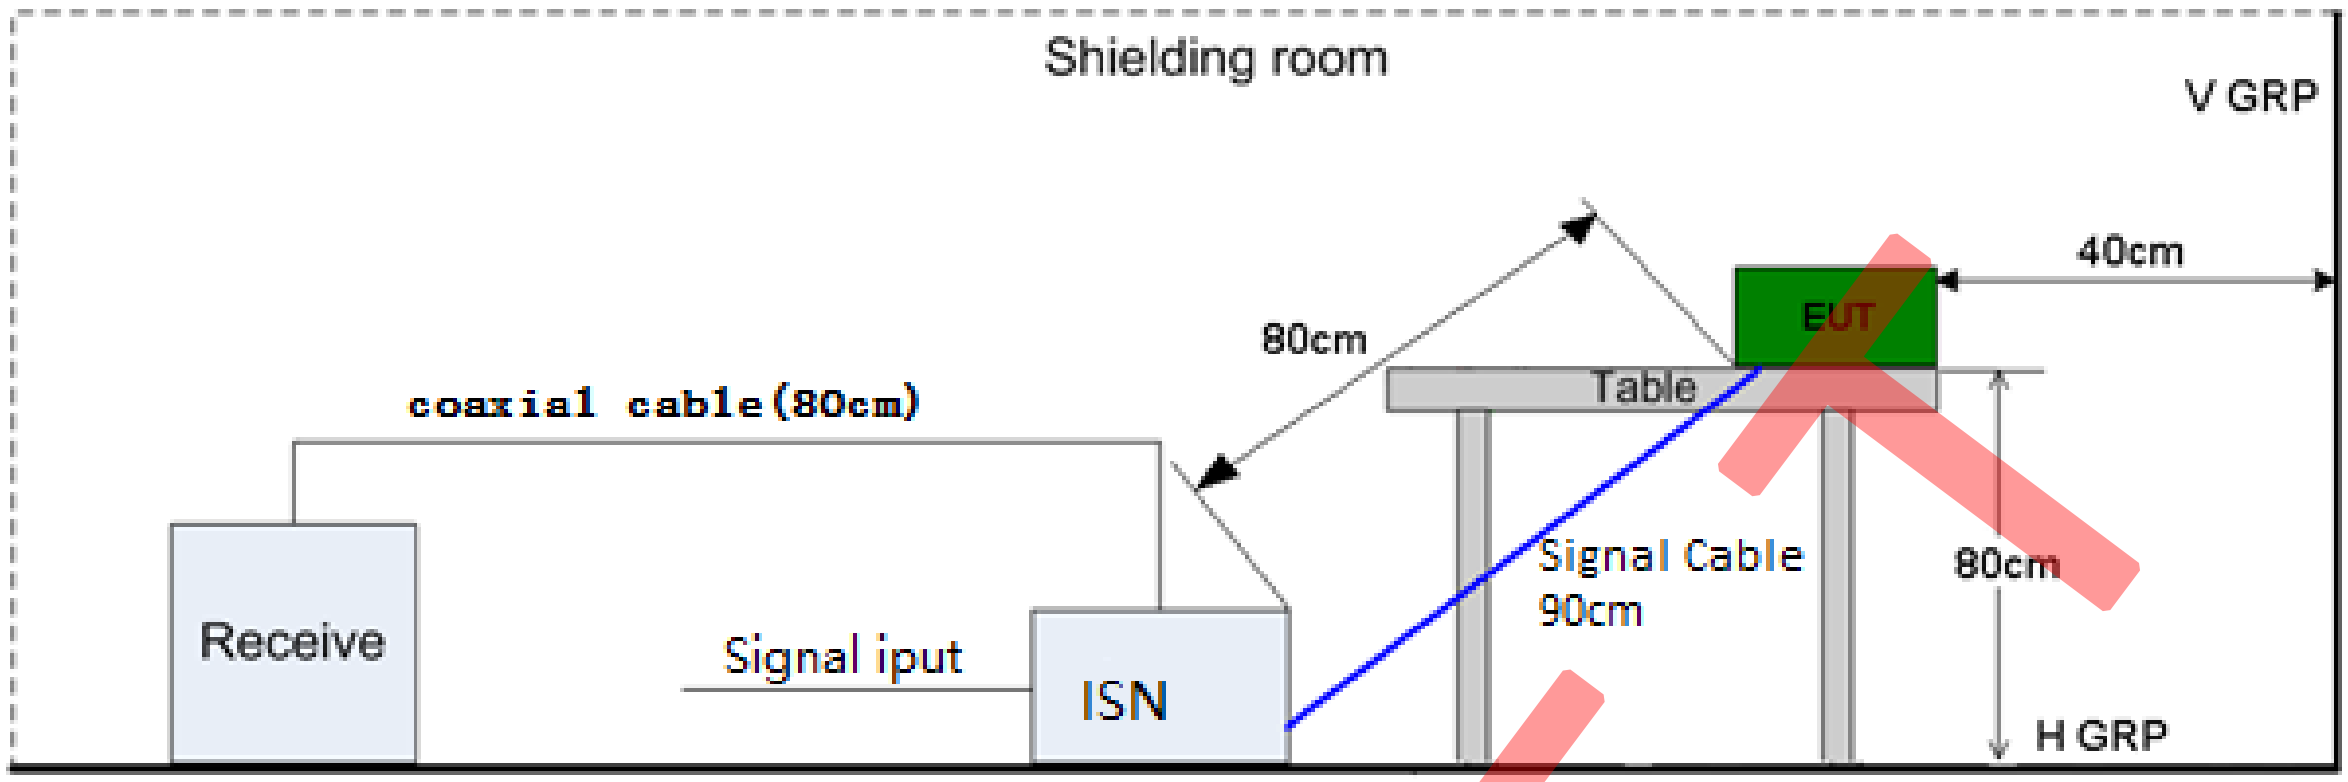

Test setup for Balanced Unscreened port

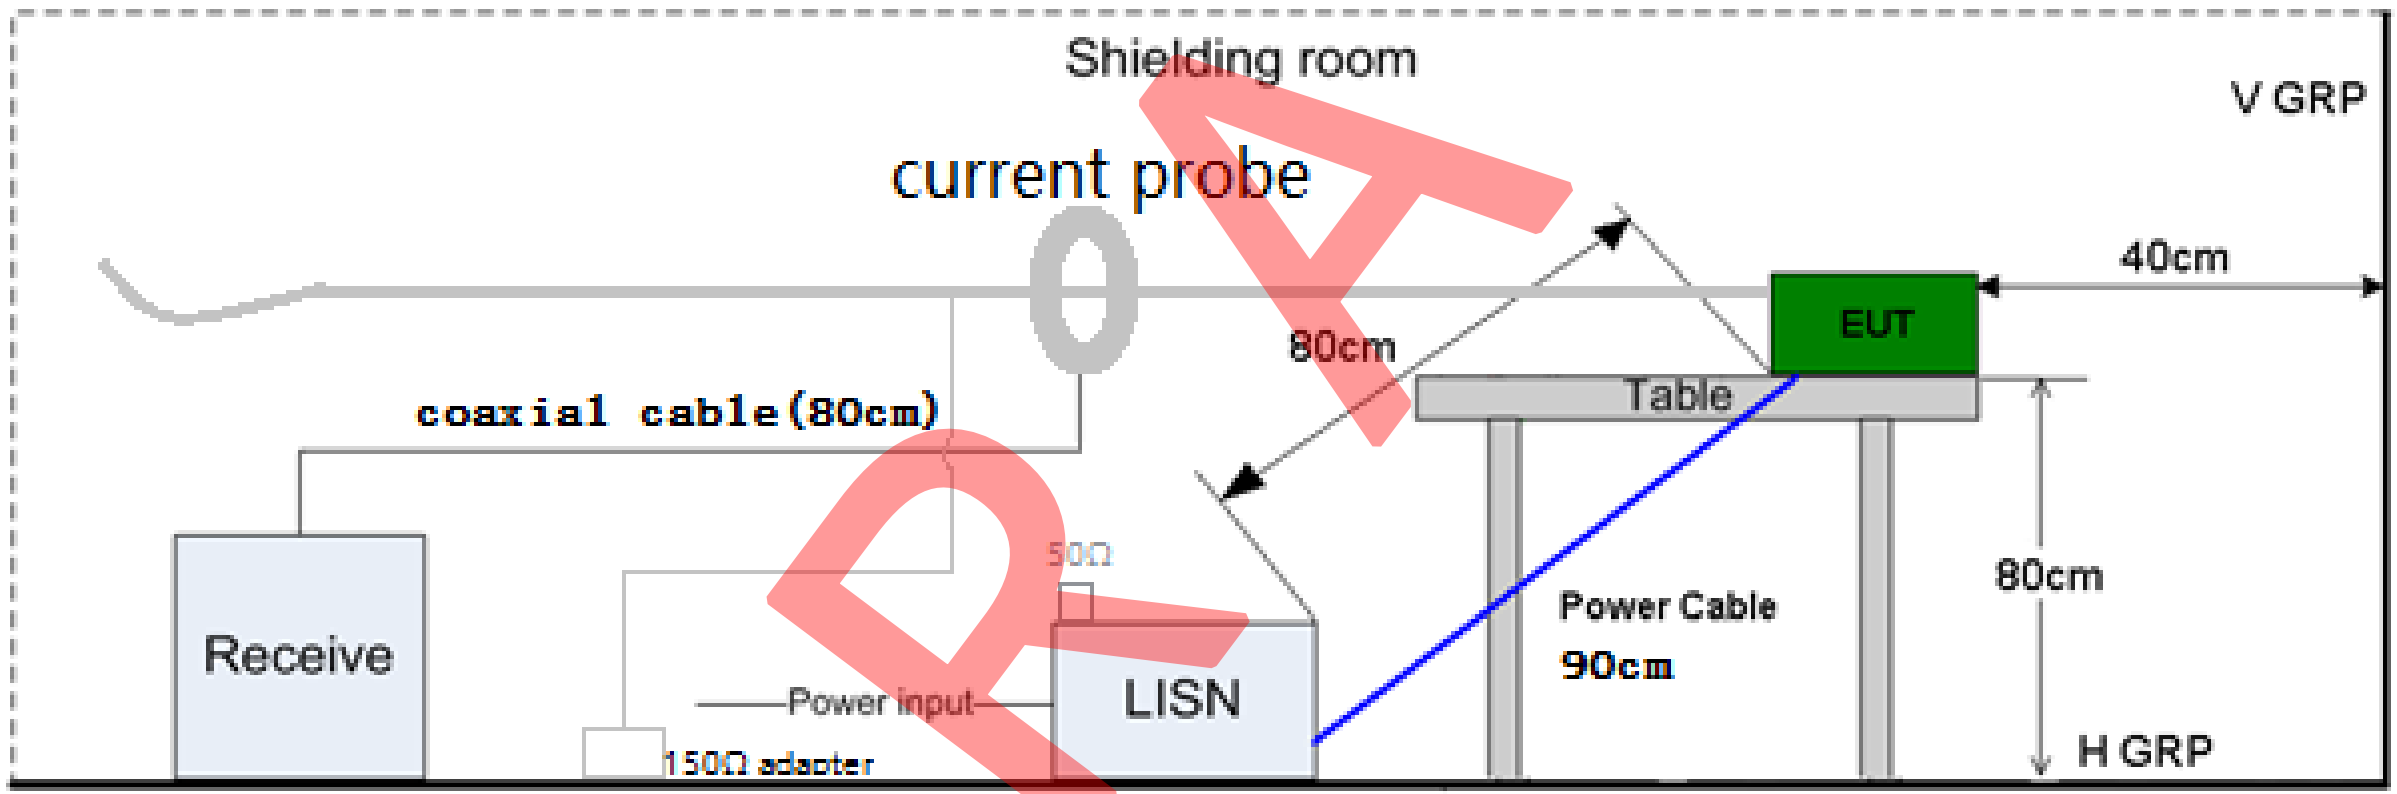

Test setup for Screened or Coaxial port

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001
Worst Case Operating Mode: IPTV
Port: Wired network port

Test Data

Asymmetric Mode Conducted Emissions (LAN Port)
Pursuant to EN55032: Emissions Requirement

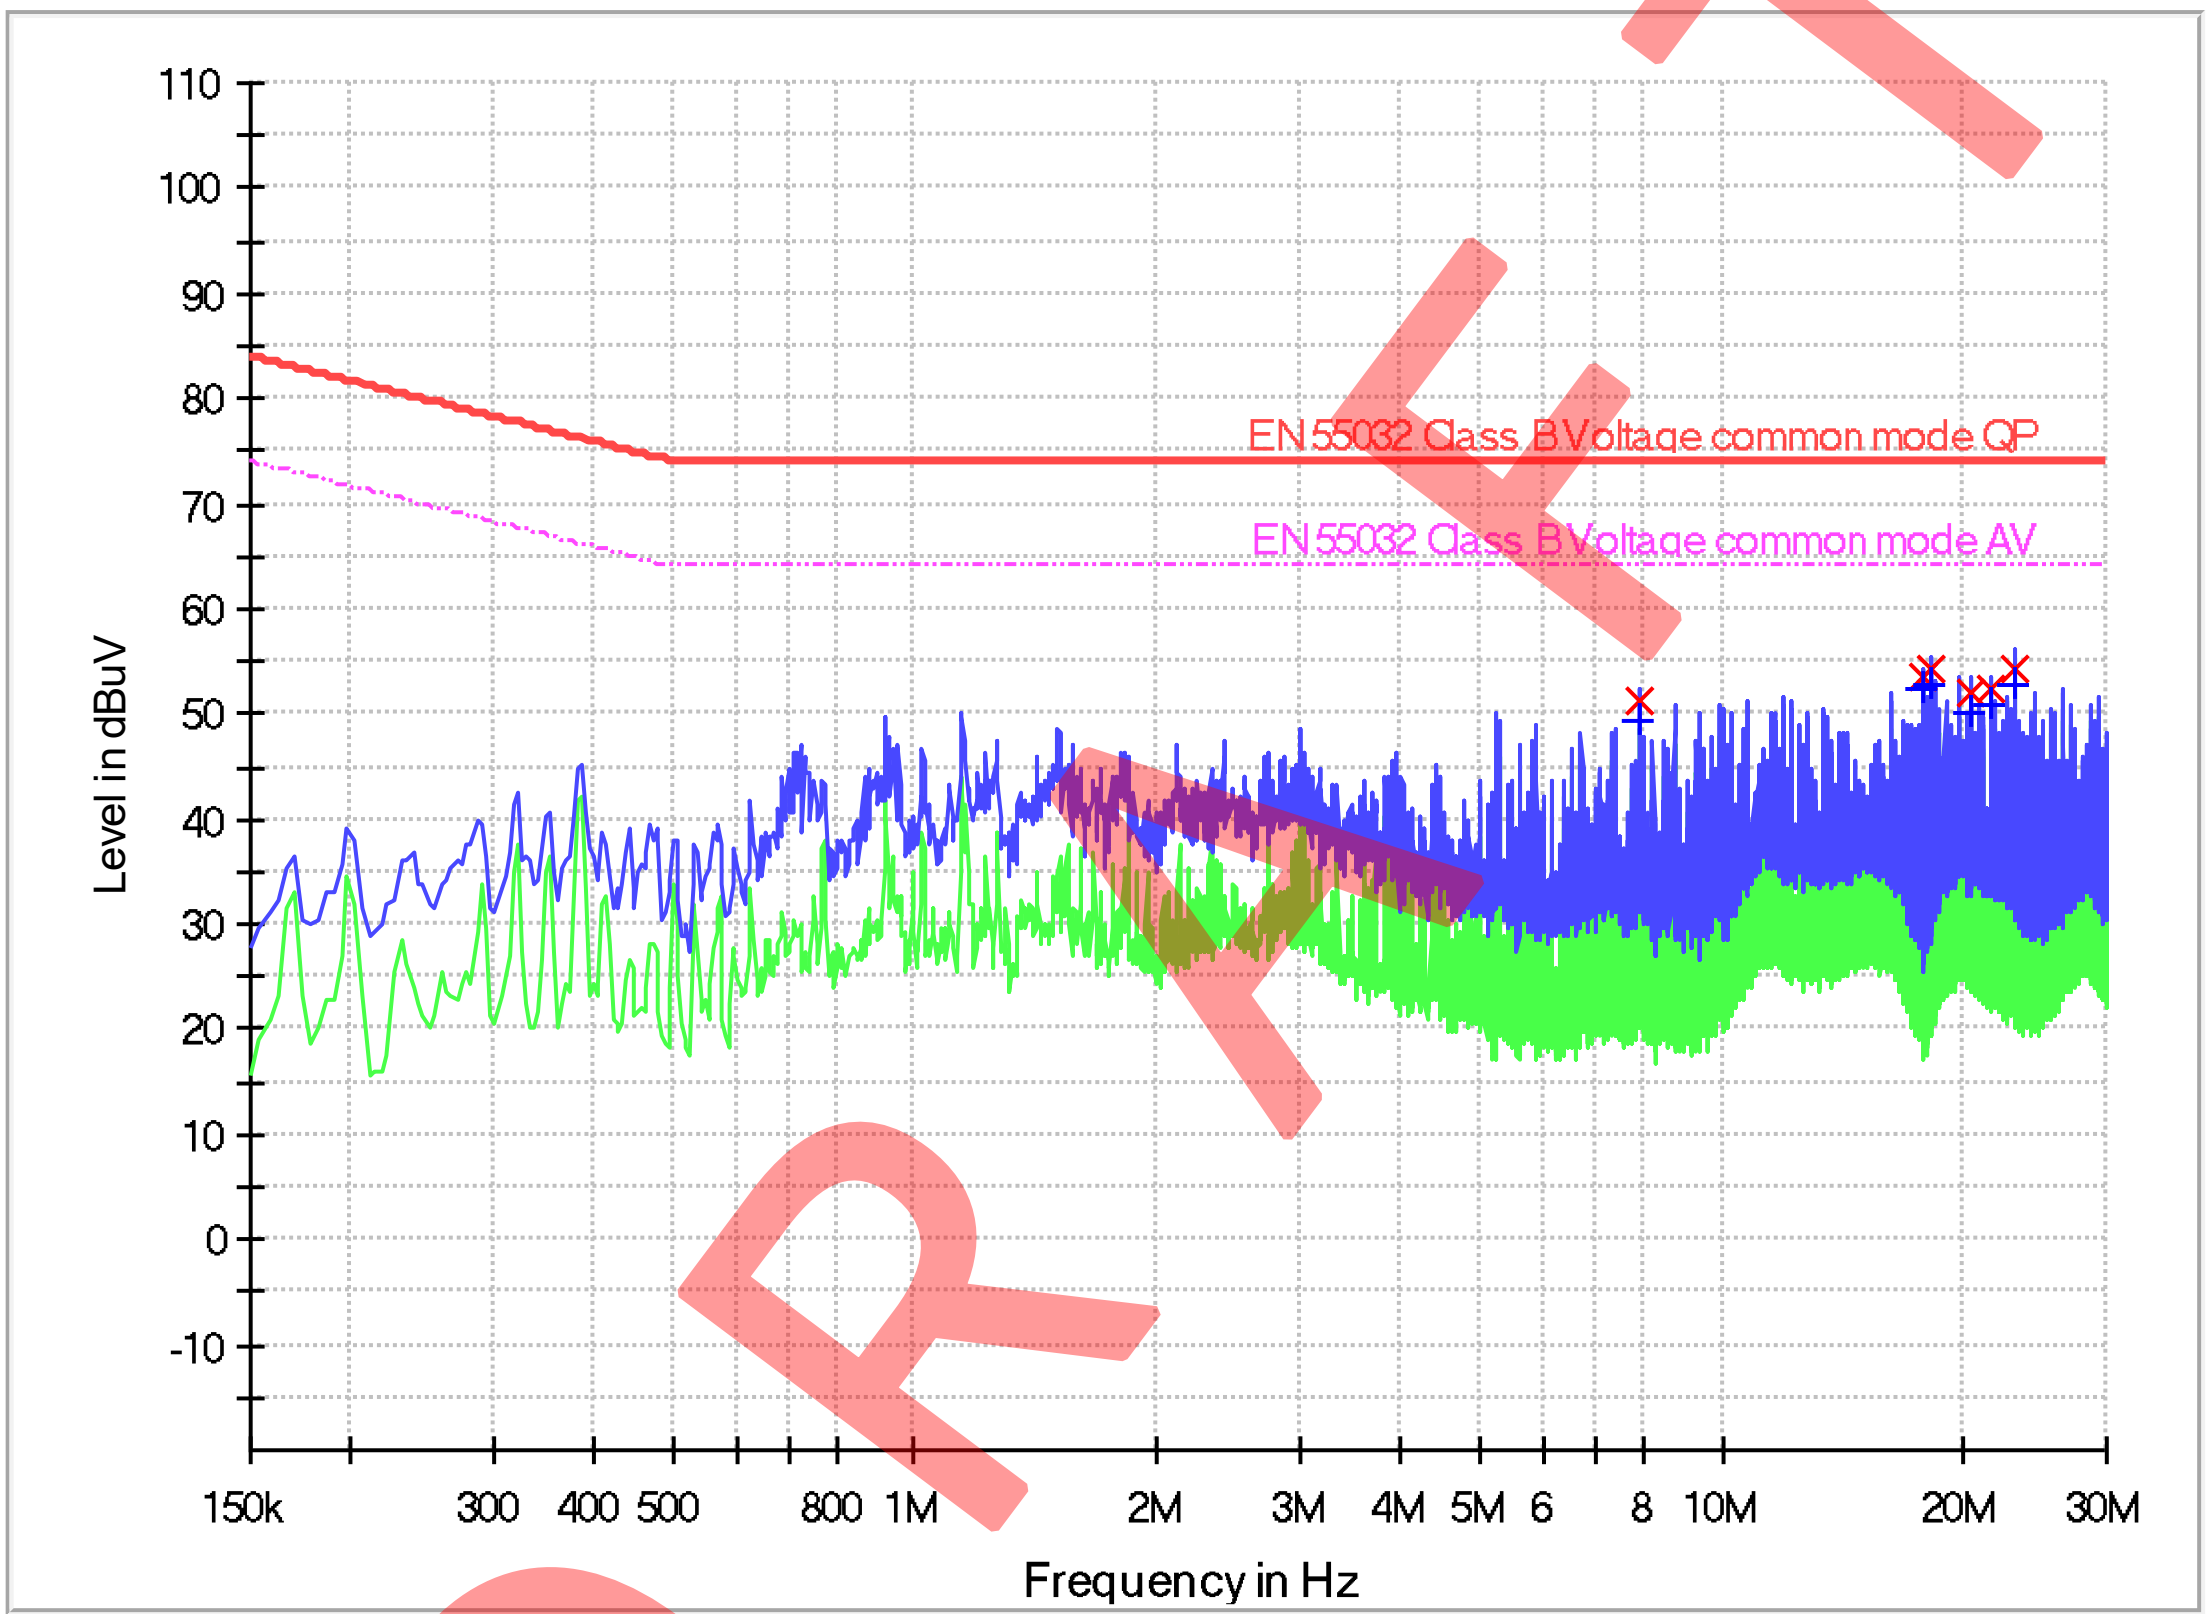

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
7.922000	51.1	9.000	9.3	22.9	74.0
17.694000	53.6	9.000	9.4	20.4	74.0
18.242000	54.2	9.000	9.4	19.8	74.0
20.258000	51.9	9.000	9.4	22.1	74.0
21.662000	52.4	9.000	9.4	21.6	74.0
23.130000	54.2	9.000	9.4	19.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
7.922000	49.3	9.000	9.3	14.7	64.0
17.694000	52.3	9.000	9.4	11.7	64.0
18.242000	52.6	9.000	9.4	11.4	64.0
20.258000	50.2	9.000	9.4	13.8	64.0
21.662000	50.8	9.000	9.4	13.2	64.0
23.130000	52.9	9.000	9.4	11.1	64.0

Remark:
1. Corr. Factor (dB) = ISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBµV) – Quasi Peak/Average (dBµV)

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001
Worst Case Operating Mode: DVB-T
Port: DVB-T Antenna

Test Data

Asymmetric Mode Conducted Emissions
Pursuant to EN55032: Emissions Requirement

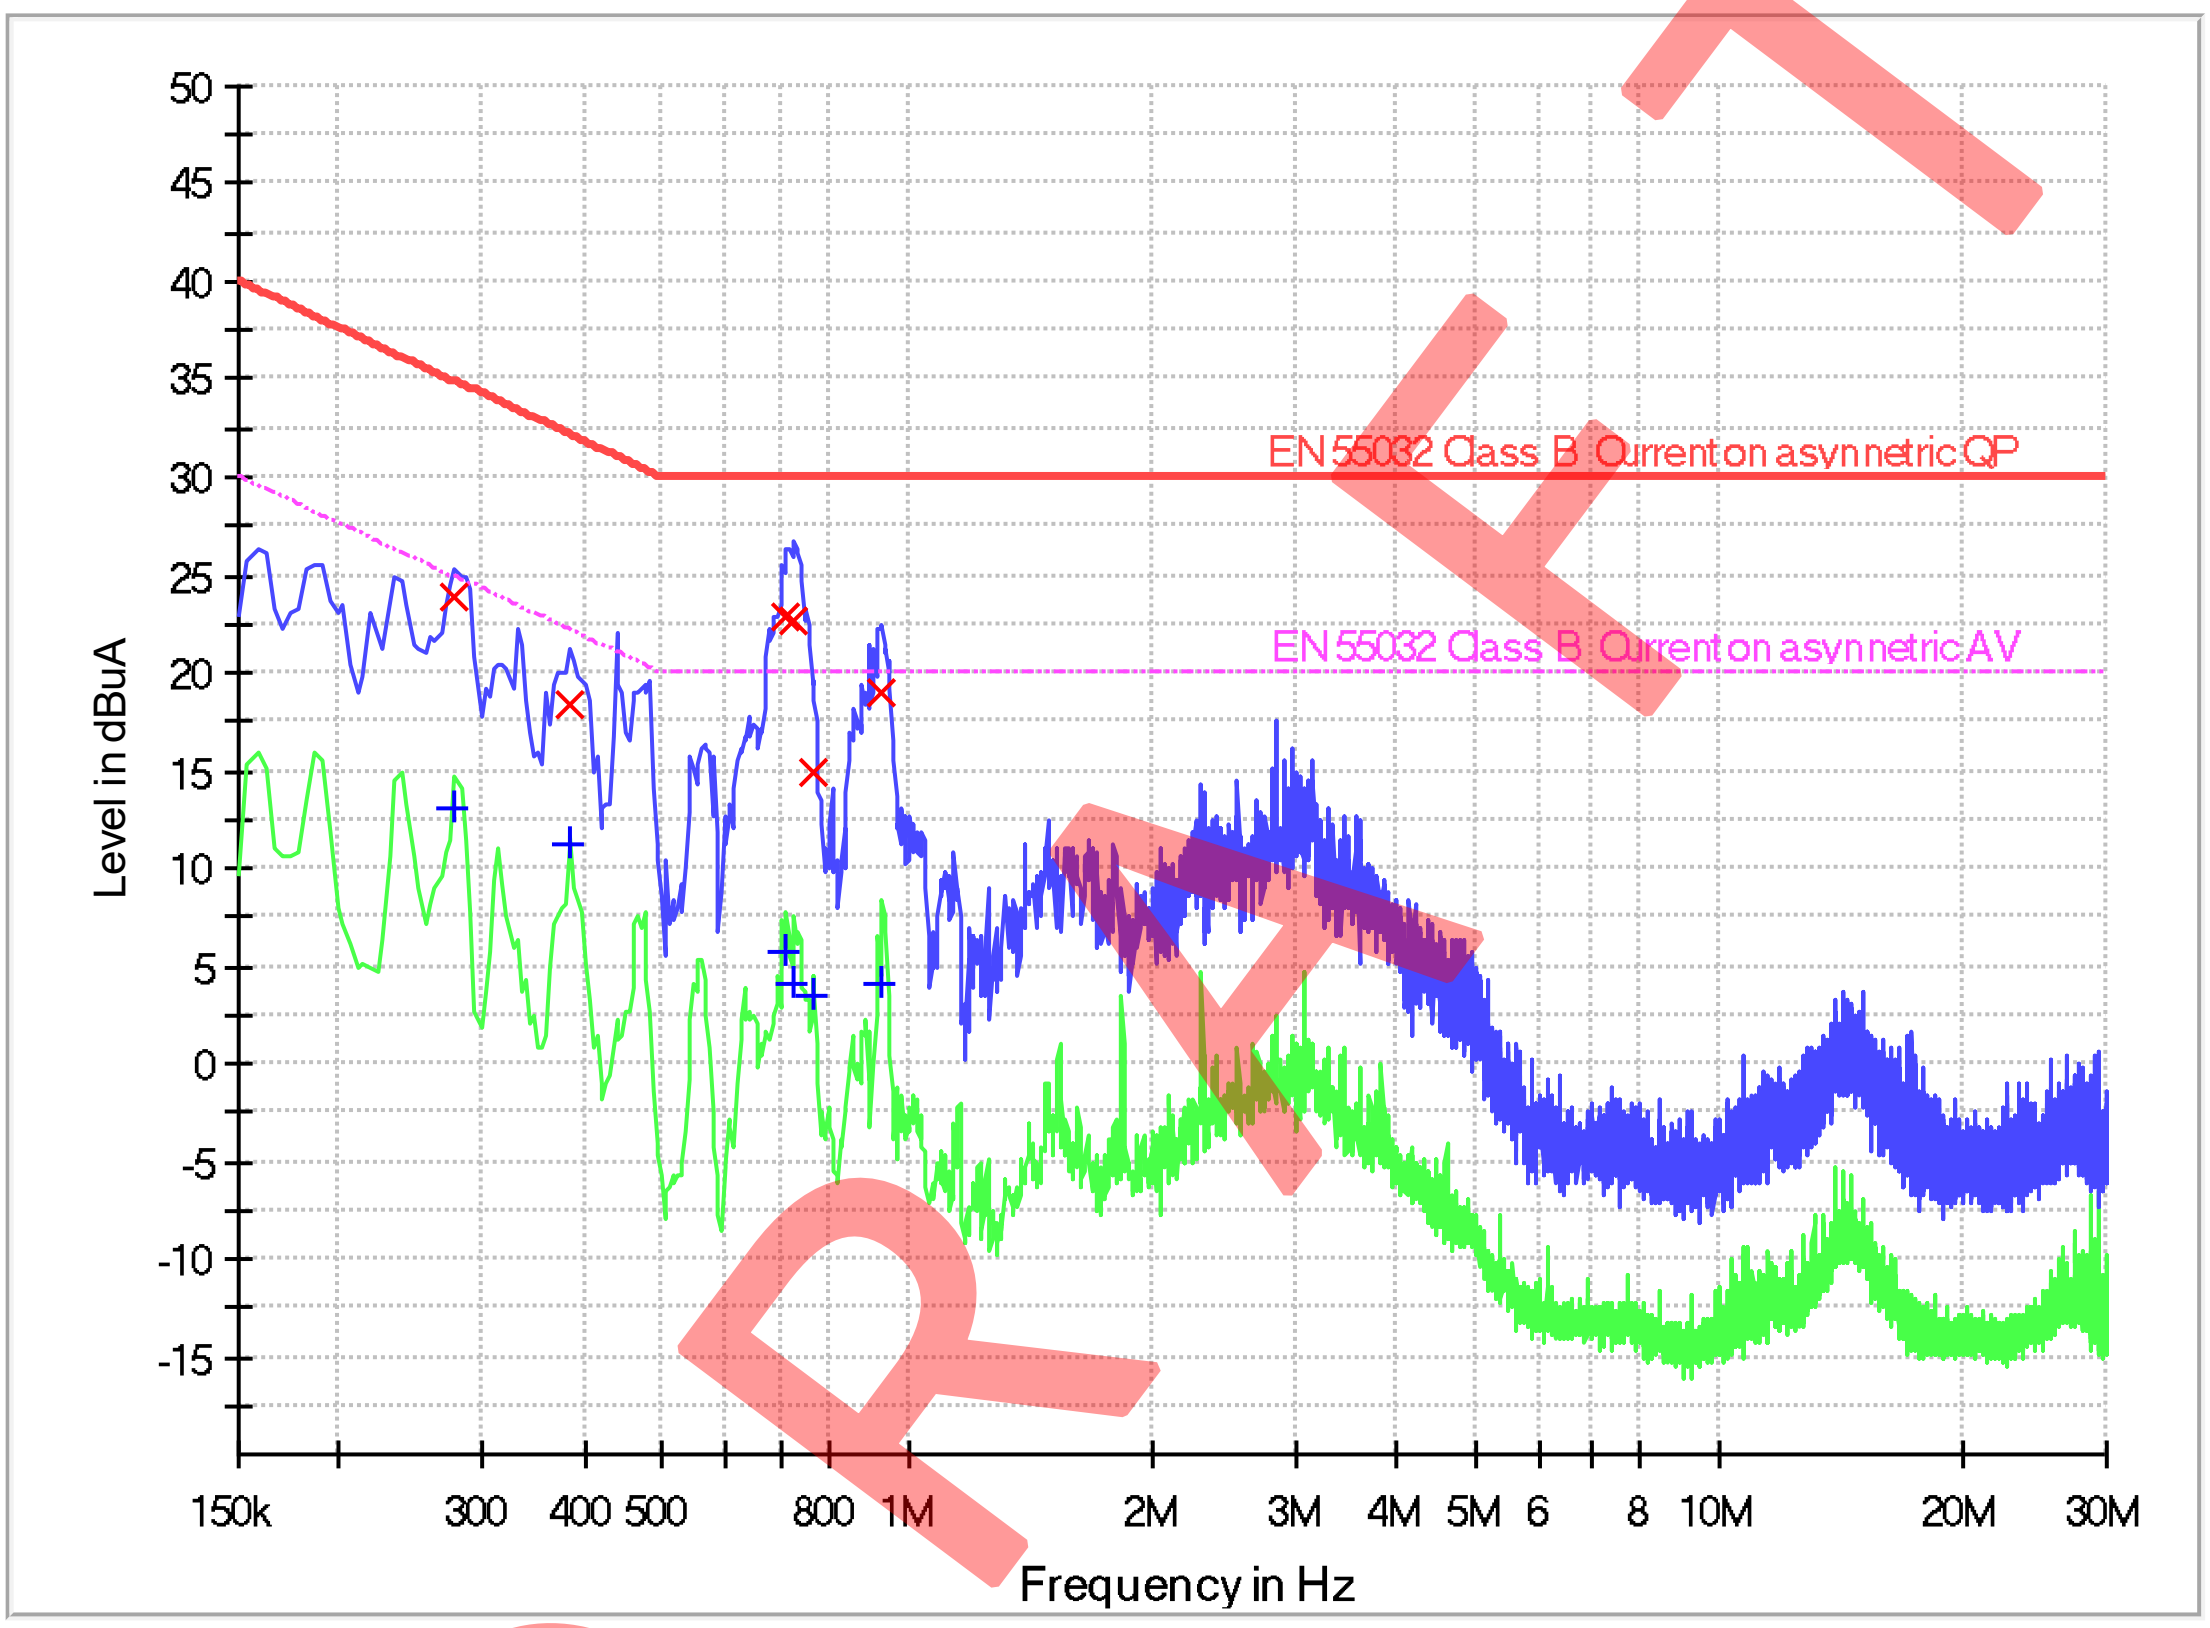

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuA)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuA)
0.278000	23.9	9.000	0.9	11.0	34.9
0.386000	18.4	9.000	0.7	13.7	32.1
0.710000	22.8	9.000	0.3	7.2	30.0
0.726000	22.7	9.000	0.3	7.3	30.0
0.766000	15.0	9.000	0.3	15.0	30.0
0.930000	18.9	9.000	0.3	11.1	30.0

Limit and Margin AV

Frequency (MHz)	Average (dBuA)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuA)
0.278000	13.0	9.000	0.9	11.9	24.9
0.386000	11.2	9.000	0.7	10.9	22.1
0.710000	5.6	9.000	0.3	14.4	20.0
0.726000	4.1	9.000	0.3	15.9	20.0
0.766000	3.5	9.000	0.3	16.5	20.0
0.930000	4.1	9.000	0.3	15.9	20.0

Remark:
1. Corr. Factor (dB) = Current Probe Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

Antenna Terminal Disturbance Voltage
Pursuant to EN55032: Emissions Requirement

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R&S	ESCI	2024-07-09	2025-07-09
SZ070-15	Matching Pad	R&S	RAM	2024-04-28	2025-04-28
SZ067-03	Power Splitter	R&S	RVZ	2024-12-05	2025-12-05

Notes: 1. Peak and average detector quick scan are showed on the graph and final quasi-peak and average detector data are measured, the worst-case is recorded in the following graph and table.

2. Frequency range scanned: 30MHz to 2150MHz.

3. Only emissions significantly above equipment noise floor is reported.

Test Setup

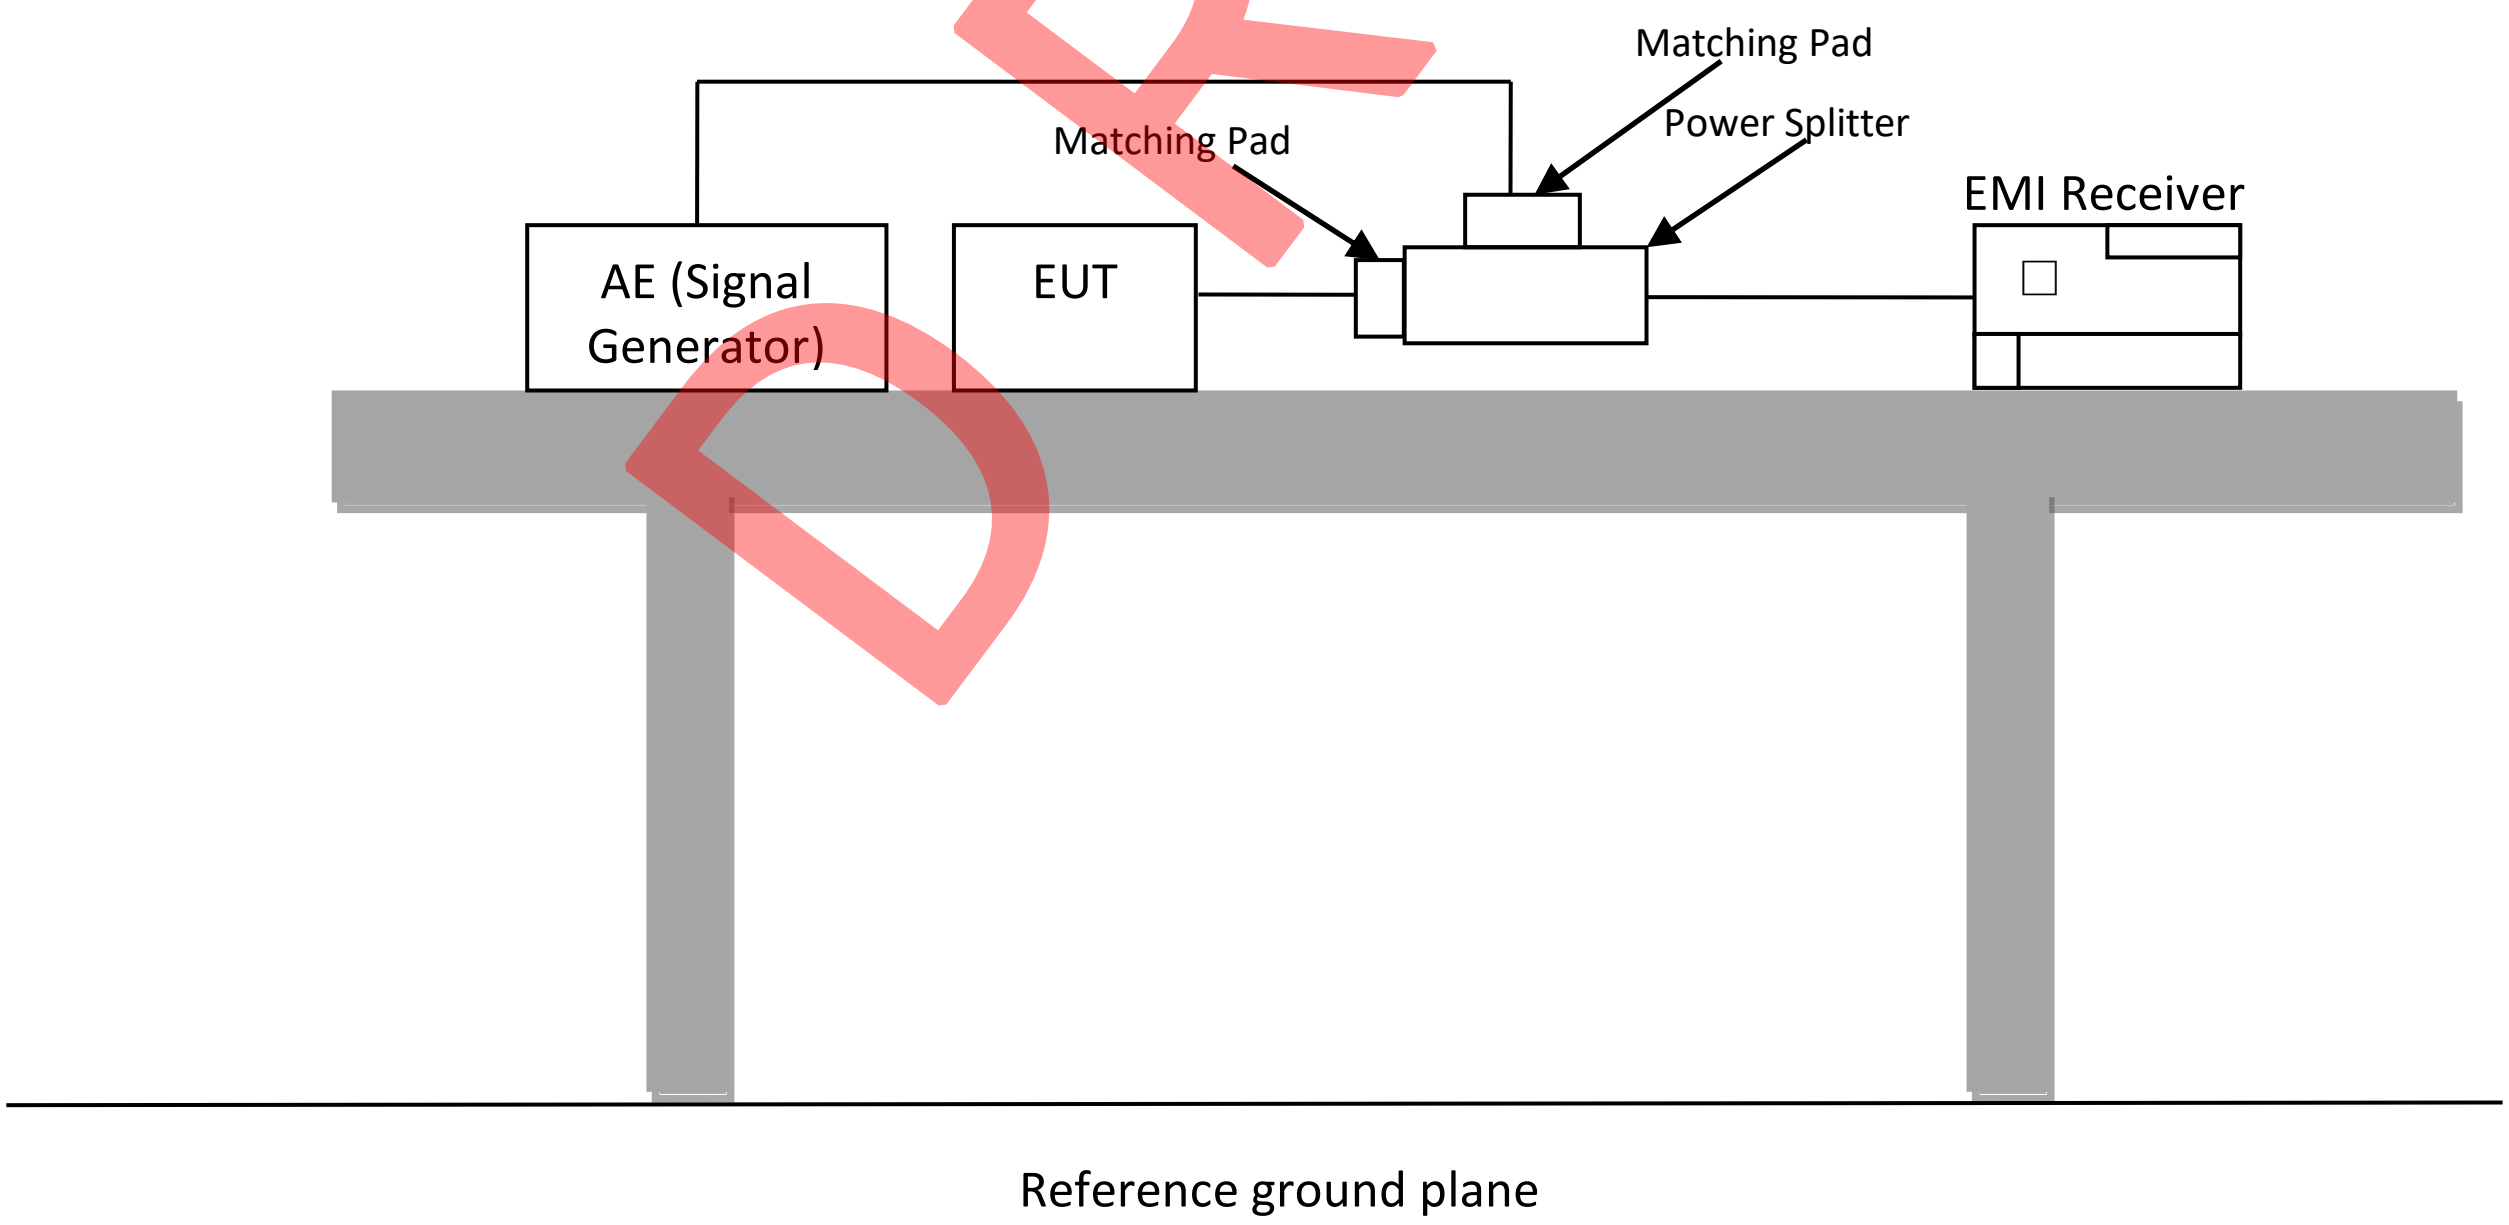

Test Data

Antenna Terminal Disturbance Voltage
Pursuant to EN 55032: Emissions Requirement

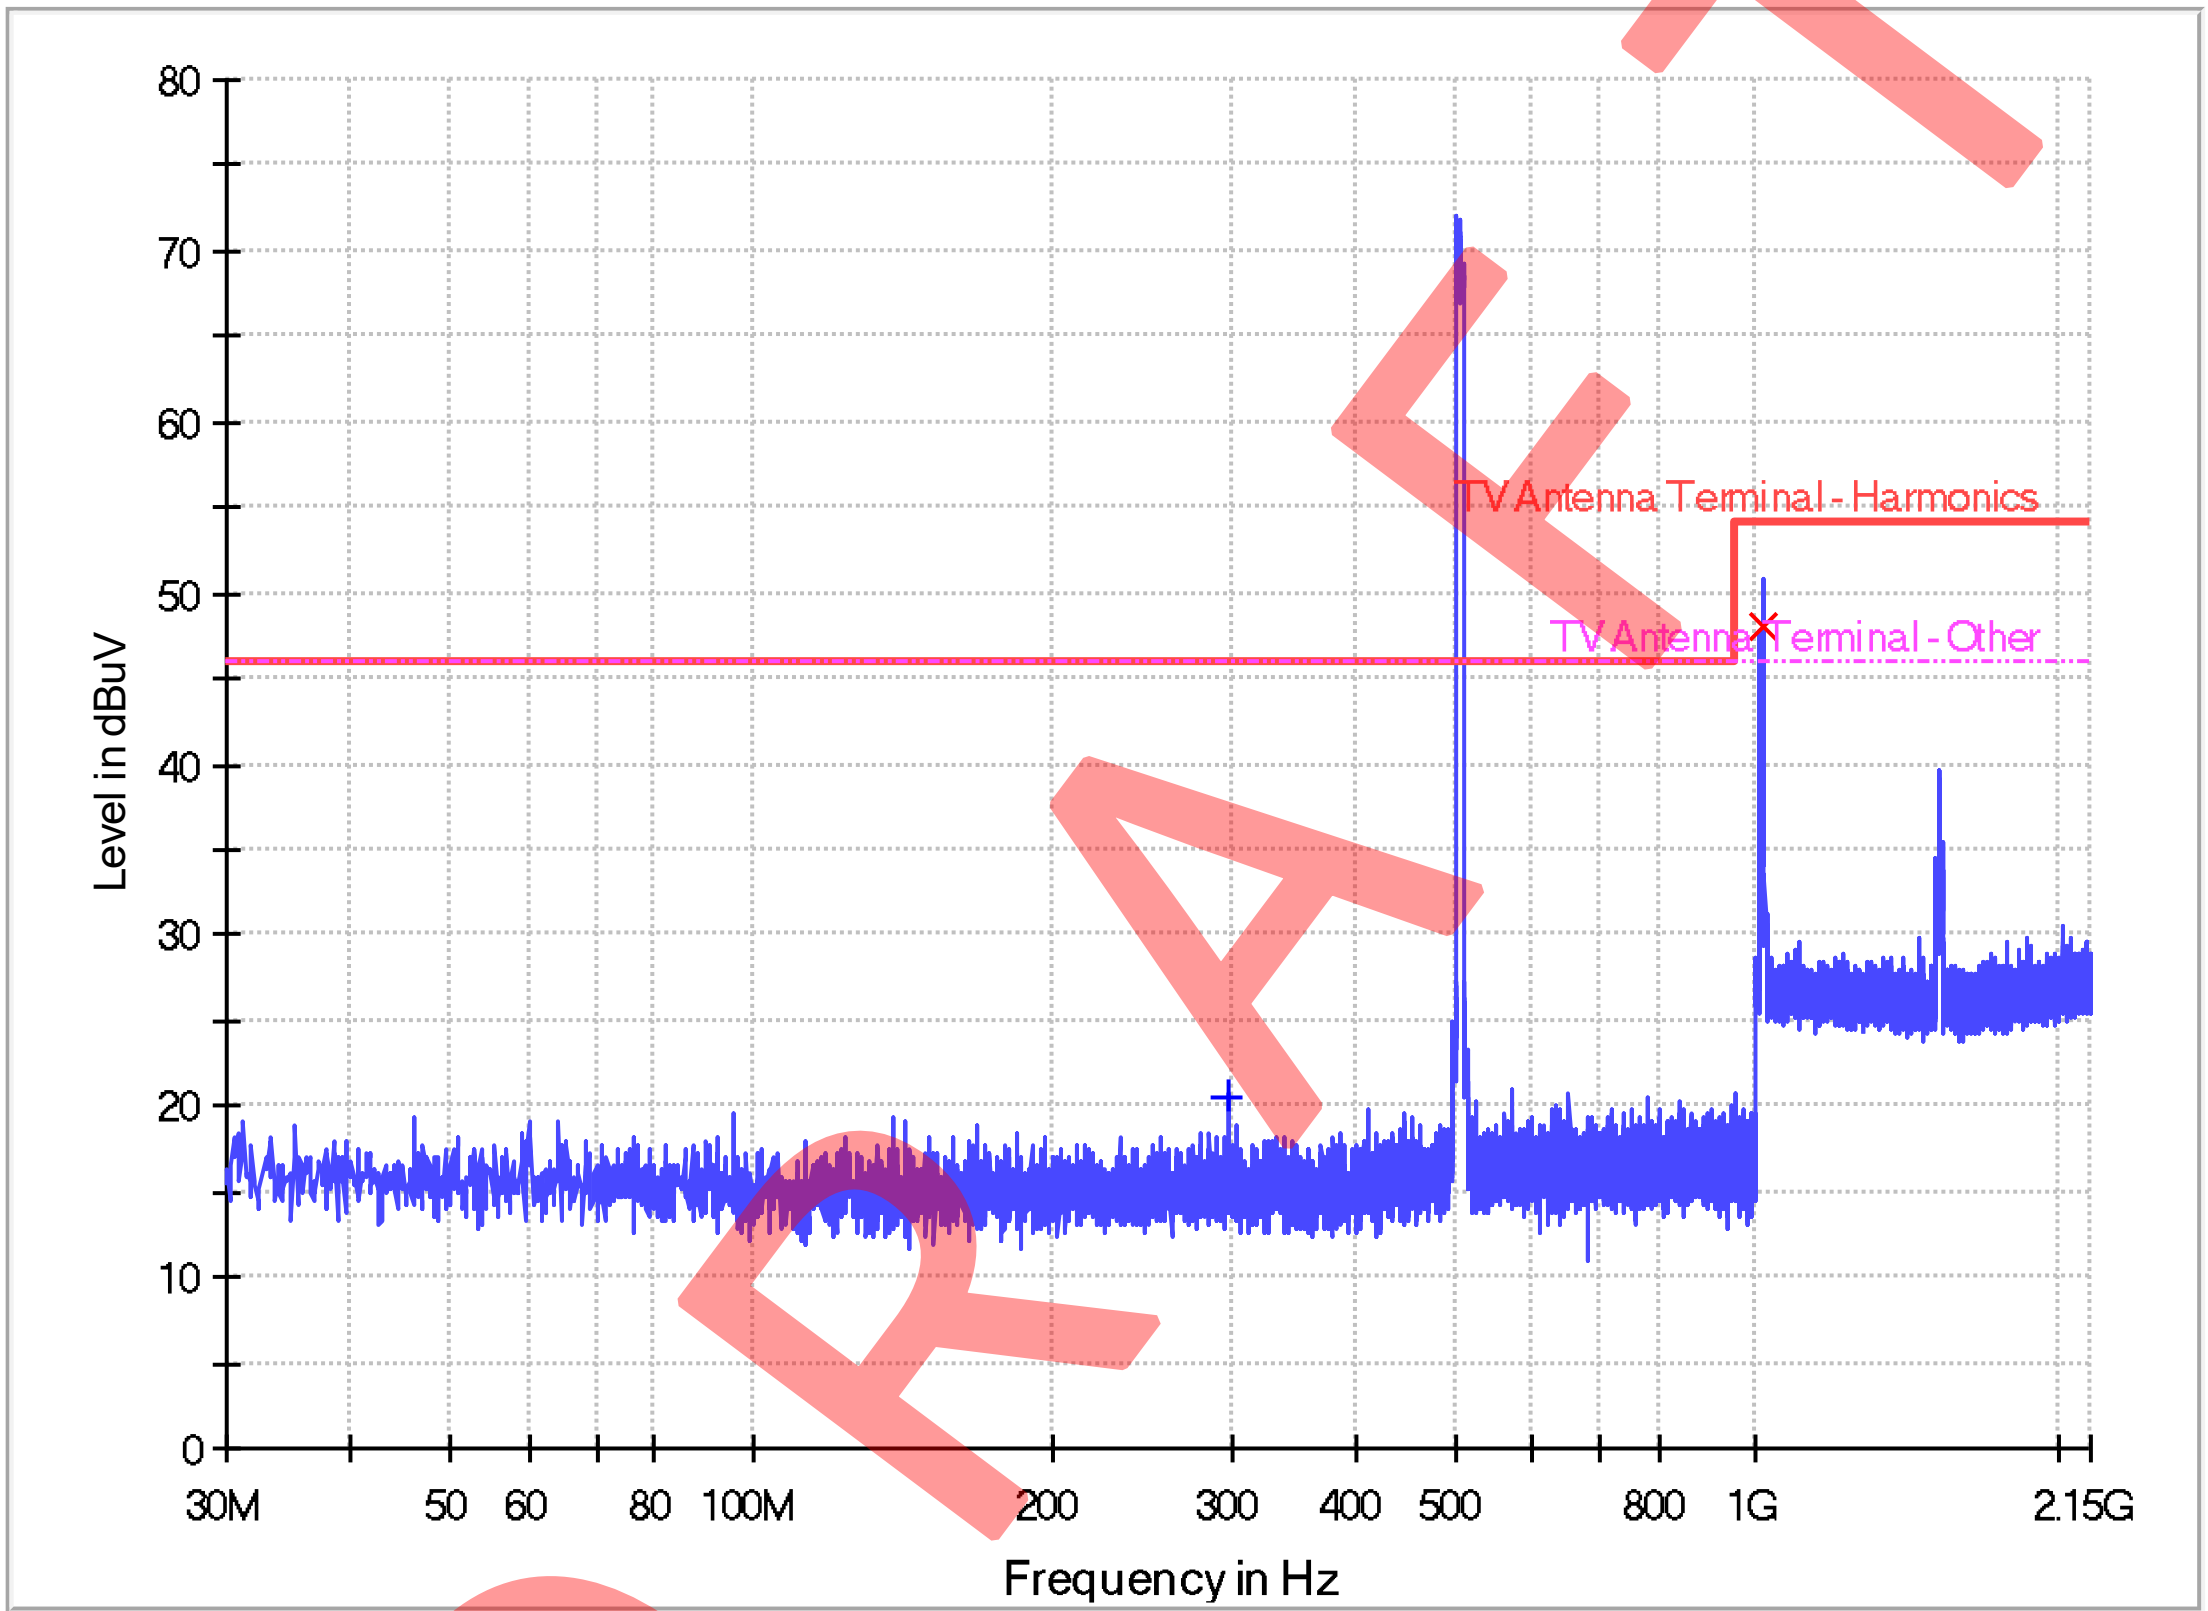

Limit and Margin

Frequency (MHz)	MaxPeak (dBuV)	QuasiPeak (dBuV))	Corr. (dB)	Margin (dB)	Limit (dBuV)
296.992500	---	20.5	14.6	25.5	46.0
1014.518750	48.1	---	15.8	5.9	54.0

Remark:
1. Corr. Factor (dB) = Matching Pad factor (dB) + Power Splitter factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)
3. --- denotes the not applicable

Note: The measured RF signal at FM radio or TV signal carrier frequency and sidebands were not the disturbance of equipment under test.

Harmonics
EN IEC 61000-3-2

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ064-01	Compliance Test System	California Instruments	5001iX-CTS-400	2024-12-06	2025-12-06
SZ064-01-01	Power Analyzer and Conditioning System	California Instruments	PACS-1	2024-12-06	2025-12-06

Notes: 1. The test result consisting of worst-case was attached in the following pages.
2. Uncertainty: 0.03% at a level of confidence of 95%.

Test Setup Diagram

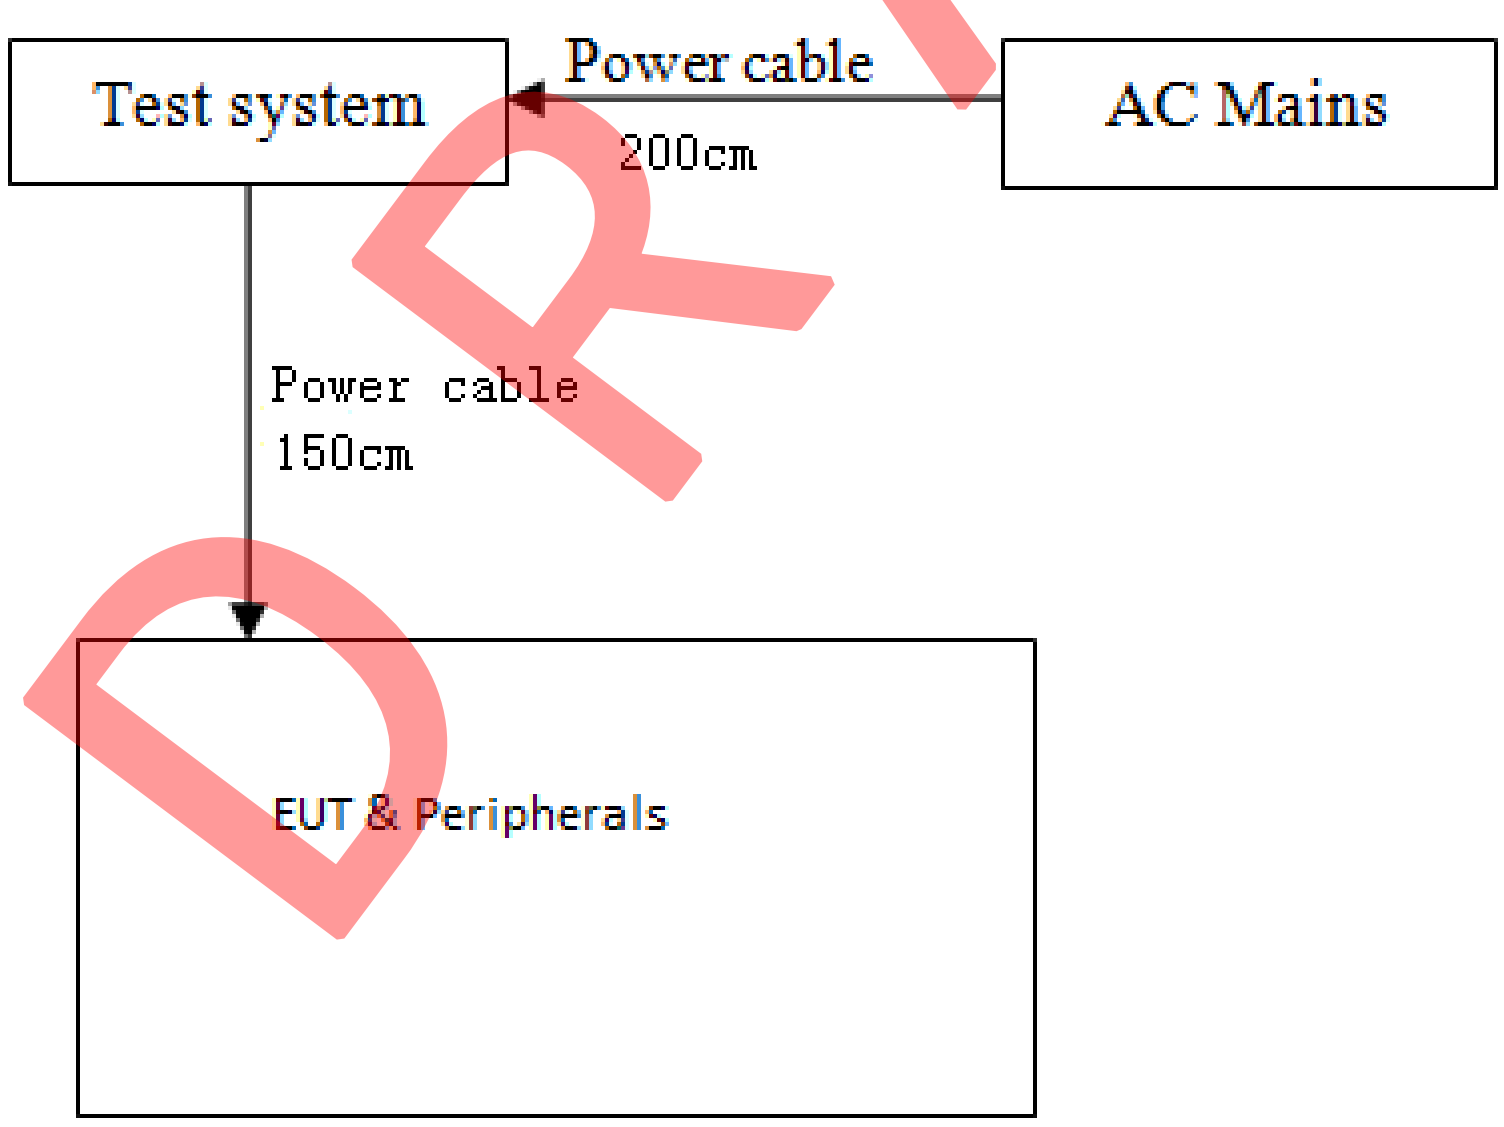

Test Results

Test Result: N/L **Source qualification: Normal**

Current & voltage waveforms

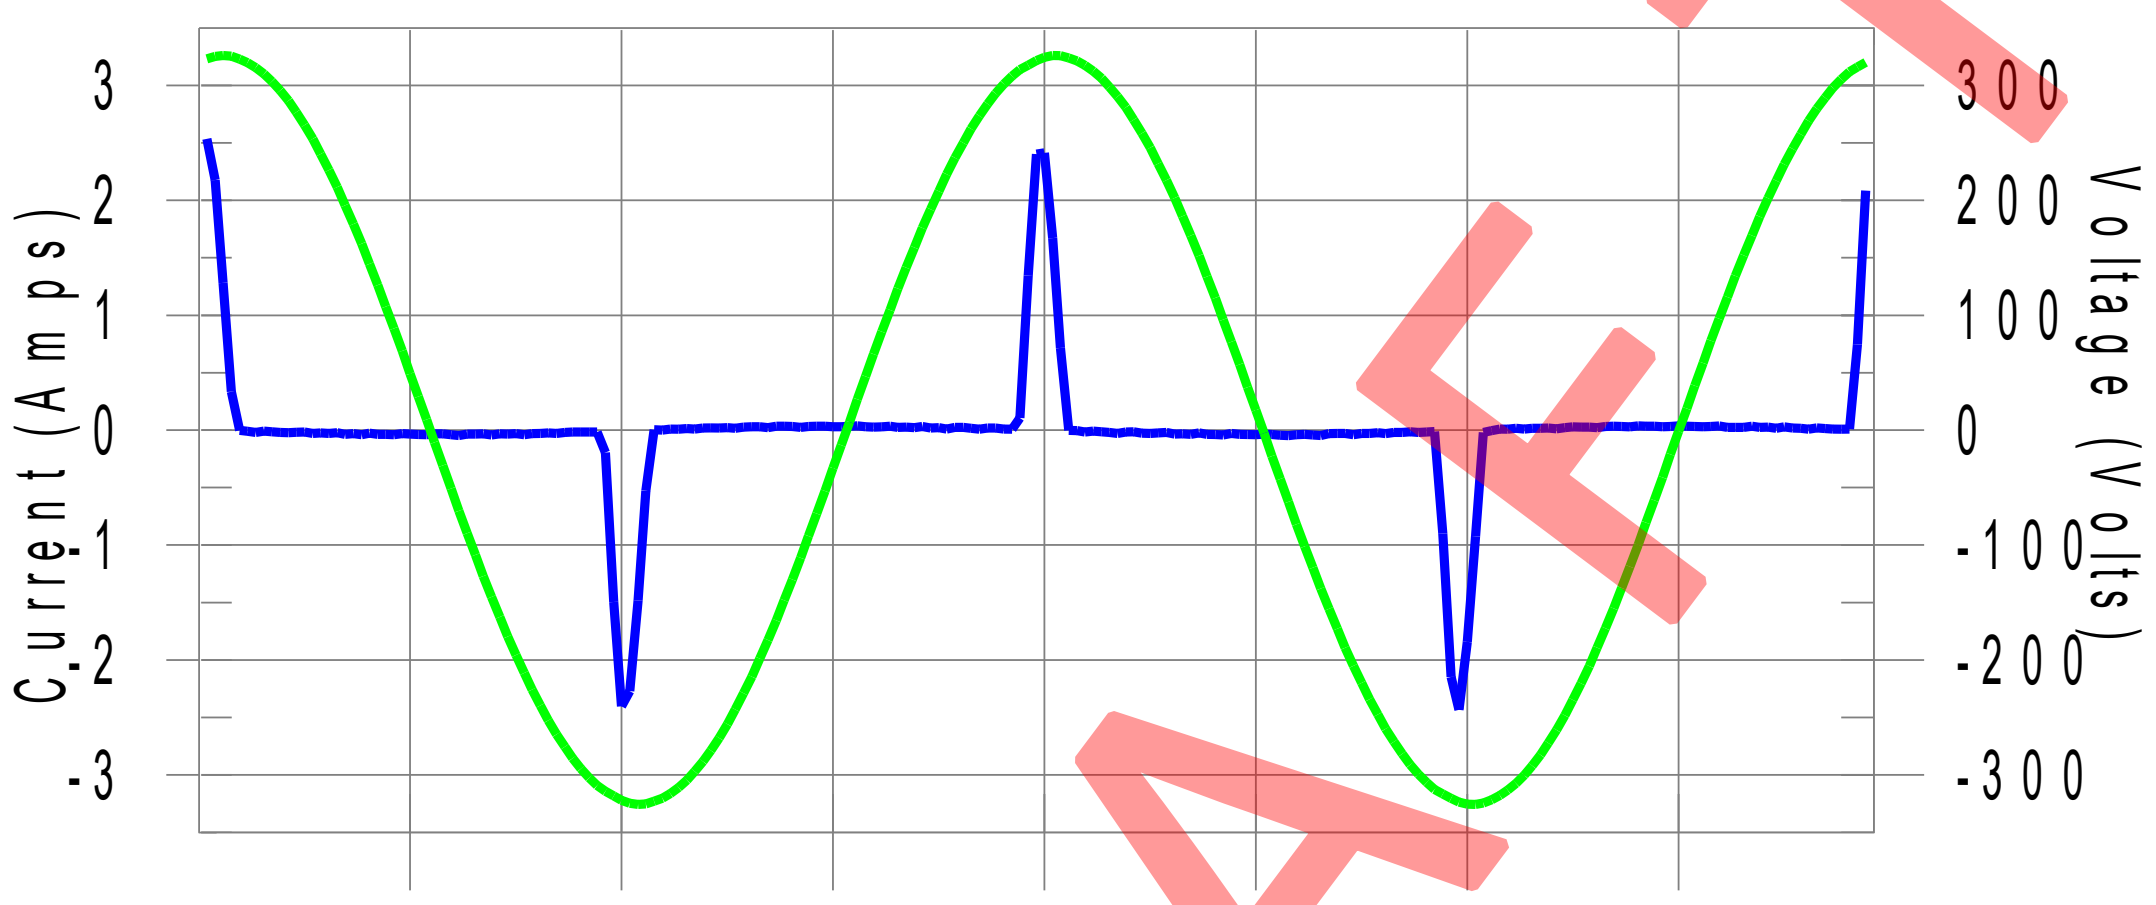

Harmonics and Class D limit line **European Limits**

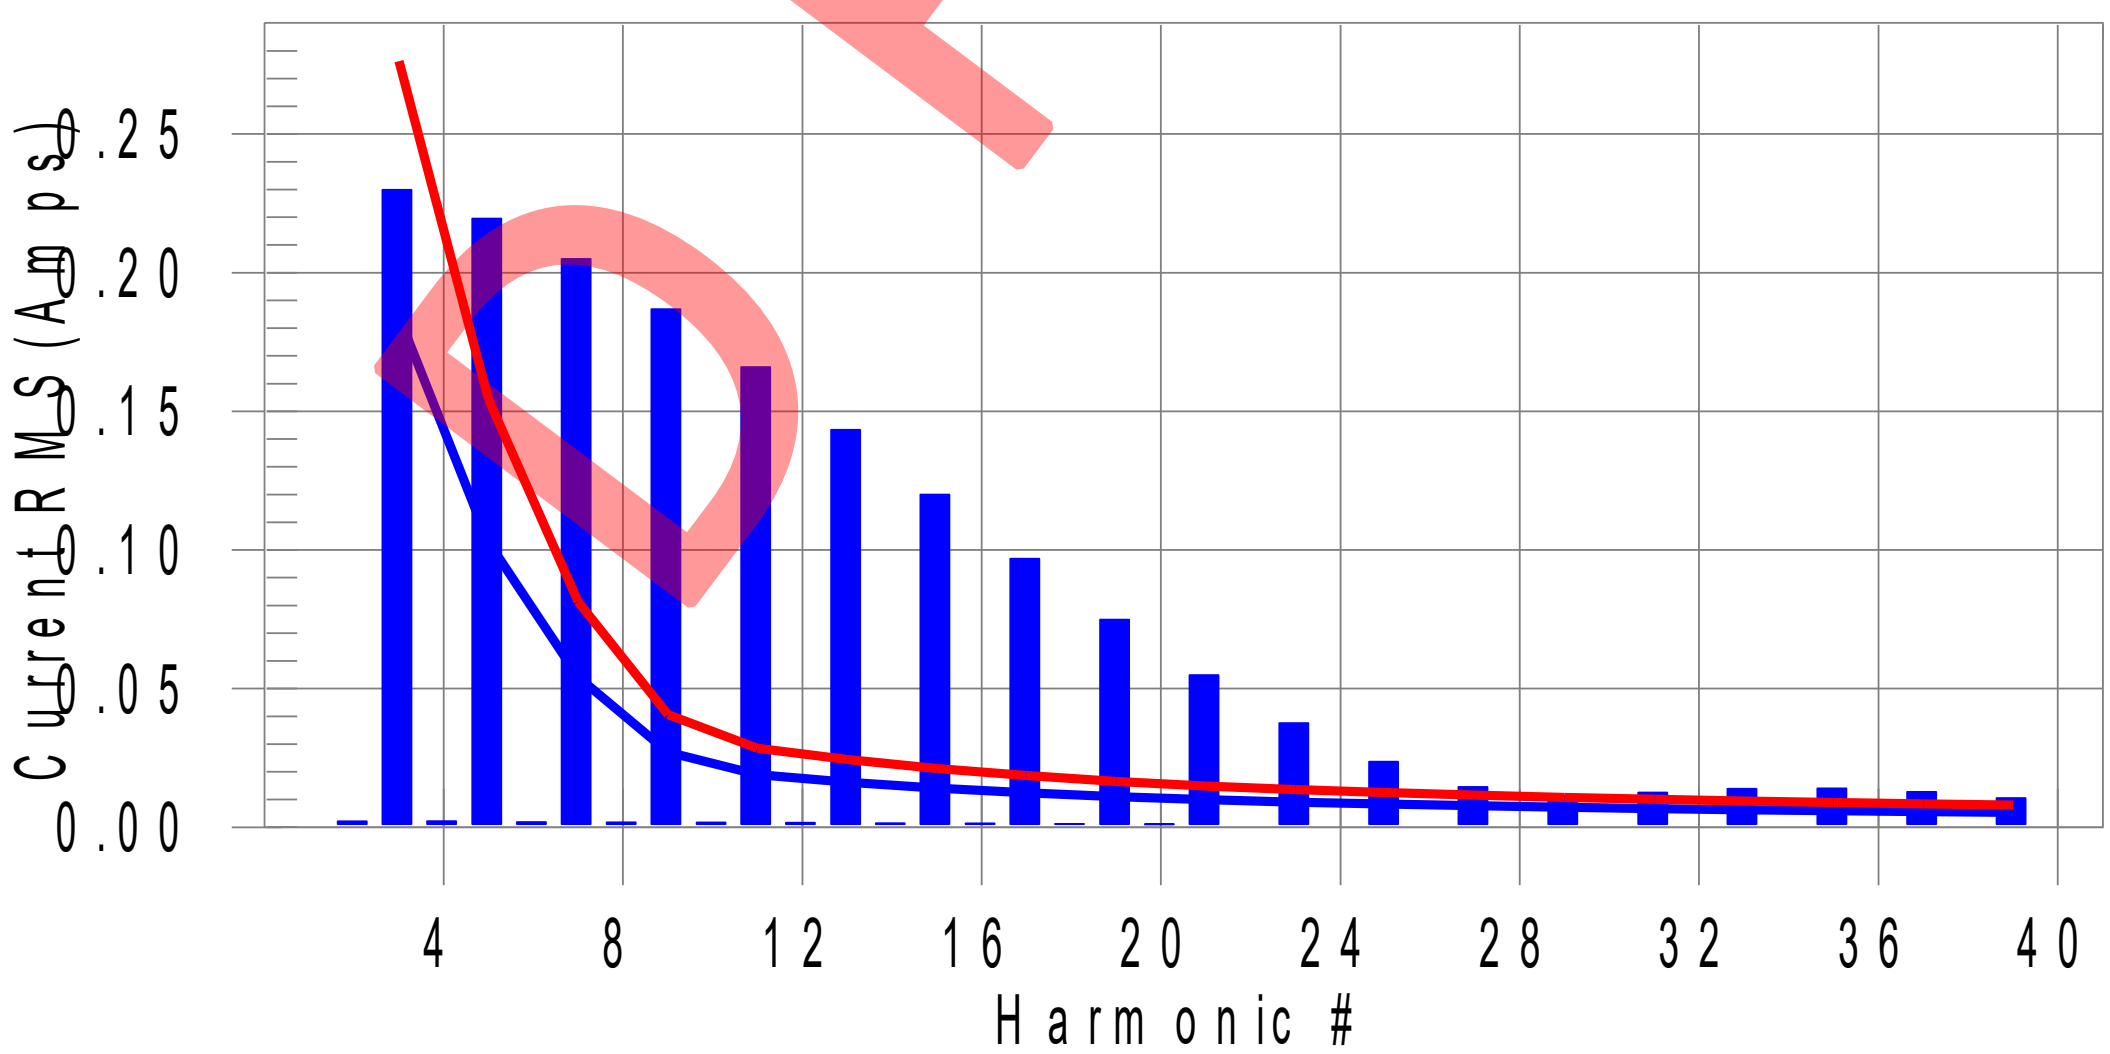

Test result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

Worst Case Operating Mode: DVB-T(506MHz)

Test Result: N/L **Source qualification: Normal**
THC(A): 0.511 **I-THD(%): 212.7** **POHC(A): 0.078** **POHC Limit(A): 0.023**

Highest parameter values during test:

V_RMS (Volts):	**230.21**	**Frequency(Hz):**	**50.00**
I_Peak (Amps):	**2.560**	**I_RMS (Amps):**	**0.565**
I_Fund (Amps):	**0.240**	**Crest Factor:**	**4.555**
Power (Watts):	**54.2**	**Power Factor:**	**0.417**

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.004	0.000	N/A	N/L
3	0.230	0.184	N/A	0.232	0.276	N/A	N/L
4	0.002	0.000	N/A	0.004	0.000	N/A	N/L
5	0.220	0.103	N/A	0.220	0.154	N/A	N/L
6	0.002	0.000	N/A	0.004	0.000	N/A	N/L
7	0.205	0.054	N/A	0.206	0.081	N/A	N/L
8	0.002	0.000	N/A	0.004	0.000	N/A	N/L
9	0.187	0.027	N/A	0.187	0.041	N/A	N/L
10	0.002	0.000	N/A	0.003	0.000	N/A	N/L
11	0.166	0.019	N/A	0.166	0.028	N/A	N/L
12	0.002	0.000	N/A	0.003	0.000	N/A	N/L
13	0.143	0.016	N/A	0.144	0.024	N/A	N/L
14	0.001	0.000	N/A	0.003	0.000	N/A	N/L
15	0.120	0.014	N/A	0.121	0.021	N/A	N/L
16	0.001	0.000	N/A	0.003	0.000	N/A	N/L
17	0.097	0.012	N/A	0.098	0.019	N/A	N/L
18	0.001	0.000	N/A	0.002	0.000	N/A	N/L
19	0.075	0.011	N/A	0.076	0.016	N/A	N/L
20	0.001	0.000	N/A	0.002	0.000	N/A	N/L
21	0.055	0.010	N/A	0.056	0.015	N/A	N/L
22	0.001	0.000	N/A	0.002	0.000	N/A	N/L
23	0.038	0.009	N/A	0.039	0.014	N/A	N/L
24	0.001	0.000	N/A	0.002	0.000	N/A	N/L
25	0.024	0.008	N/A	0.025	0.013	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.014	0.008	N/A	0.015	0.012	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.011	0.007	N/A	0.012	0.011	N/A	N/L
30	0.001	0.000	N/A	0.001	0.000	N/A	N/L
31	0.013	0.007	N/A	0.013	0.010	N/A	N/L
32	0.001	0.000	N/A	0.001	0.000	N/A	N/L
33	0.014	0.006	N/A	0.014	0.009	N/A	N/L
34	0.001	0.000	N/A	0.001	0.000	N/A	N/L
35	0.014	0.006	N/A	0.014	0.009	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.013	0.006	N/A	0.013	0.008	N/A	N/L
38	0.000	0.000	N/A	0.001	0.000	N/A	N/L
39	0.011	0.005	N/A	0.011	0.008	N/A	N/L
40	0.000	0.000	N/A	0.001	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

Voltage Fluctuations
Pursuant to EN 61000-3-3

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ064-01	Compliance Test System	California Instruments	5001iX-CTS-400	2024-12-06	2025-12-06
SZ064-01-01	Power Analyzer and Conditioning System	California Instruments	PACS-1	2024-12-06	2025-12-06

Notes: 1. The test result consisting of worst-case was attached in the following pages.
2. Uncertainty: 0.25% at a level of confidence of 95%.

Test Setup Diagram

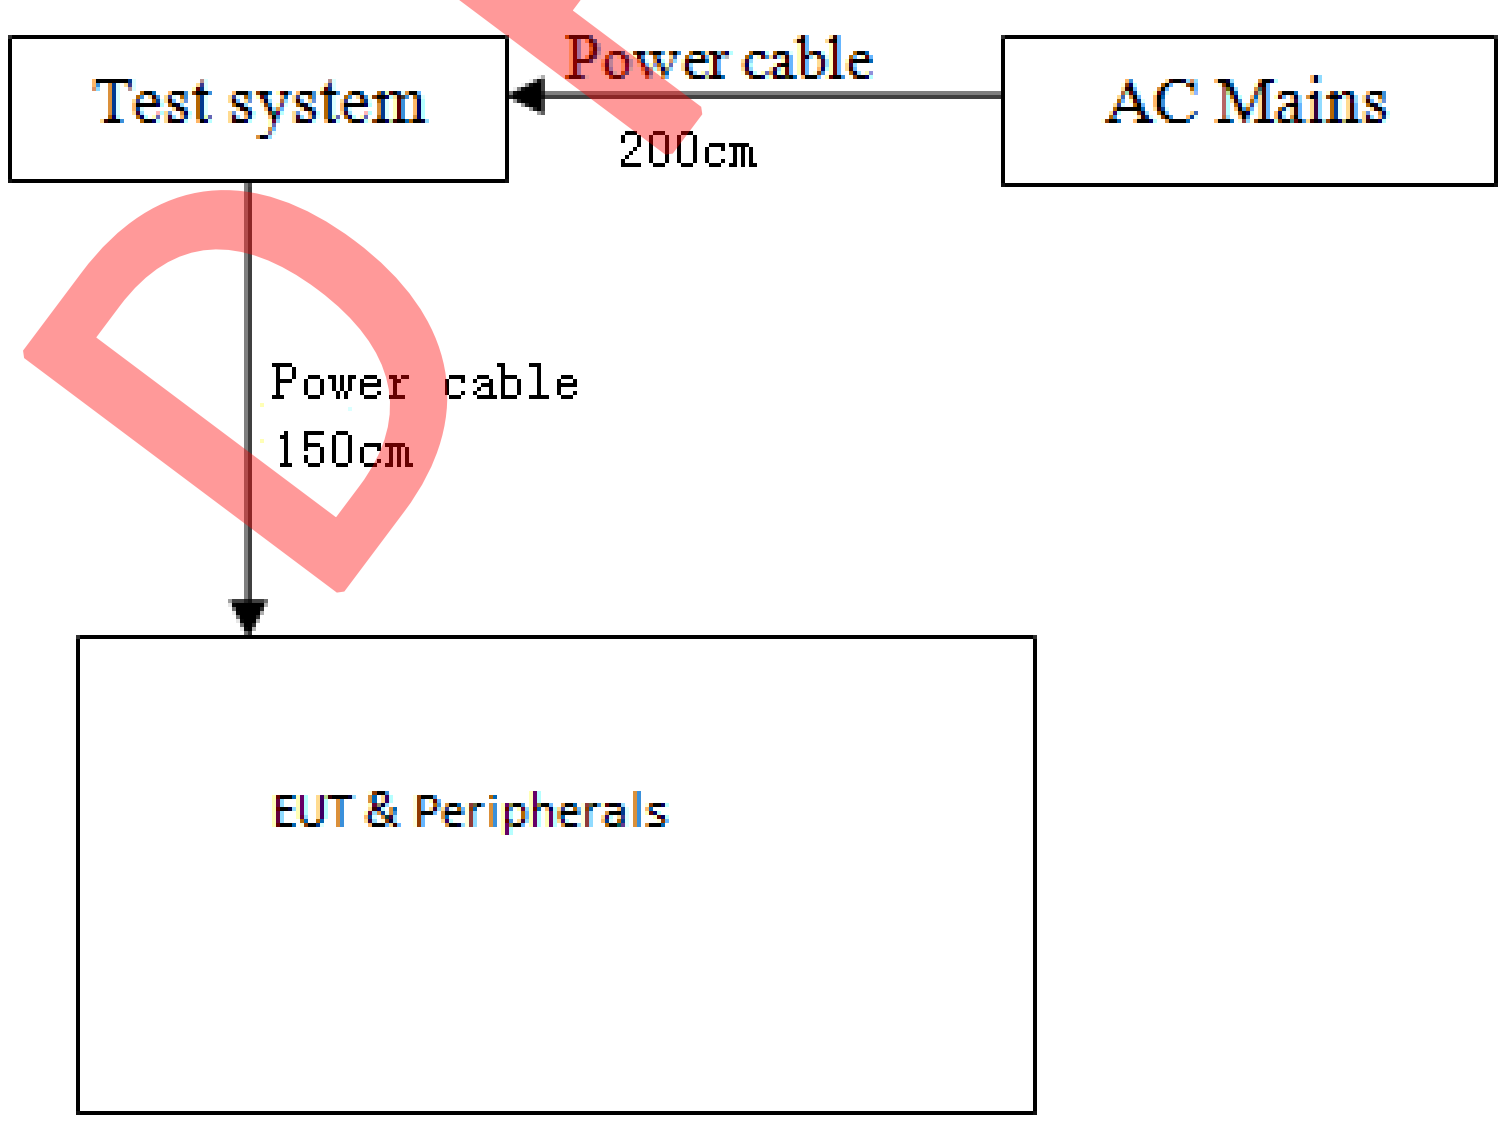

Test Results

Flicker Test Summary per EN/IEC 61000-3-3 Ed. 3.0 (Run time)

Test Result: Pass **Status: Test Completed**

Pst$_i$ and limit line **European Limits**

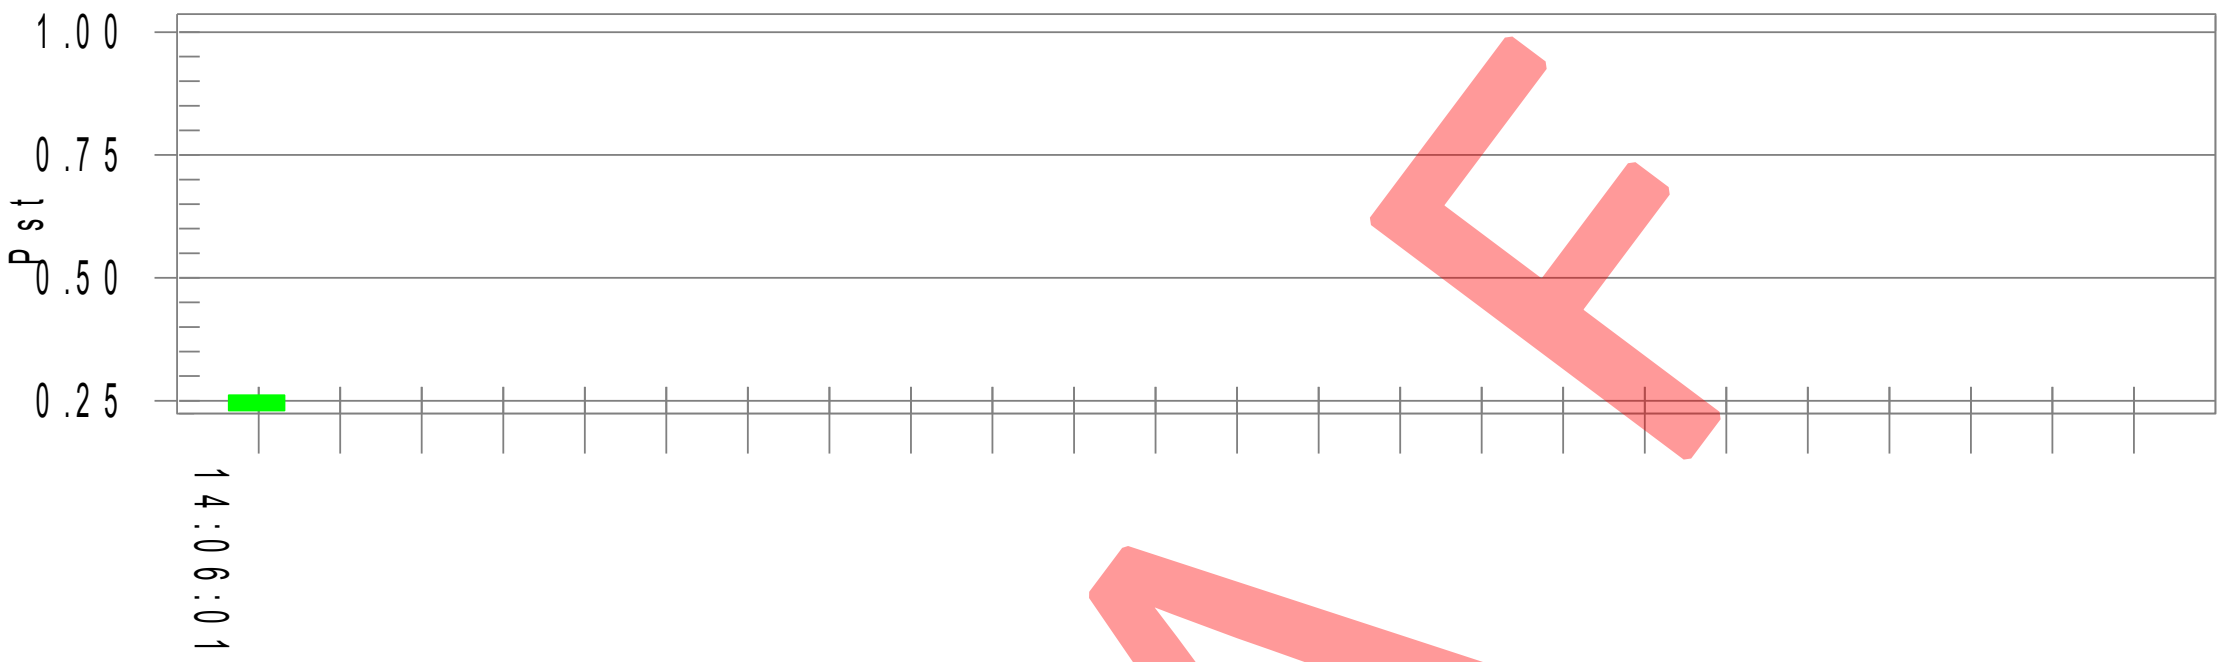

Parameter values recorded during the test:

Vrms at the end of test (Volt):	**230.11**			
Highest dt (%):		**Test limit (%):**		
T-max (mS):	**0**	**Test limit (mS):**	**500.0**	**Pass**
Highest dc (%):	**0.00**	**Test limit (%):**	**3.30**	**Pass**
Highest dmax (%):	**0.00**	**Test limit (%):**	**4.00**	**Pass**
Highest Pst (10 min. period):	**0.261**	**Test limit:**	**1.000**	**Pass**

Electrostatic Discharge
Pursuant to EN 61000-4-2

Test Summary (Pursuant to EN 55035)

Port:	Enclosure
Basic Standard:	EN 61000-4-2
Required Performance Criterion:	B
Limit:	±8.0kV (Air Discharge)
	±4.0kV (Contact Discharge)
	±4.0kV (Indirect Contact Discharge)
Temperature:	22.8°C
Relative Humidity:	42.5%
Test Mode:	ATV, DVB-T/T2, DVB-C, DVB-S/S2, AV In, USB Play, HDMI IN, HDMI(ARC), IPTV
Test Setup:	Table-top
Test of Post-Installation:	N/A
Time Between Each Discharge:	1 second

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ189-05	ESD Simulator	TESEQ	NSG 437	2024-06-07	2025-06-07

Test Setup Diagram

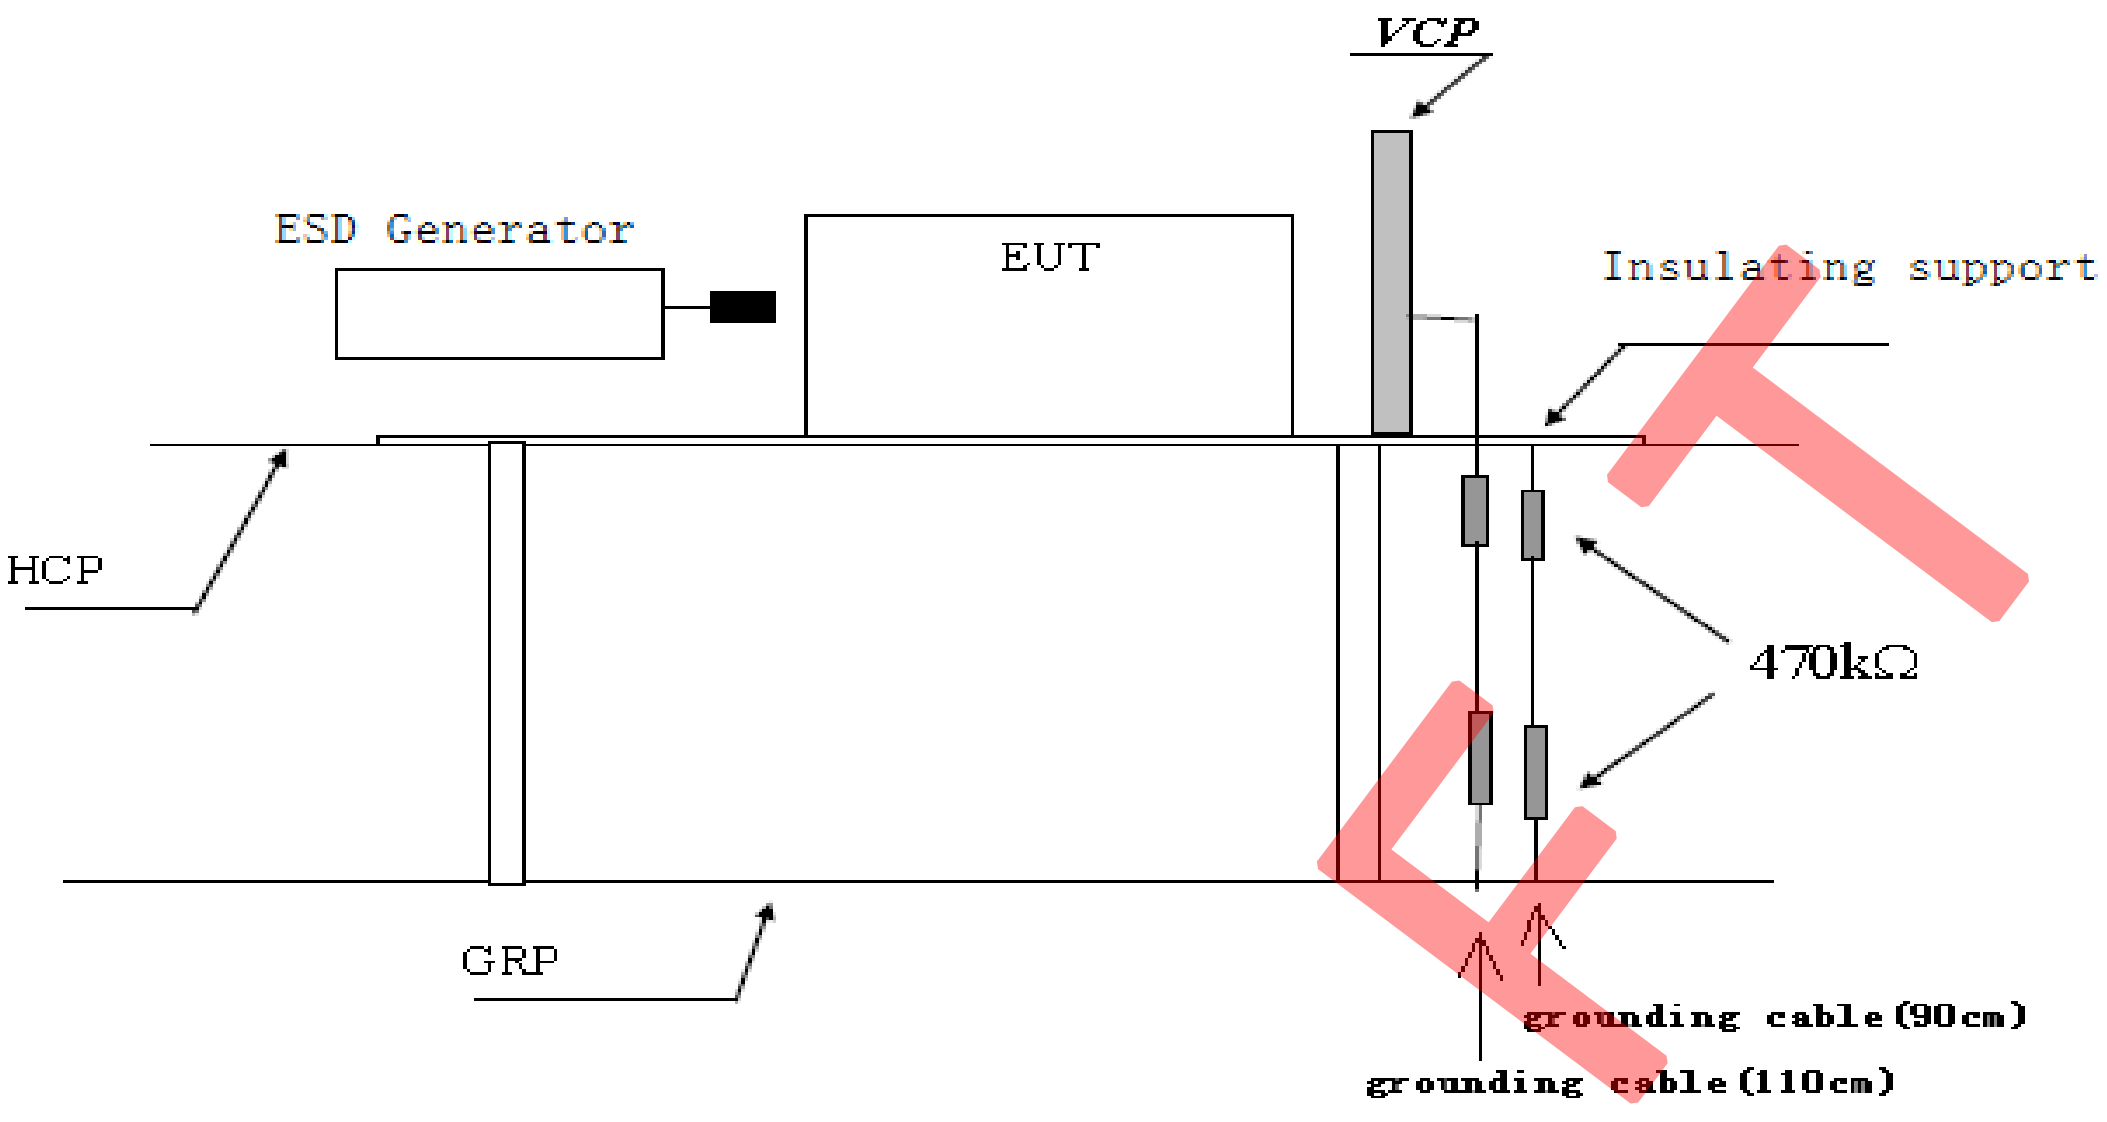

Test set-up of electrostatic discharge

Test Results

EN 61000-4-2
Electrostatic Discharge

Discharge Type	No. of Discharge	Applied Voltage	Result (Pursuant to EN55035, Criterion B)
Contact Discharge	20	±4kV	Pass
Air Discharge	20	±2.0, ±4.0, ±8.0kV	Pass
Indirect HCP Discharge	20	±4kV	Pass
Indirect VCP Discharge	20	±4kV	Pass

☒ Additional Information

☒ No observable change

☐ EUT stopped operation and could / could not be reset by operator at _____V, _____of ESD.

☐ EUT was in abnormal operation:
– Operation mode was changed from _____ to _____ at _____V, _____of ESD.

☐ In all modes, the EUT screen flash during Contact Discharge ±4kv and Direct Air Discharge ±2, ±4, ±8kv test, but it can be resumed by itself after test.

Radiated Immunity
Pursuant to EN 61000-4-3

Test Summary (Pursuant to EN 55035)

Basic Standard:	EN 61000-4-3
Port:	Enclosure
Required Performance Criterion:	A
Limit:	3.0V/m (rms) (see note)
Test Modulation:	1kHz, 80% AM
Frequency:	80MHz to 1000MHz, 1800MHz, 2600MHz, 3500MHz, 5000MHz
Dwell Time:	1s
Frequency Step:	1%
Temperature:	23.6°C
Relative Humidity:	54.3%
Test Facility:	Full Anechoic Chamber
Antenna Polarization:	Horizontal and Vertical
Type of Antenna:	Log-periodic
Test Distance:	3 meters
Test Mode:	ATV, DVB-T/T2, DVB-C, DVB-S/S2, AV In, USB Play, HDMI IN, HDMI(ARC), IPTV
Test Setup:	Table-top

Note：For Broadcast reception function

1. The disturbance level is reduced to 1 V for in-band frequencies.
2. The tuned channel ±0,5 MHz (lower edge frequency – 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. Except for DVB-C, the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. For DVB-C, the disturbance levels are 3 V/m or 3 V, except in the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel), where the disturbance level is 1 V/m.

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ188-02	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2026-12-12
SZ061-03	Biconilog Antenna	ETS	3142C	2024-07-09	2027-07-09
SZ061-16	Stacked double log. -Per. Antenna	SCHWARZBECK	STLP 9149	2024-11-18	2027-11-18
SZ180-15	Signal Generator	R&S	SMB100A	2024-12-05	2025-12-05
SZ181-01	Amplifier	PRANA	AP32 MT215	2024-12-06	2025-12-06
SZ190-07	RF Amplifier	Milmega	AS0860-75/45	2024-12-06	2025-12-06
SZ089-06	Audio Analyzer	Audio Precision	ATS-1	2024-09-29	2025-09-29

Test Setup Diagram

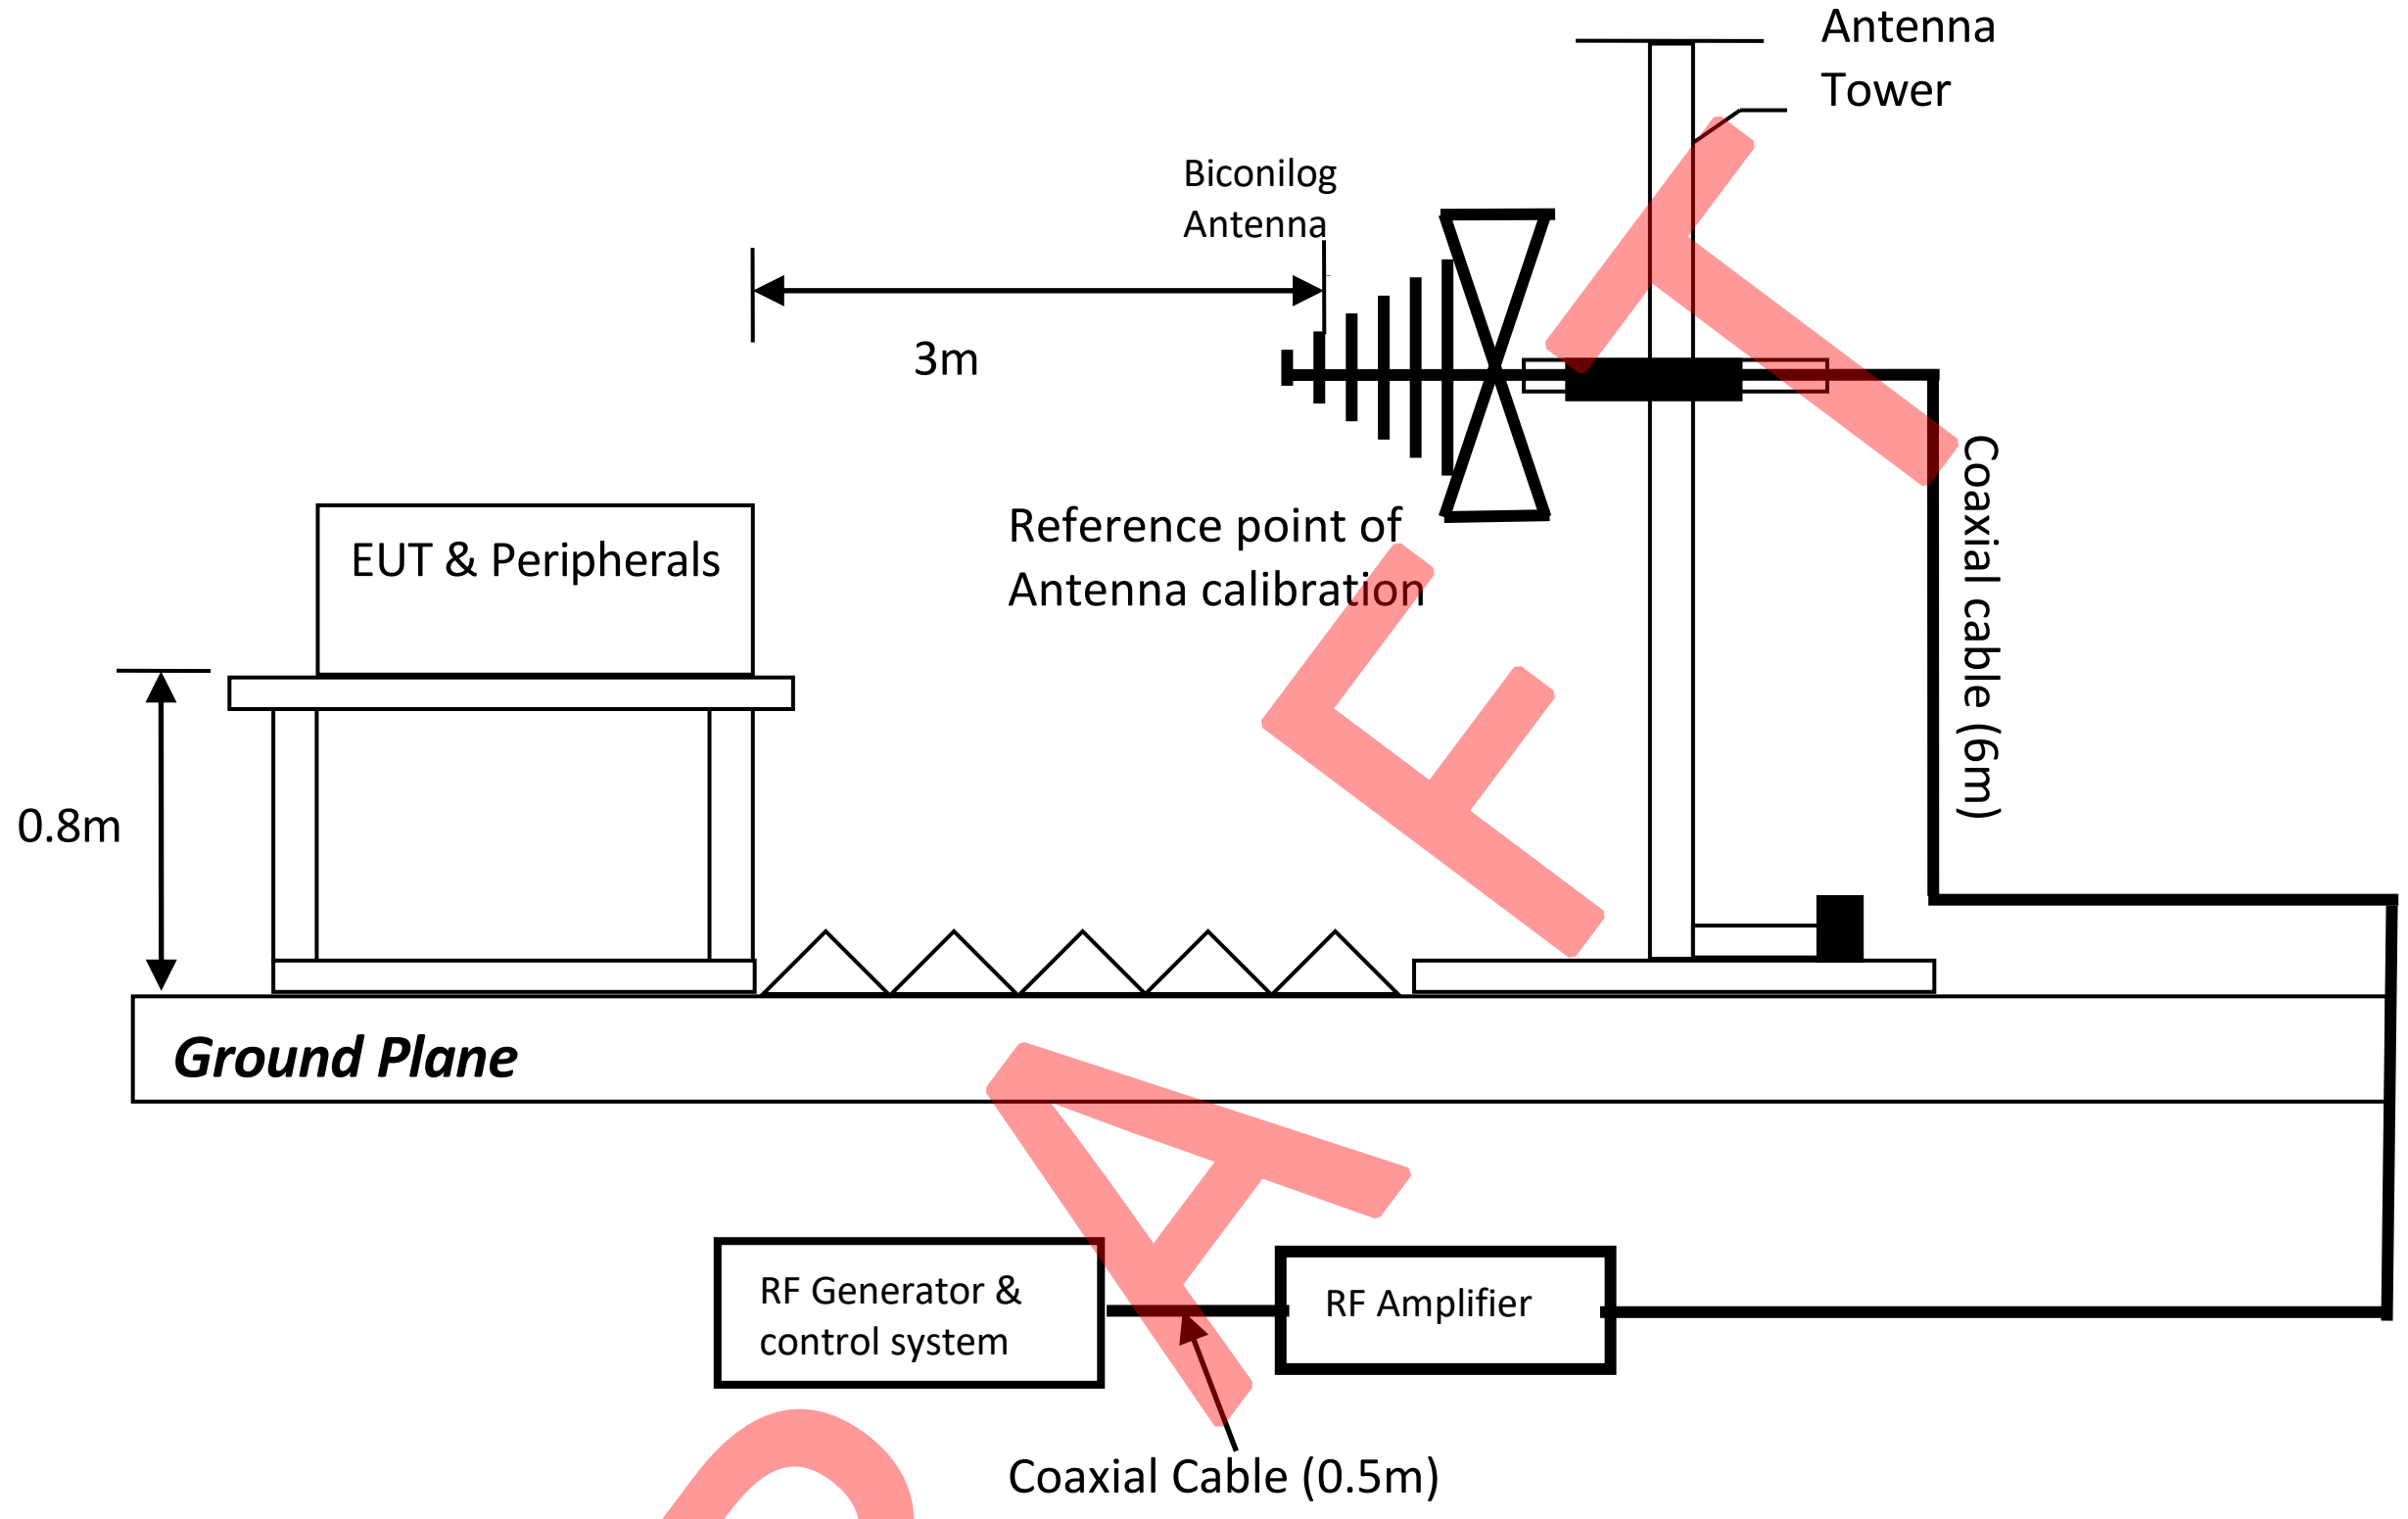

Test set-up of Immunity to Radiated Electric Fields

Test Results

EN61000-4-3
Radiated Immunity

Frequency (MHz)	Exposed Side	Field Strength V/m (rms)	Result (Pursuant to EN55035, Criterion A)
80 to 1000, 1800, 2600, 3500, 5000	Front	For DVB-C mode: 3V/m(rms), Except the tuned channel ±0.5MHz is 1V/m; For others mode: 3.0V/m (rms), Except the in band frequency 1V/m and tuned channel ±0.5MHz is excluded from testing	Pass
80 to 1000, 1800, 2600, 3500, 5000	Left		Pass
80 to 1000, 1800, 2600, 3500, 5000	Rear		Pass
80 to 1000, 1800, 2600, 3500, 5000	Right		Pass

Note： For Broadcast reception function

1. The disturbance level is reduced to 1 V for in-band frequencies.
2. The tuned channel ±0,5 MHz (lower edge frequency – 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. Except for DVB-C, the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. For DVB-C, the disturbance levels are 3 V/m or 3 V, except in the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel), where the disturbance level is 1 V/m.

☒ Additional Information

☒ No observable change

☐ EUT stopped operation and could / could not be reset by operator at Freq. _____ of Radiated Immunity.

☐ EUT was in abnormal operation:
– Operation mode was changed from _____ to _____ at Freq. _____ of Radiated Immunity.

☐ ____
____

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001

Worst Case Operating Mode: HDMI in

Monitor port： Earphone

Horizontal

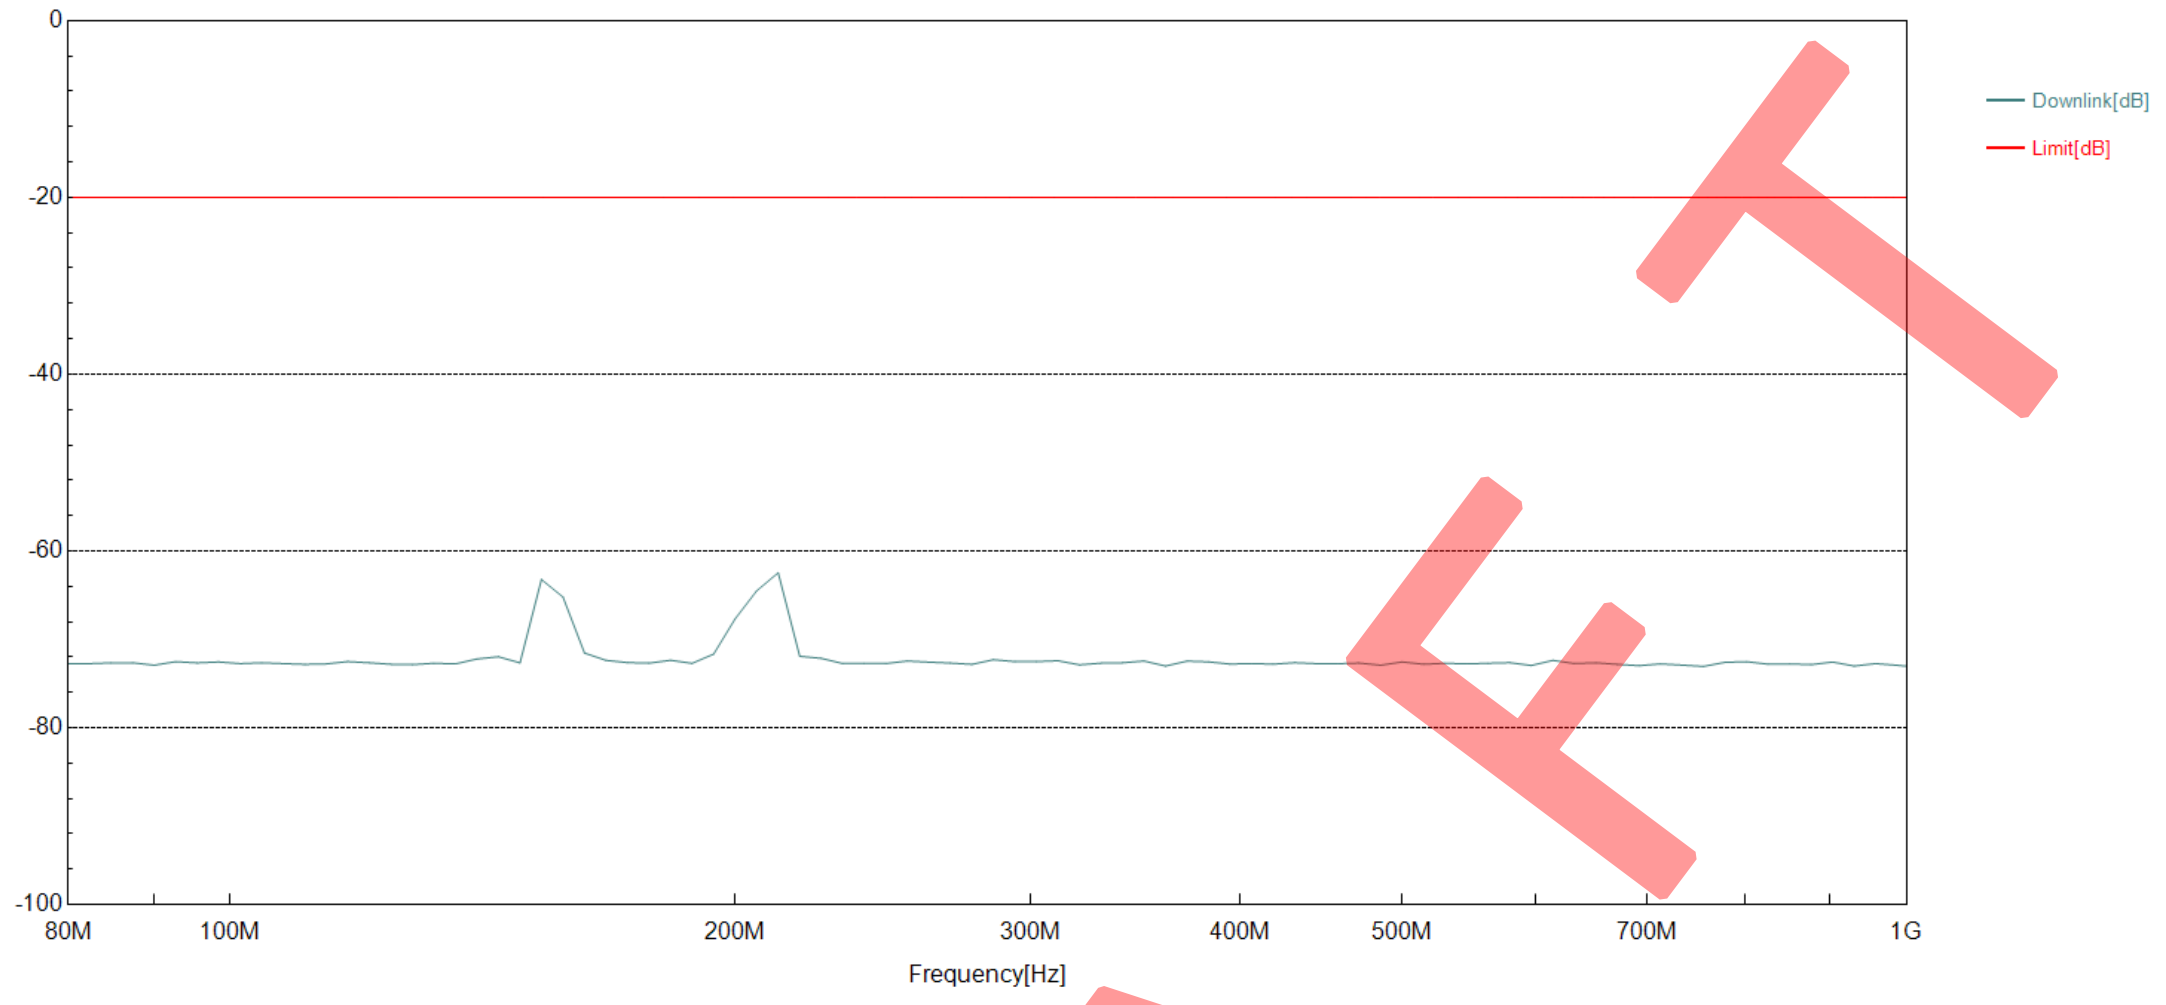

Vertical

Mode	Frequency	Port	Polarizition	Output Level (dBV)	K/C Level (dBV)	K/C S/N (dB)	Limit(dB)
AV	1800MHz	Earphone	H	-6.00	-60.45	-54.45	-20.00
			V	-6.00	-54.06	-48.06	-20.00

Electrical Fast Transient / Burst
Pursuant to EN 61000-4-4

Test Summary (Pursuant to EN 55035)

Basic Standard:	EN 61000-4-4	
Port:	AC Power Lines	Signal Lines
Required Performance Criterion:	B	
Limit:	±1.0kV	±0.5kV
Test Duration:	1 minute	
Temperature:	22.5°C	
Relative Humidity:	54.2%	
Test Mode:	ATV, DVB-T/T2, DVB-C, DVB-S/S2, AV In, USB Play, HDMI IN, HDMI(ARC), IPTV	
Test Setup:	Table-top	
Generator Drive:	Internal	

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2024-12-06	2025-12-06
SZ063-01-01	Capacitive Coupling Clamp	Haefely	IP4A	2024-12-06	2025-12-06

Test Setup Diagram

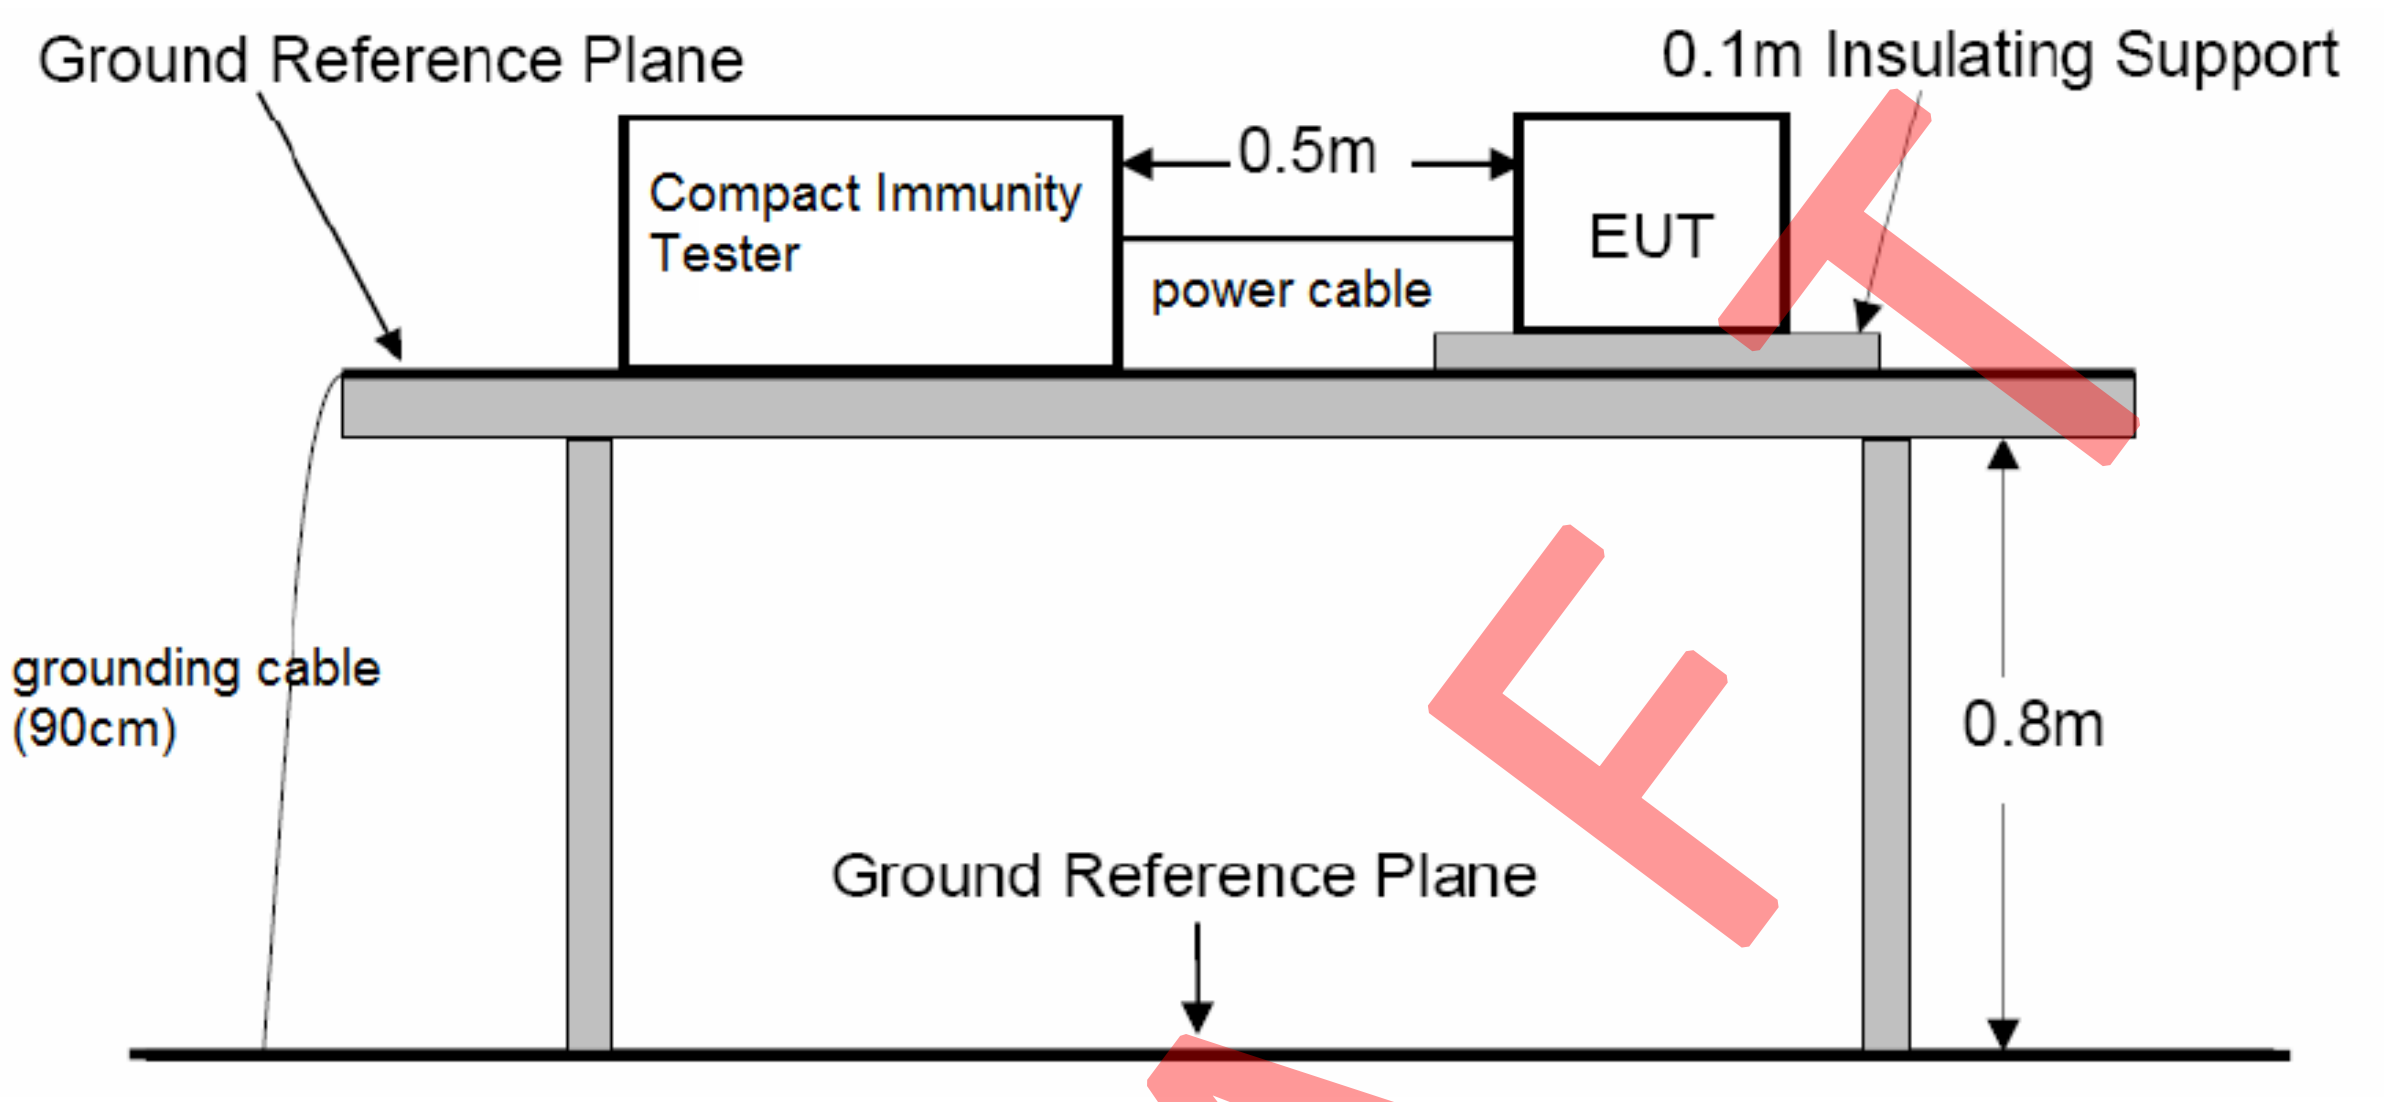

Test set-up of immunity to electrical fast transient bursts for power port

Test Results

EN61000-4-4
Electrical Fast Transient / Burst

Port	Level	Polarity	Result (Pursuant to EN55035, Criterion B)
AC Power Lines	1kV	+	Pass
	1kV	–	Pass
Signal Lines	0.5kV	+	Pass
	0.5kV	–	Pass

☒ Additional Information

- ☒ No observable change
- ☐ EUT stopped operation and could / could not be reset by operator at _____V of Fast Transient.
- ☐ EUT was in abnormal operation:
  - Operation mode was changed from _____ to _____ at _____V of Fast Transient.
- ☐ ____

Surge Immunity
Pursuant to EN 61000-4-5

Test Summary (Pursuant to EN 55035)

Basic Standard:	EN 61000-4-5			
Port:	AC Power Lines			Shield
	Phase and Neutral	Phase and Earth	Neutral and Earth	Shield to ground
Limit:	5 Positive and 5 Negative Surges			
	±1kV	±2kV	±2kV	±0.5kV
Generator Impedance:	2ohm	12ohm	12ohm	2ohm
Required Performance Criterion:	B			
Repetition Rate:	1 minute			
Test Mode:	ATV, DVB-T/T2, DVB-C, DVB-S/S2, AV In, USB Play, HDMI IN, HDMI(ARC), IPTV			
Test Setup:	Table-top			
Surge Generator Trigger:	Internal			
Installation Condition:	Class 3: Electrical environment where cables run in parallel.			
Phase Angle:	90°, 270°			

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2024-12-06	2025-12-06

Test Setup Diagram

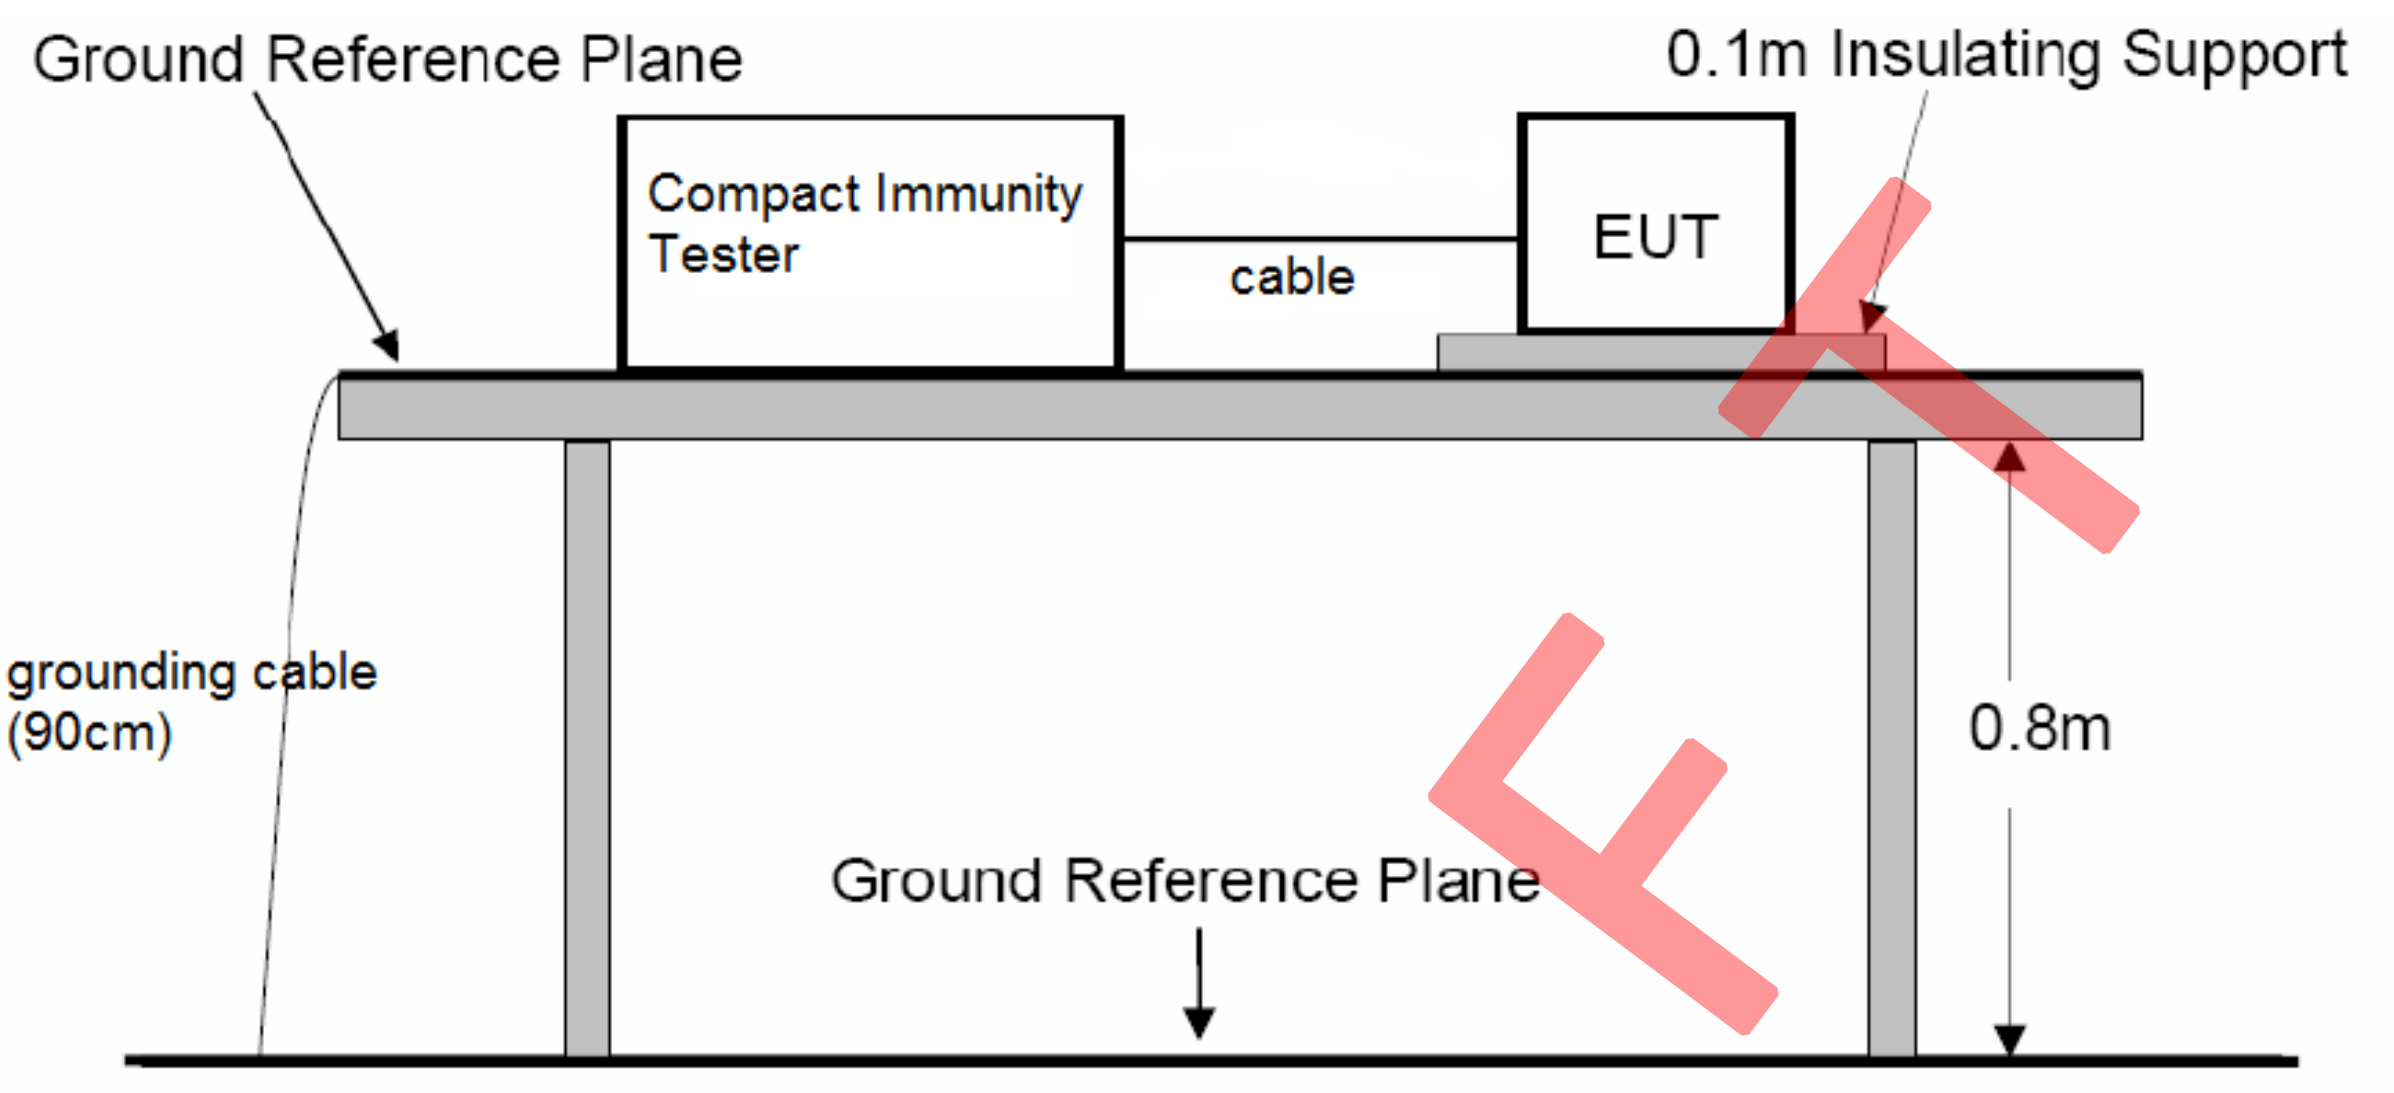

Test set-up of Surge Immunity for Power port

Test Results

EN61000-4-5
Surge Immunity

Level		Result (Pursuant to EN 55035, Criterion B)
Between Phase and Neutral:	±1kV	Pass
Between Phase and Earth:	±2kV	N/A
Between Neutral and Earth:	±2kV	N/A
Between Shield and Earth:	±0.5kV	Pass

☒ Additional Information

☒ No observable change

☐ EUT stopped operation and could / could not be reset by operator at _____V of Surge.

☐ EUT was in abnormal operation:
– Operation mode was changed from _____ to _____ at _____V of Surge.

☐ ____
____

Injected Current (0.15MHz to 80MHz)
Pursuant to EN 61000-4-6

Test Summary (Pursuant to EN 55035)

Basic Standard:	EN 61000-4-6	
Port:	AC Power Lines, DC Power Lines, Signal Lines and Control Lines	
Required Performance Criterion:	A	
Level:	0.15MHz-10MHz	3V (rms)
	10MHz-30MHz	3V (rms) to 1V (rms)
	30MHz-80MHz	1V (rms)
Test Modulation:	1kHz, 80% AM	
Frequency:	0.15MHz to 80MHz	
Dwell Time:	1s	
Frequency Step:	1%	
Temperature:	23.6°C	
Relative Humidity:	54.3%	
Coupling Factor of CDN:	–1.0dB ~ –1.7dB	
Test Mode:	ATV, DVB-T/T2, DVB-C, DVB-S/S2, AV In, USB Play, HDMI IN, HDMI(ARC), IPTV	
Test Setup:	Table-top	

Note：For Broadcast reception function

1. The disturbance level is reduced to 1 V for in-band frequencies.
2. The tuned channel ±0,5 MHz (lower edge frequency – 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. Except for DVB-C, the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. For DVB-C, the disturbance levels are 3 V/m or 3 V, except in the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel), where the disturbance level is 1 V/m.

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ180-02	Signal Generator	Aeroflex	2023A	2024-12-05	2025-12-05
SZ181-03	Amplifier	AR-WORLDWIDE	75A250	2024-12-06	2025-12-06
SZ181-03-01	Attenuator	AR-WORLDWIDE	6dB/50FH-006-100	2024-12-06	2025-12-06
SZ183-01	RF CURRENT-INJECTION CLAMP	LUTHI	EM101	2024-12-06	2025-12-06
SZ184-01	Coupling-Decoupling Network	LUTHI	CDN L-801 M2/M3	2024-12-06	2025-12-06
SZ188-04	Shielding Room	Jiang yin Tian De	5*6*2.9m/5*2.5 *2.7m	2022-12-20	2025-12-20
SZ089-03	Audio Analyzer	AP	ATS-1A	2024-12-06	2025-12-06

Test Setup Diagram

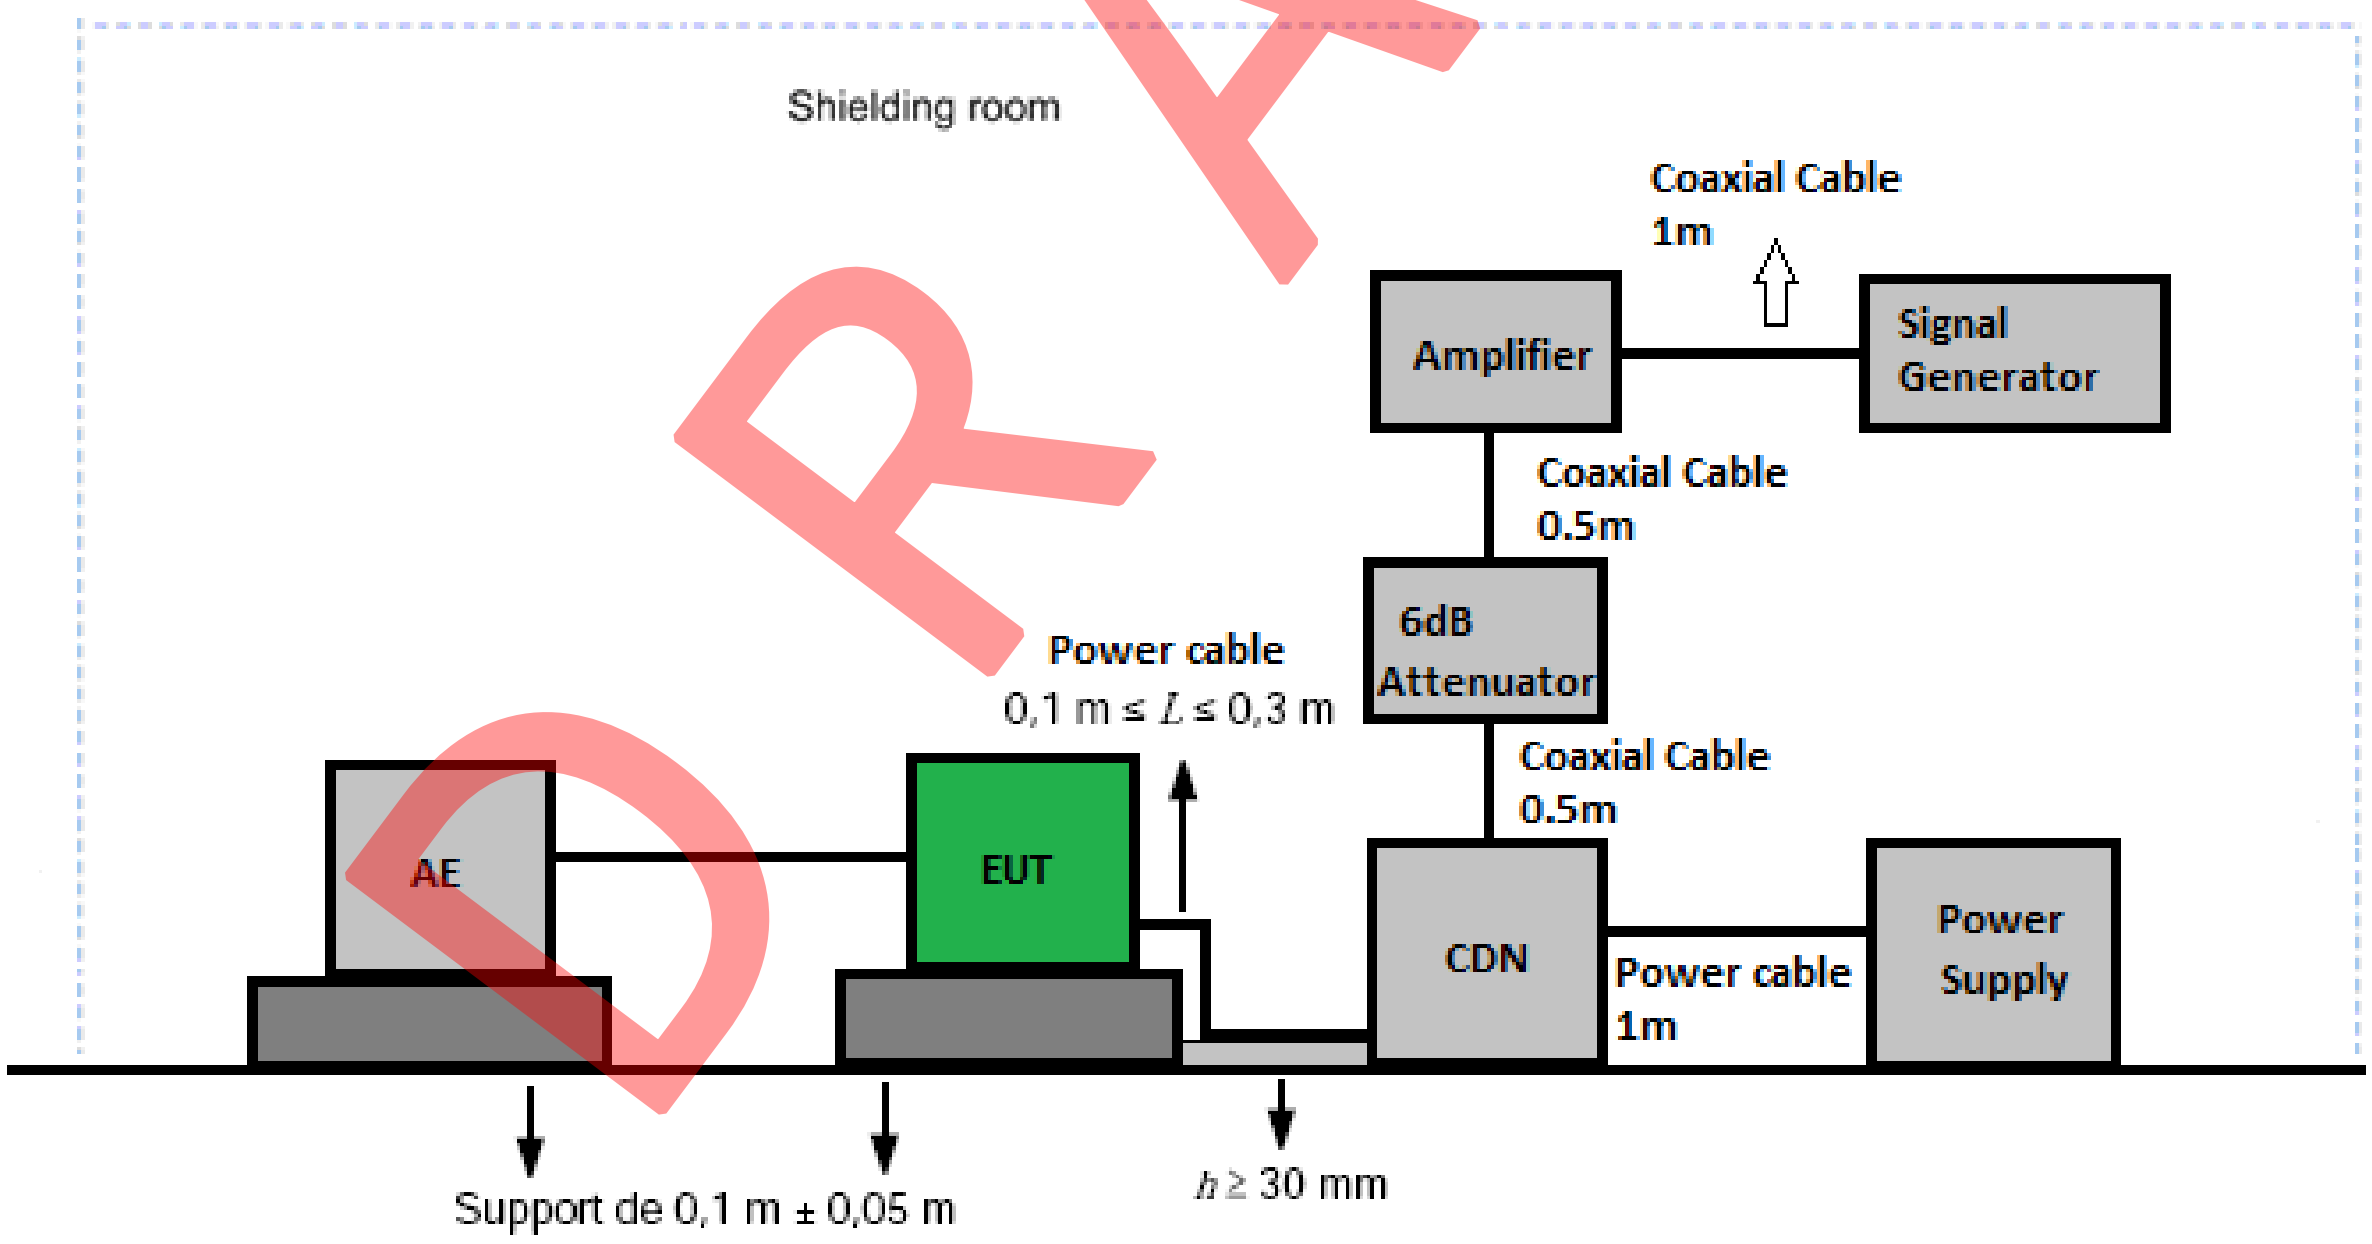

Test set-up of Injected Current

Test Results

EN61000-4-6
Injected Current (0.15MHz to 80MHz)

Port	Frequency (MHz)	Level (V)	Result (Pursuant to EN 55035, Criterion A)
AC Power Lines	0.15 to 10	3	Pass
	10 to 30	3 to 1	
	30 to 80	1 Except for DVB-C, the tuned channel ±0.5MHz is excluded from testing	
Signal Lines	0.15 to 10	3	Pass
	10 to 30	3 to 1	
	30 to 80	1 Except for DVB-C, the tuned channel ±0.5MHz is excluded from testing	

Note： For Broadcast reception function

1. The disturbance level is reduced to 1 V for in-band frequencies.
2. The tuned channel ±0,5 MHz (lower edge frequency – 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. Except for DVB-C, the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel) is excluded from testing. For DVB-C, the disturbance levels are 3 V/m or 3 V, except in the tuned channel ± 0,5 MHz (lower edge frequency - 0,5 MHz up to the upper edge frequency + 0,5 MHz of the tuned channel), where the disturbance level is 1 V/m.

☒ Additional Information

☒ No observable change

☐ EUT stopped operation and could / could not be reset by operator at _____V of Injected Current.

☐ EUT was in abnormal operation:
– Operation mode was changed from _____ to _____ at _____V of Injected Current.

☐ ____
____

Model: MHDV4080-T9503-S2 Intertek Report No.: 260508019SZN-001

Worst Case Operating Mode: IPTV

Monitor: Earphone

AC Port:

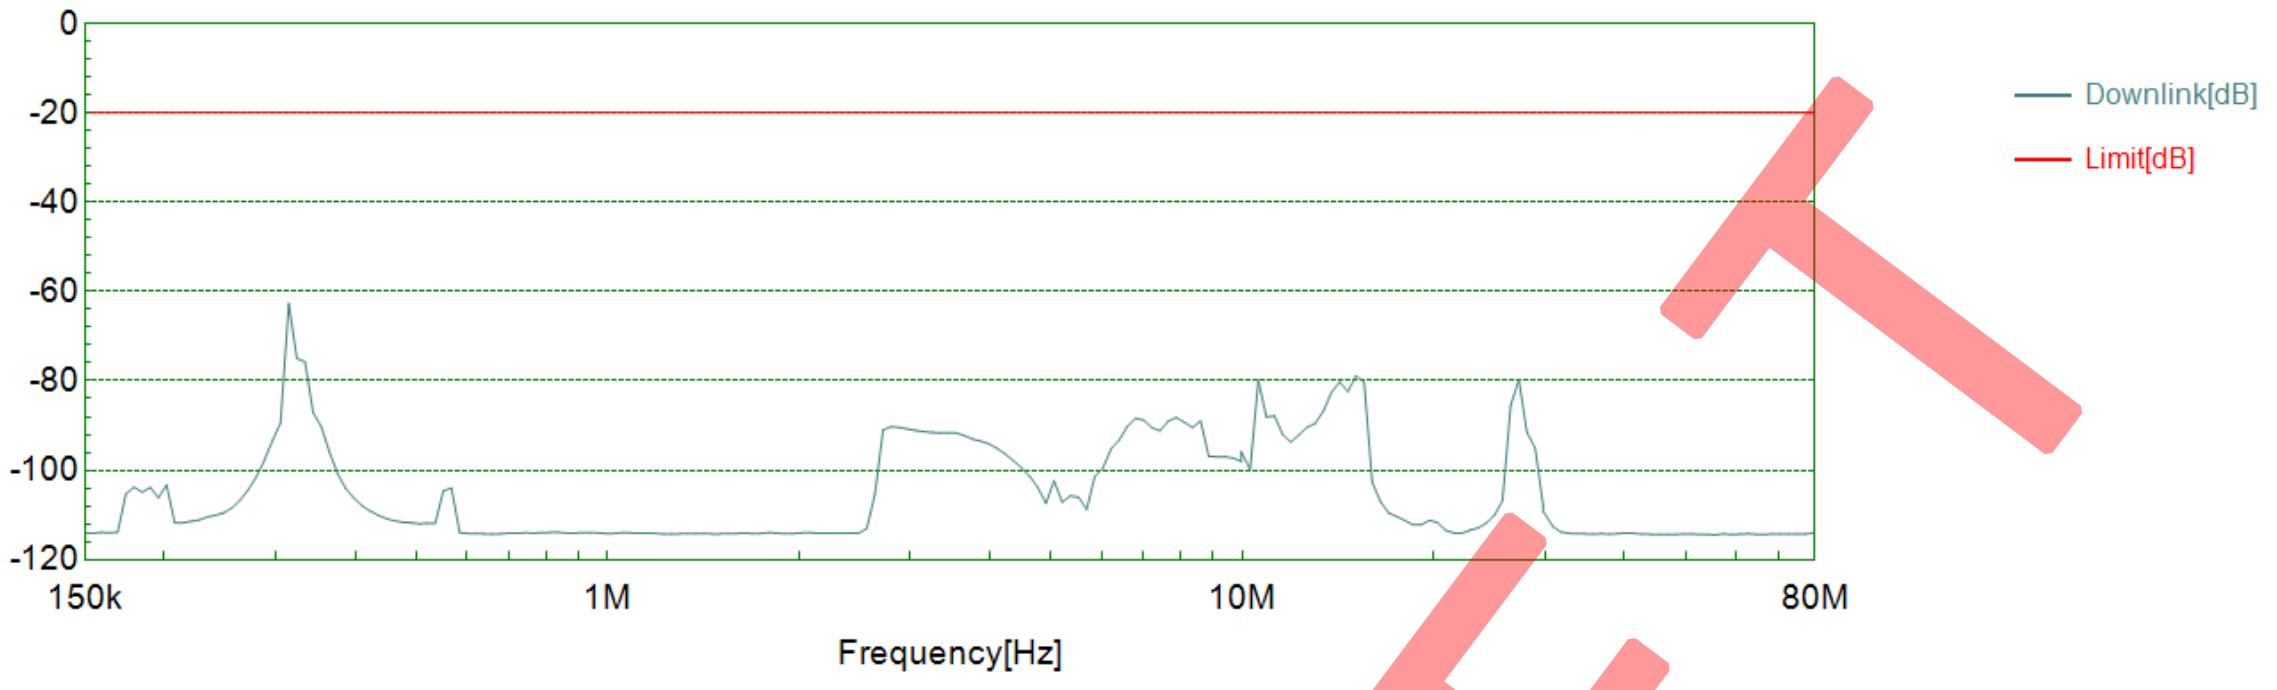

Signal Port:

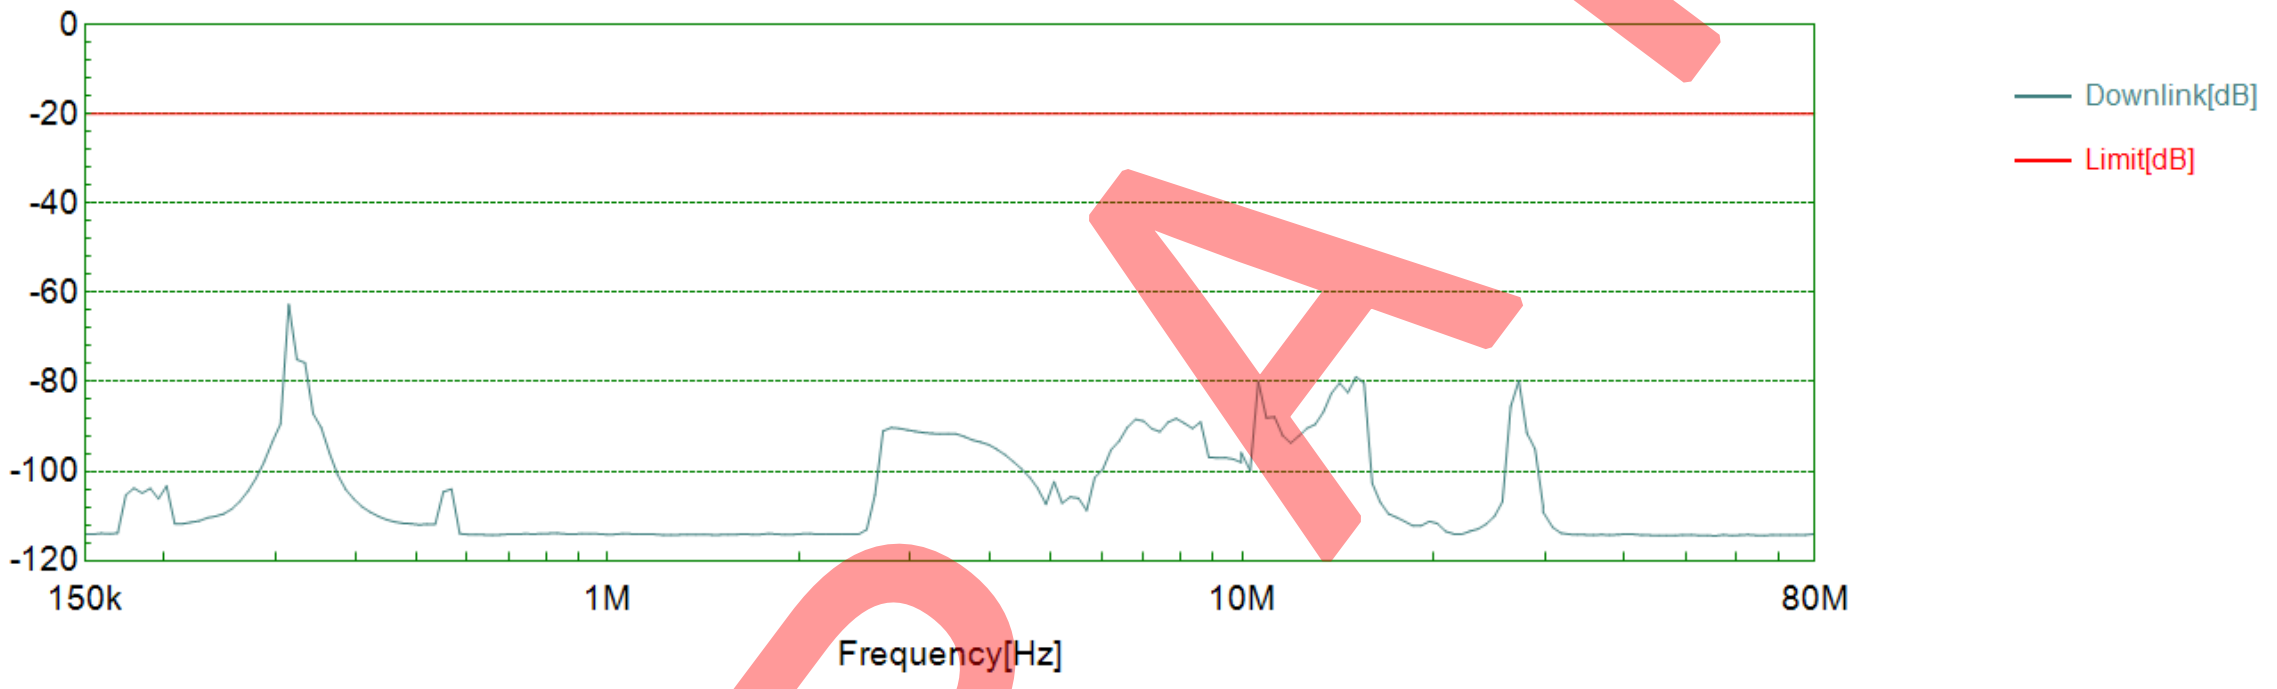

Voltage Dips and Interruptions
Pursuant to EN 61000-4-11

Test Summary (Pursuant to EN 55035)

Basic Standard:	EN61000-4-11		
Port:	AC Power Lines		
Limit:	Test Level in %U_T	Duration(s)	Required Performance Criterion
	0	0.01	B
	70	0.5	C
	0	5	C
No. of Dips / Interruptions:	3		
Test Mode:	ATV, DVB-T/T2, DVB-C, DVB-S/S2, AV In, USB Play, HDMI IN, HDMI(ARC), IPTV		
Test Setup:	Table-top		

U_T is the rated voltage for the equipment.

Used Test Equipment

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2024-12-06	2025-12-06

Test Setup Diagram

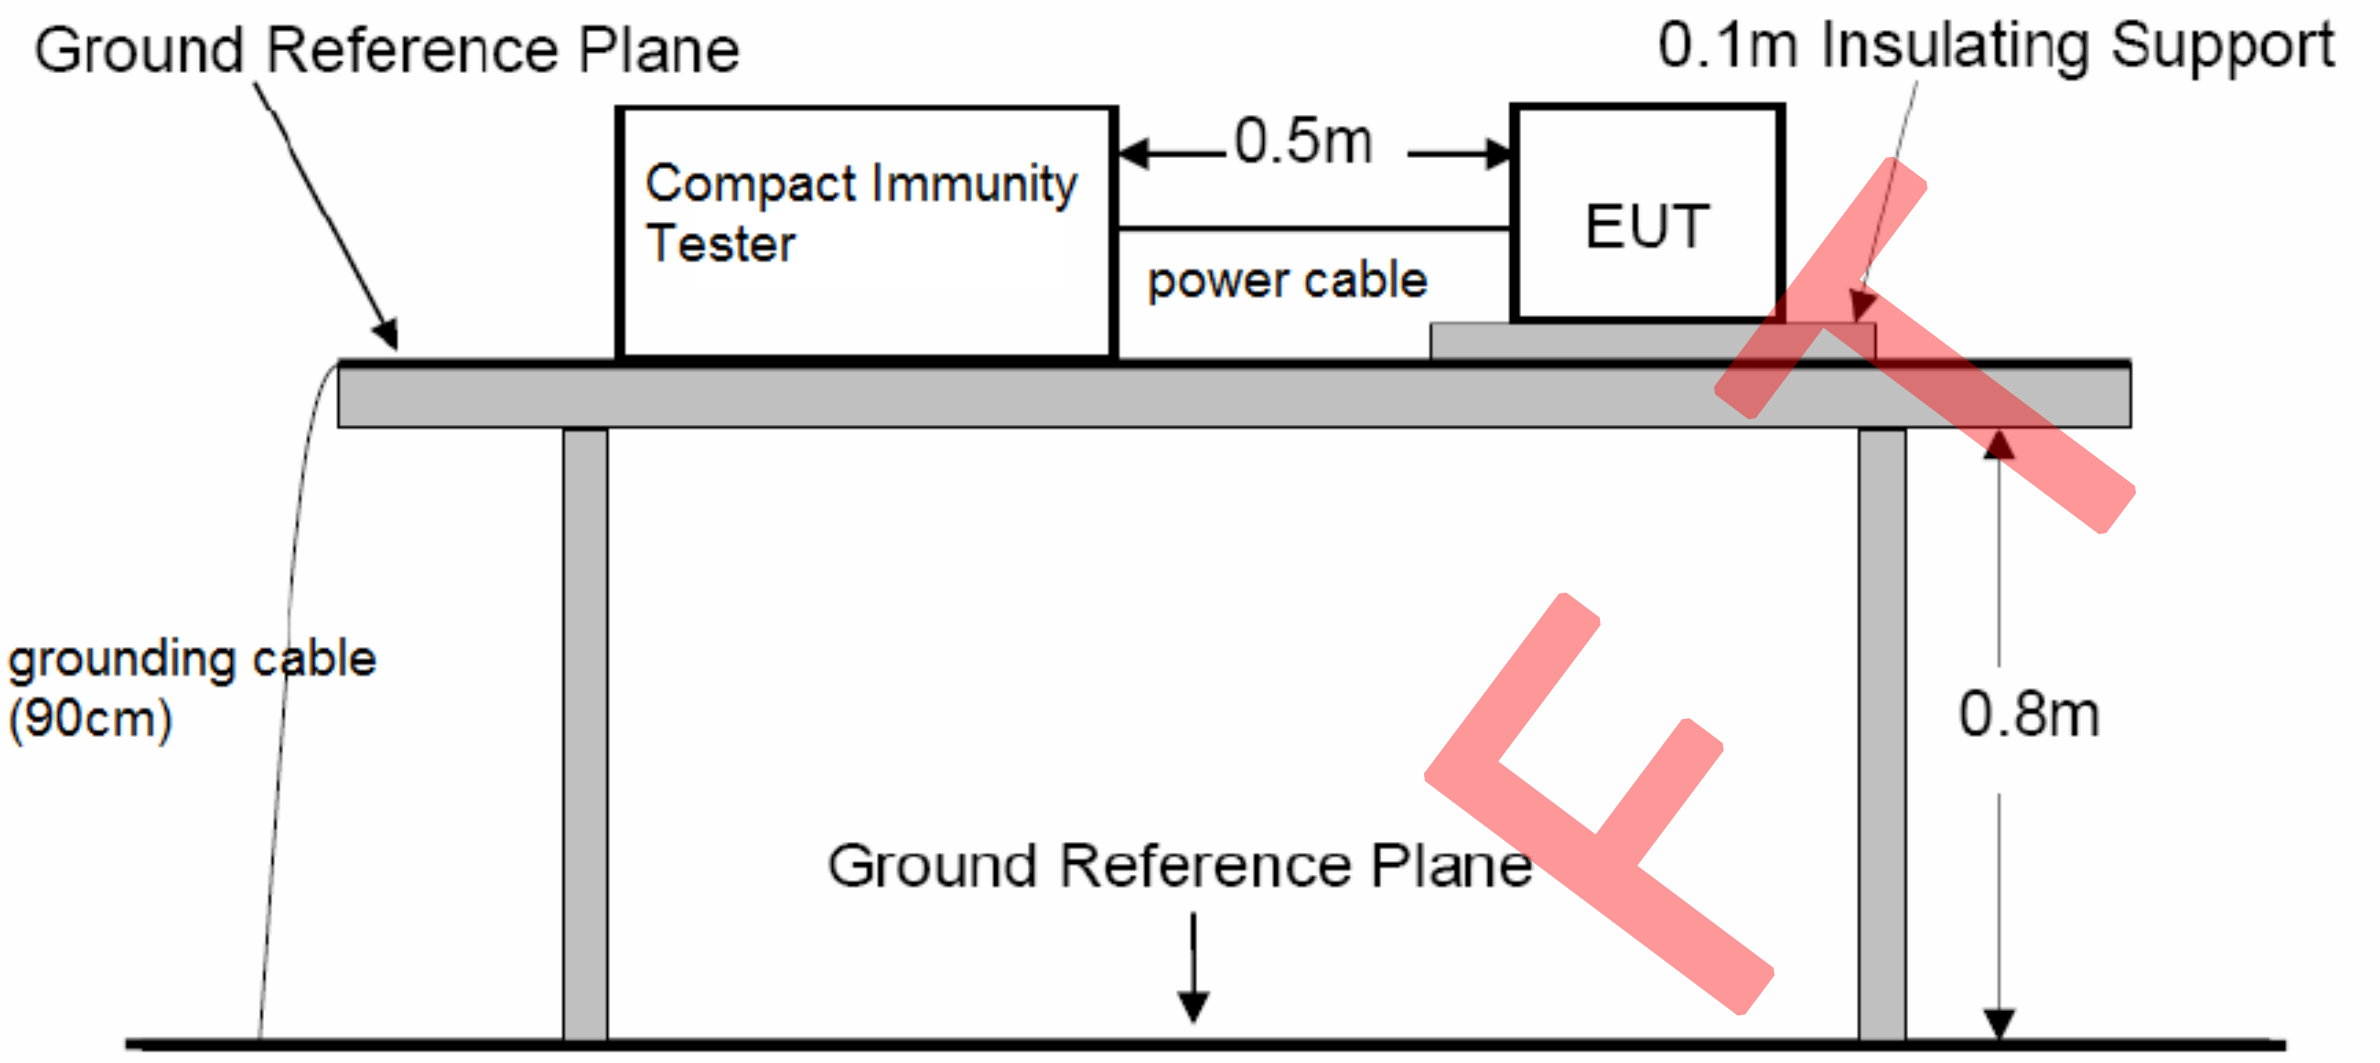

Test set-up of Voltage Dips and Interruptions

Test Results

EN61000-4-11
Voltage Dips and Interruptions

Test Condition		Result (Pursuant to EN 55035, Criterion B)
Test Level in $\%U_T$	Duration(s)	
0	0.01	Pass

Test Condition		Result (Pursuant to EN 55035, Criterion C)
Test Level in $\%U_T$	Duration(s)	
70	0.5	Pass
0	5	Pass

☒ Additional Information

☐ No observable change

☒ EUT stopped operation and could be reset by operator at test level 0%U_T, 5s of Interrupt.

☐ EUT was in abnormal operation:
- Operation mode was changed from _____ to _____ at test level _____ of Dip. / Interrupt.

☐ ____
____

Photos of Test Set-up

Please refer to Annex of EUT Photos_260508019SZN.

Photos of EUT

Please refer to Annex of EUT Photos_260508019SZN.

********************************** End of Report*************************************