intertek
Total Quality. Assured.

Shen Zhen MTC Co., LTD

TEST REPORT

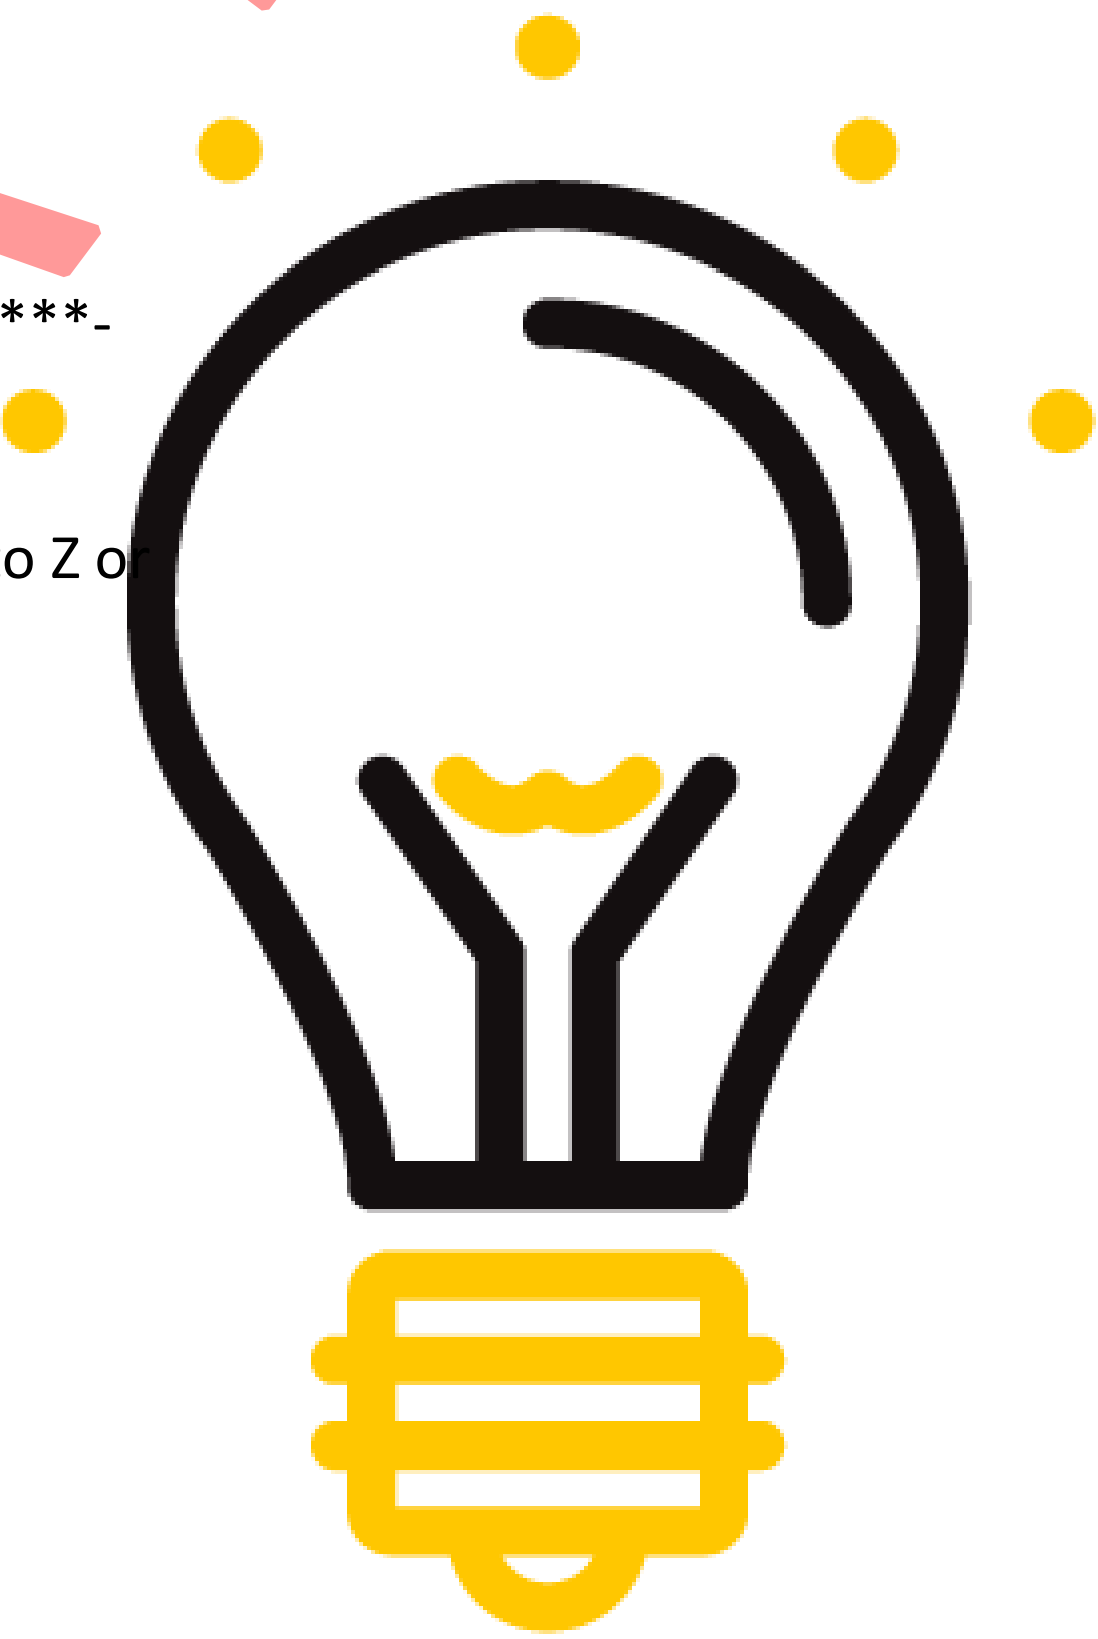

SCOPE OF WORK
RADIO FREQUENCY TESTING–MUDV50B0-90106-T2, MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **-*50********(* can from 0 to 9, A to Z or blank), PR50U3421SKB.

REPORT NUMBER
260508031SZN-005

ISSUE DATE	**[REVISED DATE]**
21 May 2026	[---------------------]

PAGES
27

DOCUMENT CONTROL NUMBER
ETSI EN300440_c

No. 101&201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community,
GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China
Tel: (86 755) 8601 6288
Fax: (86 755) 8601 6751
www.intertek.com

intertek
Total Quality. Assured.

TEST REPORT

Intertek Report No. : 260508031SZN-005

RADIO COMMUNICATIONS TESTING REPORT

Shen Zhen MTC Co., LTD

MUDV50B0-90106-T2, MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **-*50********(* can from 0 to 9, A to Z or blank), PR50U3421SKB.

TV/LCD LED TV/LED LCD TV

5.8GHz Transceiver

Test Report: 260508031SZN-005

Report Prepared and Checked By:	Bruce Zheng Project Engineer	
Report Approved By :	Rode Liu Project Engineer	
Date :	21 May 2026	

RADIO PERFORMANCE MEASUREMENTS

RESULT SUMMARY

Requirements	ETSI EN 300 440 Technical requirements (Clause Number)	ETSI EN 300 440 Test Specification (Clause Number)	Condition	Compliance
E.I.R.P.	4.2.2	4.2.2.3	Applies to all devices with transmitters	Complied
Permitted range of operating frequencies	4.2.3	4.2.3.3	Applies to all devices with transmitters	Complied
Unwanted emissions in the spurious domain	4.2.4	4.2.4.3	Applies to all devices with transmitters	Complied
Duty Cycle	4.2.5.4	4.2.5.4.3	Transmitting devices which do not use LBT, DAA, or RFID transmitters operating in the 2 446 to 2 454 MHz band transmitting more than 500 mW e.i.r.p. power level	Complied
Additional requirements for FHSS equipment	4.2.6	4.2.6.3	Equipment utilizing FHSS modulation	N/A
Adjacent channel selectivity	4.3.3	4.3.3.3	Applies to equipment Category 1 receivers	N/A
Blocking or desensitization	4.3.4	4.3.4.3	Applies to category 1 and 2 receivers	N/A
Spurious radiation	4.3.5	4.3.5.3	Applies to all receivers, except receivers used in combination with permanently co-located transmitters continuously transmitting	Complied
When determining the test conclusion, the Measurement Uncertainty of test has been considered. Note: N/A means Not apply.				

EQUIPMENT UNDER TEST (EUT) INFORMATION

Applicant:	Shen Zhen MTC Co., LTD MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street, Longgang district, Shenzhen, China
Description of EUT:	TV/LCD LED TV/LED LCD TV
Type Number (s):	MUDV50B0-90106-T2
Brand Name(s):	AMTC, Sharp, Polaroid
Serial Number (s):	Not Labelled
Equipment Received:	05 December 2022
Test Date (s):	05 December 2022 to 06 January 2023
Test Site and Location:	Intertek Testing Services Shenzhen Ltd. No. 101&201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China
Test Specification (s):	ETSI EN 300 440 V2.1.1 (2017-03)

CONTENTS

EXHIBIT 1

GENERAL DESCRIPTION

1 INTRODUCTION

Intertek Testing Services Shenzhen Limited has tested the Shen Zhen MTC Co., LTD MUDV50B0-90106-T2, TV/LCD LED TV/LED LCD TV. The sample was tested to the relevant performance specification published by the European Telecommunications Standards Institute. This report contains the results of these tests and is submitted to Shen Zhen MTC Co., LTD as the final test results.

The Model: MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **-*50********(* can from 0 to 9, A to Z or blank), PR50U3421SKB are the same as the Model: MUDV50B0-90106-T2 in hardware aspect except the different appearance. The difference in model number serves as marketing strategy.

This report is based on previous report with report number 240731081SZN-003 dated 10 September 2024(original signatory: Bruce Zheng, Rode Liu on file). Owing to adding the models, no test was required after evaluation.

The production units are required to conform to the initial sample as received when the units are placed on the market.

2 TEST SPECIFICATIONS

2.1 RELEVANT PERFORMANCE SPECIFICATION

The relevant performance specifications for Shen Zhen MTC Co., LTD MUDV50B0-90106-T2, TV/LCD LED TV/LED LCD TV are ETSI EN 300 440 V2.1.1 (2017-03). The harmonised standards are ETSI EN 300 440 V2.1.1 (2017-03).

The tests performed are those required to demonstrate compliance with the technical specifications and the essential requirements of 3.2 of the Radio Equipment Directive (2014/53/EU) - RED for regulatory purposes.

2.2 TEST ENVIRONMENT

The tests were performed in the Radio communications and Electromagnetic Compatibility Test Facility at Intertek Testing Services Shenzhen Limited. The sample was subjected to the ambient conditions in the laboratory and indoor test site except during tests at extremes of temperatures and the Radiated Emissions Tests. The temperature and relative humidity recorded during the period of each test are given in the results.

2.3 CONFIGURATION OF TEST SAMPLE

The test sample consisted of one transceiver and under manufacturer's specified test mode, only the worst-case data were reported.

2.4 TEST POWER SOURCES

The TV/LCD LED TV/LED LCD TV is intended to operate from 220-240V~, 50/60Hz, 128W. The test power source voltages were:

Nominal test voltage AC 230V

2.5 TEST FREQUENCIES

Channel List:

Band 5725~5850MHz			
802.11a / n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

Test Channel:

Channel	Frequency MHz
802.11a / n(HT20)	
149	5745
157	5785
165	5825
802.11n(HT40)	
151	5755
159	5795

2.6 GENERAL REQUIREMENTS

2.6.1 MODULATION

1. Constant envelope digital frequency modulation is used with OFDM technique,

2.6.2 ANTENNA

1. The antenna used in Transceiver is permanent Integrate antenna.
2. Antenna gain 1: 2.0dBi, Antenna gain 2: 3.0dBi

2.6.3 Test Condition

Manufacturer's declared operating temperature: -10°C to +55°C.

2.7 MEASUREMENT UNCERTAINTY

All measurement uncertainties stated in this report are estimated to a 95% confidence level.

2.8 SUPPORT EQUIPMENT – RADIO PERFORMANCE MEASUREMENTS

1. Laptop (Lenovo X1) (Provided by Intertek)
2. USB Cable (Detachable, un-shielded with core, 100cm) (Provided by Applicant)
3. Test Software (Provided by Applicant) was installed on the EUT

EXHIBIT 2

TEST RESULT
OF
RADIO PERFORMANCE MEASUREMENTS

3 EQUIVALENT ISOTROPICALLY RADIATED POWER (E.I.R.P.)

3.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 440 V2.1.1 (2017-03)
Clause :	4.2.2
Test method	Conducted measurement

3.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ016-12	Temperature & Humidity Chamber	Terchy	MHK-120NK	2022-01-05	2023-01-05
SZ182-02	RF Power Meter	Anritsu	ML2496A	2022-05-16	2023-05-16
SZ070-24	Open Switch and Control Unit with TS8997 option for power measurement test	R&S	OSP120+B157	2022-12-22	2023-12-22
SZ006-15	DC Power Supply	APC	GPS-3030DD	2022-05-23	2023-05-23

3.3 TEST SETUP

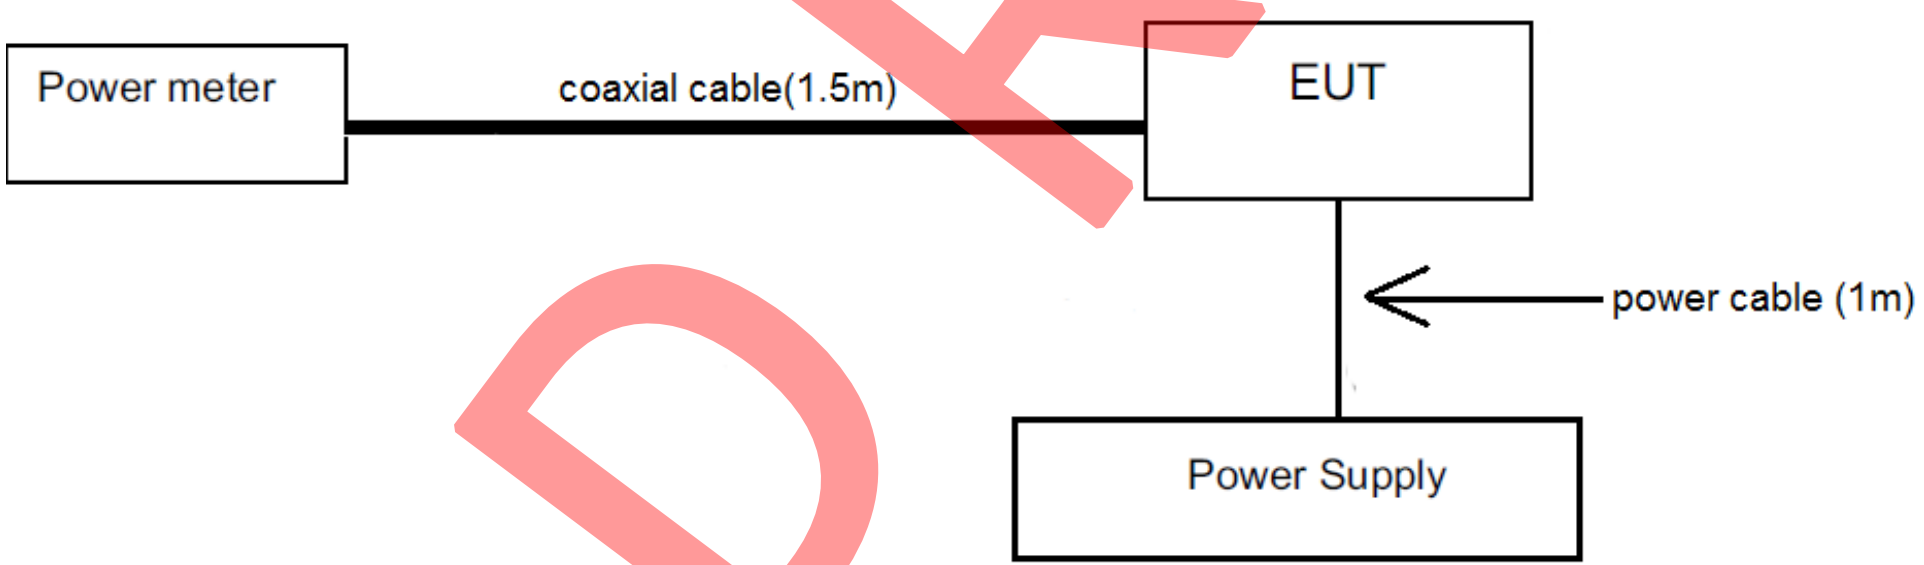

3.4 WORST CASE TEST RESULT (AC Power Supply)

For SISO: ANT1

802.11a

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	11.9	14.0	-2.1
		5785	11.7	14.0	-2.3
		5825	11.8	14.0	-2.2

802.11n(HT20)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	10.6	14.0	-3.4
		5785	10.5	14.0	-3.5
		5825	10.5	14.0	-3.5

802.11AC(VHT20)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	10.7	14.0	-3.3
		5785	10.6	14.0	-3.4
		5825	10.6	14.0	-3.4

802.11n(HT40)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5755	10.8	14.0	-3.2
		5795	10.7	14.0	-3.3

802.11AC(VHT40)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5755	10.7	14.0	-3.3
		5795	10.6	14.0	-3.4

802.11AC(VHT80)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5775	10.3	14.0	-3.7

For SISO: ANT2

802.11a

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	8.0	14.0	-6.0
		5785	8.2	14.0	-5.8
		5825	8.2	14.0	-5.8

802.11n(HT20)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	6.9	14.0	-7.1
		5785	7.0	14.0	-7.0
		5825	7.0	14.0	-7.0

802.11AC(VHT20)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	6.9	14.0	-7.1
		5785	6.9	14.0	-7.1
		5825	7.1	14.0	-6.9

802.11n(HT40)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5755	7.0	14.0	-7.0
		5795	7.0	14.0	-7.0

802.11AC(VHT40)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5755	6.9	14.0	-7.1
		5795	7.0	14.0	-7.0

802.11AC(VHT80)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5775	6.6	14.0	-7.4

For MIMO :

802.11n(HT20)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	12.1	14.0	-1.9
		5785	12.0	14.0	-2.0
		5825	12.1	14.0	-1.9

802.11AC(HT20)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5745	12.1	14.0	-1.9
		5785	12.0	14.0	-2.0
		5825	12.1	14.0	-1.9

802.11n(HT40)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5755	12.0	14.0	-2.0
		5795	11.9	14.0	-2.1

802.11AC(HT40)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5755	12.0	14.0	-2.0
		5795	12.0	14.0	-2.0

802.11AC(HT80)

Test conditions		Frequency (MHz)	EIRP (dBm)	EIRP Limit (dBm)	Margin (dB)
Temp/Hum	Voltage				
T_{nom}=25℃ H_{nom}=55%	$V_{AC\ nom}$ 230V	5775	11.6	14.0	-2.4

Notes:

1. Negative sign (-) in the margin column signify levels below the limit.
2. 14 dBm corresponds to 25mW.
3. Measurement Uncertainty: ±1.49B.
4. Remark: Power setting and Power level in the test software provided by the client.

4 PERMITTED RANGE OF OPERATING FREQUENCIES

4.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 440 V2.1.1 (2017-03)
Clause :	4.2.3
Test method	Conducted measurements

4.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19
SZ016-12	Temperature & Humidity Chamber	Terchy	MHK-120NK	2022-01-05	2023-01-05
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15

4.3 Limits

The width of the power spectrum envelope is f_H -f_L for a given operating frequency. In equipment that allows adjustment or selection of different operating frequencies, the power envelope takes up different positions in the allowed band. The frequency range is determined by the lowest value of f_L and the highest value of f_H resulting from the adjustment of the equipment to the lowest and highest operating frequencies.

4.4 TEST SETUP

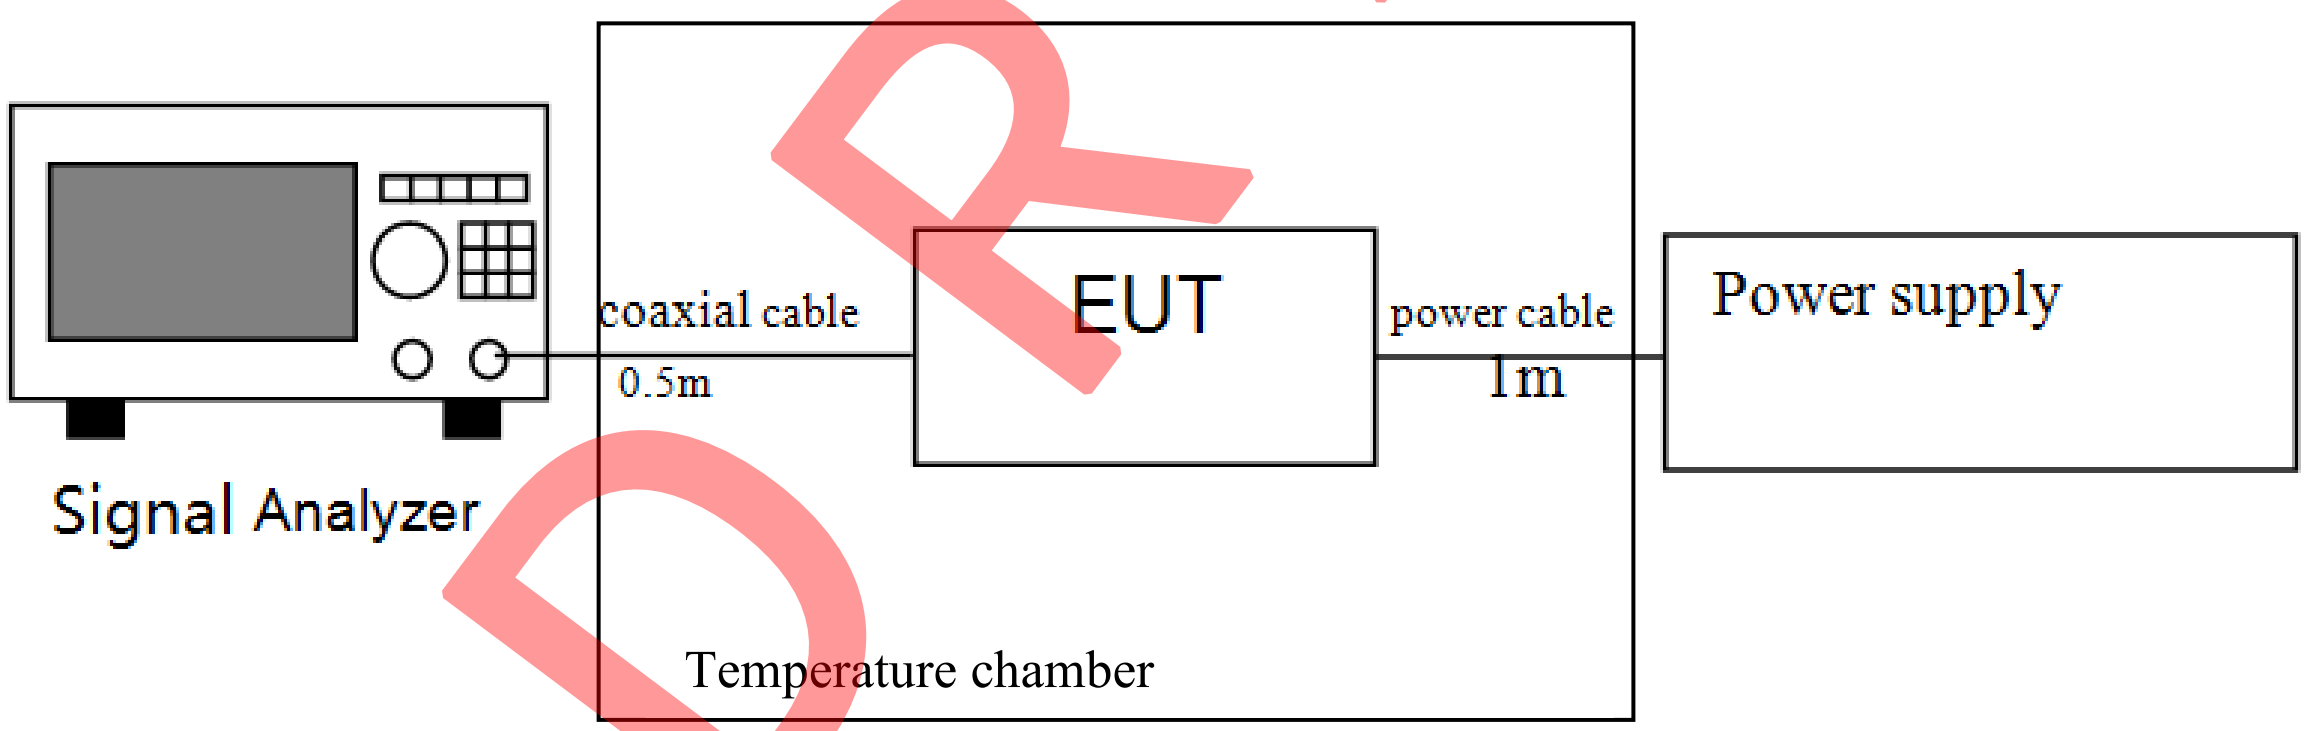

4.5 TEST RESULT

PERMITTED RANGE OF OPERATING FREQUENCIES

802.11a(Worst case data):

Temperature (°C) Humidity (%)	Voltage	F_L(GHz) >5.725GHz	F_H(GHz) <5.875GHz
T_{nom} 25°C H_{nom} 50%	$V_{AC\ nom}$ 230V	5.736456	5.833504
T_{min} -10°C H_{min} 0%	$V_{AC\ min}$ 100V	5.736451	5.833501
	$V_{AC\ max}$ 240V	5.736449	5.833497
T_{max} 55°C H_{max} 85%	$V_{AC\ min}$ 100V	5.736452	5.833502
	$V_{AC\ max}$ 240V	5.736453	5.835477

802.11n(HT20)

Temperature (°C) Humidity (%)	Voltage	F_L(GHz) >5.725GHz	F_H(GHz) <5.875GHz
T_{nom} 25°C H_{nom} 50%	$V_{AC\ nom}$ 230V	5.735843	5.833930
T_{min} -10°C H_{min} 0%	$V_{AC\ min}$ 100V	5.735839	5.833919
	$V_{AC\ max}$ 240V	5.735841	5.833921
T_{max} 55°C H_{max} 85%	$V_{AC\ min}$ 100V	5.735833	5.833918
	$V_{AC\ max}$ 240V	5.735836	5.833924

802.11AC(VHT20)

Temperature (°C) Humidity (%)	Voltage	F_L(GHz) >5.725GHz	F_H(GHz) <5.875GHz
T_{nom} 25°C H_{nom} 50%	$V_{AC\ nom}$ 230V	5.736030	5.833917
T_{min} -10°C H_{min} 0%	$V_{AC\ min}$ 100V	5.736021	5.833901
	$V_{AC\ max}$ 240V	5.736024	5.833899
T_{max} 55°C H_{max} 85%	$V_{AC\ min}$ 100V	5.736018	5.833914
	$V_{AC\ max}$ 240V	5.736016	5.833912

802.11n(HT40)

Temperature (°C) Humidity (%)	Voltage	F_L(GHz) >5.725GHz	F_H(GHz) <5.875GHz
T_{nom} 25°C H_{nom} 50%	$V_{AC\ nom}$ 230V	5.736686	5.813261
T_{min} -40°C H_{min} 0%	$V_{AC\ min}$ 100V	5.736681	5.813254
	$V_{AC\ max}$ 240V	5.736679	5.813249
T_{max} 55°C H_{max} 85%	$V_{AC\ min}$ 100V	5.736677	5.813251
	$V_{AC\ max}$ 240V	5.736674	5.813252

802.11AC(VHT40)

Temperature (°C) Humidity (%)	Voltage	F_L(GHz) >5.725GHz	F_H(GHz) <5.875GHz
T_{nom} 25°C H_{nom} 50%	$V_{AC\ nom}$ 230V	5.736686	5.813261
T_{min} -40°C H_{min} 0%	$V_{AC\ min}$ 100V	5.736677	5.813254
	$V_{AC\ max}$ 240V	5.736681	5.813252
T_{max} 55°C H_{max} 85%	$V_{AC\ min}$ 100V	5.736679	5.813258
	$V_{AC\ max}$ 240V	5.736672	5.813253

802.11AC(VHT80)

Temperature (°C) Humidity (%)	Voltage	F_L(GHz) >5.725GHz	F_H(GHz) <5.875GHz
T_{nom} 25°C H_{nom} 50%	$V_{AC\ nom}$ 230V	5.736719	5.813227
T_{min} -40°C H_{min} 0%	$V_{AC\ min}$ 100V	5.736701	5.813221
	$V_{AC\ max}$ 240V	5.736711	5.813218
T_{max} 55°C H_{max} 85%	$V_{AC\ min}$ 100V	5.736708	5.813219
	$V_{AC\ max}$ 240V	5.736712	5.813224

Note:
1. F_{LB}: Lowest frequency at appropriate spurious emission level
2. F_{HB}: Highest frequency at appropriate spurious emission level
3. Measurement Uncertainty: ± 240Hz.
4. The permitted range of modulation bandwidth must be within the limits of the assigned frequency band 5.725-5.875 GHz.

OCCUPIED BANDWIDTH

(Worst case data): ANT 1
802.11a:

Frequency (MHz)	99% Bandwidth (MHz)	FL at 99% BW (MHz)	FH at 99% BW (MHz)	Result
5745	16.424	5736.888	5753.312	Pass
5825	16.424	5816.888	5833.312	Pass

802.11n(HT20)

Frequency (MHz)	99% Bandwidth (MHz)	FL at 99% BW (MHz)	FH at 99% BW (MHz)	Result
5745	17.662	5736.289	5753.911	Pass
5825	17.662	5816. 289	5833.911	Pass

802.11n(HT40)

Frequency (MHz)	99% Bandwidth (MHz)	FL at 99% BW (MHz)	FH at 99% BW (MHz)	Result
5755	36.204	5737.018	5773.222	Pass
5795	36.204	5776.938	5813.142	Pass

802.11AC(VHT20)

Frequency (MHz)	99% Bandwidth (MHz)	FL at 99% BW (MHz)	FH at 99% BW (MHz)	Result
5745	17.662	5736.289	5753.911	Pass
5825	17.662	5816. 289	5833.911	Pass

802.11AC(VHT40)

Frequency (MHz)	99% Bandwidth (MHz)	FL at 99% BW (MHz)	FH at 99% BW (MHz)	Result
5755	36.204	5737.018	5773.222	Pass
5795	36.204	5776.938	5813.142	Pass

802.11AC(VHT80)

Frequency (MHz)	99% Bandwidth (MHz)	FL at 99% BW (MHz)	FH at 99% BW (MHz)	Result
5775	75.125	5737.438	5812.562	Pass

5 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN FOR TRANSMITTERS

5.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 440 V2.1.1 (2017-03)
Clause :	4.2.4
Test method	Radiated measurements

5.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2022-07-08	2023-07-08
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19
SZ061-12	Biconilog Antenna	ETS	3142E	2021-08-04	2024-08-04
SZ061-09	Double - Ridged Waveguide Horn Antenna	ETS	3115	2022-10-14	2025-10-14
SZ181-04	Preamplifier	Agilent	8449B	2022-05-16	2023-05-16
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2024-12-12
SZ062-04	RF Cable	RADIALL	RG 213U	2022-05-15	2023-05-15
SZ062-13	RF Cable	Habia	0.026-26.5GHz	2022-05-15	2023-05-15
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	2022-05-15	2023-05-15

5.3 Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values.

Frequency ranges State	47 MHz to 74 MHz 87,5 MHz to 108 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
Operating	4 nW	250 nW	1 µW
Standby	2 nW	2 nW	20 nW

5.4 TEST SETUP DIAGRAM:

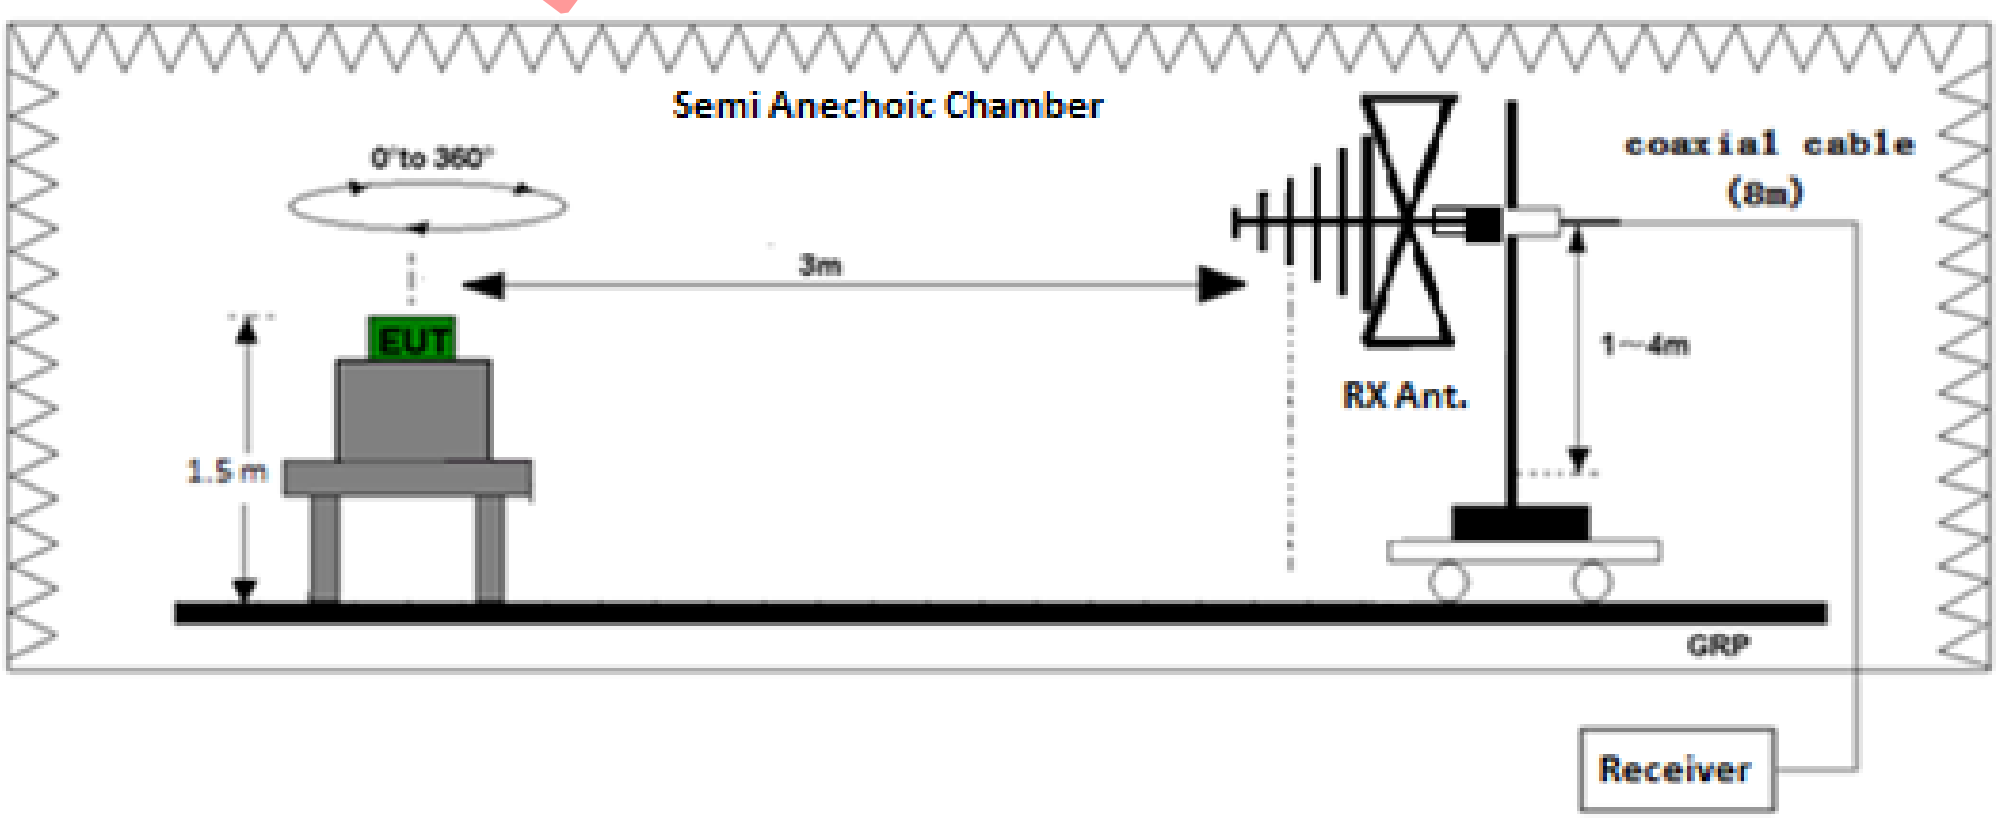

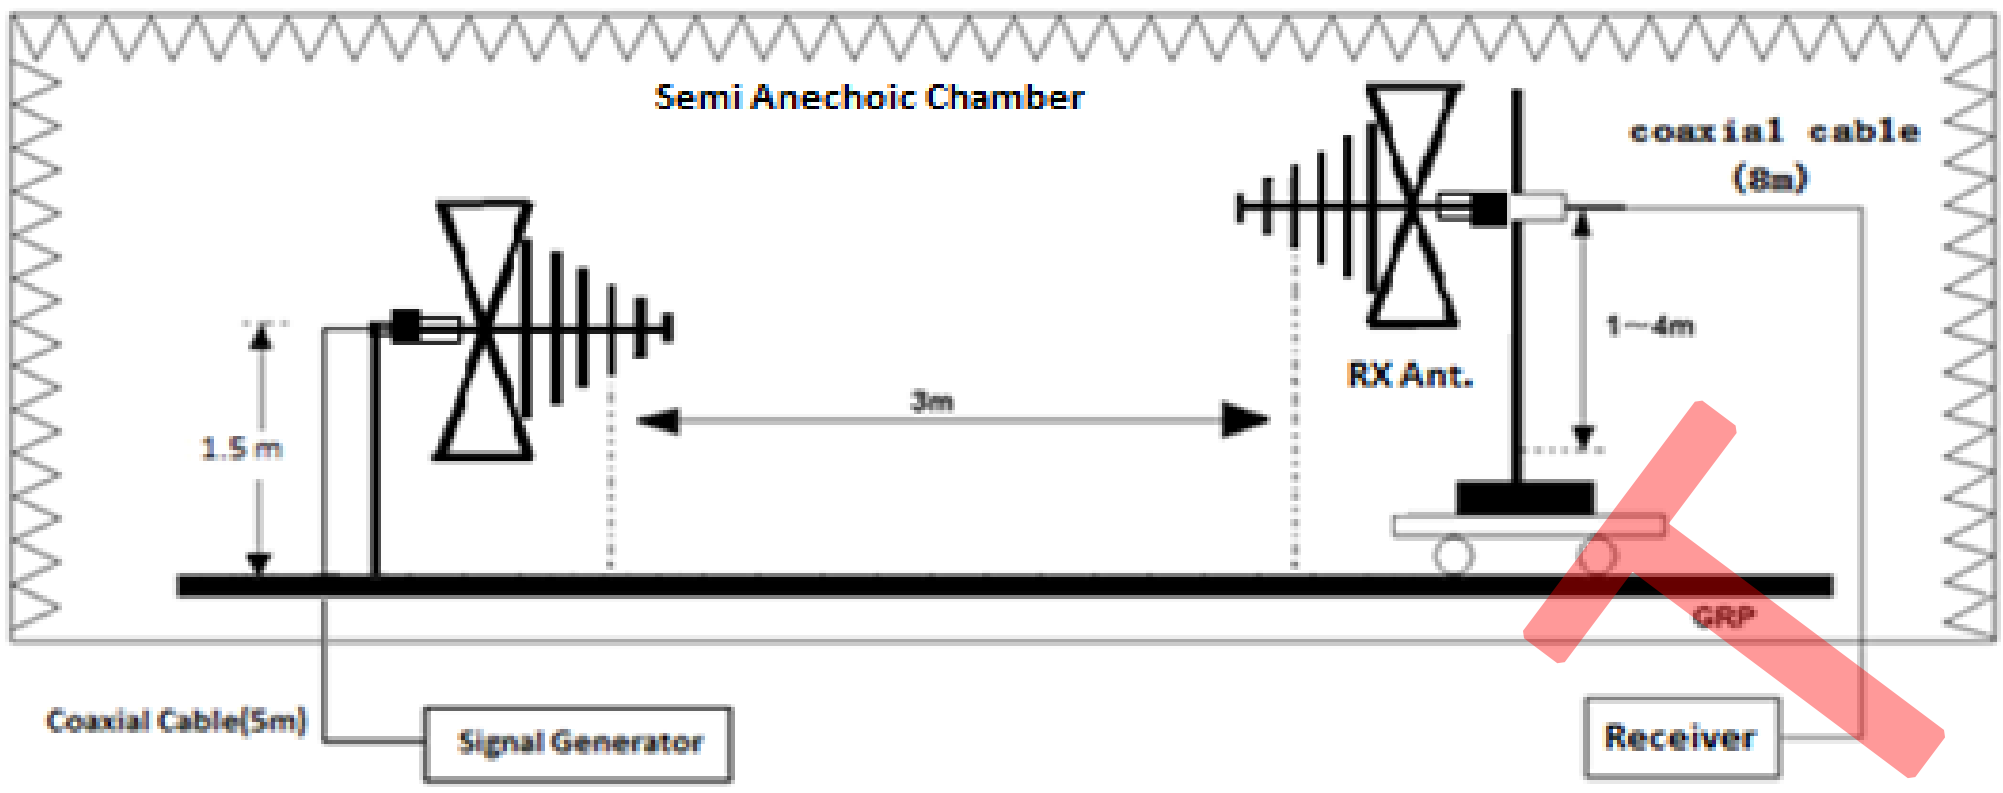

Test set-up of radiated disturbance (30MHz-1GHz)

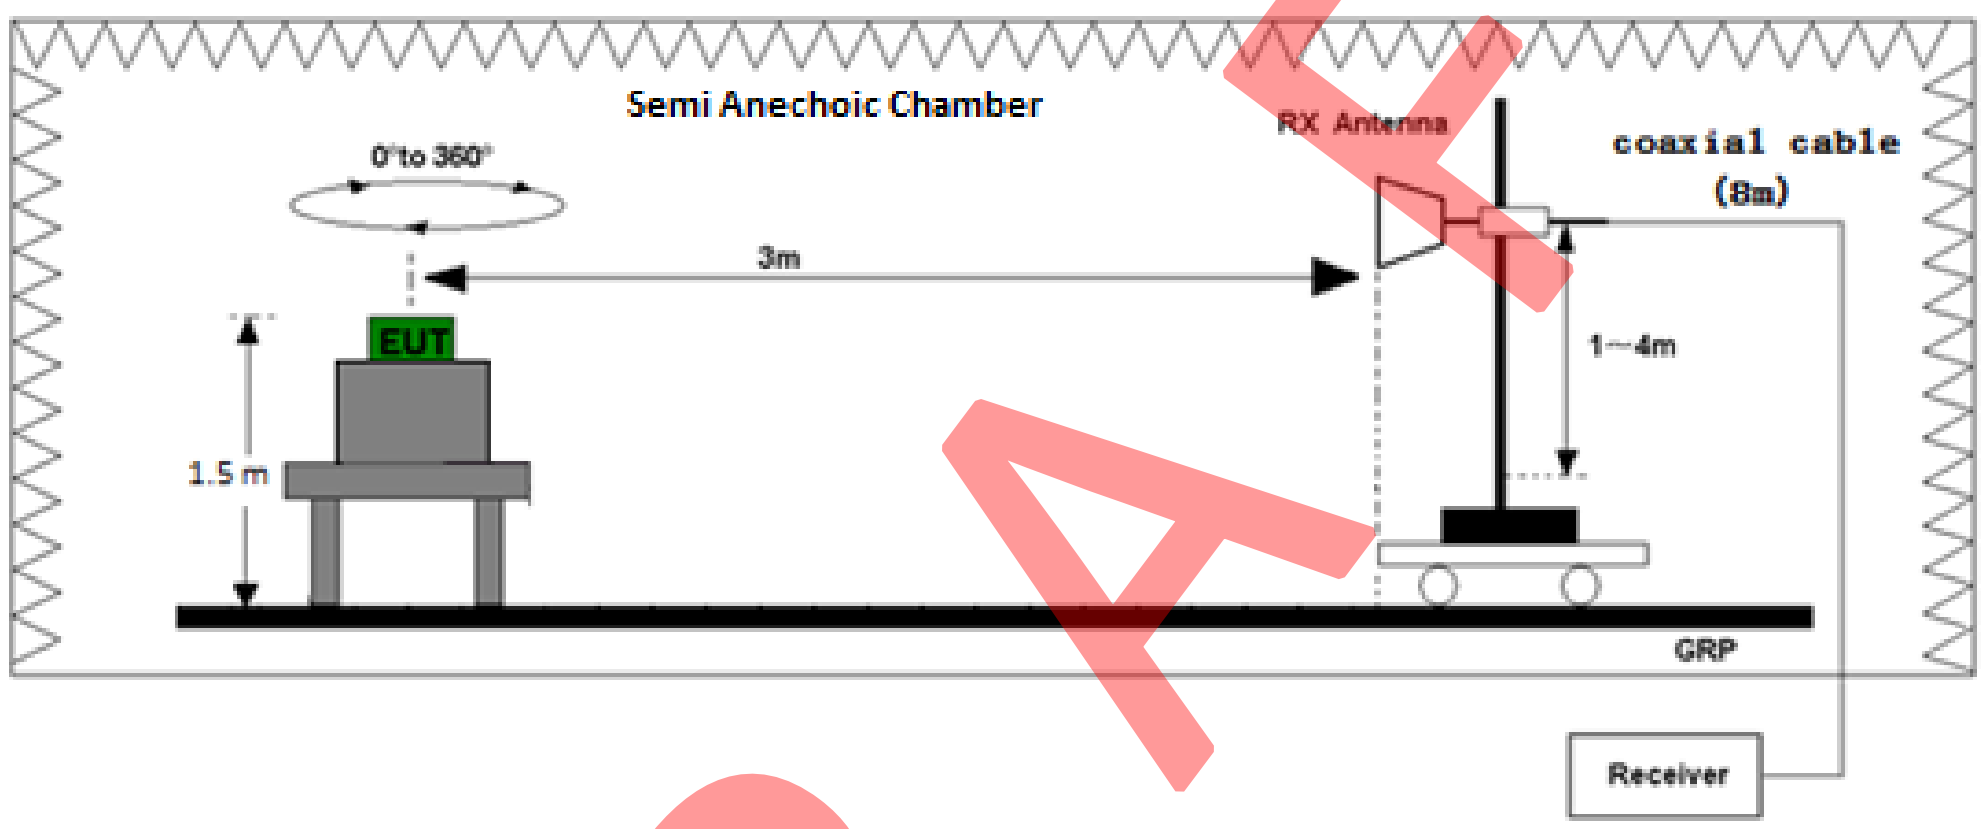

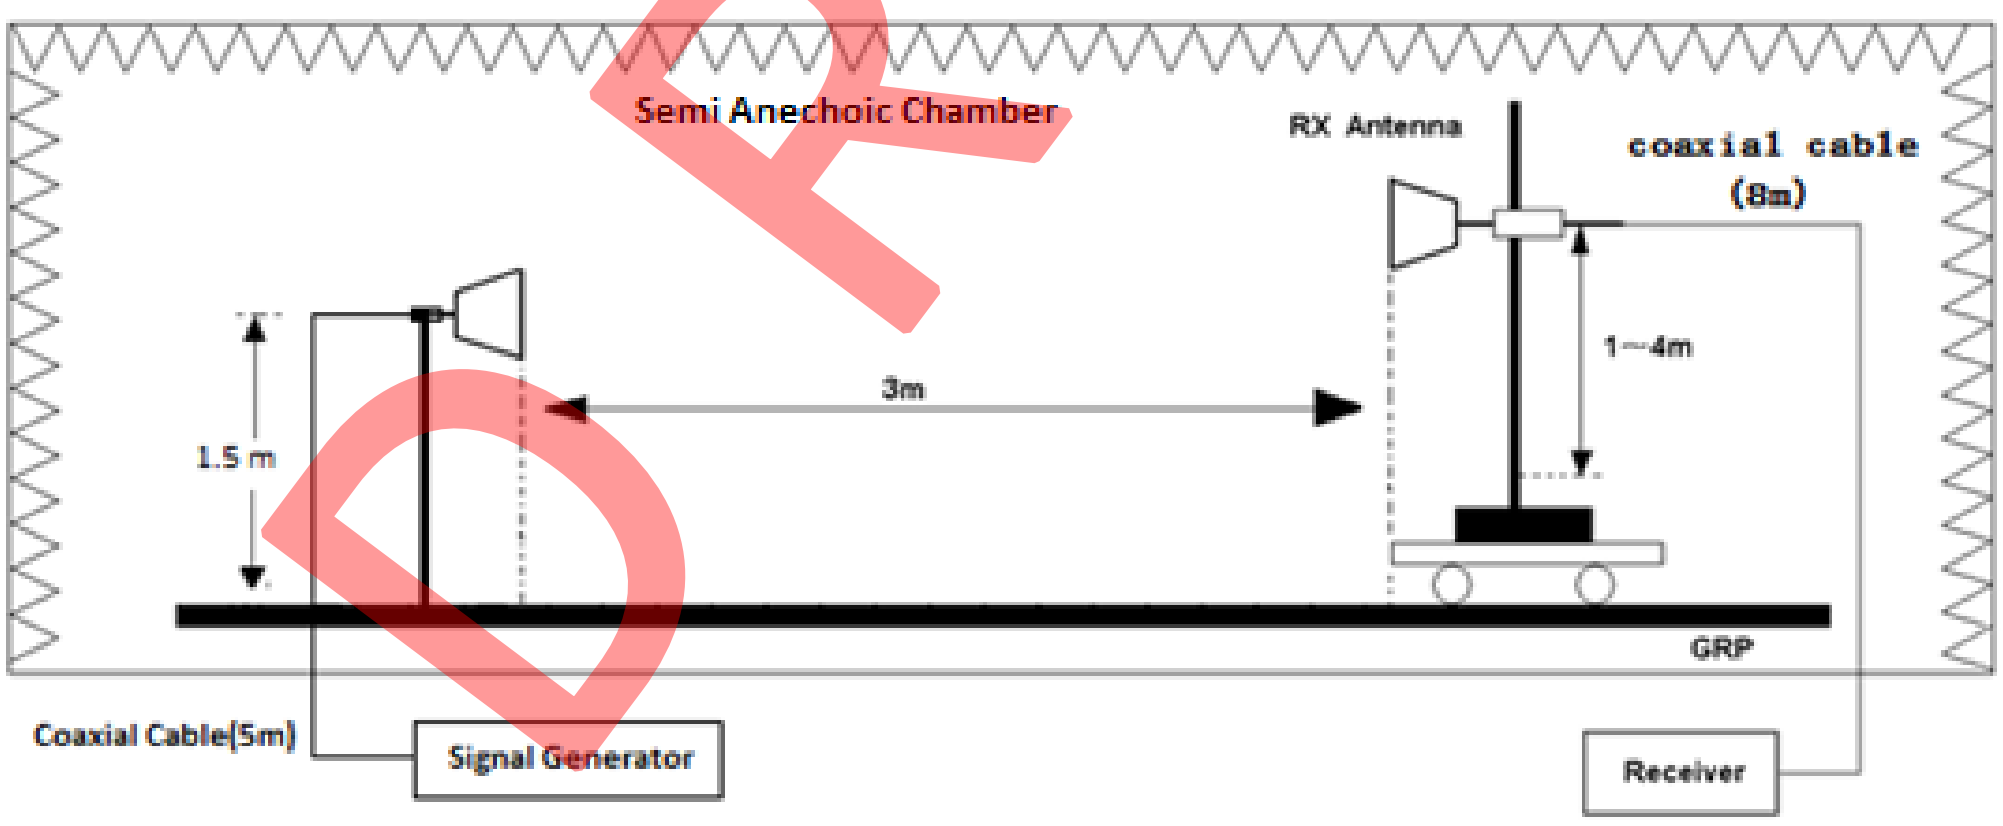

Test set-up of radiated disturbance (above 1GHz)

5.5 Test Result

Test Conditions: Temperature 23.4°C; Humidity 52.5%

SPURIOUS EMISSIONS - OPERATING

802.11a -Worse case-ANT1

5745MHz
Antenna Polarization Horizontal:

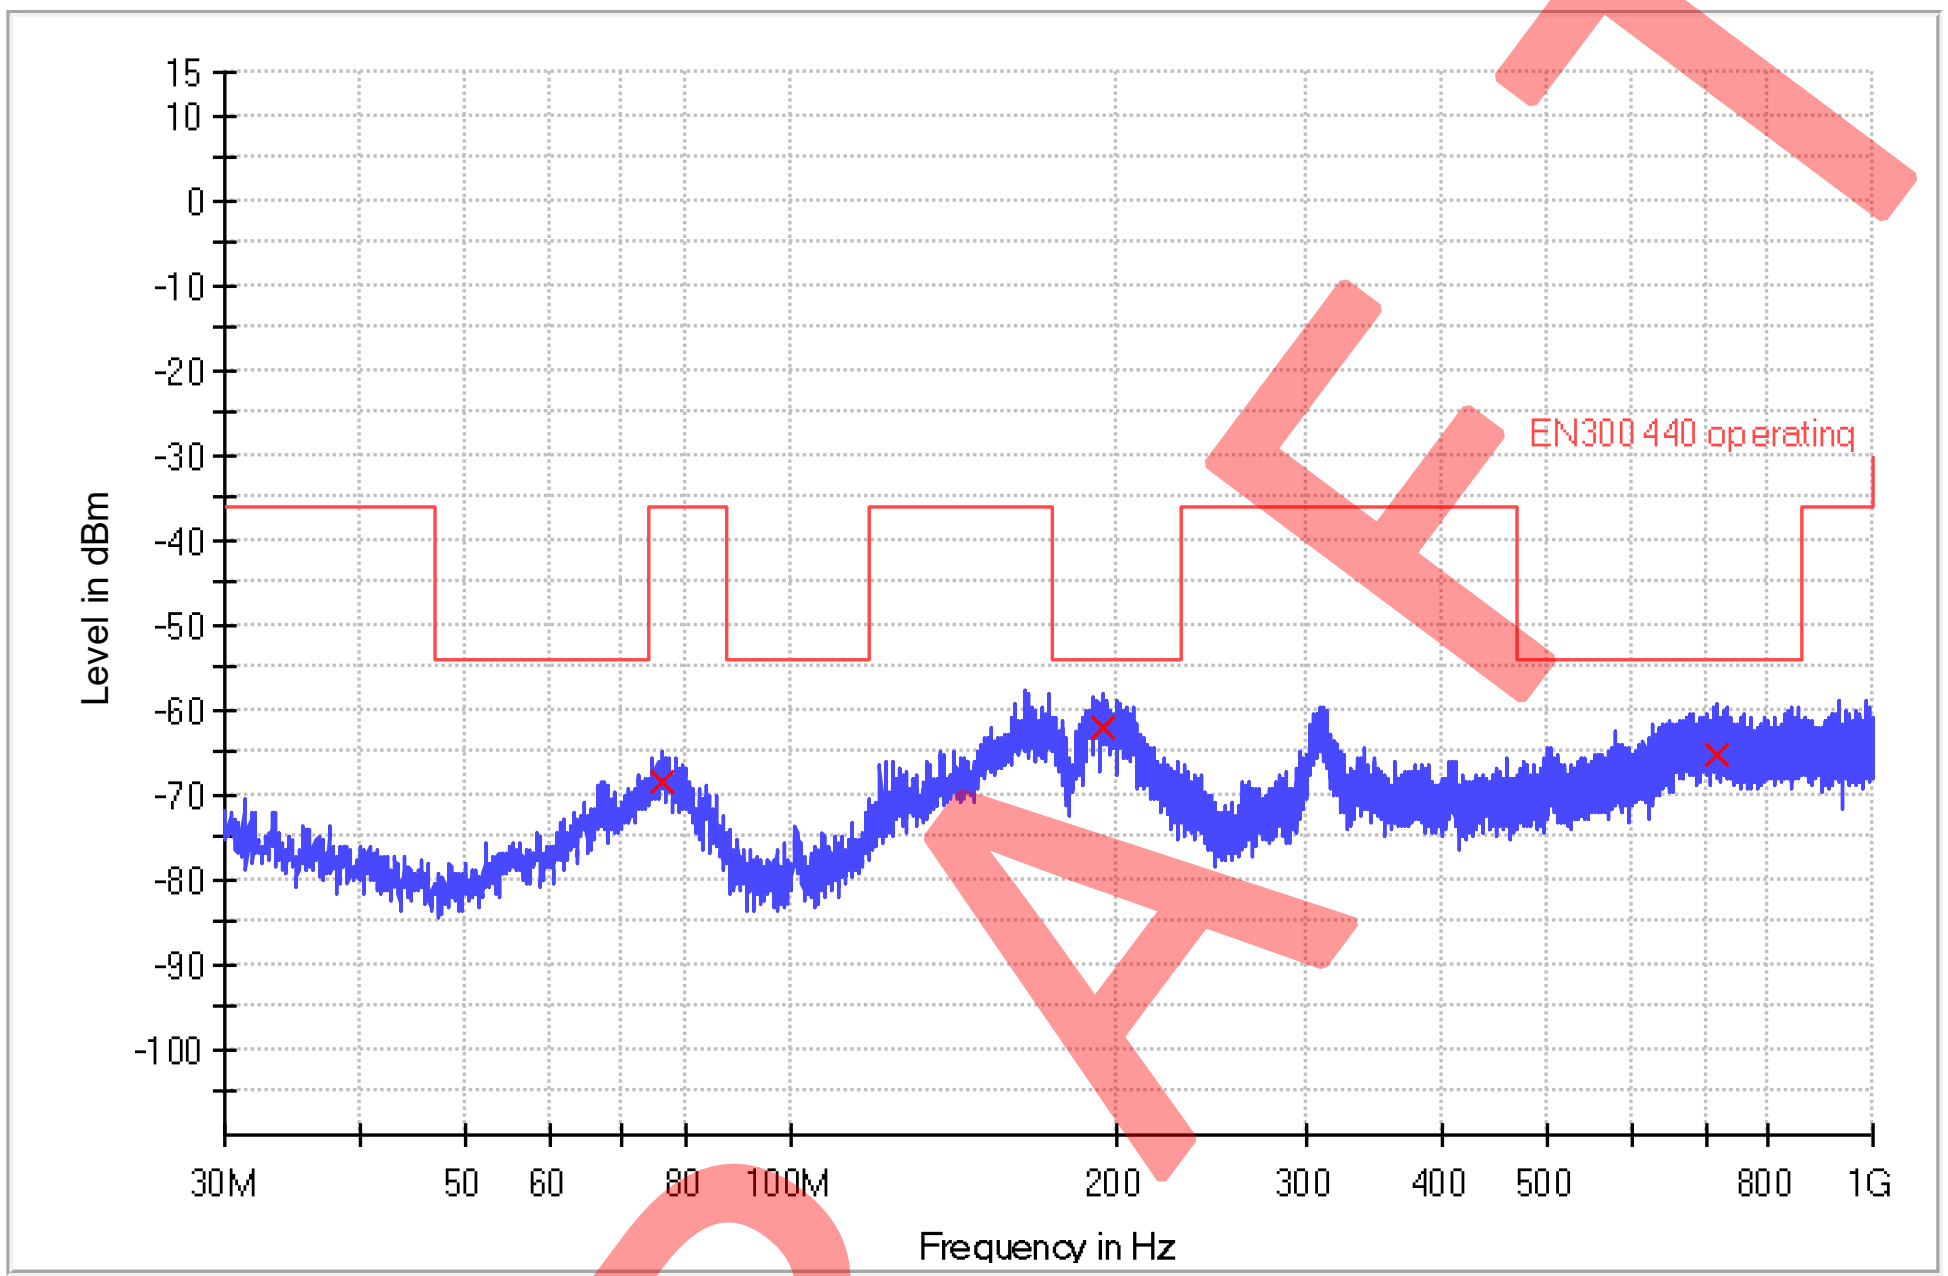

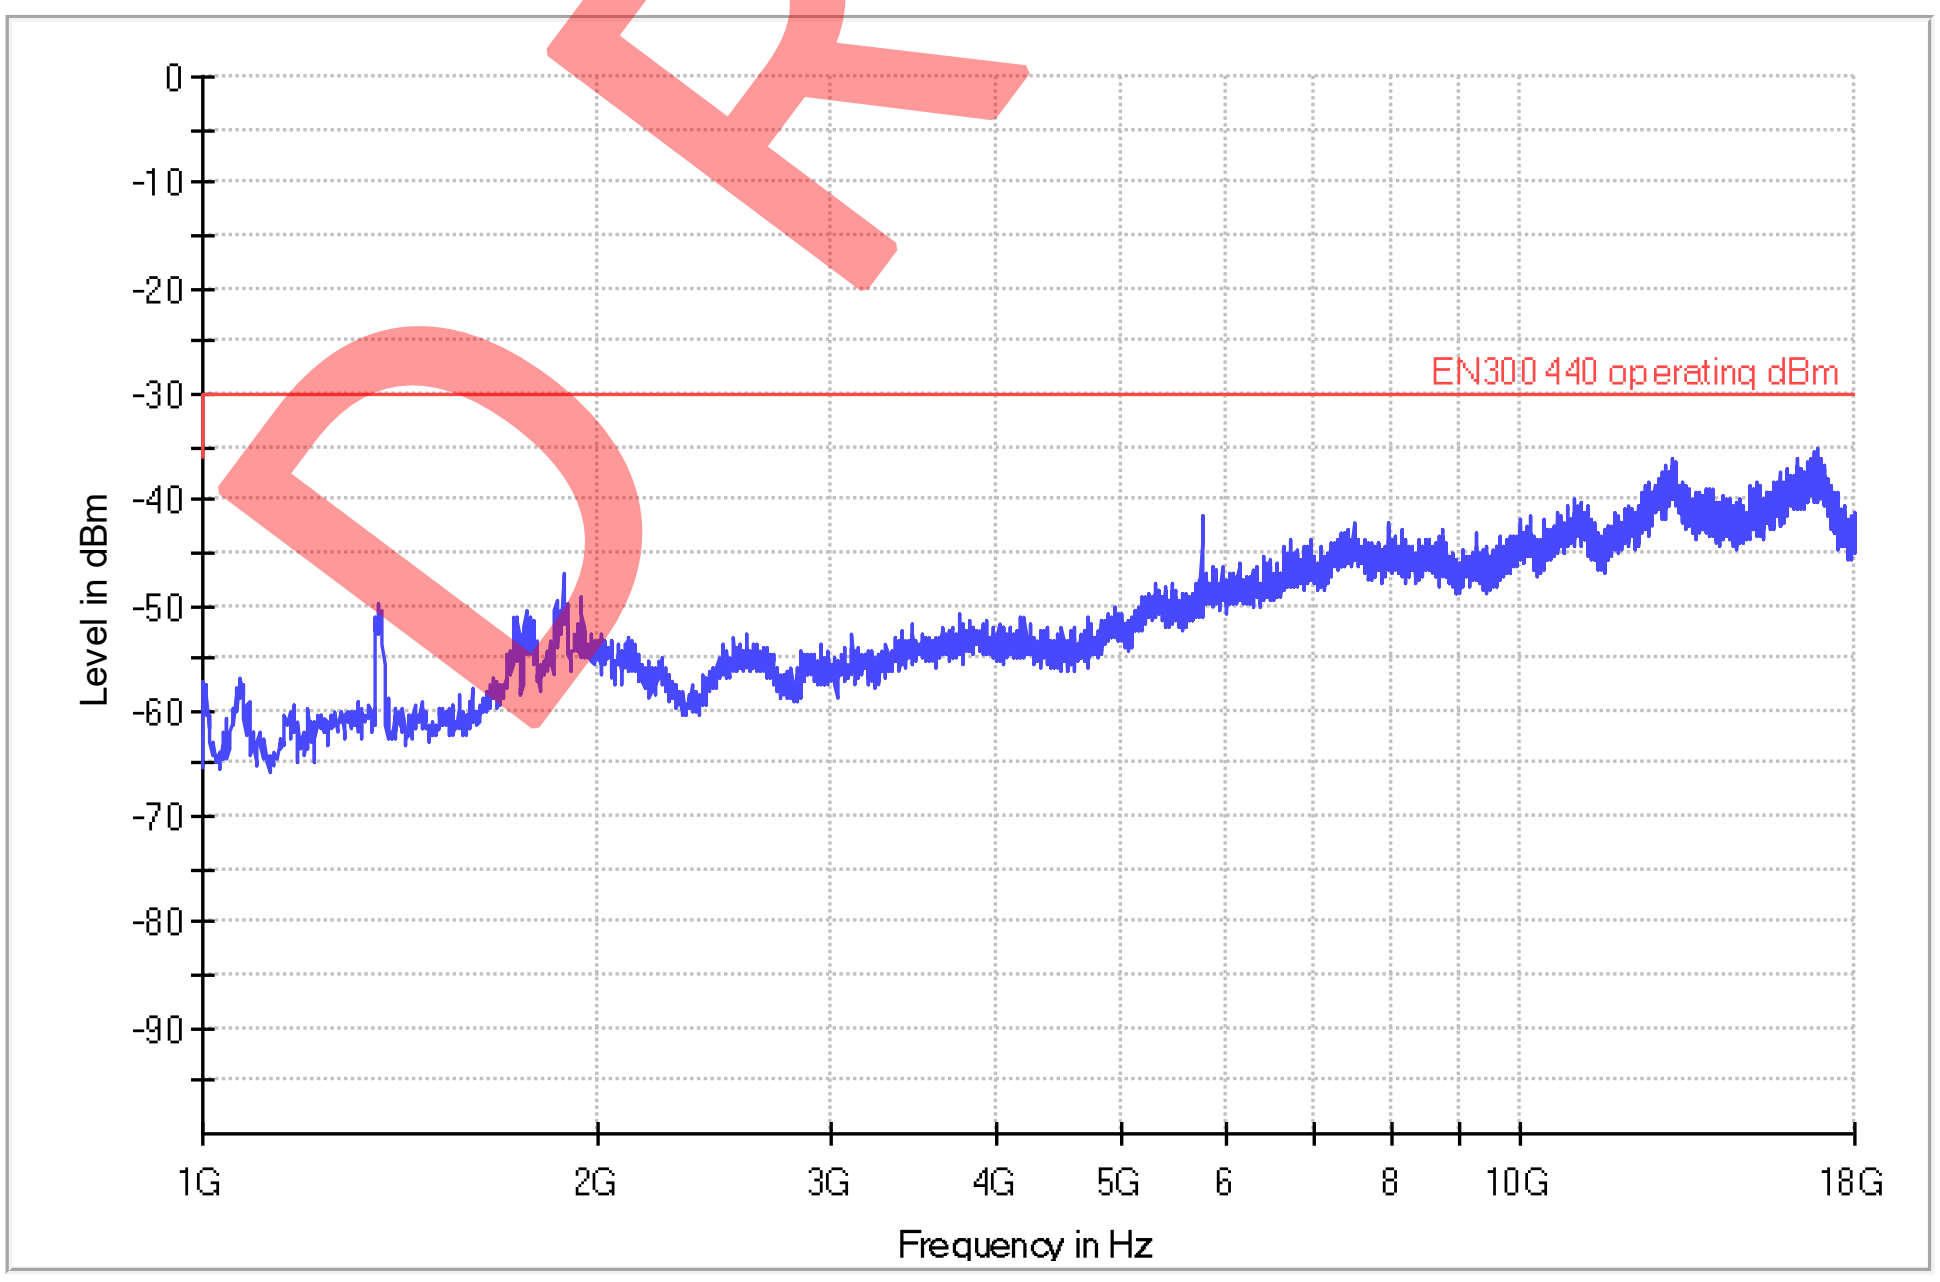

Frequency (MHz)	QuasiPeak (dBm)	Meas. Time (ms)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBm)
76.107333	-68.5	1000.0	H	-83.8	32.5	-36.0
194.285667	-62.0	1000.0	H	-78.8	8.0	-54.0
716.000000	-65.1	1000.0	H	-65.4	11.1	-54.0

☒ 1G-18G no emissions significantly above equipment noise floor.

5825MHz

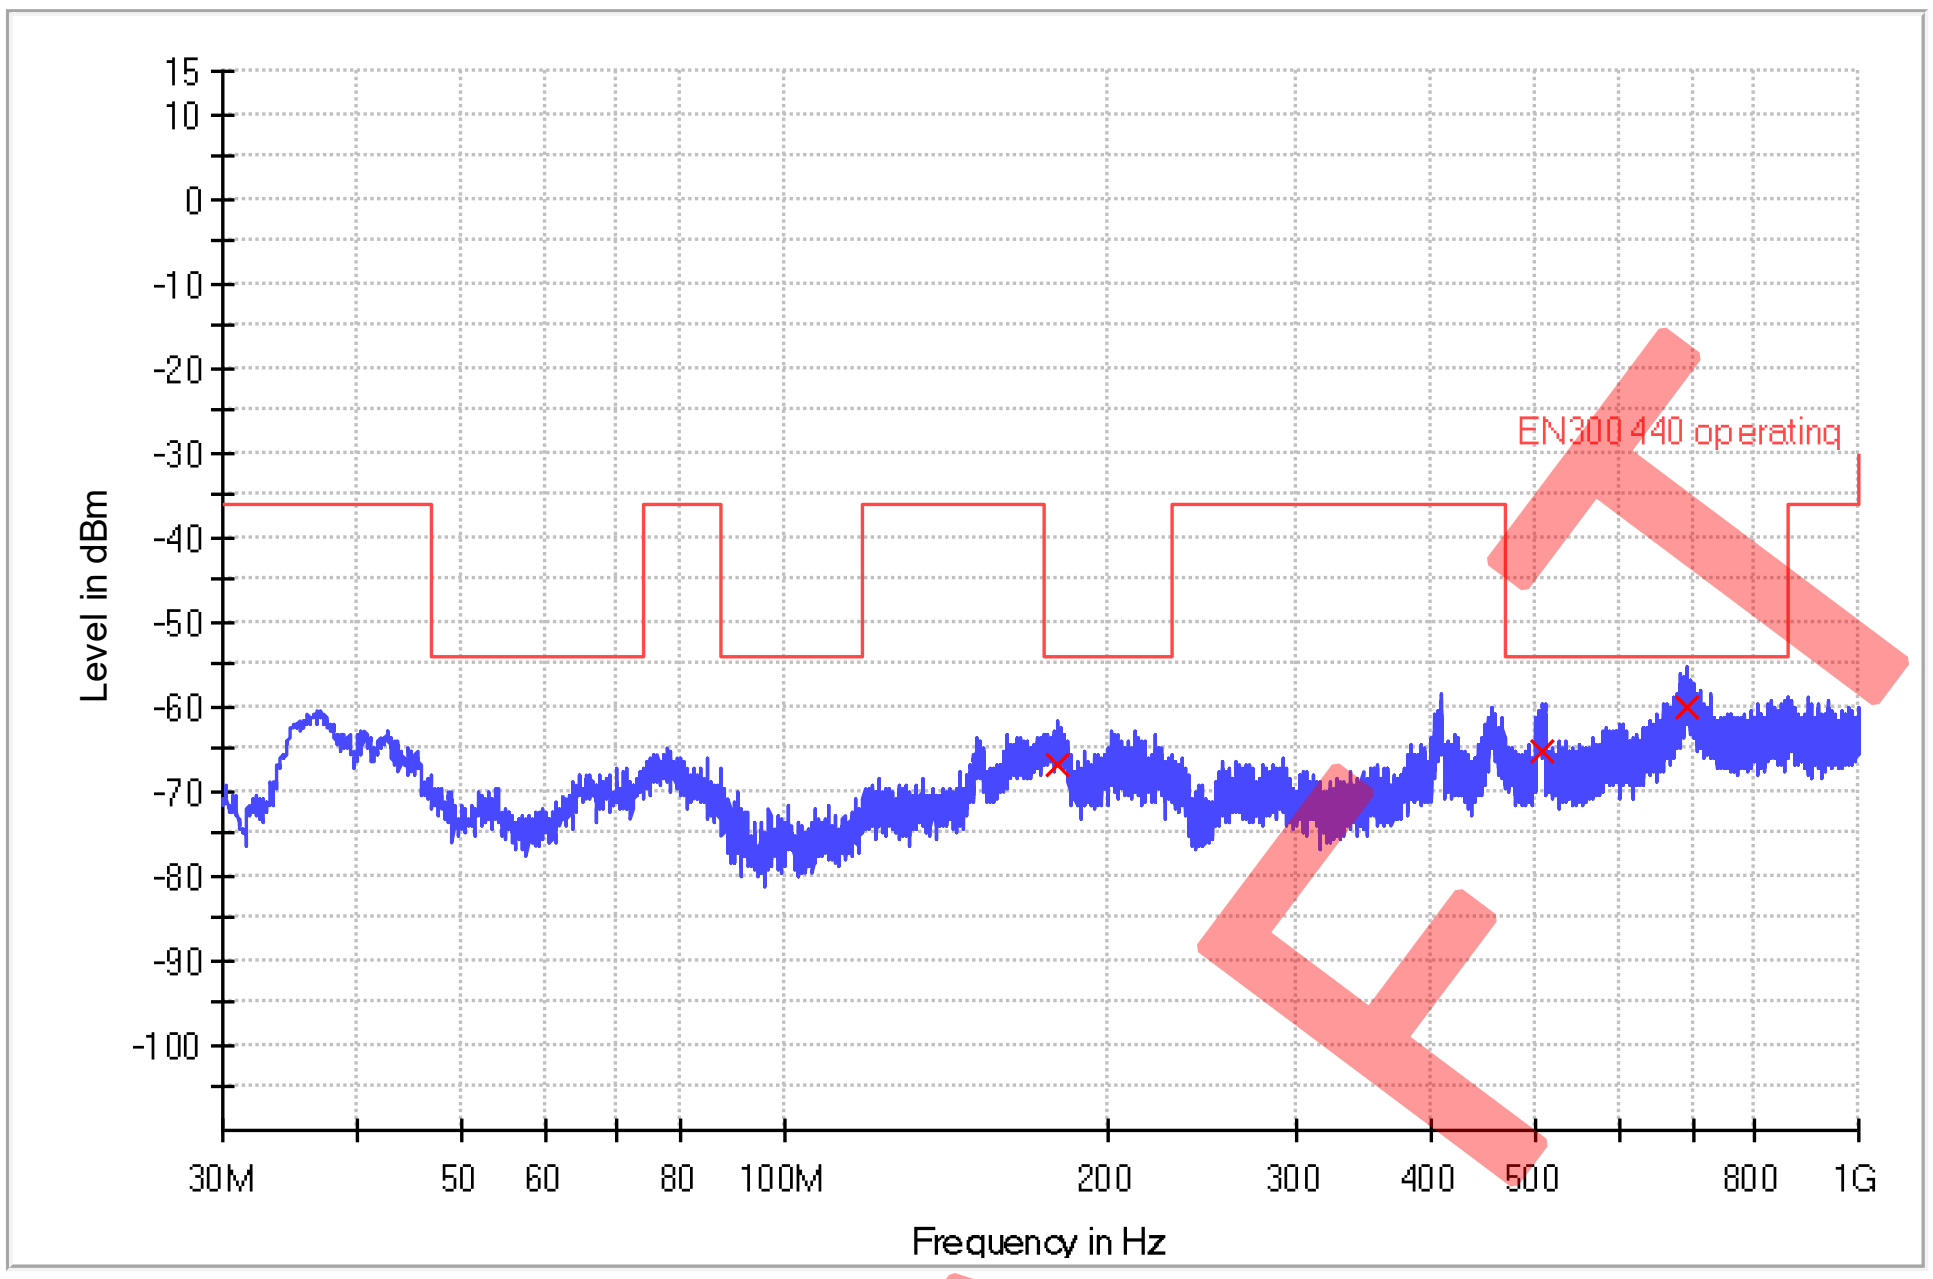

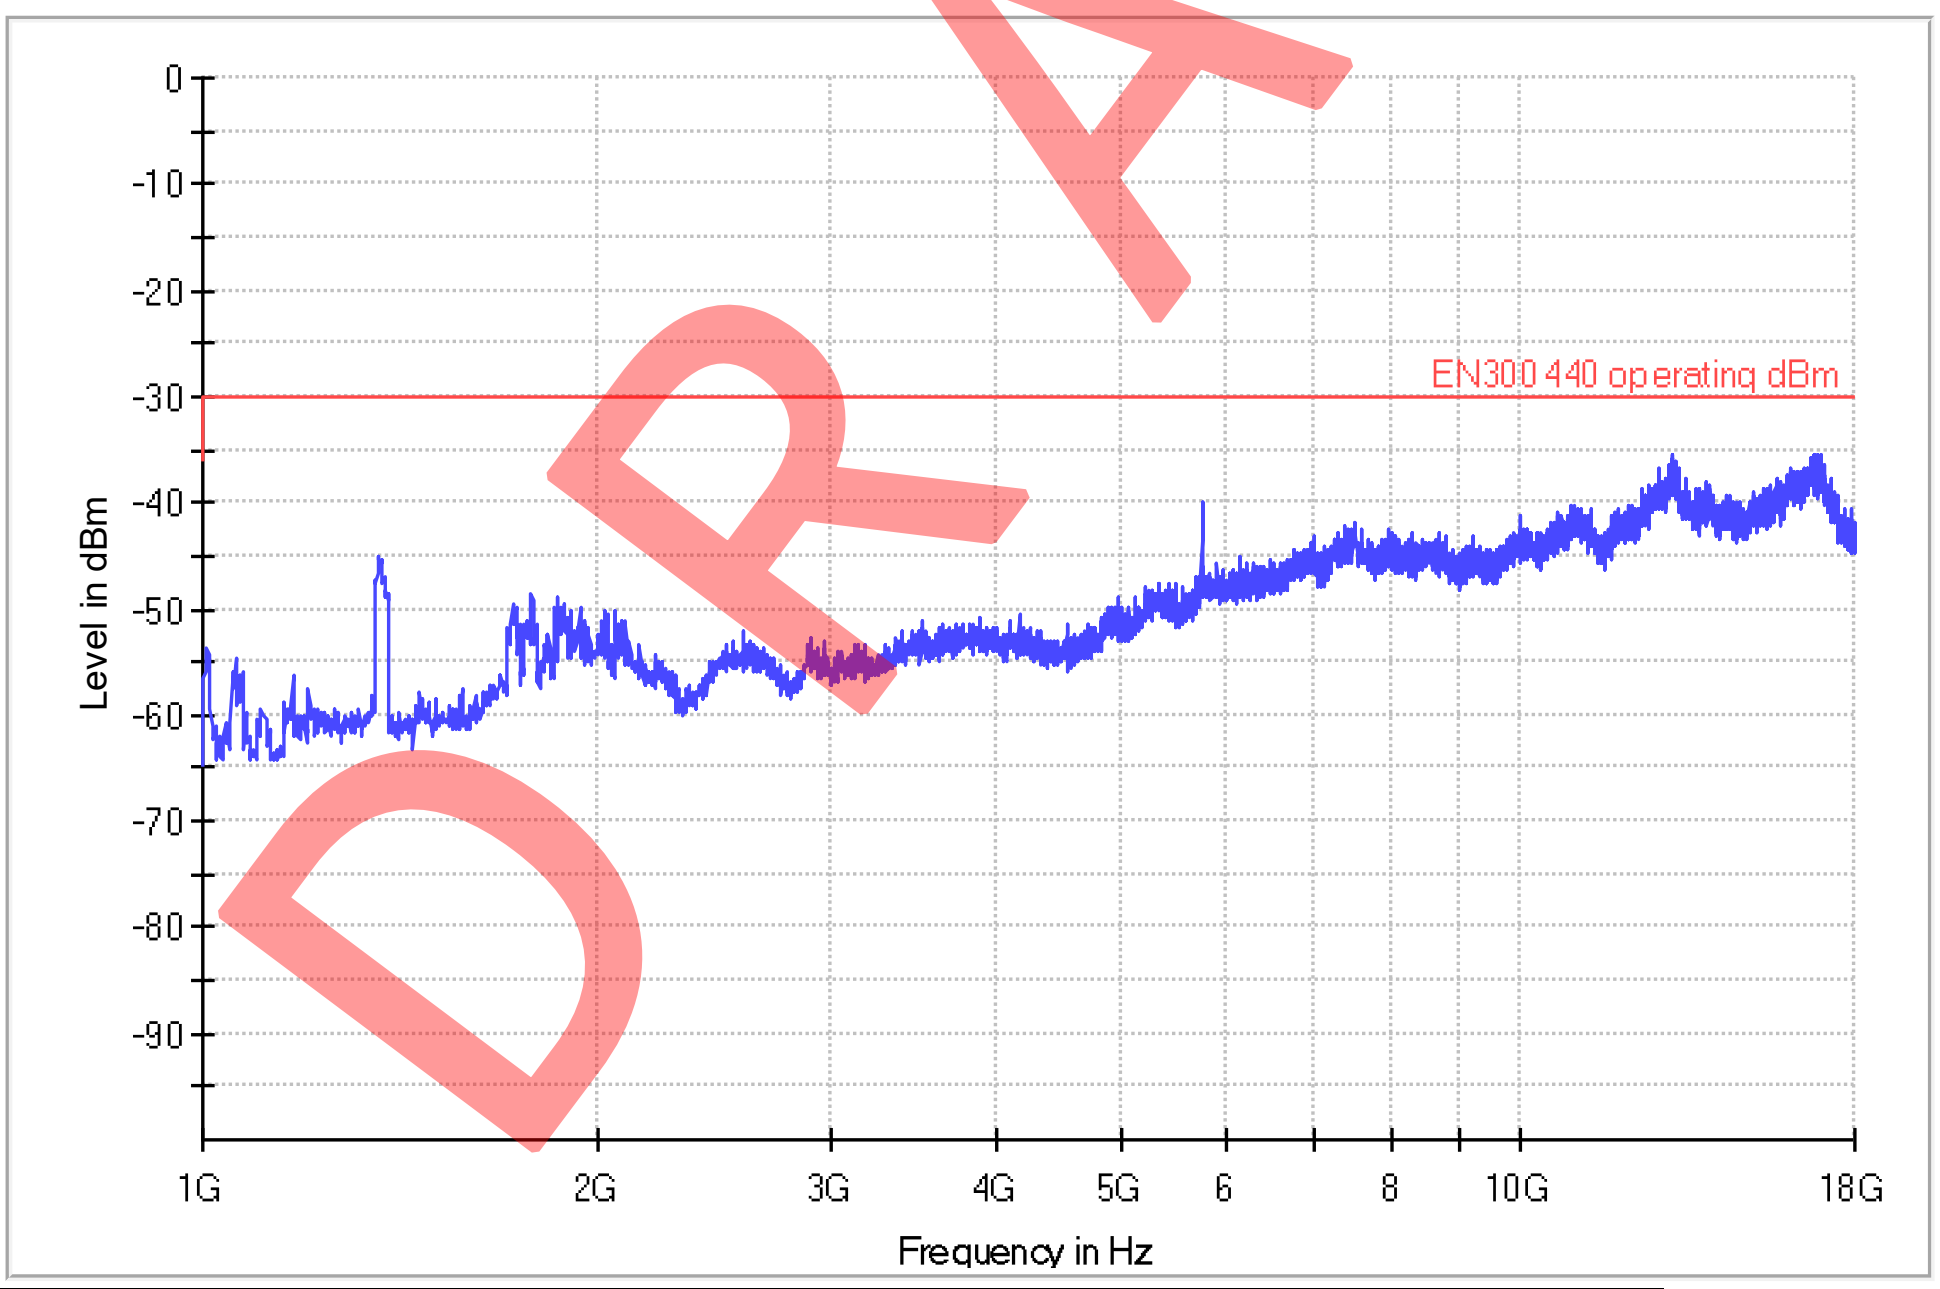

Frequency (MHz)	QuasiPeak (dBm)	Meas. Time (ms)	Polarization	Corr. (dB)	Margin - QPK (dB)	Limit - QPK (dBm)
179.994333	-66.8	1000.0	H	-79.9	12.8	-54.0
509.341667	-65.4	1000.0	H	-70.6	11.4	-54.0
693.000000	-60.2	1000.0	H	-65.7	6.2	-54.0

☒ 1G-18G no emissions significantly above equipment noise floor.

SPURIOUS EMISSIONS - STANDBY

There were no emissions found above system measuring level (at least 10 dB below the limit).
Notes:

1. Other emissions found were at least 10 dB below the limit.
2. -30 dBm corresponds to 1 μW.
3. Measurement Uncertainty: ±4.8dB.

6 SPURIOUS RADIATIONS FOR RECEIVERS

6.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 440 V2.1.1 (2017-03)
Clause :	4.3.5
Test method	Radiated measurements

6.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2022-07-08	2023-07-08
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19
SZ061-12	Biconilog Antenna	ETS	3142E	2021-08-04	2024-08-04
SZ061-09	Double - Ridged Waveguide Horn Antenna	ETS	3115	2022-10-14	2025-10-14
SZ181-04	Preamplifier	Agilent	8449B	2022-05-16	2023-05-16
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2024-12-12
SZ062-04	RF Cable	RADIALL	RG 213U	2022-05-15	2023-05-15
SZ062-13	RF Cable	Habia	0.026-26.5GHz	2022-05-15	2023-05-15
SZ062-05	RF Cable	RADIALL	0.04-26.5GHz	2022-05-15	2023-05-15

6.3 Limit

The power of any spurious emission shall not exceed 2 nW in the range 25 MHz to 1 GHz and shall not exceed 20 nW on frequencies above 1 GHz.

6.4 Worse Case Test Result

Test Conditions: Temperature 27.4°C; Humidity 68.3%

SPURIOUS EMISSIONS - OPERATING

There were no emissions found above system measuring level (at least 10 dB below the limit).

SPURIOUS EMISSIONS - STANDBY

There were no emissions found above system measuring level (at least 10 dB below the limit).

Notes:

1. Other emissions found were at least 10 dB below the limit.
2. -57 dBm corresponds to 2nW, -47 dBm corresponds to 20nW.
3. Measurement Uncertainty: ±3.0dB.

7 Receiver Blocking

7.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 440 V2.1.1 (2017-03)
Clause :	4.3.4
Test method	Conducted measurements
Test Mode	Normal test mode

7.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ056-05	Spectrum Analyzer	Agilent	E4407B	2021-12-21 2022-12-19	2022-12-21 2023-12-19
SZ070-05	Directional Coupler	Agilent	87300C	2022-12-28	2023-12-28
SZ070-20	Combiner	Mini-Circuits	ZN2PD-63-S+	2022-05-16	2023-05-16
SZ070-21	Combiner	Mini-Circuits	ZN2PD-63-S+	2022-05-16	2023-05-16
SZ180-13	MXG Vector Signal Generator	Keysight	N5182B	2022-10-17	2023-10-17
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15

7.3 Limit

Receiver category	Limit
1	-30 dBm + k
2	-45 dBm + k
3	No limit

7.4 Test Setup

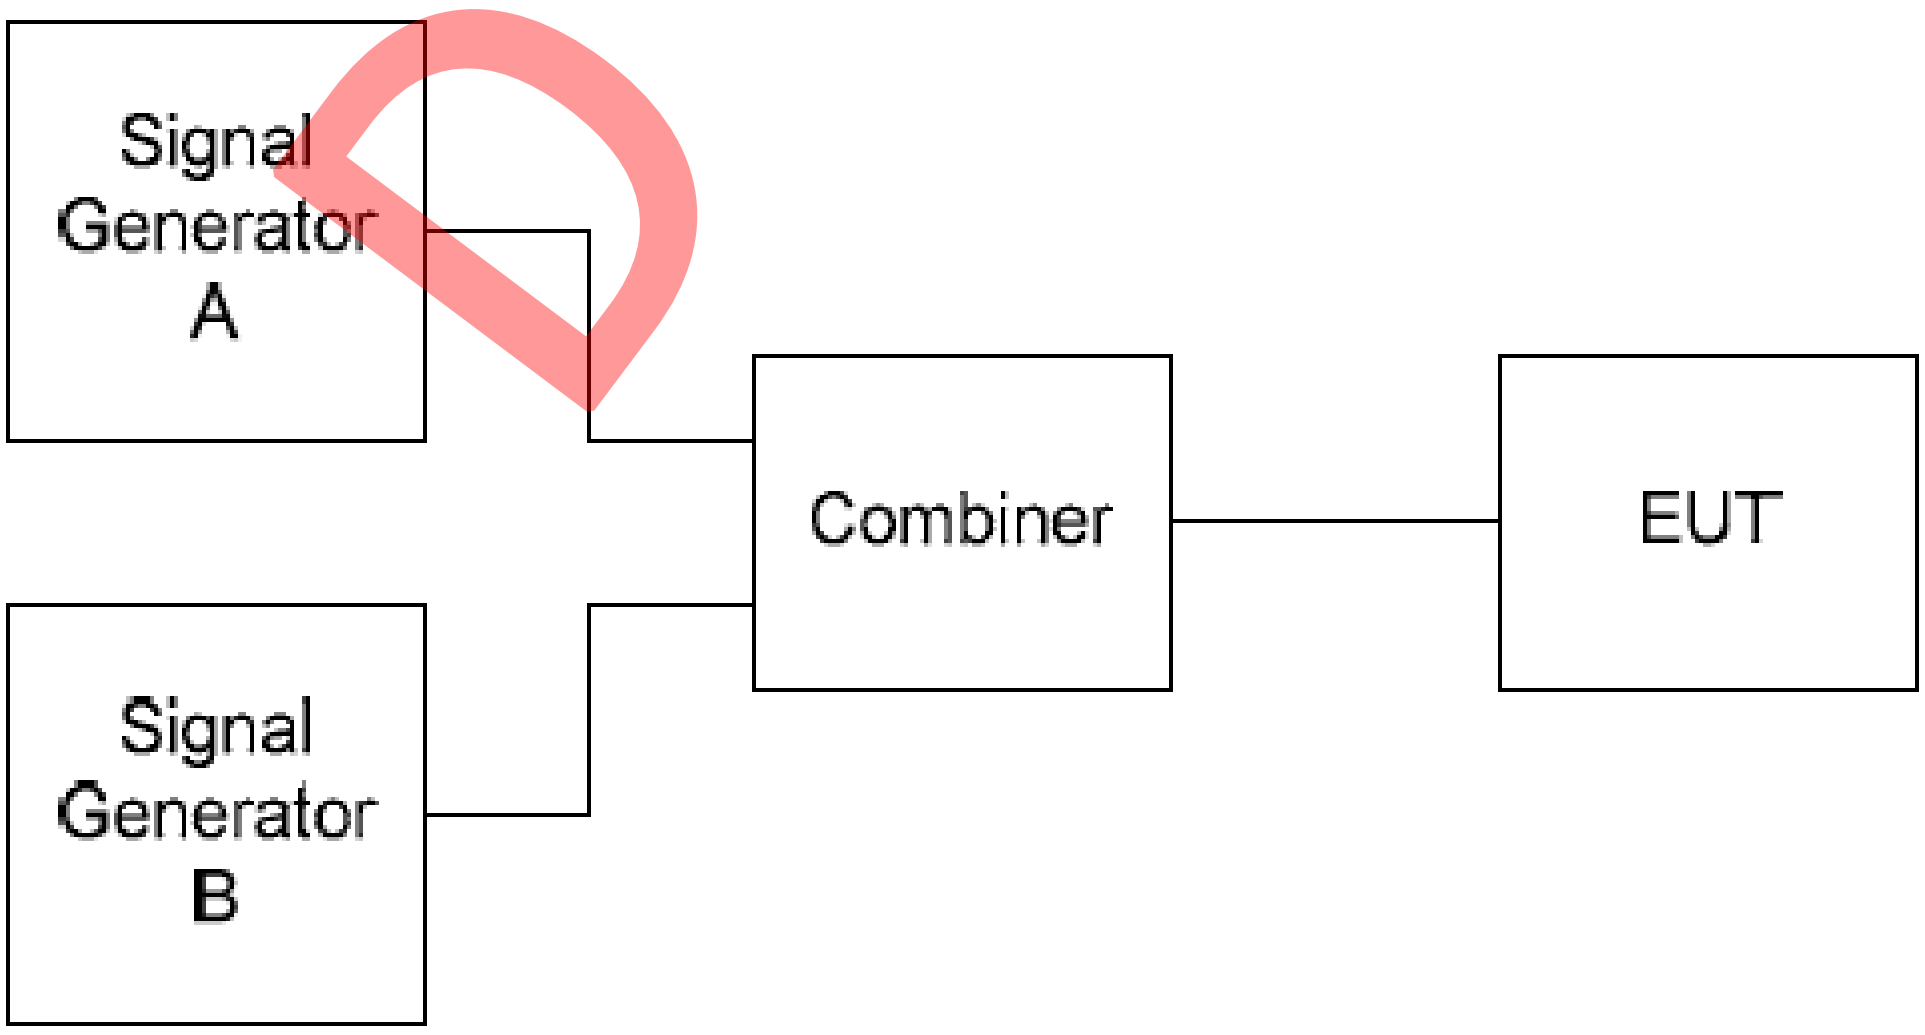

7.5 Test Result

Channel 149(5745Mhz)

The minimum level of Wanted signal from companion device (dBm) (P_{min}+3dB)	Blocking signal frequency (MHz)		Blocking signal power (dBm)	Limt(-45 dBm + k)	Result
-78.0+3	±10*BW	Lower:5581.6	-34.3	-71.6	Pass
		Upper:5908.4	-33.2	-71.6	Pass
-78.0+3	±20*BW	Lower:5418.2	-26.8	-71.6	Pass
		Upper:6071.8	-27.2	-71.6	Pass
-78.0+3	±50*BW	Lower:4928	-21.2	-71.6	Pass
		Upper:6562	-20.3	-71.6	Pass

Notes: 1. When adjusts the level for the wanted signal at the input of the UUT to -63 dBm, the UUT still gives sufficient response. And when below the level -63 dBm, the UUT couldn't give sufficient response.

2. The receive channel bandwith(BW) is 17.0 MHz.
3. The nominal frequency of the receiver F during test is 5745 MHz.
4. The correction factor $k = -20\log f - 10\log BW$. Where f is the frequency in GHz, BW is the channel bandwidth in MHz. the factor k is limited within -40 < k < 0 dB. As the f is 5745 MHz and BW is 17.0 MHz, the correction factor k is -26.47 dB.

8. DUTY CYCLE

8.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 440 V2.1.1 (2017-03)
Clause :	4.2.5
Test method	Conducted measurements

8.2 EQUIPMENT LIST

Serial No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ056-05	Spectrum Analyzer	Agilent	E4407B	2021-12-20 2022-12-19	2022-12-20 2023-12-19
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15

8.3 Limits

No Restriction

8.4 Test Result

Worse Case: 802.11a

Frequency (MHz)	Duty Cycle
5745	96.76%

EXHIBIT 3

PHOTOS OF EUT

9. PHOTOS OF TEST SET-UP

Please refer to Annex of EUT Photos_260508031SZN.

*********************************** End of Report***********************************