

Shen Zhen MTC Co., LTD

TEST REPORT

SCOPE OF WORK

EMC TESTING—MHDV4080-T9503-S2, MHDV4080-T9503, MHDV40****- T9503-##, MHDV40****-T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40*****(* can from 0 to 9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25

REPORT NUMBER

260508019SZN-003

ISSUE DATE

20 May 2026

[REVISED DATE]

[-----]

PAGES

42

DOCUMENT CONTROL NUMBER

ETSI EN301489_c

© 2017 INTERTEK



EMC TESTING REPORT

Shen Zhen MTC Co., LTD

MHDV4080-T9503-S2, MHDV4080-T9503, MHDV40****-T9503-##,
MHDV40****-T9503, (*, # can from 0 to 9, A to Z or blank), 2T-
C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-
C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-
C40HD2x25EB, 2T-C40HD2x25KB, **-*40*****(* can from 0 to
9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350,
L40RFE25

TV/LED TV

2.4GHz & 5GHz Transceiver

Test Report: 260508019SZN-003

Report Prepared and Checked:	Bruce Zheng Project Engineer	
Report Approved By:	Rode Liu Project Engineer	
Date:	20 May 2026	

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

EMC COMPLIANCE MEASUREMENTS

RESULT SUMMARY

Items	ETSI EN 301 489-17	ETSI EN 301 489-3	ETSI EN 301 489-1	Compliance
	Clause Number			
EMC Emission	7.1	7.1	8.2 8.4	Complied
Harmonic Current Emission (AC Mains Power Input Port)	7.1	N/A	8.5	N/A
Voltage Fluctuations and Flicker (AC Mains Power Input Port)	7.1	N/A	8.6	Complied
Wired network Ports	7.1	7.1	8.7	Complied
Electrostatic Discharge	7.2	7.2	9.3	Complied
Radio Frequency Electromagnetic Field (80MHz-6GHz)	7.2	7.2	9.2	Complied
Fast Transients	7.2	7.2	9.4	Complied
Surges	7.2	7.2	9.8	Complied
Conducted RF Immunity	7.2	7.2	9.5	Complied
Voltage Dips & Interruptions	7.2	7.2	9.7	Complied
Items	Test Specifications			Compliance
Harmonic Current Emission (AC Mains Power Input Port)	EN IEC 61000-3-2			N/A
Voltage Fluctuations and Flicker (AC Mains Power Input Port)	EN 61000-3-3			Complied
NOTES:				
1. When determining the test conclusion, the Measurement Uncertainty of test has been considered.				
2. N/A means Not applicable.				

EQUIPMENT UNDER TEST (EUT) INFORMATION

Applicant: Shen Zhen MTC Co., LTD
MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan Longgang district, Shenzhen, China

Description of EUT: TV/LED TV

Type Number (s): MHDV4080-T9503-S2

Brand Name(s): AMTC, SHARP, Polaroid, VITADO, JVC, Logik

Serial Number (s): Not Labelled

Equipment Received: 14 January 2025

Test Date (s): 14 January 2025 to 12 February 2025

Type of EUT: Fixed equipment

Test Site and Location: Intertek Testing Services Shenzhen Ltd.
No.101&201, Building B, No.308, Wuhe Avenue, Zhangkengjing, Guanhu Subdistrict, Longhua District, Shenzhen, Guangdong, China

Test Specification (s): ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.3.2 (2023-01)
ETSI EN 301 489-17 V3.3.1 (2024-09)
EN IEC 61000-3-2: 2019+A1:2021
EN 61000-3-3: 2013+A2:2021

CONTENTS

EXHIBIT 1	GENERAL DESCRIPTION	5
1	INTRODUCTION	6
2	TEST SPECIFICATION	6
EXHIBIT 2	TEST RESULT OF EMC COMPLIANCE MEASUREMENTS	10
3	EMC EMISSION TEST	11
4	HARMONIC EMISSION TEST	22
5	VOLTAGE FLUCTUATIONS AND FLICKER	25
6	ELECTROSTATIC DISCHARGE	27
7	RADIO FREQUENCY ELECTROMAGNETIC FIELD	29
8	FAST TRANSIENTS	32
9	SURGES	34
10	CONDUCTED RF IMMUNITY	36
11	VOLTAGE DIPS & INTERRUPTIONS	39
EXHIBIT 3	PHOTOS OF EUT	41
12	EUT PHOTOS	42

EXHIBIT 1

GENERAL DESCRIPTION

DRAFT

1 INTRODUCTION

Intertek Testing Services Shenzhen Limited has been tested the TV/LED TV MHDV4080-T9503-S2. The sample was tested to the relevant performance specification published by the European Telecommunications Standards Institute. This report contains the results of these tests and is submitted Shen Zhen MTC Co., LTD as the final test results.

The equipment under test (EUT) is a TV/LED TV with WIFI function; The EUT was powered 220-240V~, 50/60Hz, 70W or 90W, the detail please see the user manual.

The Model: MHDV4080-T9503, MHDV40****- T9503-##, MHDV40****- T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **_40*****(* can from 0 to 9,A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L4ORFE25 are the same as the Model: MHDV4080-T9503-S2 in hardware aspect. The difference in model number serves as marketing strategy.

This report bases on the previous report with report number 251219032SZN-001 Dated 09 January 2026 (original signature by Bruce Zheng, Rode Liu on file). Owing to adding the models, no test was required after evaluation.

The production units are required to conform to the initial sample as received when the units are placed on the market.

2 TEST SPECIFICATION

2.1 RELEVANT PERFORMANCE SPECIFICATION

The relevant performance specifications for Shen Zhen MTC Co., LTD MHDV4080-T9503-S2 TV/LED TV is ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-17 V3.3.1 (2024-09), ETSI EN 301 489-3 V2.3.2 (2023-01), EN IEC 61000-3-2: 2019+A1:2021 and EN 61000-3-3: 2013+A2:2021.

The tests performed are those required to demonstrate compliance with the technical specifications and the essential requirements of Article 3.1(b) of the Radio Equipment Directive (2014/53/EU) - RED for regulatory purposes.

2.2 TEST ENVIRONMENT

The tests were performed in the Radio communications and Electromagnetic Compatibility Test Facility at Intertek Testing Services Shenzhen Limited. The sample was subjected to the ambient conditions in the laboratory and indoor test site except during tests at extremes of temperatures and the Radiated Emissions Tests. The temperature and relative humidity recorded during the period of each test are given in the results.

2.3 CONFIGURATION OF TEST SAMPLE

Test Mode	
Mode 1:	WiFi Link
Mode 2:	WiFi Idle

2.4 GENERAL REQUIREMENTS

2.4.1 MODULATION

1. Wi-Fi is CCK / DSSS / OFDM modulation type.

2.4.2 ANTENNA

The antenna used in Transceiver is Integrate antenna.

2.5 MEASUREMENT UNCERTAINTY

All measurement uncertainties stated in this report are estimated to a 95% confidence level.

2.6 SUPPORT EQUIPMENT – EMC COMPLIANCE MEASUREMENTS

1. Router (TP-Link, TL-WDR8620)

2.7 PERFORMANCE CRITERIA

2.7.1 GENERAL PERFORMANCE CRITERIA(EN 301 489-17):

2.7.1.1 PERFORMANCE CRITERIA OVERVIEW

Criteria	During test	After test (i.e. as a result of the application of the test)
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

NOTE: Operate as intended during the test allows a level of degradation in accordance with clause 6.2.2.

Minimum performance level for Criterion A:

For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

2.7.1.2 PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA

Refer to EN 301 489-17, the performance criteria for Continuous phenomena.

The performance criteria A shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur during the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur during the test.

2.7.1.3 PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA

Refer to EN 301 489-17, the performance criteria for Transient phenomena.

The performance criteria B shall apply, except for voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur as a result of the application of the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur as a result of the application of the test.

2.7.2 GENERAL PERFORMANCE CRITERIA(EN 301 489-1& EN 301 489-3):

2.7.2.1 Performance Criteria for Continuous Phenomena

During the test, the equipment shall:

- continue to operate as intended;
- not unintentionally transmit;
- not unintentionally change its operating state;
- not unintentionally change critical stored data.

2.7.2.2 Performance Criteria for Transient Phenomena

For all ports and transient phenomena with the exception described below, the following applies:

- The application of the transient phenomena shall not result in a change of the mode of operation (e.g. unintended transmission) or the loss of critical stored data.

- After application of the transient phenomena, the equipment shall operate as intended.

For surges applied to symmetrically operated wired network ports intended to be connected directly to outdoor lines the following criteria applies:

- For products with only one symmetrical port intended for connection to outdoor lines, loss of function is allowed, provided the function is self-recoverable, or can be otherwise restored. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.
- For products with more than one symmetrical port intended for connection to outdoor lines, loss of function on the port under test is allowed, provided the function is self-recoverable. Information stored in non-volatile memory, or protected by a battery backup, shall not be lost.

2.7.2.3 Performance Criteria

For a 0 % residual voltage dip tests the following performance criteria apply:

- The performance criteria for transient phenomena shall apply (as specified in clause 2.7.2).

For a 70 % residual voltage dip and voltage interruption tests, the following performance criteria apply:

- in the case where the equipment is fitted with or connected to a battery back-up, the performance criteria for transient phenomena shall apply as specified in clause 2.7.2);
- in the case where the equipment is powered solely from the AC mains supply (without the use of a parallel battery back-up) volatile user data may have been lost and if applicable the communication link need not to be maintained and lost functions should be recoverable by user or operator;
- no unintentional responses shall occur at the end of the test, when the voltage is restored to nominal;
- in the event of loss of function(s) or in the event of loss of user stored data, this fact shall be recorded.

2.7.2.4 Continuous and non-continuous operation

Latency is the time delay between the initiation and the completion of operation of the EUT. Correct functioning requires completing the relevant operation within the maximum latency time.

Where the maximum latency is specified in the applicable harmonised radio standard (in the wanted performance criterion, or an acknowledge requirement), that value shall be used.

Where this is not the case, then the maximum latency is that required by the intended use of the EUT.

2.7.2.5 Operating modes

Where the EUT has more than one mode of operation (see clause 2.4), an unplanned transition from one mode to another is considered as an unintentional response. The EUT shall be tested in all modes to confirm there are no such unintentional responses.

DRAFT

EXHIBIT 2

**TEST RESULT
OF
EMC COMPLIANCE MEASUREMENTS**

DRAFT

TEST REPORT

Intertek Report No.: 260508019SZN-003

3 EMC EMISSION TEST

3.1 TEST METHOD AND SUMMARY


Basic Standard:	EN 55032: 2015+A11:2020	
Test:	Radiated Emission	Conducted Emission
Test Mode:	WiFi Link	WiFi Link
Classification:	Class B	
Port:	Enclosure Port of Ancillary Equipment	AC Mains Power Port

3.2 RADIATED EMISSION TEST


3.2.1 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-04	EMI Receiver	R&S	ESR7	2024-11-10	2025-11-10
SZ056-03	Spectrum Analyzer	R&S	FSP30	2024-04-22	2025-04-22
SZ061-13	Biconilog Antenna	ETS	3142E	2022-07-13	2025-07-13
SZ061-09	Horn Antenna	ETS	3115	2022-10-14	2025-10-14
SZ181-04	Preamplifier	Agilent	8449B	2024-04-22	2025-04-22
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-22	2026-12-22

3.2.2 TEST SETUP DIAGRAM:

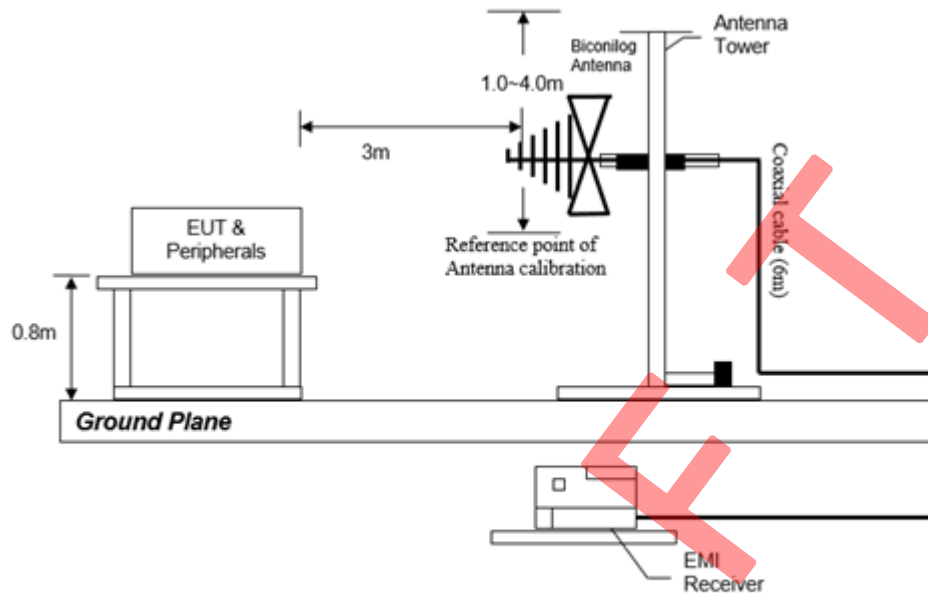

(Radiated Emission Measurements Test Setup for 30MHz to 1GHz)

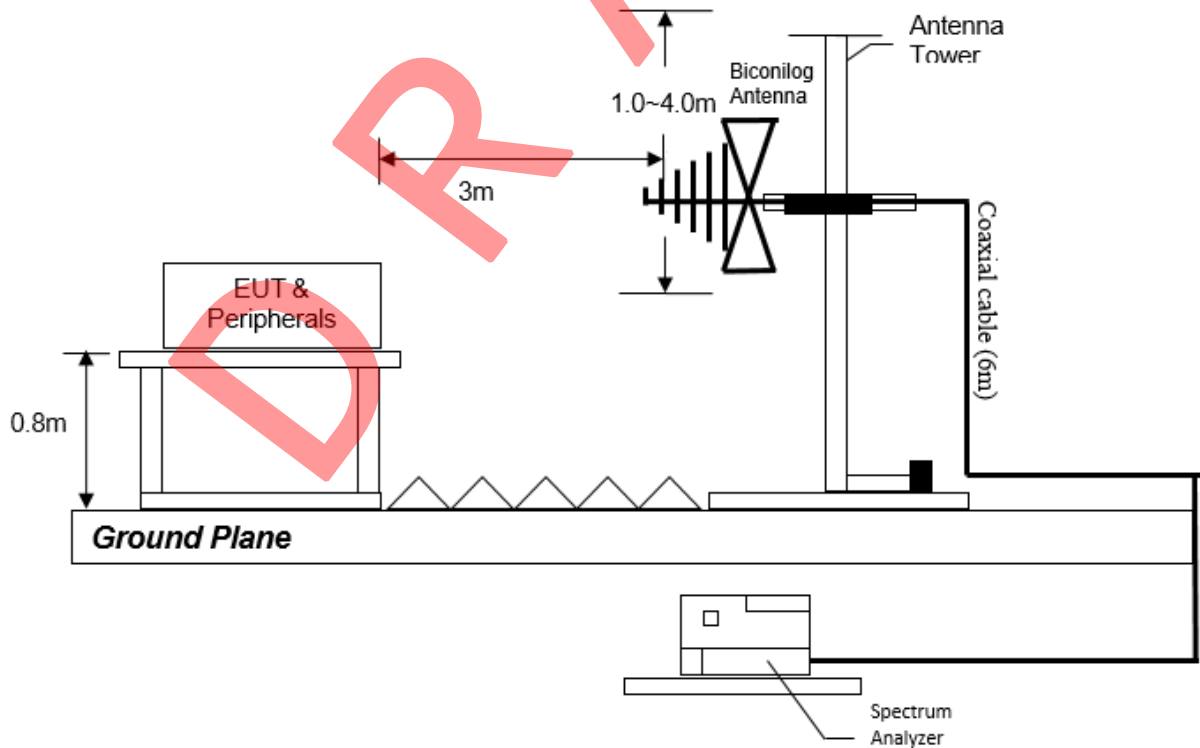

(Radiated Emission Measurements Test Setup for 1GHz to 6GHz)


3.2.3 TEST RESULT

Worst Case Test mode: WiFi Link

Worst Case Test Voltage: AC 230V, 50Hz

Radiated Disturbance Pursuant to EN55032: Class B Emissions Requirement (30M to 1G) Hz

Horizontal

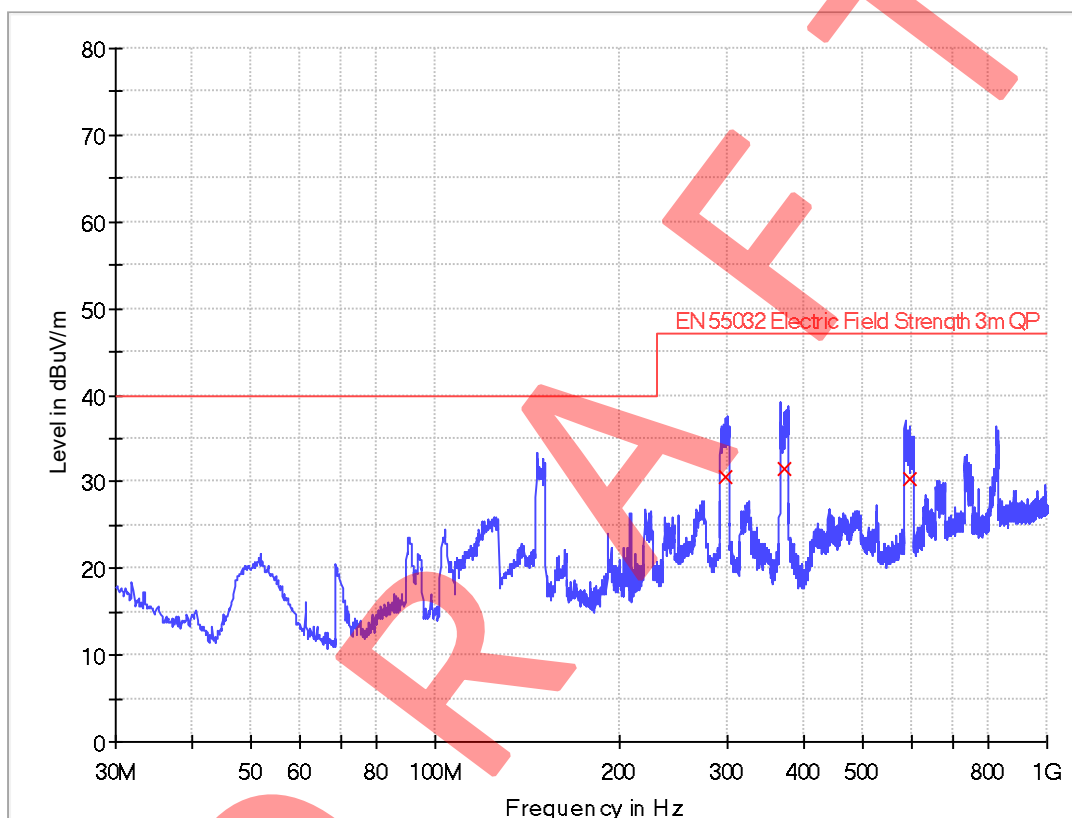


Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
297.235000	30.6	1000.0	120.000	H	15.0	16.4	47.0
372.410000	31.6	1000.0	120.000	H	17.0	15.4	47.0
594.903750	30.4	1000.0	120.000	H	21.8	16.6	47.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit QPK (dBμV/m) – QuasiPeak (dBμV/m)

Horizontal

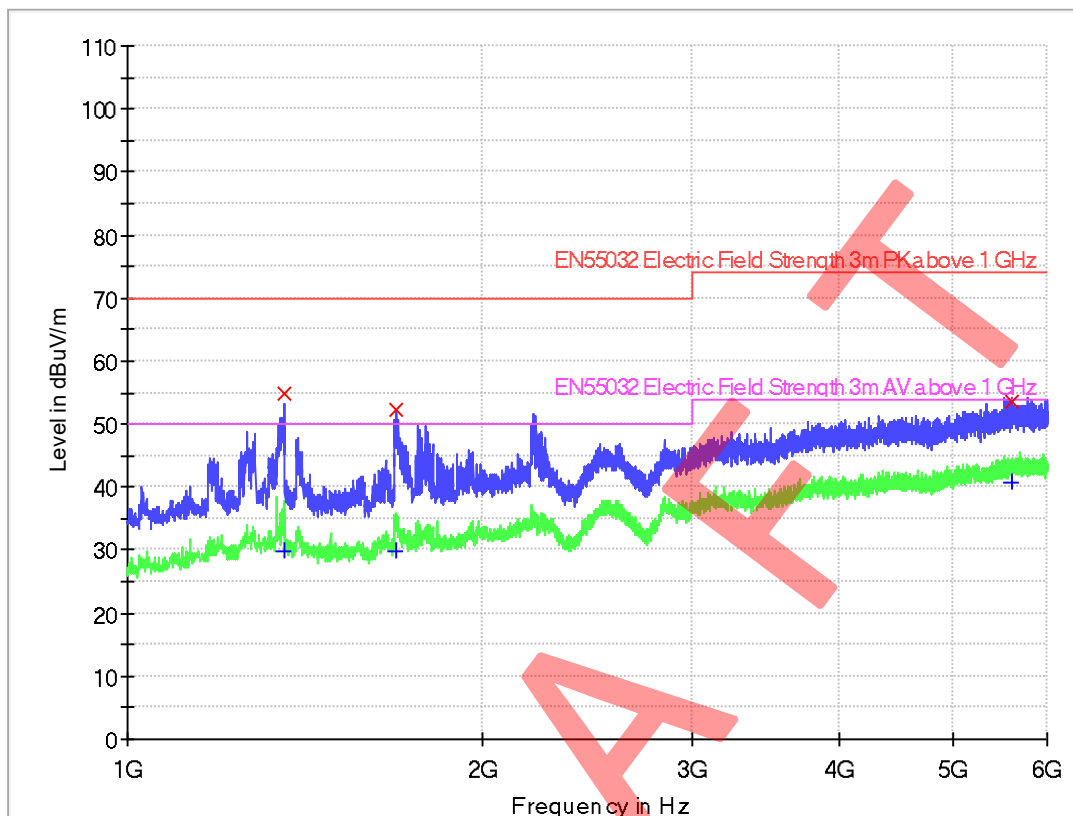

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1356.875000	54.9	1000.0	1000.000	H	-7.3	15.1	70.0
1690.625000	52.1	1000.0	1000.000	H	-6.7	17.9	70.0
5609.375000	53.7	1000.0	1000.000	H	9.6	20.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1356.875000	29.9	1000.0	1000.000	H	-7.3	20.1	50.0
1690.625000	29.8	1000.0	1000.000	H	-6.7	20.2	50.0
5609.375000	40.8	1000.0	1000.000	H	9.6	13.2	54.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Limit (dBuV) - Max peak/Average (dBuV)

TEST REPORT


Intertek Report No.: 260508019SZN-003

Worst Case Test mode: WiFi Link

Worst Case Test Voltage: AC 230V, 50Hz

Radiated Disturbance Pursuant to EN55032: Class B Emissions Requirement (30M to 1G) Hz

Vertical

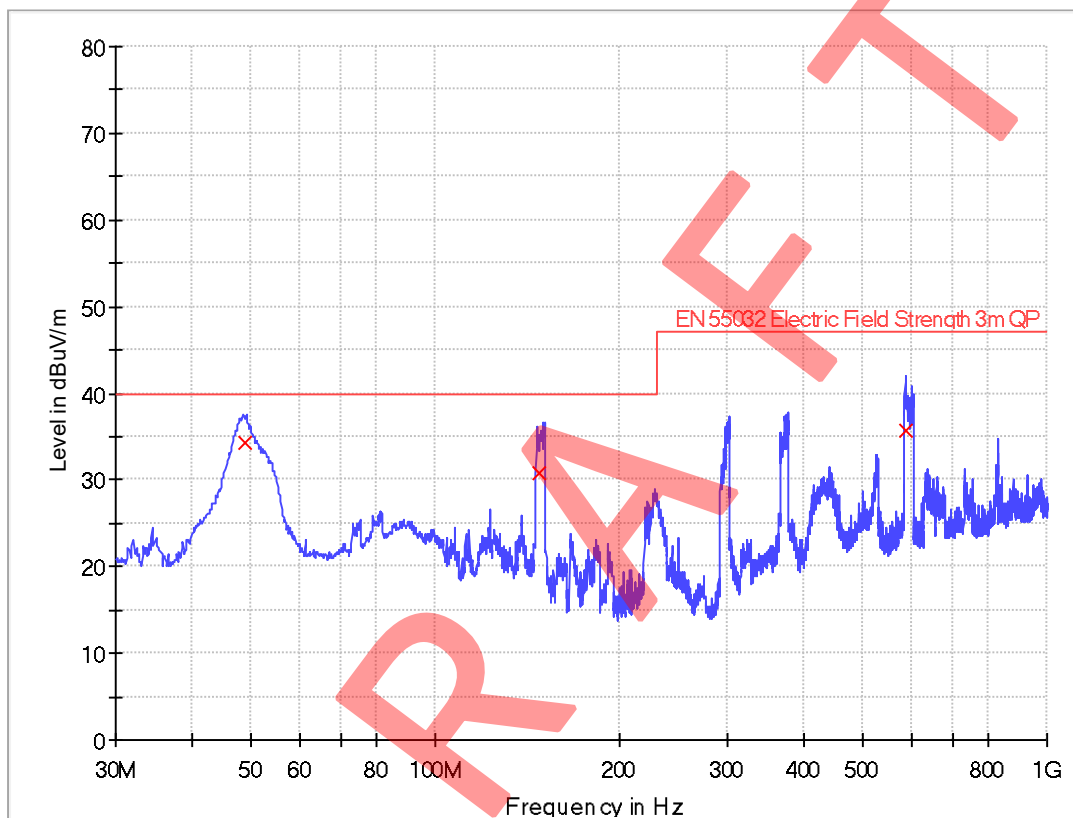


Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
48.672500	34.3	1000.0	120.000	V	8.2	5.7	40.0
147.976250	30.7	1000.0	120.000	V	9.7	9.3	40.0
585.931250	35.7	1000.0	120.000	V	21.6	11.3	47.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit QPK (dBμV/m) – QuasiPeak (dBμV/m)

Vertical

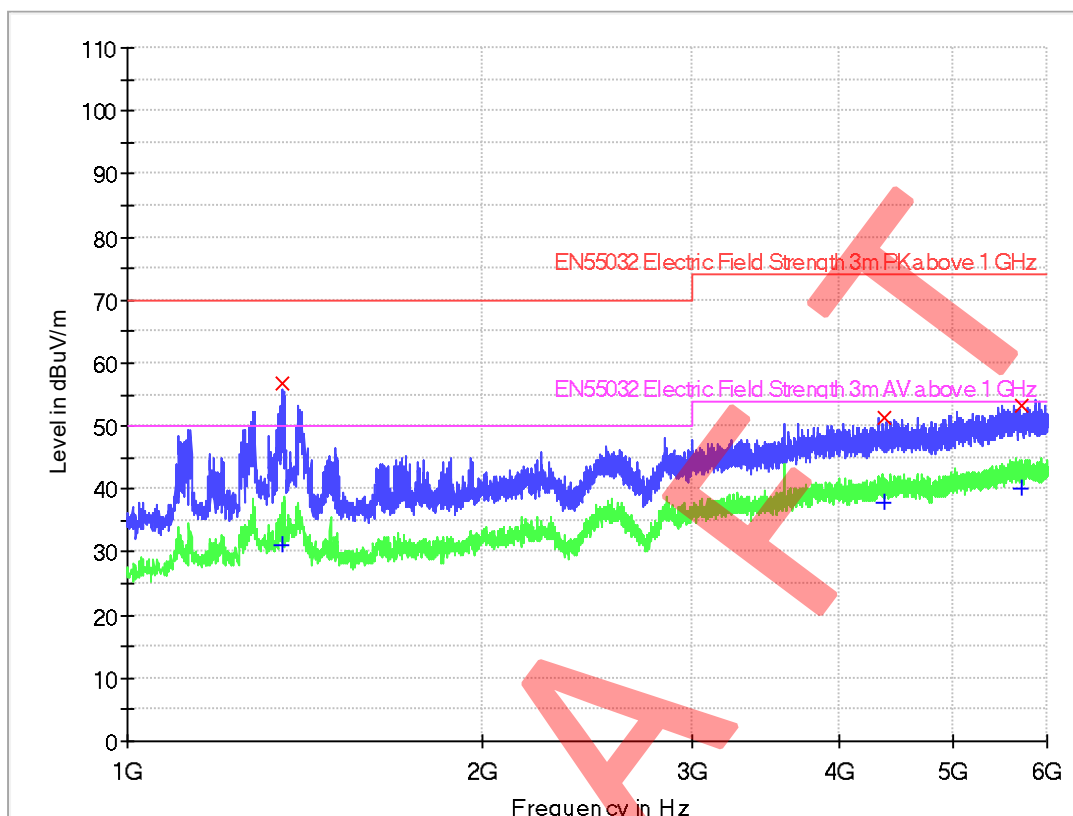

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBuV/m)
1353.125000	56.8	1000.0	1000.000	V	-7.3	13.2	70.0
4362.500000	51.4	1000.0	1000.000	V	6.2	22.6	74.0
5708.125000	53.1	1000.0	1000.000	V	9.7	20.9	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBuV/m)
1353.125000	31.1	1000.0	1000.000	V	-7.3	18.9	50.0
4362.500000	37.7	1000.0	1000.000	V	6.2	16.3	54.0
5708.125000	40.2	1000.0	1000.000	V	9.7	13.8	54.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBuV/m) = Corr. (dB/m) + Read Level (dBuV)
3. Margin (dB) = Limit (dBuV) - Max peak/Average (dBuV)

3.2.4 MEASUREMENT UNCERTAINTY


Measurement Uncertainties: ± 4.8 dB. The measured result is above the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance is more probable than non-compliance with the specification limit.

3.3 CONDUCTED EMISSION TEST

3.3.1 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2024-07-09	2025-07-09
SZ187-01	Two-Line V-Network	R & S	ENV216	2024-10-24	2025-10-24
SZ187-02	Two-Line V-Network	R & S	ENV216	2024-04-23	2025-04-23
SZ188-03	Shielding Room	ETS	RFD-100	2022-12-20	2025-12-20

Test Setup:

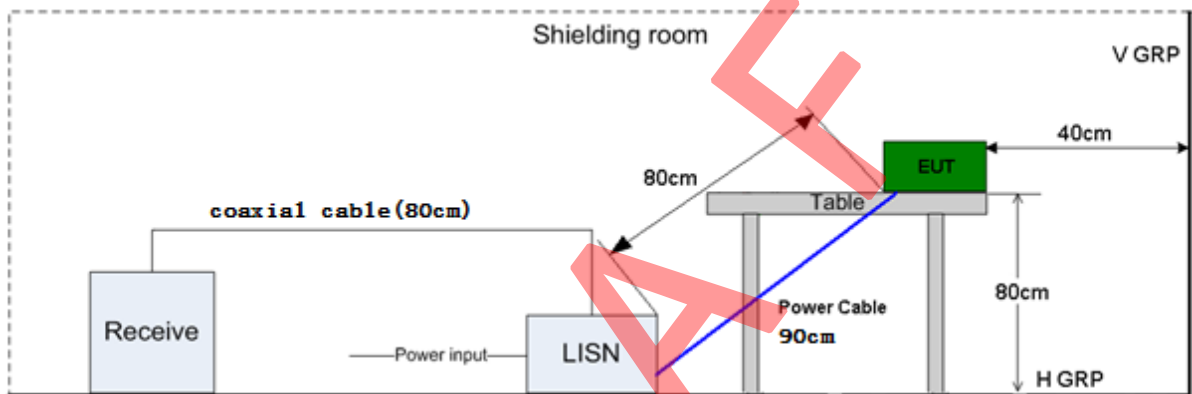

3.3.2 TEST RESULT

Worst Case Operating Mode: WiFi Link


Worst Case Test Voltage: AC 230V, 50Hz

Phase: Live

Test Data

RFI Voltage Test

Pursuant to EN55032: Class B Emissions Requirement

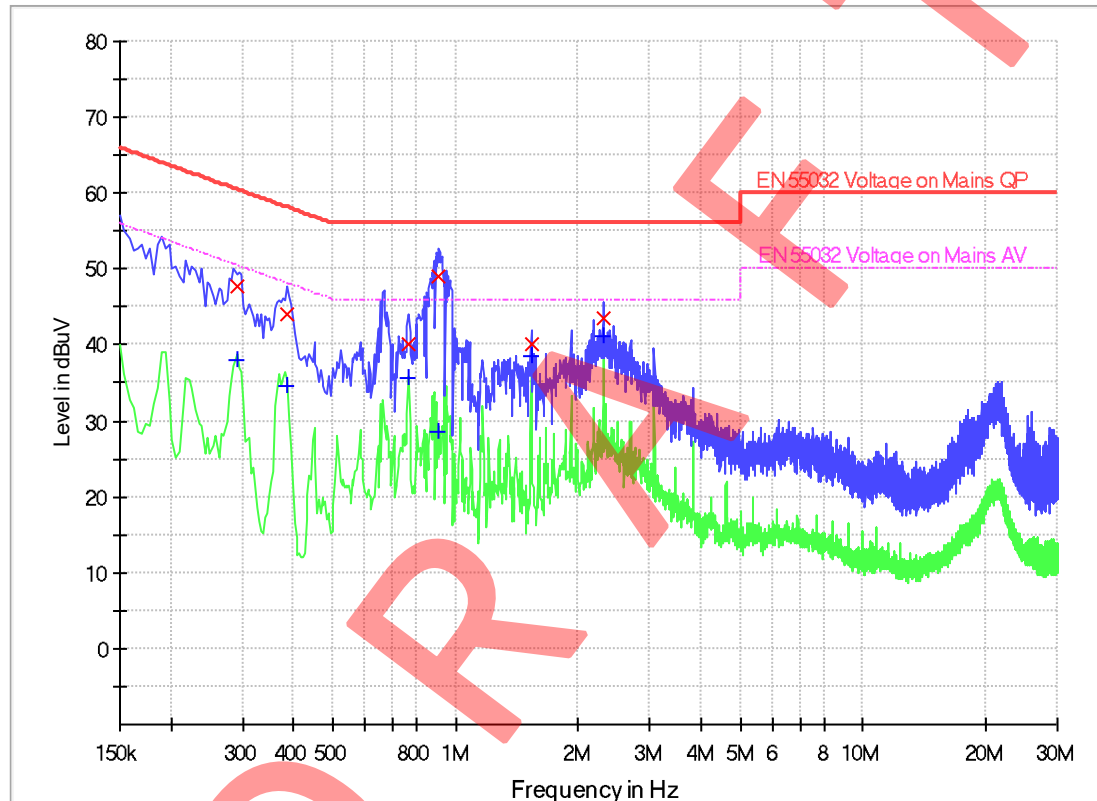

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.290000	47.6	9.000	L1	9.6	12.9	60.5
0.386000	44.1	9.000	L1	9.6	14.0	58.1
0.770000	40.2	9.000	L1	9.6	15.8	56.0
0.910000	49.1	9.000	L1	9.6	6.9	56.0
1.538000	40.2	9.000	L1	9.6	15.8	56.0
2.306000	43.4	9.000	L1	9.7	12.6	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.290000	38.1	9.000	L1	9.6	12.4	50.5
0.386000	34.6	9.000	L1	9.6	13.5	48.1
0.770000	35.6	9.000	L1	9.6	10.5	46.0
0.910000	28.7	9.000	L1	9.6	17.3	46.0
1.538000	38.5	9.000	L1	9.6	7.5	46.0
2.306000	41.1	9.000	L1	9.7	4.9	46.0


Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – QuasiPeak/Average (dBμV)

Worst Case Operating Mode: WiFi Link
Worst Case Test Voltage: AC 230V, 50Hz
Phase: Neutral

Test Data

RFI Voltage Test Pursuant to EN55032: Class B Emissions Requirement

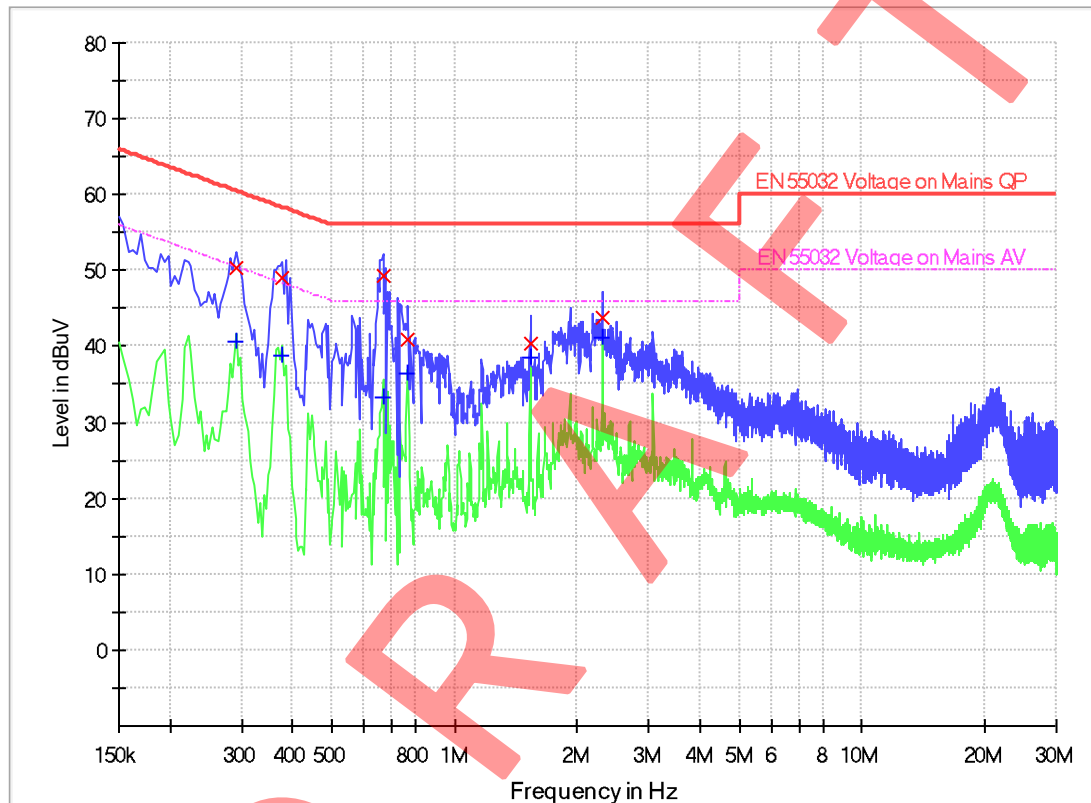

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.290000	50.4	9.000	N	9.6	10.1	60.5
0.378000	49.2	9.000	N	9.6	9.1	58.3
0.666000	49.2	9.000	N	9.6	6.8	56.0
0.770000	40.9	9.000	N	9.6	15.1	56.0
1.538000	40.5	9.000	N	9.6	15.5	56.0
2.306000	43.8	9.000	N	9.7	12.2	56.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.290000	40.6	9.000	N	9.6	9.9	50.5
0.378000	38.8	9.000	N	9.6	9.5	48.3
0.666000	33.2	9.000	N	9.6	12.8	46.0
0.770000	36.5	9.000	N	9.6	9.5	46.0
1.538000	38.5	9.000	N	9.6	7.5	46.0
2.306000	41.1	9.000	N	9.7	4.9	46.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

3.3.3 MEASUREMENT UNCERTAINTY


Measurement Uncertainties: ± 3.2 dB.

3.4 ASYMMETRIC MODE CONDUCTED EMISSIONS TEST

3.4.1 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2024-07-09	2025-07-09
SZ183-05	Current Transformer	SCHWARZBECK	SW 9605	2024-07-10	2025-07-10
SZ187-01	Two-Line V-Network	R & S	ENV216	2024-10-24	2025-10-24
SZ187-02	Two-Line V-Network	R & S	ENV216	2024-04-23	2025-04-23
SZ184-04	Impedance Stabilization Network	Teseq	ISN T8	2024-07-10	2025-07-10
SZ184-05	Calibration Kit for ISN	Teseq	CAS ISN	2024-07-10	2025-07-10
SZ188-03	Shielding Room	ETS	RFD-100	2022-12-20	2025-12-20

3.4.2 TEST SETUP

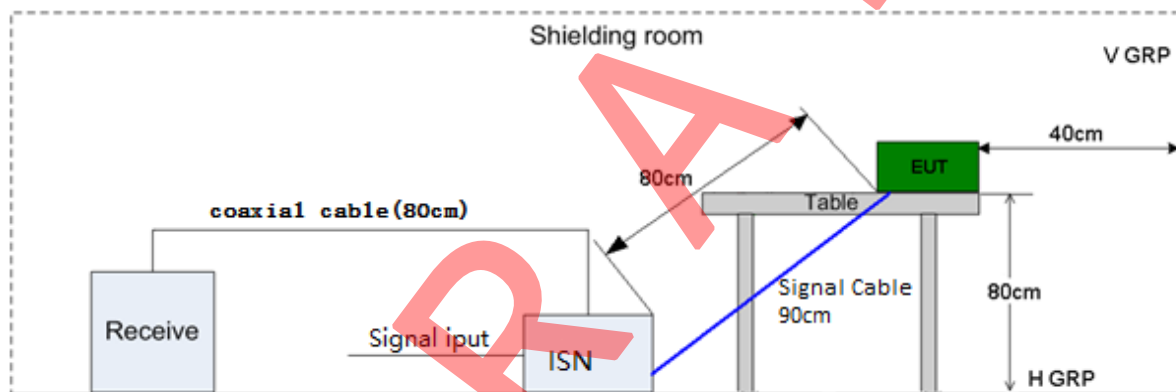

Test set-up of conducted disturbance for power port

3.4.3 TEST RESULT

Worst Case Operating Mode: WiFi Link


Worst Case Test Voltage: AC 230V, 50Hz

Port: Wired network port

Test Data

Asymmetric Mode Conducted Emissions (LAN Port)

Pursuant to EN55032: Emissions Requirement

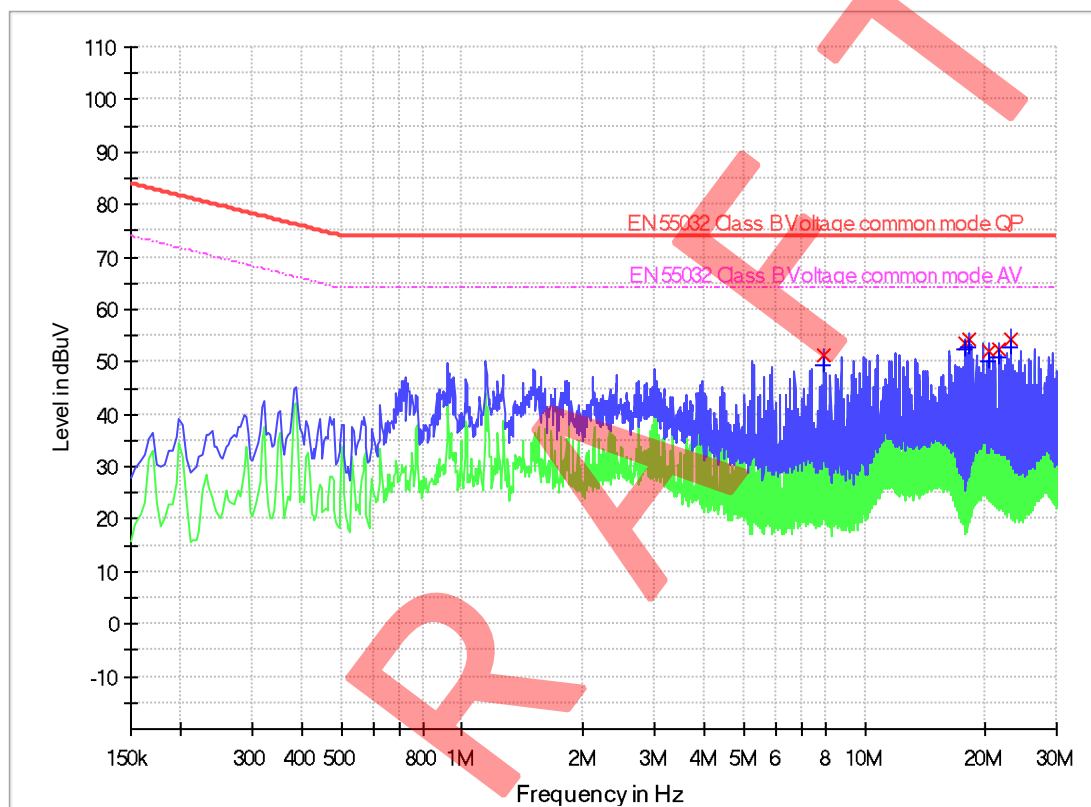

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
7.922000	51.1	9.000	9.3	22.9	74.0
17.694000	53.6	9.000	9.4	20.4	74.0
18.242000	54.2	9.000	9.4	19.8	74.0
20.258000	51.9	9.000	9.4	22.1	74.0
21.662000	52.4	9.000	9.4	21.6	74.0
23.130000	54.2	9.000	9.4	19.8	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
7.922000	49.3	9.000	9.3	14.7	64.0
17.694000	52.3	9.000	9.4	11.7	64.0
18.242000	52.6	9.000	9.4	11.4	64.0
20.258000	50.2	9.000	9.4	13.8	64.0
21.662000	50.8	9.000	9.4	13.2	64.0
23.130000	52.9	9.000	9.4	11.1	64.0

3.4.4 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: ± 3.2 dB.

4 HARMONIC EMISSION TEST


4.1 TEST METHOD AND SUMMARY

Basic Standard:	EN IEC 61000-3-2: 2019+A1:2021
Classification:	Class D
Port:	AC Mains Input Port

4.2 TEST EQUIPMENT

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ064-01	Compliance Test System	California Instruments	5001iX-CTS-400	2024-12-06	2025-12-06
SZ064-01-01	Power Analyzer and Conditioning System	California Instruments	PACS-1	2024-12-06	2025-12-06

4.3 Test Setup Diagram

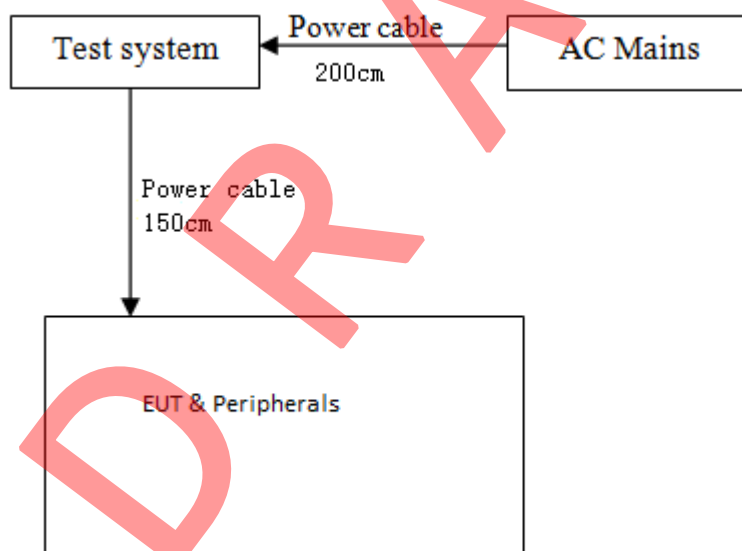


4.4 TEST RESULT

Test Result: N/L


Source qualification: Normal

Current & voltage waveforms

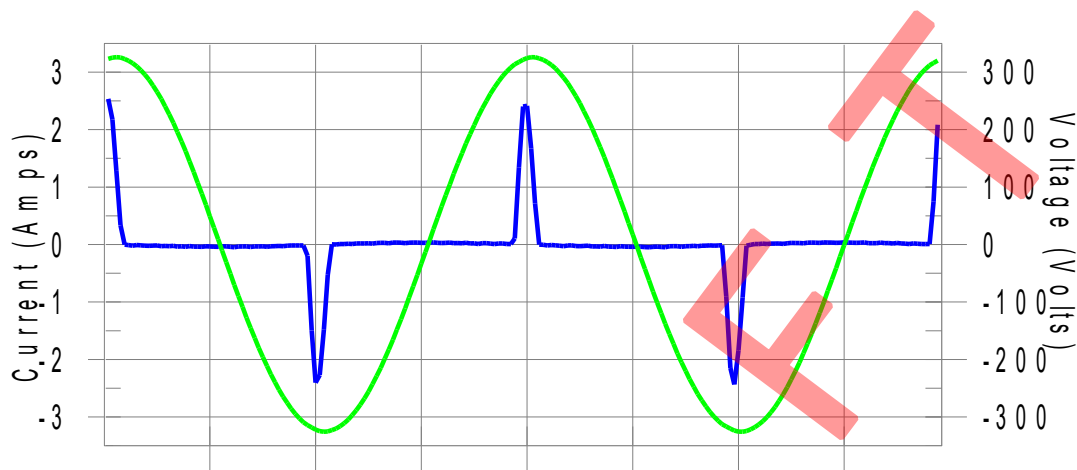

Harmonics and Class D limit line

European Limits

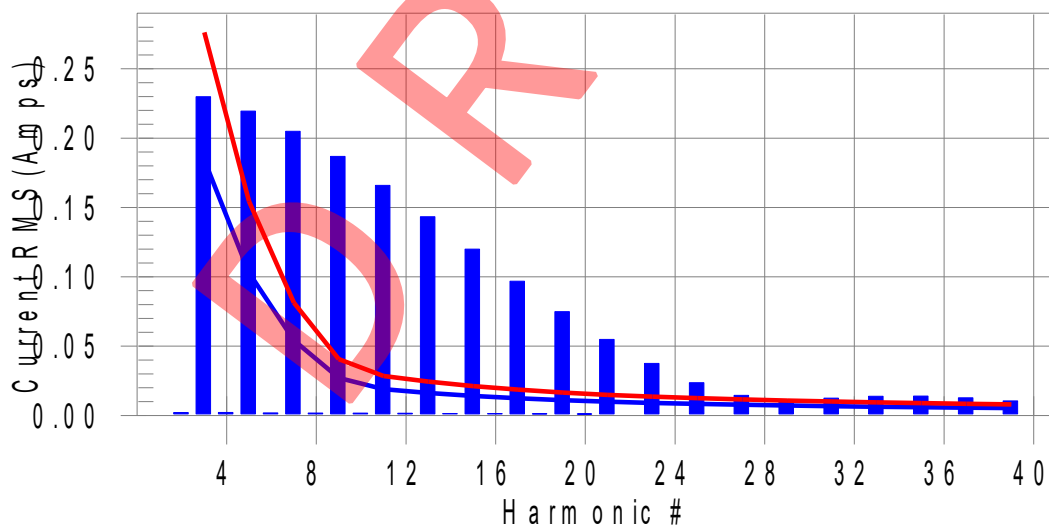

Test result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

TEST REPORT

Intertek Report No.: 260508019SZN-003

Test Result: N/L Source qualification: Normal
 THC(A): 0.511 I-THD(%): 212.7 POHC(A): 0.078 POHC Limit(A): 0.023

Highest parameter values during test:

V_RMS (Volts):	230.21	Frequency(Hz):	50.00
I_Peak (Amps):	2.560	I_RMS (Amps):	0.565
I_Fund (Amps):	0.240	Crest Factor:	4.555
Power (Watts):	54.2	Power Factor:	0.417

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.004	0.000	N/A	N/L
3	0.230	0.184	N/A	0.232	0.276	N/A	N/L
4	0.002	0.000	N/A	0.004	0.000	N/A	N/L
5	0.220	0.103	N/A	0.220	0.154	N/A	N/L
6	0.002	0.000	N/A	0.004	0.000	N/A	N/L
7	0.205	0.054	N/A	0.206	0.081	N/A	N/L
8	0.002	0.000	N/A	0.004	0.000	N/A	N/L
9	0.187	0.027	N/A	0.187	0.041	N/A	N/L
10	0.002	0.000	N/A	0.003	0.000	N/A	N/L
11	0.166	0.019	N/A	0.166	0.028	N/A	N/L
12	0.002	0.000	N/A	0.003	0.000	N/A	N/L
13	0.143	0.016	N/A	0.144	0.024	N/A	N/L
14	0.001	0.000	N/A	0.003	0.000	N/A	N/L
15	0.120	0.014	N/A	0.121	0.021	N/A	N/L
16	0.001	0.000	N/A	0.003	0.000	N/A	N/L
17	0.097	0.012	N/A	0.098	0.019	N/A	N/L
18	0.001	0.000	N/A	0.002	0.000	N/A	N/L
19	0.075	0.011	N/A	0.076	0.016	N/A	N/L
20	0.001	0.000	N/A	0.002	0.000	N/A	N/L
21	0.055	0.010	N/A	0.056	0.015	N/A	N/L
22	0.001	0.000	N/A	0.002	0.000	N/A	N/L
23	0.038	0.009	N/A	0.039	0.014	N/A	N/L
24	0.001	0.000	N/A	0.002	0.000	N/A	N/L
25	0.024	0.008	N/A	0.025	0.013	N/A	N/L
26	0.001	0.000	N/A	0.001	0.000	N/A	N/L
27	0.014	0.008	N/A	0.015	0.012	N/A	N/L
28	0.001	0.000	N/A	0.001	0.000	N/A	N/L
29	0.011	0.007	N/A	0.012	0.011	N/A	N/L
30	0.001	0.000	N/A	0.001	0.000	N/A	N/L
31	0.013	0.007	N/A	0.013	0.010	N/A	N/L
32	0.001	0.000	N/A	0.001	0.000	N/A	N/L
33	0.014	0.006	N/A	0.014	0.009	N/A	N/L
34	0.001	0.000	N/A	0.001	0.000	N/A	N/L
35	0.014	0.006	N/A	0.014	0.009	N/A	N/L
36	0.001	0.000	N/A	0.001	0.000	N/A	N/L
37	0.013	0.006	N/A	0.013	0.008	N/A	N/L
38	0.000	0.000	N/A	0.001	0.000	N/A	N/L
39	0.011	0.005	N/A	0.011	0.008	N/A	N/L
40	0.000	0.000	N/A	0.001	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

4.5 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: 0.03%.

5 VOLTAGE FLUCTUATIONS AND FLICKER


5.1 TEST METHOD AND SUMMARY

Basic Standard:	EN 61000-3-3: 2013+A2:2021
Port:	AC Mains Input Port

5.2 TEST EQUIPMENT

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ064-01	Compliance Test System	California Instruments	5001iX-CTS-400	2024-12-06	2025-12-06
SZ064-01-01	Power Analyzer and Conditioning System	California Instruments	PACS-1	2024-12-06	2025-12-06

5.3 Test Setup Diagram

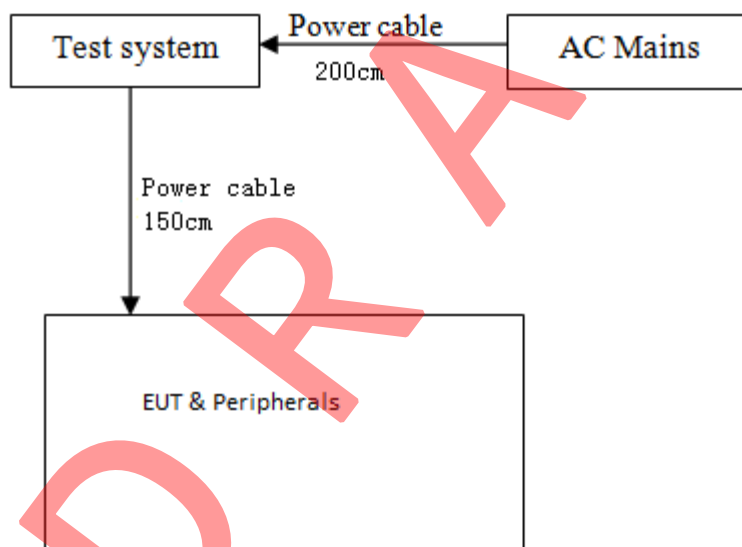

5.3 TEST RESULT


Flicker Test Summary per EN/IEC 61000-3-3 (Run time)

Worst Case Test Mode: WiFi Link

Test Result: Pass

Status: Test Completed

Pst_i and limit line

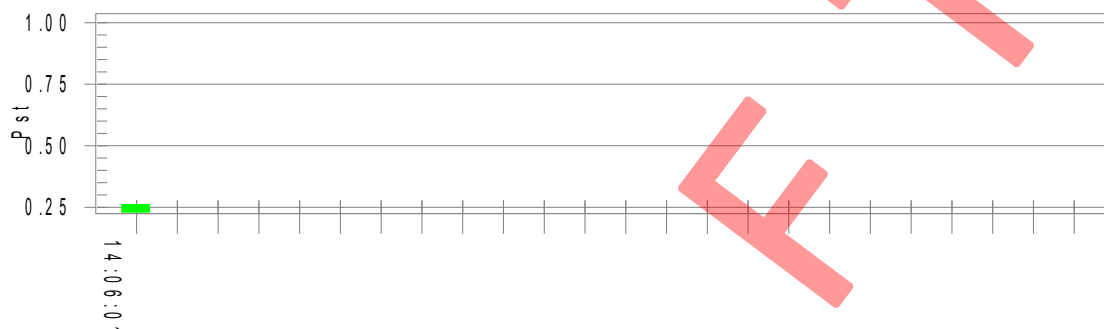

European Limits

Parameter values recorded during the test:

Vrms at the end of test (Volt): **230.11**

Highest dt (%):

T-max (mS):

Highest dc (%):

Highest dmax (%):

Highest Pst (10 min. period):

0

0.00

0.00

0.261

Test limit (%):

Test limit (mS):

Test limit (%):

Test limit (%):

Test limit:

500.0

3.30

4.00

1.000

Pass

Pass

Pass

Pass

5.4 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: $\pm 0.25\%$

6 ELECTROSTATIC DISCHARGE


6.1 TEST METHOD AND SUMMARY

Basic Standard:	EN 61000-4-2: 2009
Port:	Enclosure
Required Performance Criterion:	B
Level:	± 2.0, ± 4.0, ±8.0 kV (Air Discharge) ±4.0 kV (Contact Discharge) ±4.0 kV (Indirect Contact Discharge)
Temperature:	22.8 °C
Relative Humidity:	42.5 %
No. of Discharge(s):	Minimum of 10 Discharges per Each Polarity
Time Between Each Discharge:	1 second
Test Mode:	WiFi Link, WiFi Idle
Test Setup:	Table-top
Test of Post-installation:	N/A

6.2 TEST EQUIPMENT

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ189-05	ESD Simulator	TESEQ	NSG 437	2024-06-07	2025-06-07

6.3 Test Setup Diagram

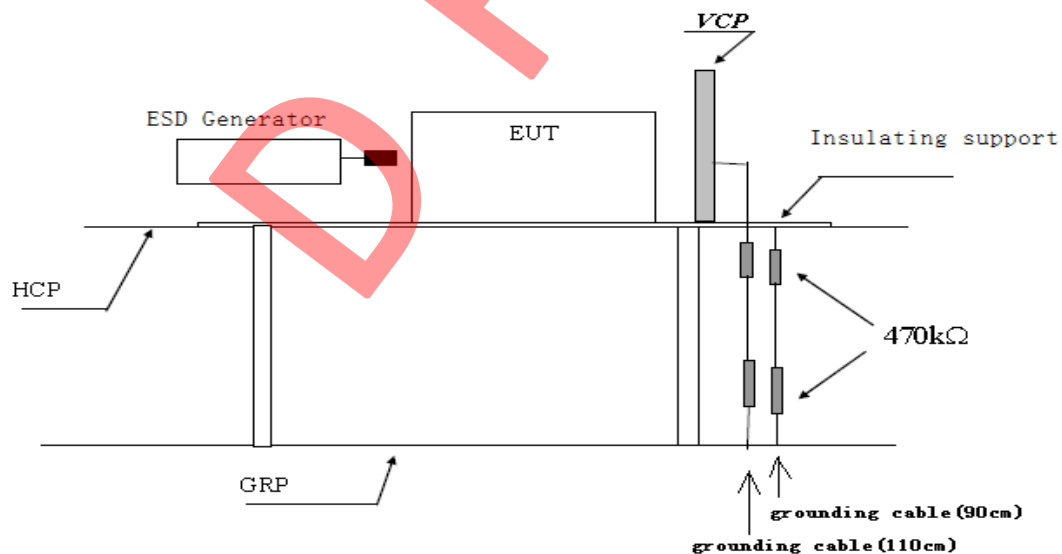

TEST REPORT

Intertek Report No.: 260508019SZN-003

6.4 TEST RESULT

6.4.1 TEST RESULT

Discharge Type	Applied Voltage	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion B)
Contact Discharge	$\pm 4\text{kV}$	Complied
Air Discharge	$\pm 2, \pm 4, \pm 8\text{kV}$	Complied
Indirect HCP Discharge	$\pm 4\text{kV}$	Complied
Indirect VCP Discharge	$\pm 4\text{kV}$	Complied

6.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

TEST REPORT

Intertek Report No.: 260508019SZN-003

7 RADIO FREQUENCY ELECTROMAGNETIC FIELD

7.1 TEST METHOD AND SUMMARY


Basic Standard:	EN 61000-4-3: 2006 + A1: 2008 + A2: 2010
Port:	Enclosure
Required Performance Criterion:	A
Level:	3.0 V/m (rms)
Test Modulation:	1kHz, 80% AM
Frequency:	80 MHz to 6 GHz
Dwell Time:	1s
Frequency Step:	1%
Temperature:	23.6°C
Relative Humidity:	54.3%
Test Facility:	Full Anechoic Chamber
Antenna Polarization:	Horizontal and Vertical
Type of Antenna:	Biconical / Log-periodic / Horn
Test Distance:	3m
Test Mode:	WiFi Link, WiFi Idle
Test Setup:	Table-top

7.2 TEST EQUIPMENT

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ188-02	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2026-12-12
SZ061-03	Biconilog Antenna	ETS	3142C	2024-07-09	2027-07-09
SZ061-16	Stacked double log. - Per. Antenna	SCHWARZBECK	STLP 9149	2024-11-18	2027-11-18
SZ180-15	Signal Generator	R&S	SMB100A	2024-12-05	2025-12-05
SZ181-01	Amplifier	PRANA	AP32 MT215	2024-12-06	2025-12-06
SZ190-07	RF Amplifier	Milmega	AS0860-75/45	2024-12-06	2025-12-06
SZ089-06	Audio Analyzer	Audio Precision	ATS-1	2024-09-29	2025-09-29

* The Equipment would be verified together with the test system before testing.

7.3 Test Setup Diagram

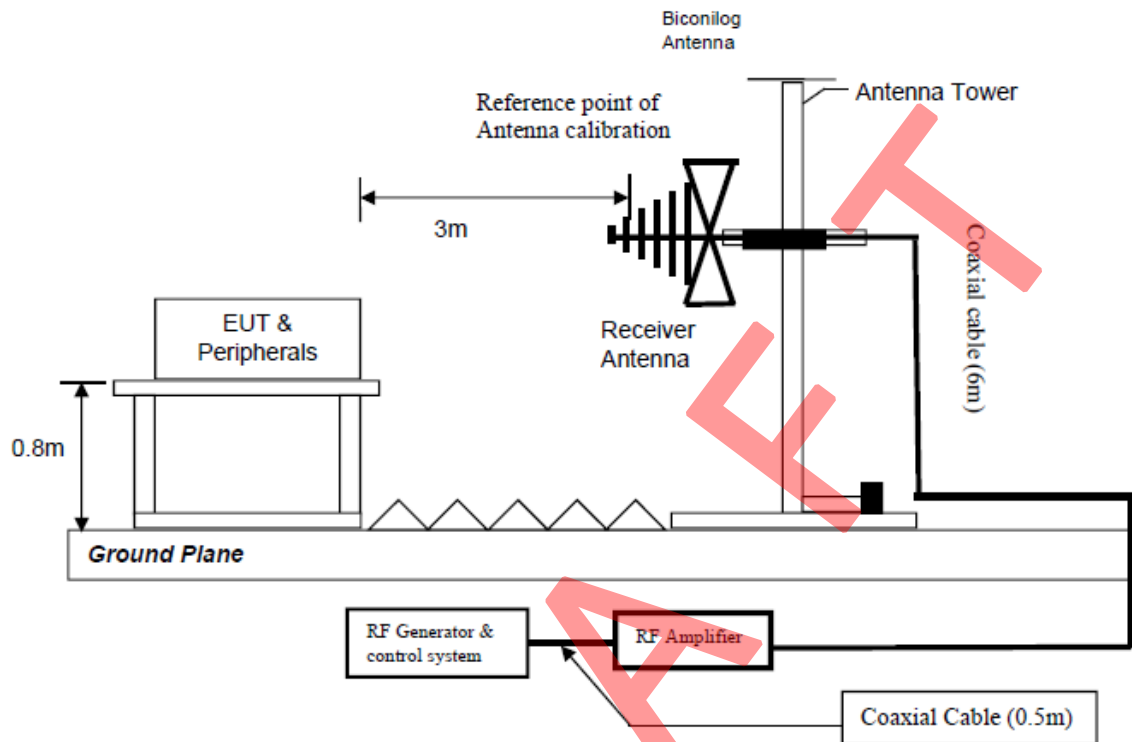

Test set-up of Immunity to Radiated Electric Fields

TEST REPORT

Intertek Report No.: 260508019SZN-003

7.4 TEST RESULT

7.4.1 TEST RESULT

Frequency (MHz)	Exposed Side	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion A)
80 to 6000	Front	Complied
80 to 6000	Left	Complied
80 to 6000	Rear	Complied
80 to 6000	Right	Complied

7.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

7.5 DECLARATION INFORMATION FROM APPLICANT

None.

8 FAST TRANSIENTS


8.1 TEST METHOD AND SUMMARY

Basic Standard:	EN 61000-4-4: 2012	
Port:	A.C. Power Lines	Telecommunication Lines, D.C. Power Lines, Signal Lines and Control Lines
Required Performance Criterion:	B	
Level:	±1.0kV	±0.5kV
Temperature:	22.5°C	
Relative Humidity:	54.2%	
Test Duration	1 minute per each polarity	
Test Mode:	WiFi Link, WiFi Idle	
Test Setup:	Table-top	
Generator Drive:	Internal	
Sequence of Application:	Each One	

8.2 TEST EQUIPMENT

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2024-12-06	2025-12-06

8.3 Test Setup Diagram

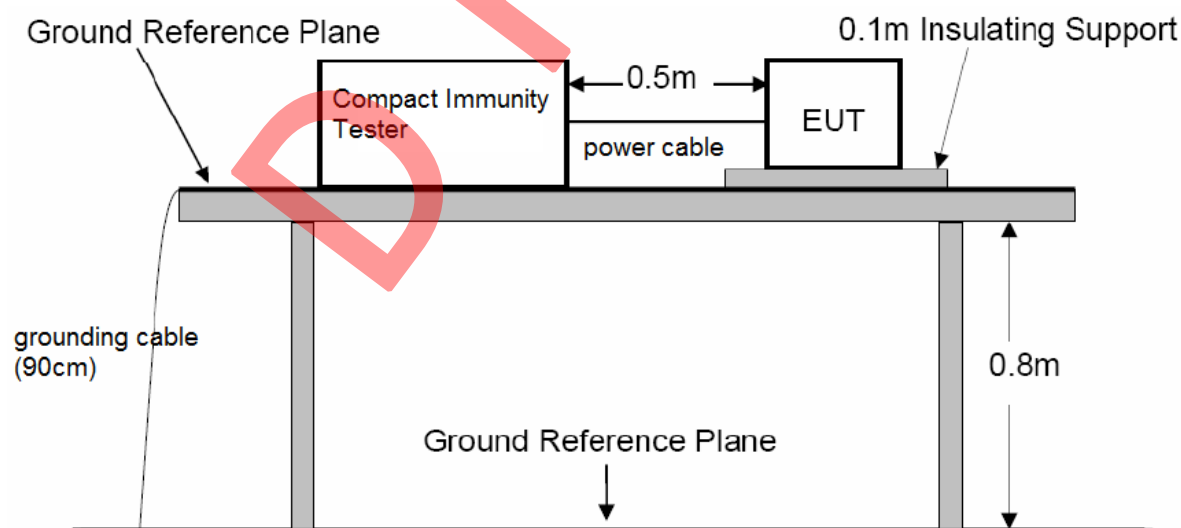

8.4 TEST RESULT

8.4.1 TEST RESULT

TEST REPORT

Intertek Report No.: 260508019SZN-003

Port	Level	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion B)
A.C. Power Lines	$\pm 1\text{kV}$	Complied
Telecommunication Lines	$\pm 0.5\text{kV}$	Complied
D.C. Power Lines	$\pm 0.5\text{kV}$	N/A
Signal Lines	$\pm 0.5\text{kV}$	Complied
Control Lines	$\pm 0.5\text{kV}$	N/A

8.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

8.5 DECLARATION INFORMATION FROM APPLICANT

None.

9 SURGES


9.1 TEST METHOD AND SUMMARY

Basic Standard:	EN 61000-4-5: 2006		
Port:	A.C. Power Lines		
	Phase And Neutral	Phase And Earth	Neutral And Earth
Level:	5 Positive And 5 Negative Surges		
	±1kV	N/A	N/A
Generator Impedance:	2 ohm	12 ohm	12 ohm
Required Performance Criterion:	B		
Temperature:	22.5°C		
Relative Humidity:	54.2%		
Repetition Rate:	1 minute		
Test Mode:	WiFi Link, WiFi Idle		
Test Setup:	Capacitive Coupling		
Surge Generator Trigger:	Internal		
Installation Condition:	Class 3: Electrical environment where cables run in parallel.		
Phase Angle:	0°, 90°, 180°, 270°		

9.2 TEST EQUIPMENT

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2024-12-06	2025-12-06

9.3 Test Setup Diagram

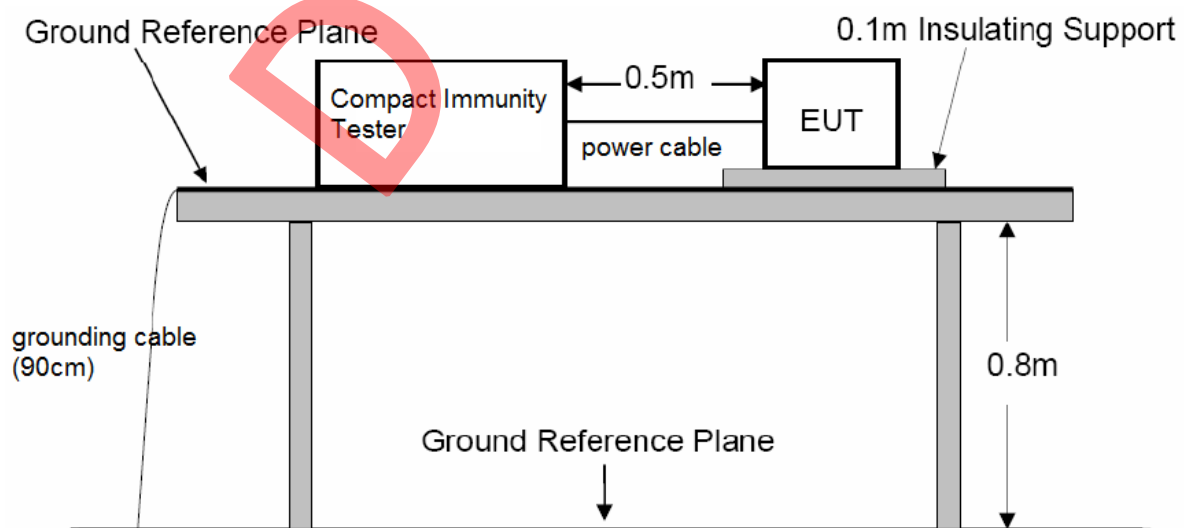

TEST REPORT

Intertek Report No.: 260508019SZN-003

9.4 TEST RESULT

9.4.1 TEST RESULT

Level		Result (Pursuant to ETSI EN 301 489-3/-17 Criterion B)
Between Phase And Neutral:	$\pm 1\text{kV}$	Complied
Between Phase And Earth:	$\pm 2\text{kV}$	N/A
Between Neutral And Earth:	$\pm 2\text{kV}$	N/A

9.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

9.5 DECLARATION INFORMATION FROM APPLICANT

None.

DRAFT

TEST REPORT

Intertek Report No.: 260508019SZN-003

10 CONDUCTED RF IMMUNITY

10.1 TEST METHOD AND SUMMARY


Basic Standard:	EN 61000-4-6: 2009
Port:	A.C. Power Lines, Telecommunication Lines, D.C. Power Lines, Signal Lines and Control Lines
Required Performance Criterion:	A
Level:	3.0V (rms)
Test Modulation:	1 kHz, 80% AM
Frequency:	0.15 MHz to 80 MHz
Dwell Time:	1s
Frequency Step:	1%
Temperature:	23.6°C
Relative Humidity:	54.3%
Coupling Factor of CDN:	-1.0dB ~ -1.7dB
Test Mode:	WiFi Link, WiFi Idle
Test Setup:	Table-top
Equipment Under Test (EUT):	Single Unit

10.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ180-02	Signal Generator	Aeroflex	2023A	2024-12-05	2025-12-05
SZ181-03	Amplifier	AR-WORLDWIDE	75A250	2024-12-06	2025-12-06
SZ181-03-01	Attenuator	AR-WORLDWIDE	6dB/50FH-006-100	2024-12-06	2025-12-06
SZ183-01	RF CURRENT-INJECTION CLAMP	LUTHI	EM101	2024-12-06	2025-12-06
SZ184-01	Coupling-Decoupling Network	LUTHI	CDN L-801 M2/M3	2024-12-06	2025-12-06
SZ188-04	Shielding Room	Jiang yin Tian De	5*6*2.9m/5*2.5*2.7m	2022-12-20	2025-12-20
SZ089-03	Audio Analyzer	AP	ATS-1A	2024-12-06	2025-12-06

* The Equipment would be verified together with the test system before testing.

10.3 Test Setup Diagram

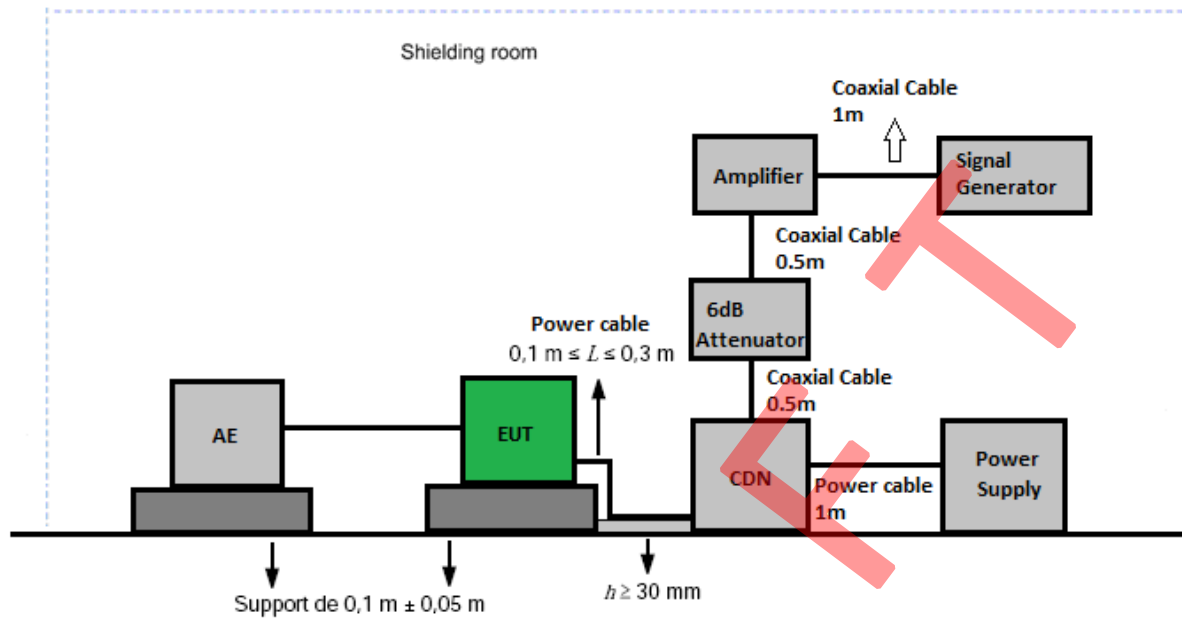

TEST REPORT

Intertek Report No.: 260508019SZN-003

10.4 TEST RESULT

10.4.1 TEST RESULT

Port	Level	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion A)
A.C. Power Lines	3V (rms)	Complied
Telecommunication Lines	3V (rms)	Complied
D.C. Power Lines	3V (rms)	N/A
Signal Lines	3V (rms)	Complied
Control Lines	3V (rms)	N/A

10.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

10.5 DECLARATION INFORMATION FROM APPLICANT

None.

11 VOLTAGE DIPS & INTERRUPTIONS

11.1 TEST METHOD AND SUMMARY

Basic Standard:	EN 61000-4-11: 2004			
Port:	A.C. Power Lines			
Level:	Test level in %U _r	Duration(s)	Required Performance Criterion	
			Transmitter	Receiver
	0	0.01	B	B
	0	0.02	B	B
	70	0.5	B	B
	0	5	C	C
No. of Dips/Interruptions:	3			
Temperature:	22.5°C			
Relative Humidity:	54.2%			
Test Mode:	WiFi Link, WiFi Idle			
Test Setup:	Test generator causes the interference to the EUT AC mains			


U_r is the rated voltage for the equipment.

11.2 TEST EQUIPMENT

Equipment No.	Equipment	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2024-12-06	2025-12-06

* The Equipment would be verified together with the test system before testing.

11.3 TEST EQUIPMENT

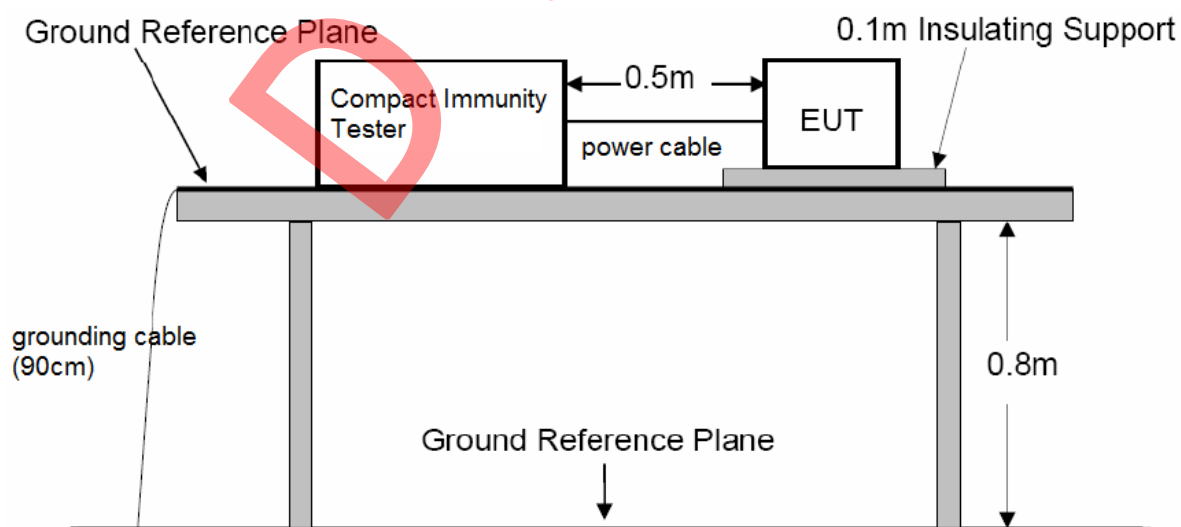

TEST REPORT

Intertek Report No.: 260508019SZN-003

11.4 TEST RESULT
11.4.1 TEST RESULT FOR TRANSMITTER

Test Condition		Result (Pursuant to ETSI EN 301 489-3/-17)	
Test Level in %U _T	Duration(s)	Meet Criterion A	Meet Criterion B & C
0	0.01	N/A	Complied
0	0.02	N/A	Complied
70	0.5	N/A	Complied
0	5	N/A	Complied

U_T is the rated voltage for the equipment.

11.4.2 ADDITIONAL RESULT INFORMATION

EUT stopped operation and could be reset by operator at test level 0%U_T, 5s of Interrupt.

11.5 DECLARATION INFORMATION FROM APPLICANT

None.

EXHIBIT 3

PHOTOS OF EUT

DRAFT

12. PHOTOS OF TEST SET-UP

Please refer to Annex of EUT Photos_260508019SZN.

***** End of Report*****

DRAFT