

Shen Zhen MTC Co., LTD

TEST REPORT

SCOPE OF WORK

Radio Frequency Testing—MHDV4080-T9503-S2,
MHDV4080-T9503, MHDV40****- T9503-##,
MHDV40****- T9503, (*, # can from 0 to 9, A to Z or
blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-
C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB,
2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB,
-*40***(* can from 0 to 9,A to Z or blank),
PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25

REPORT NUMBER

260508019SZN-005

ISSUE DATE

20 May 2026

[REVISED DATE]

[-----]

PAGES

16

DOCUMENT CONTROL NUMBER

ETSI EN300440_c

© 2017 INTERTEK



TEST REPORT

Intertek Report No.: 260508019SZN-005

RADIO COMMUNICATIONS TESTING REPORT

Shen Zhen MTC Co., LTD

MHDV4080-T9503-S2, MHDV4080-T9503, MHDV40****- T9503-##,
MHDV40****- T9503, (*, # can from 0 to 9, A to Z or blank), 2T-
C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-
C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB,
2T-C40HD2x25KB, **-*40*****(* can from 0 to 9,A to Z or blank),
PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25

TV/LED TV

5.8GHz Transceiver

Test Report: 260508019SZN-005

Report Prepared and Checked:	Bruce Zheng Project Engineer	
Report Approved By:	Rode Liu Project Engineer	
Date:	20 May 2026	

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

TEST REPORT

Intertek Report No.: 260508019SZN-005

RADIO PERFORMANCE MEASUREMENTS RESULT SUMMARY

Requirements	ETSI EN 300 440		Condition	Compliance
	Technical requirements	Test Specification		
	Clause Number			
E.I.R.P.	4.2.2	4.2.2.3	Applies to all devices with transmitters	Complied
Permitted range of operating frequencies	4.2.3	4.2.3.3	Applies to all devices with transmitters	Complied
Unwanted emissions in the spurious domain	4.2.4	4.2.4.3	Applies to all devices with transmitters	Complied
Duty Cycle	4.2.5.4	4.2.5.4.3	Transmitting devices which do not use LBT, DAA, or RFID transmitters operating in the 2 446 to 2 454 MHz band transmitting more than 500 mW e.i.r.p. power level	Complied
Additional requirements for FHSS equipment	4.2.6	4.2.6.3	Equipment utilizing FHSS modulation	N/A
Adjacent channel selectivity	4.3.3	4.3.3.3	Applies to equipment Category 1 receivers	N/A
Blocking or desensitization	4.3.4	4.3.4.3	Applies to category 1 and 2 receivers	Complied
Spurious radiation	4.3.5	4.3.5.3	Applies to all receivers, except receivers used in combination with permanently co-located transmitters continuously transmitting	Complied
When determining the test conclusion, the Measurement Uncertainty of test has been considered. Note: N/A means Not apply.				

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

EQUIPMENT UNDER TEST (EUT) INFORMATION

Applicant: Shen Zhen MTC Co., LTD
MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan
Longgang district, Shenzhen, China

Description of EUT: TV/LED TV

Type Number (s): MHDV4080-T9503-S2

Brand Name(s): AMTC, SHARP, Polariod, VITADO, JVC, Logik

Serial Number (s): Not Labelled

Equipment Received: 14 January 2025

Test Date (s): 14 January 2025 to 12 February 2025

Test Site and Location: Intertek Testing Services Shenzhen Ltd.
No.101&201, Building B, No.308, Wuhe Avenue, Zhangkengjing, Guanhu
Subdistrict, Longhua District, Shenzhen, Guangdong, China

Test Specification (s): ETSI EN 300 440 V2.1.1 (2017-03)

CONTENTS

EXHIBIT 1 GENERAL DESCRIPTION	5
1 INTRODUCTION	6
2 TEST SPECIFICATION	6
EXHIBIT 2 TEST RESULT OF RADIO PERFORMANCE MEASUREMENTS	8
3 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN FOR TRANSMITTERS	9
4 SPURIOUS RADIATIONS FOR RECEIVERS	14
EXHIBIT 3 PHOTOS OF EUT	15
5 PHOTOS OF TEST SET-UP	16

EXHIBIT 1

GENERAL DESCRIPTION

DRAFT

1 INTRODUCTION

Intertek Testing Services Shenzhen Limited has tested the Shen Zhen MTC Co., LTD MHDV4080-T9503-S2, TV/LED TV. The sample was tested to the relevant performance specification published by the European Telecommunications Standards Institute. This report contains the results of these tests and is submitted to Shen Zhen MTC Co., LTD as the final test results.

The Model: MHDV4080-T9503, MHDV40****- T9503-##, MHDV40****- T9503, (*, # can from 0 to 9, A to Z or blank), 2T-C40HD2225EB, 2T-C40HD2225KB, 2T-C40HD2725KB, 2T-C40HD2725EB, 2T-C40HD3225EB, 2T-C40HD3225KB, 2T-C40HD2x25EB, 2T-C40HD2x25KB, **-*40*****(* can from 0 to 9, A to Z or blank), PR40F2462VKB, F40AR5G, LT-40CR350, L40RFE25 are the same as the Model: MHDV4080-T9503-S2 in hardware aspect. The difference in model number serves as marketing strategy.

This report bases on the previous report with report number 251219032SZN-003 Dated 09 January 2026 (original signature by Bruce Zheng, Rode Liu on file). Owing to adding the models, no test was required after evaluation.

Due to the use of the same wireless module, Intertek only conducted the Radiated Spurious Emissions test. The results of other test items were cited from the module report CN23DLMM 003 Date of issue is 27 October 2023 (original signature by Breeze Jiang, Lin Lin on file).

The production units are required to conform to the initial sample as received when the units are placed on the market.

2 TEST SPECIFICATIONS

2.1 RELEVANT PERFORMANCE SPECIFICATION

The relevant performance specifications for Shen Zhen MTC Co., LTD MHDV4080-T9503-S2, TV/LED TV are ETSI EN 300 440 V2.1.1 (2017-03). The harmonised standards are ETSI EN 300 440 V2.1.1 (2017-03).

The tests performed are those required to demonstrate compliance with the technical specifications and the essential requirements of Article 3.2 of the Radio Equipment Directive (2014/53/EU) - RED for regulatory purposes.

2.2 TEST ENVIRONMENT

The tests were performed in the Radio communications and Electromagnetic Compatibility Test Facility at Intertek Testing Services Shenzhen Limited. The sample was subjected to the ambient conditions in the laboratory and indoor test site except during tests at extremes of temperatures and the Radiated Emissions Tests. The temperature and relative humidity recorded during the period of each test are given in the results.

2.3 CONFIGURATION OF TEST SAMPLE

The test sample consisted of one transceiver and under manufacturer's specified test mode, only the worst-case data were reported.

2.4 TEST POWER SOURCES

The TV/LED TV is intended to operate from 220-240V~, 50/60Hz, 70W or 90W. The test power source voltages were:

Nominal test voltage AC 230V

2.5 TEST FREQUENCIES

Channel List:

802.11a / n(HT20)		802.11n(HT40)	
Channel	Frequency (MHz)	Channel	Frequency (MHz)
149	5745	151	5755
153	5765	159	5795
157	5785		
161	5805		
165	5825		

Test Channel:

Channel	Frequency MHz
802.11a / n(HT20)	
149	5745
157	5785
165	5825
802.11n(HT40)	
151	5755
159	5795

2.6 GENERAL REQUIREMENTS

2.6.1 MODULATION

1. Constant envelope digital frequency modulation is used with OFDM technique,

2.6.2 ANTENNA

1. The antenna used in Transceiver is permanent Integrate antenna.
2. Antenna gain: 2.57dBi

2.6.3 Test Condition

Manufacturer's declared operating temperature: -10°C to +55°C.

2.7 MEASUREMENT UNCERTAINTY

All measurement uncertainties stated in this report are estimated to a 95% confidence level.

2.8 SUPPORT EQUIPMENT – radio performance measurements

1. Laptop (Dell 5420) (Provided by Intertek)
2. USB Cable (Detachable, un-shielded with core, 100cm) (Provided by Applicant)
3. Test Software (Provided by Applicant) was installed on the EUT

EXHIBIT 2

**TEST RESULT
OF
RADIO PERFORMANCE MEASUREMENTS**

DRAFT

3 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN FOR TRANSMITTERS

3.1 TEST METHOD AND SUMMARY

Basic Standard:	ETSI EN 300 440 V2.1.1 (2017-03)
Clause:	4.2.4
Test method	Radiated measurements

3.2 EQUIPMENT LIST


Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-03	EMI Receiver	R&S	ESR7	2024-04-23	2025-04-23
SZ056-06	Signal Analyzer	R&S	FSV40	2024-12-06	2025-12-06
SZ061-13	Biconilog Antenna	ETS	3142E	2022-07-13	2025-07-13
SZ061-08	Horn Antenna	ETS	3115	2024-09-13	2027-09-13
SZ181-08	Microwave System Amplifier	keysight	83017A	2024-07-29	2025-07-29
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	2021-05-25	2026-05-25
SZ062-40	RF Cable	Talent Microwave	A50-3.5M3.5M-4.5M	2024-09-30	2025-09-30
SZ062-41	RF Cable	Talent Microwave	A50-3.5M3.5M-8M	2024-09-30	2025-09-30
SZ062-34	RF Cable	Talent Microwave	A50-3.5M3.5M-1M	2024-09-30	2025-09-30


3.3 Limit

The transmitter unwanted emissions in the spurious domain shall not exceed the values.



Frequency ranges	47 MHz to 74 MHz 87,5 MHz to 108 MHz 174 MHz to 230 MHz 470 MHz to 862 MHz	Other frequencies ≤ 1 000 MHz	Frequencies > 1 000 MHz
State			
Operating	4 nW	250 nW	1 μW
Standby	2 nW	2 nW	20 nW

3.4 TEST SETUP DIAGRAM:

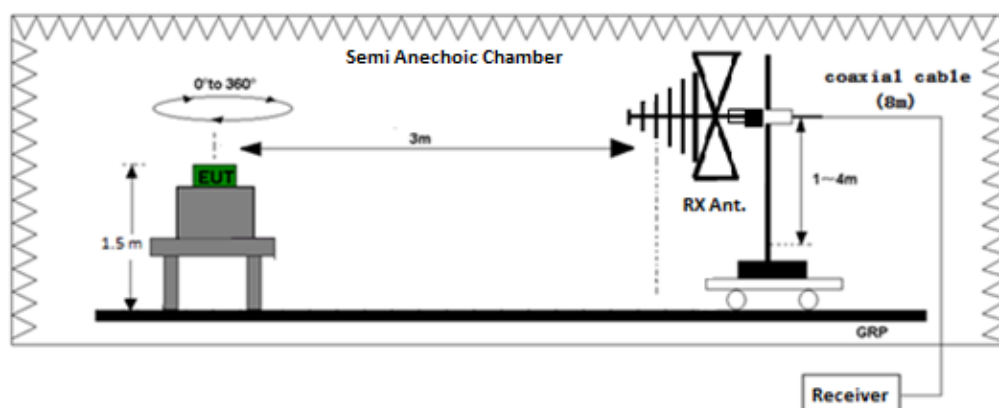

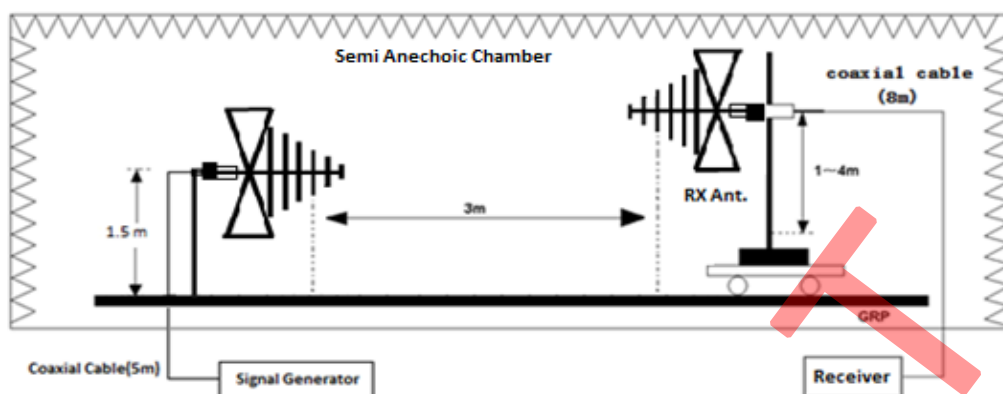

Test set-up of radiated disturbance (30MHz-1GHz)

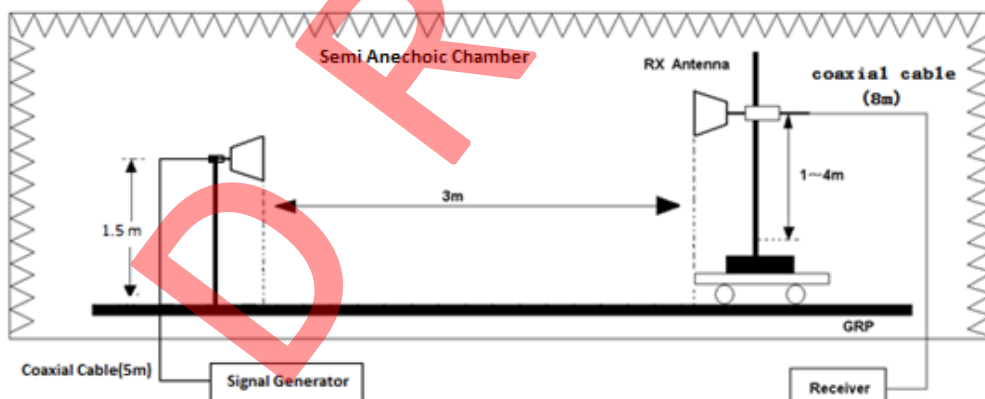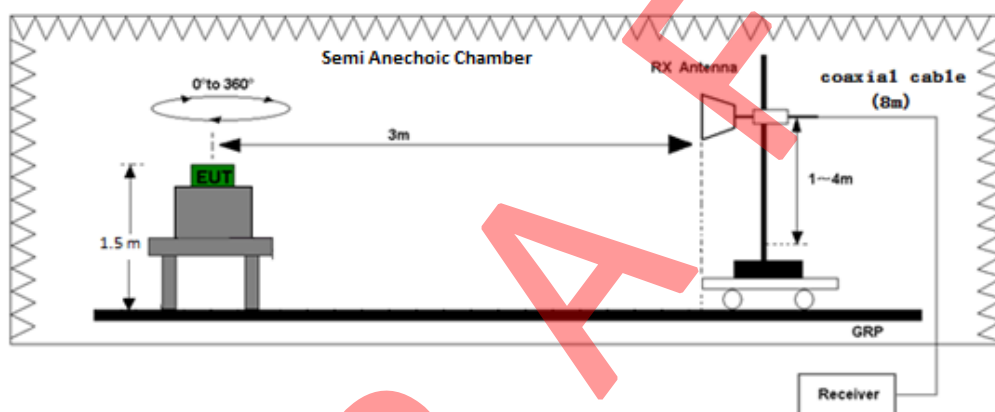

Test set-up of radiated disturbance (above 1GHz)

3.5 Test Result



Test Conditions: Temperature 21.9°C; Humidity 43%

SPURIOUS EMISSIONS - OPERATING

802.11a -Worse case-ANT1

5745MHz



Antenna Polarization Horizontal:

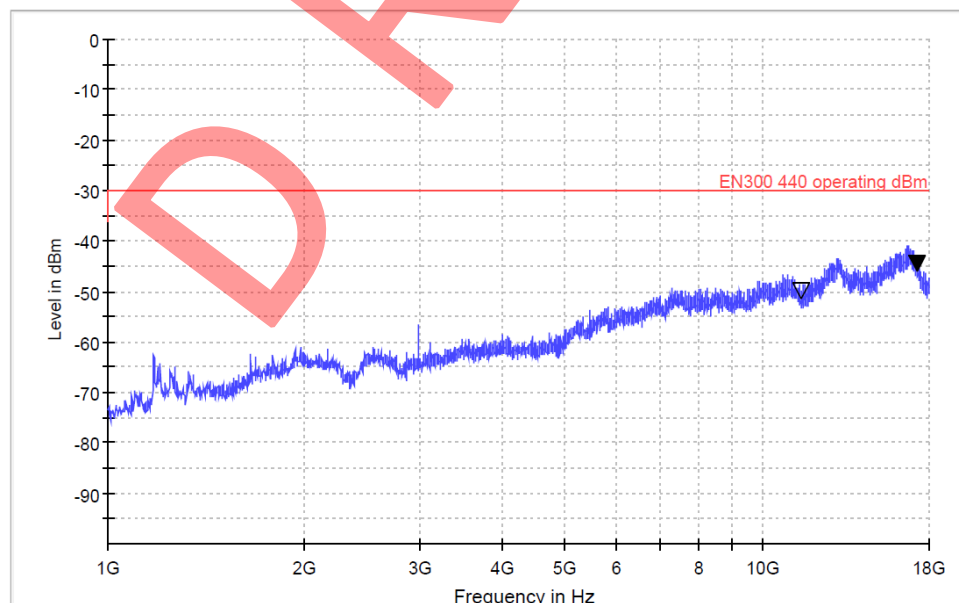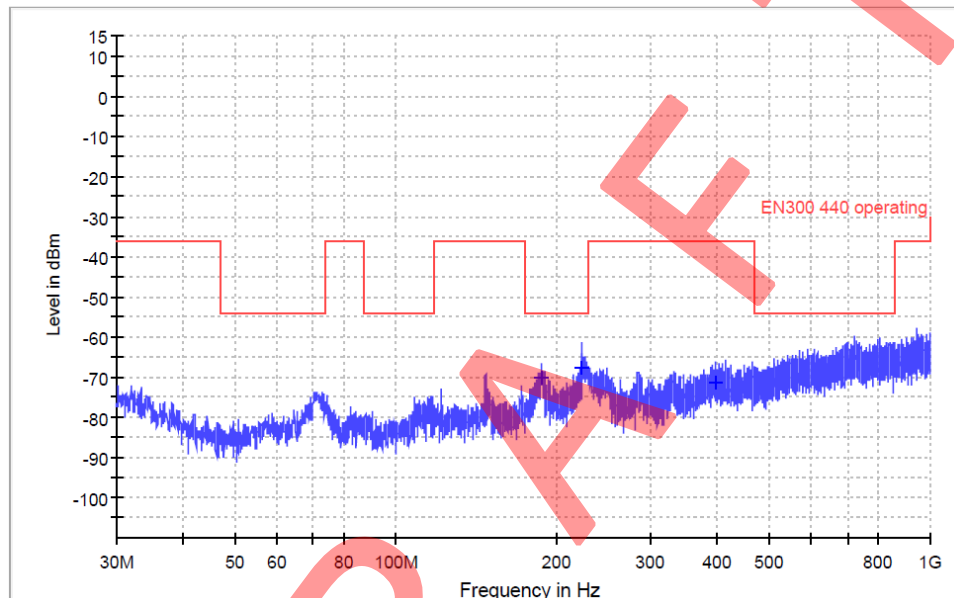

Antenna Polarization	Frequency (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
---	---	---	---	---

☒ No emissions significantly above equipment noise floor.

5825MHz

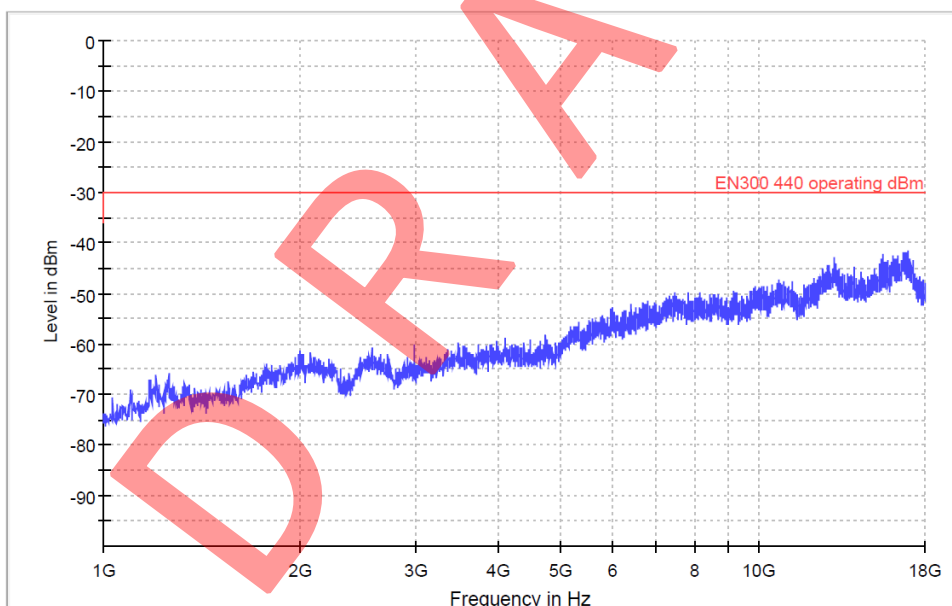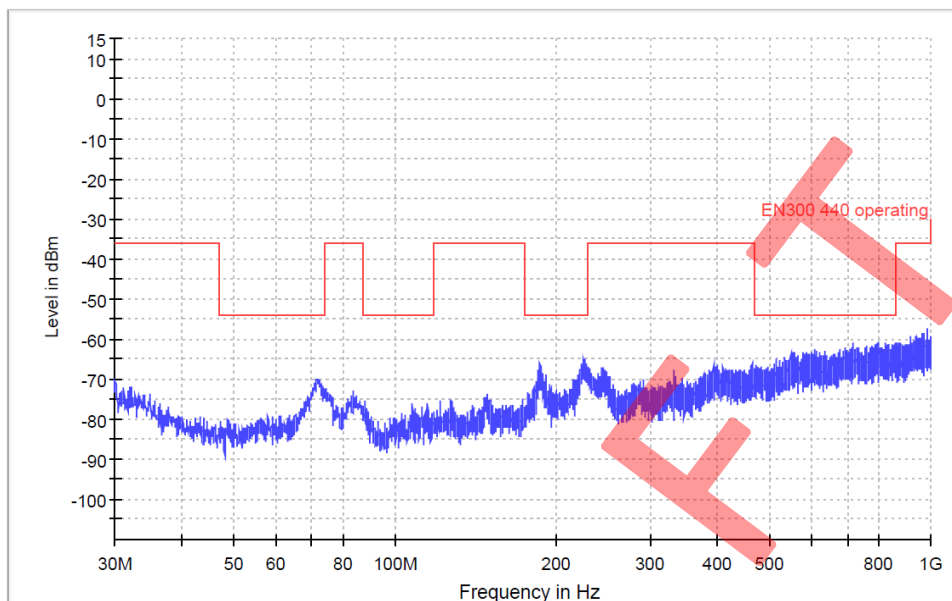

Antenna Polarization	Frequency (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
---	---	---	---	---

☒ No emissions significantly above equipment noise floor.

Notes:

1. Negative sign (-) in the margin column signify levels below the limit.
2. Other emissions found were at least 10 dB below the limit.
3. Measurement Uncertainty: ± 4.8 dB for frequency range 25MHz to 1GHz and ± 6.0 dB for frequency above 1GHz.

SPURIOUS EMISSIONS - STANDBY

There were no emissions found above system measuring level (at least 10 dB below the limit).

Notes:

1. Negative sign (-) in the margin column signify levels below the limit.
2. Other emissions found were at least 10 dB below the limit.
3. -30 dBm corresponds to 1 μ W.
4. Measurement Uncertainty: ± 4.8 dB.

4 SPURIOUS RADIATIONS FOR RECEIVERS

4.1 TEST METHOD AND SUMMARY

Basic Standard:	ETSI EN 300 440 V2.1.1 (2017-03)
Clause:	4.3.5
Test method	Radiated measurements

4.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-03	EMI Receiver	R&S	ESR7	2024-04-23	2025-04-23
SZ056-06	Signal Analyzer	R&S	FSV40	2024-12-06	2025-12-06
SZ061-13	Biconilog Antenna	ETS	3142E	2022-07-13	2025-07-13
SZ061-08	Horn Antenna	ETS	3115	2024-09-13	2027-09-13
SZ181-08	Microwave System Amplifier	keysight	83017A	2024-07-29	2025-07-29
SZ188-05	Anechoic Chamber	ETS	FACT 3-2.0	2021-05-25	2026-05-25
SZ062-40	RF Cable	Talent Microwave	A50-3.5M3.5M-4.5M	2024-09-30	2025-09-30
SZ062-41	RF Cable	Talent Microwave	A50-3.5M3.5M-8M	2024-09-30	2025-09-30
SZ062-34	RF Cable	Talent Microwave	A50-3.5M3.5M-1M	2024-09-30	2025-09-30

4.3 Limit

The power of any spurious emission shall not exceed 2 nW in the range 25 MHz to 1 GHz and shall not exceed 20 nW on frequencies above 1 GHz.

4.4 Worse Case Test Result

Test Conditions: Temperature 21.9°C; Humidity 43%

SPURIOUS EMISSIONS - OPERATING

There were no emissions found above system measuring level (at least 10 dB below the limit).

SPURIOUS EMISSIONS - STANDBY

There were no emissions found above system measuring level (at least 10 dB below the limit).

Notes:

- Negative sign (-) in the margin column signify levels below the limit.
- Other emissions found were at least 10 dB below the limit.
- 57 dBm corresponds to 2nW, -47 dBm corresponds to 20nW.
- Measurement Uncertainty: ± 3.0 dB.

EXHIBIT 3

PHOTOS OF EUT

DRAFT

5 PHOTOS OF TEST SET-UP

Please refer to Annex of EUT Photos_260508019SZN.

***** End of Report*****

DRAFT