

Shen Zhen MTC Co., LTD

TEST REPORT

SCOPE OF WORK

EMC TESTING—MUDV50B0-90106-T2, MUDV50B0-90106-S2,
MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to
9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-
C50HJ4020EB, 4T-C50HJ4020KB, **-*50***** (* can from 0
to 9, A to Z or blank), PR50U3421SKB.

REPORT NUMBER

260508031SZN-003

ISSUE DATE

21 May 2026

[REVISED DATE]

[-----]

PAGES

48

DOCUMENT CONTROL NUMBER

ETSI EN301489_c

© 2017 INTERTEK



EMC TESTING REPORT

Shen Zhen MTC Co., LTD

MUDV50B0-90106-T2, MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **-*50*****(* can from 0 to 9, A to Z or blank), PR50U3421SKB.

TV/LCD LED TV/LED LCD TV

2.4GHz & 5GHz Transceiver

Test Report: 260508031SZN-003

Report Prepared and Checked By :	Bruce Zheng Project Engineer	
Report Approved By :	Rode Liu Project Engineer	
Date :	21 May 2026	

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

EMC COMPLIANCE MEASUREMENTS
RESULT SUMMARY

	ETSI EN 301 489-3/-17	ETSI EN 301 489-1	Compliance
	Clause Number		
EMC Emission	7.1	8.2 8.4	Complied
Electrostatic Discharge	7.2	9.3	Complied
Radio Frequency Electromagnetic Field (80MHz-6GHz)	7.2	9.2	Complied
Fast Transients	7.2	9.4	Complied
Surges	7.2	9.8	Complied
Conducted RF Immunity	7.2	9.5	Complied
Voltage Dips & Interruptions	7.2	9.7	Complied
When determining the test conclusion, the Measurement Uncertainty of test has been considered.			

Project	Standard	Compliance
Harmonic Current Emission (AC Mains Power Input Port)	EN IEC 61000-3-2: 2019+A1:2021	Complied
Voltage Fluctuations and Flicker (AC Mains Power Input Port)	EN 61000-3-3: 2013+A2:2021	Complied

**EQUIPMENT UNDER TEST (EUT)
INFORMATION**

Applicant: Shen Zhen MTC Co., LTD
MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan Longgang district, Shenzhen, China

Description of EUT: TV/LCD LED TV/LED LCD TV

Type Number (s): MUDV50B0-90106-T2

Brand Name(s): AMTC, Sharp, Polaroid

Serial Number (s): Not Labelled

Equipment Received: 05 December 2022, 31 July 2024

Test Date (s): 05 December 2022 to 06 January 2023, 31 July 2024 to 15 August 2024

Type of EUT: Fixed equipment

Test Site and Location: Intertek Testing Services Shenzhen Ltd.
No. 1018/201, Building B, No. 308 Wuhe Avenue, Zhangkengjing Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China

Test Specification (s): ETSI EN 301 489-1 V2.2.3 (2019-11)
ETSI EN 301 489-3 V2.3.2 (2023-01)
ETSI EN 301 489-17 V3.3.1 (2024-09)
EN IEC61000-3-2: 2019+A1:2021
EN 61000-3-3: 2013+A2:2021

CONTENTS

EXHIBIT 1	GENERAL DESCRIPTION	5
1	INTRODUCTION	6
2	TEST SPECIFICATION	6
EXHIBIT 2	TEST RESULT OF EMC COMPLIANCE MEASUREMENTS	9
3	EMC EMISSION TEST	10
4	HARMONIC EMISSION TEST	28
5	VOLTAGE FLUCTUATIONS AND FLICKER	31
6	ELECTROSTATIC DISCHARGE	33
7	RADIO FREQUENCY ELECTROMAGNETIC FIELD	35
8	FAST TRANSIENTS	38
9	SURGES	40
10	CONDUCTED RF IMMUNITY	42
11	VOLTAGE DIPS & INTERRUPTIONS	45
EXHIBIT 3	PHOTOS OF EUT	47
12	EUT PHOTOS	48

EXHIBIT 1

GENERAL DESCRIPTION

DRAFT

TEST REPORT

Intertek Report No. : 260508031SZN-003

1 INTRODUCTION

Intertek Testing Services Shenzhen Limited has been tested the TV/LCD LED TV/LED LCD TV MUDV50B0-90106-T2. The sample was tested to the relevant performance specification published by the European Telecommunications Standards Institute. This report contains the results of these tests and is submitted TV/LCD LED TV/LED LCD TV as the final test results.

The equipment under test (EUT) is a TV/LCD LED TV/LED LCD TV with WIFI and Bluetooth function; The EUT was powered 220-240V~, 50/60Hz, 128W, the detail please see the user manual.

The Model: MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **-*50*****(* can from 0 to 9, A to Z or blank), PR50U3421SKB are the same as the Model: MUDV50B0-90106-T2 in hardware aspect. The difference in model number and Trade name serves as marketing strategy.

This report is based on previous report with report number 240731081SZN-001 dated 10 September 2024(original signatory: Bruce Zheng, Rode Liu on file). Owing to adding the models, no test was required after evaluation.

The production units are required to conform to the initial sample as received when the units are placed on the market.

2 TEST SPECIFICATION

2.1 RELEVANT PERFORMANCE SPECIFICATION

The relevant performance specifications for Shen Zhen MTC Co., LTD MUDV50B0-90106-T2 TV/LCD LED TV/LED LCD TV is ETSI EN 301 489-1 V2.2.3 (2019-11), ETSI EN 301 489-17 V3.3.1 (2024-09), ETSI EN 301 489-3 V2.3.2 (2023-01), EN IEC61000-3-2: 2019+A1:2021, EN 61000-3-3: 2013+A2:2021. The harmonized standards is ETSI EN 301 489-17 V3.3.1 (2024-09), ETSI EN 301 489-3 V2.3.2 (2023-01) and ETSI EN 301 489-1 V2.2.3 (2019-11) , EN IEC61000-3-2: 2019+A1:2021, EN 61000-3-3: 2013+A2:2021.

The tests performed are those required to demonstrate compliance with the technical specifications and the essential requirements of Article 3.1(b) of the Radio Equipment Directive (2014/53/EU) - RED for regulatory purposes.

2.2 TEST ENVIRONMENT

The tests were performed in the Radio communications and Electromagnetic Compatibility Test Facility at Intertek Testing Services Shenzhen Limited. The sample was subjected to the ambient conditions in the laboratory and indoor test site except during tests at extremes of temperatures and the Radiated Emissions Tests. The temperature and relative humidity recorded during the period of each test are given in the results.

2.3 CONFIGURATION OF TEST SAMPLE

Test Mode	
Mode 1:	Wi-Fi Link
Mode 2:	Wi-Fi Idle

TEST REPORT

Intertek Report No. : 260508031SZN-003

2.4 GENERAL REQUIREMENTS

2.4.1 MODULATION

1. Wi-Fi is CCK / DSSS / OFDM modulation type.

2.4.2 ANTENNA

The antenna used in Transceiver is Integrate antenna.

2.5 MEASUREMENT UNCERTAINTY

All measurement uncertainties stated in this report are estimated to a 95% confidence level.

2.6 SUPPORT EQUIPMENT – EMC COMPLIANCE MEASUREMENTS

1, Router (TP-Link, TL-WDR8620)

2.7 PERFORMANCE CRITERIA

2.7.1 GENERAL PERFORMANCE CRITERIA(EN 301 489-17):

2.7.1.1 PERFORMANCE CRITERIA OVERVIEW

Criteria	During test	After test (i.e. as a result of the application of the test)
A	Shall operate as intended. (See note). Shall be no loss of function. Shall be no unintentional transmissions.	Shall operate as intended. Shall be no degradation of performance. Shall be no loss of function. Shall be no loss of critical stored data.
B	May be loss of function.	Functions shall be self-recoverable. Shall operate as intended after recovering. Shall be no loss of critical stored data.
C	May be loss of function.	Functions shall be recoverable by the operator. Shall operate as intended after recovering. Shall be no loss of critical stored data.

NOTE: Operate as intended during the test allows a level of degradation in accordance with clause 6.2.2.

Minimum performance level for Criterion A:

For equipment that supports a PER or FER, the minimum performance level shall be a PER or FER less than or equal to 10 %.

For equipment that does not support a PER or a FER, the minimum performance level shall be no loss of the wireless transmission function needed for the intended use of the equipment.

2.7.1.2 PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA

Refer to EN 301 489-17, the performance criteria for Continuous phenomena.

The performance criteria A shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur during the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur during the test.

2.7.1.3 PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA

Refer to EN 301 489-17, the performance criteria for Transient phenomena.

The performance criteria B shall apply, except for voltage dips greater than or equal to 100 ms and voltage interruptions of 5 000 ms duration, for which performance criteria C shall apply.

Where the EUT is a transmitter in standby mode, unintentional transmission shall not occur as a result of the application of the test.

Where the EUT is a transceiver in receive mode, unintentional transmission shall not occur as a result of the application of the test.

2.7.2 GENERAL PERFORMANCE CRITERIA(EN 301 489-3):

Criterion	During test	After test
A	Operate as intended No loss of function No unintentional responses	Operate as intended No loss of function No degradation of performance No loss of stored data or user programmable functions
B	May show loss of function No unintentional responses	Operate as intended Lost function(s) shall be self-recoverable No degradation of performance No loss of stored data or user programmable functions

2.7.2.1 PERFORMANCE CRITERIA FOR CONTINUOUS PHENOMENA

Performance criterion A applies for immunity tests with phenomena of a continuous nature.

2.7.2.2 PERFORMANCE CRITERIA FOR TRANSIENT PHENOMENA

Performance criterion B applies for immunity tests with phenomena of a transient nature.

EXHIBIT 2

**TEST RESULT
OF
EMC COMPLIANCE MEASUREMENTS**

DRAFT

TEST REPORT

Intertek Report No. : 260508031SZN-003

3 EMC EMISSION TEST

3.1 TEST METHOD AND SUMMARY


Basic Standard :	EN 55032: 2015+A11:2020	
Test :	Radiated Emission	Conducted Emission
Test Mode:	Wi-Fi mode	Wi-Fi mode
Classification :	Class B	
Port :	Enclosure Port of Ancillary Equipment	AC Mains Power Port

3.2 RADIATED EMISSION TEST


3.2.1 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-03	EMI Receiver	R & S	ESR7	2024-04-23	2025-04-23
SZ061-13	Biconilog Antenna	ETS	3142E	2022-07-13	2025-07-13
SZ061-08	Horn Antenna	ETS	3115	2021-09-05	2024-09-05
SZ056-03	Spectrum Analyzer	R & S	FSP30	2024-04-22	2025-04-22
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2024-12-12
SZ181-04	Preamplifier	Agilent	8449B	2024-04-22	2025-04-22

3.2.2 Test Setup Diagram:

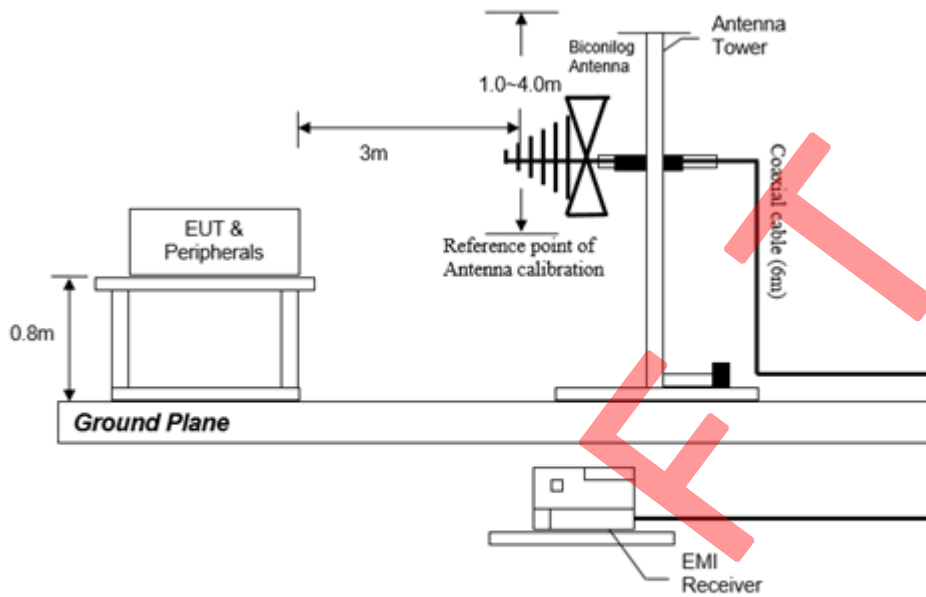

(Radiated Emission Measurements Test Setup for 30MHz to 1GHz)

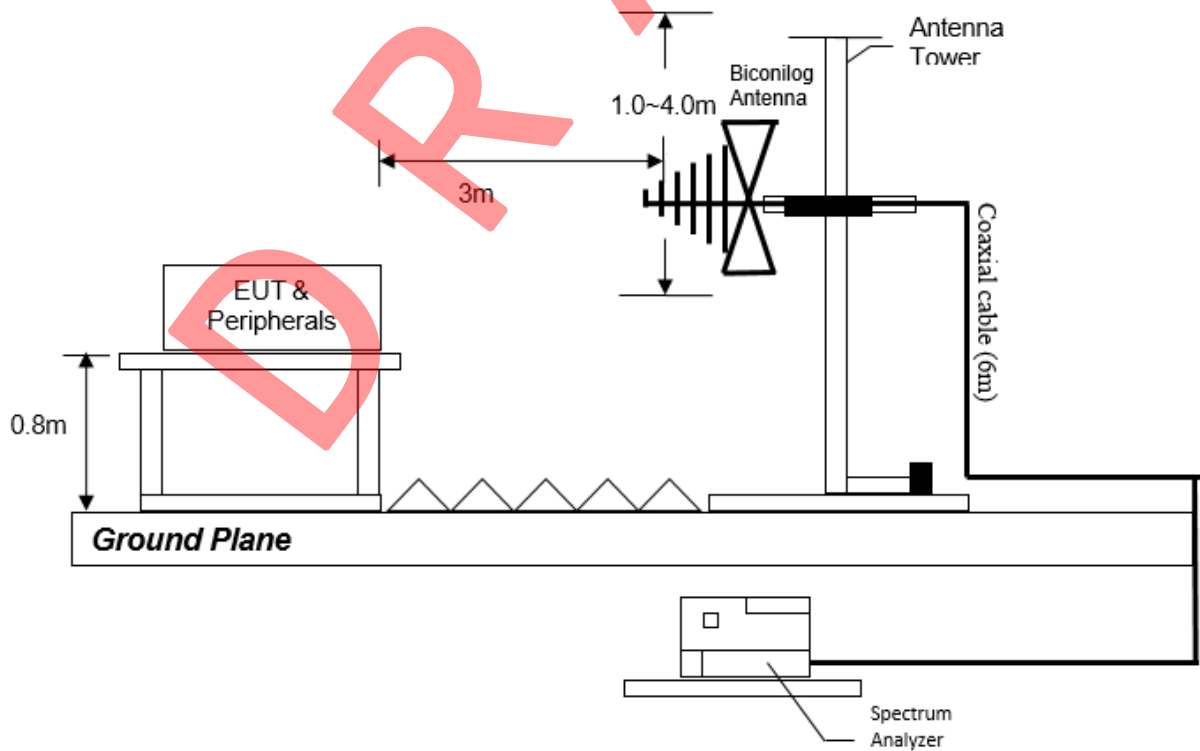

(Radiated Emission Measurements Test Setup for 1GHz to 6GHz)

TEST REPORT

Intertek Report No. : 260508031SZN-003

3.2.3 TEST RESULT


Worst Case Test mode: WiFi mode

Worst Case Test Voltage: AC 230V, 50Hz

Panel Model: V500D17-QE1

**Radiated Disturbance
Pursuant to EN55032: Class B Emissions Requirement
(30M to 1G) Hz**

Horizontal

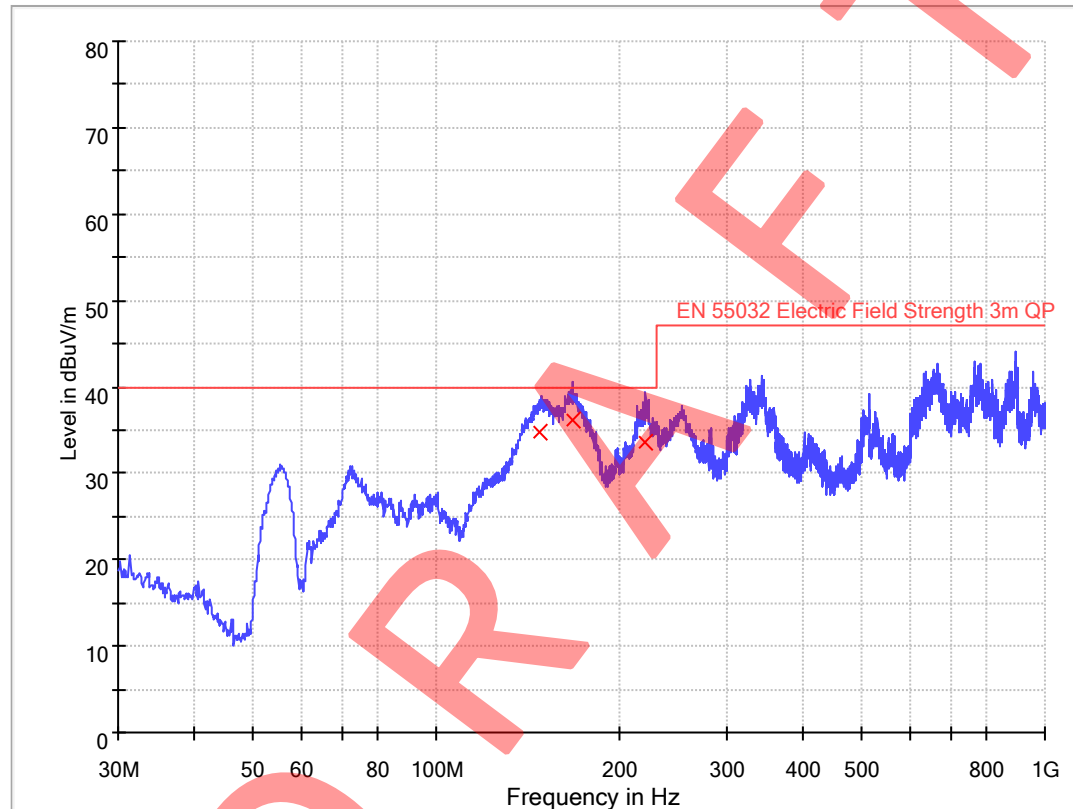


Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
147.800000	34.8	1000.0	120.000	H	11.2	5.2	40.0
167.360000	36.2	1000.0	120.000	H	11.7	3.8	40.0
220.968750	33.6	1000.0	120.000	H	13.3	6.4	40.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit QPK (dBμV/m) – QuasiPeak (dBμV/m)

Horizontal

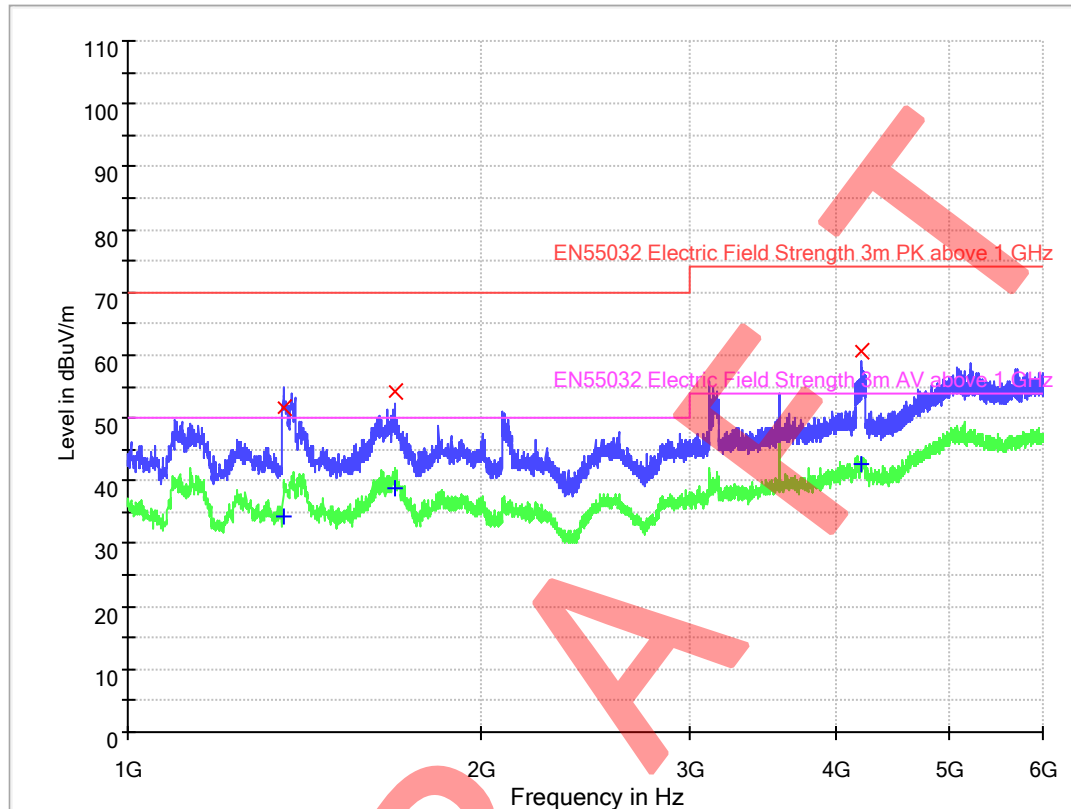

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1358.000000	51.5	1000.0	1000.000	H	-7.1	18.5	70.0
1688.125000	54.3	1000.0	1000.000	H	-6.5	15.7	70.0
4203.125000	60.7	1000.0	1000.000	H	6.2	13.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1358.000000	34.2	1000.0	1000.000	H	-7.1	15.8	50.0
1688.125000	38.9	1000.0	1000.000	H	-6.5	11.1	50.0
4203.125000	42.7	1000.0	1000.000	H	6.2	11.3	54.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV) - Max peak/Average (dBμV)


TEST REPORT

Intertek Report No. : 260508031SZN-003

Worst Case Test mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Panel Model: V500D17-QE1

Radiated Disturbance
Pursuant to EN55032: Class B Emissions Requirement
(30M to 1G) Hz

Vertical

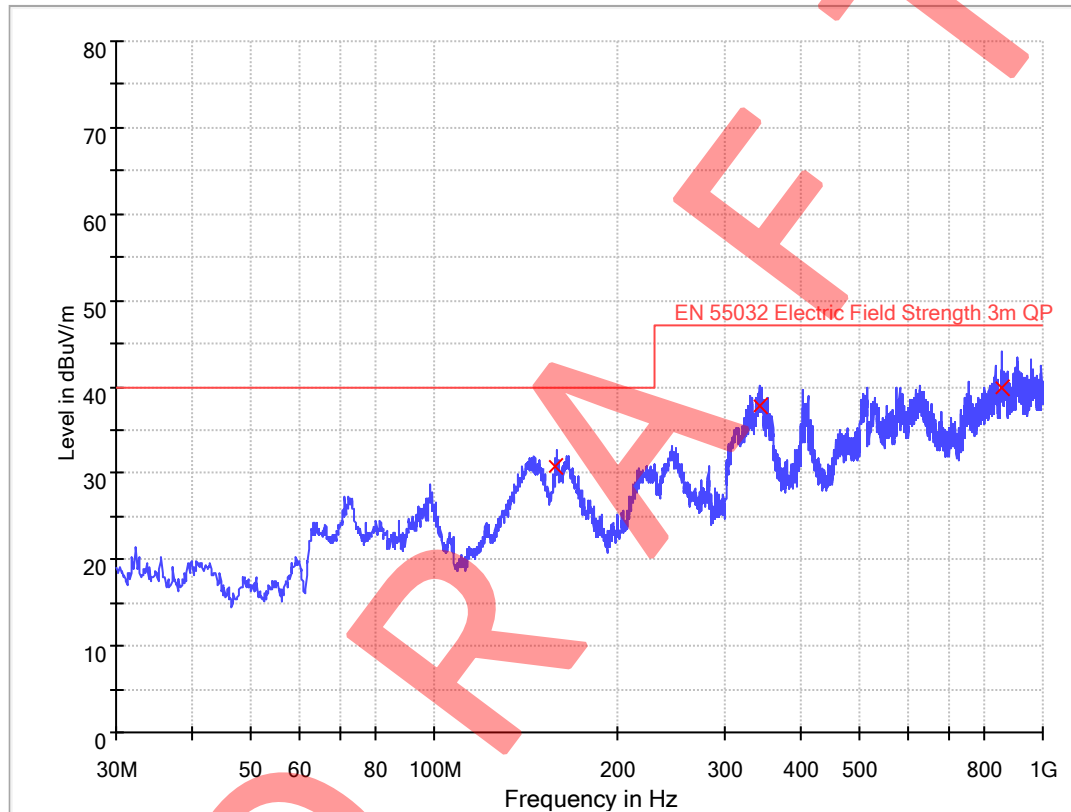


Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
157.797500	30.7	1000.0	120.000	V	12.0	9.3	40.0
342.703750	37.8	1000.0	120.000	V	18.1	9.2	47.0
856.520000	39.8	1000.0	120.000	V	26.6	7.2	47.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit QPK(dBμV/m) – QuasiPeak (dBμV/m)

Vertical

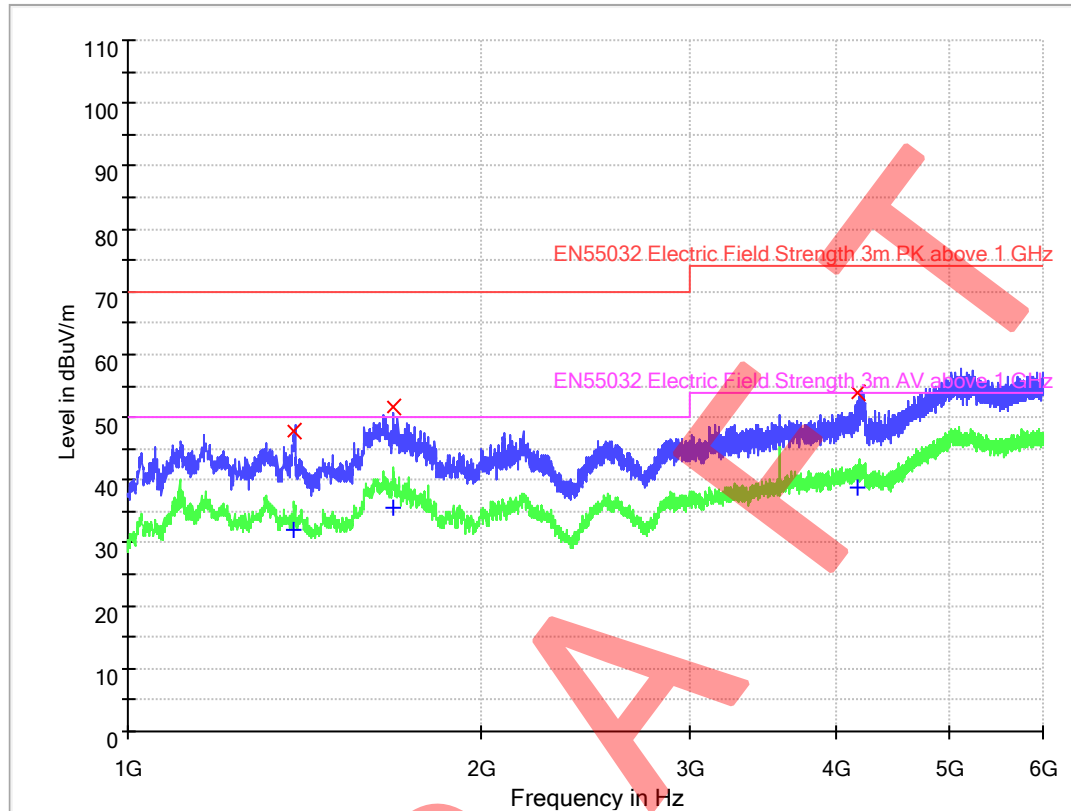

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1385.500000	47.9	1000.0	1000.000	V	-6.3	22.1	70.0
1680.000000	51.8	1000.0	1000.000	V	-6.4	18.2	70.0
4180.625000	54.0	1000.0	1000.000	V	6.1	20.0	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1385.500000	32.1	1000.0	1000.000	V	-6.3	17.9	50.0
1680.000000	35.7	1000.0	1000.000	V	-6.4	14.3	50.0
4180.625000	38.7	1000.0	1000.000	V	6.1	15.3	54.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV) - Max peak/Average (dBμV)


TEST REPORT

Intertek Report No. : 260508031SZN-003

Worst Case Test mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Panel Model: HF500QUB

Radiated Disturbance
Pursuant to EN55032: Class B Emissions Requirement
(30M to 1G) Hz

Horizontal

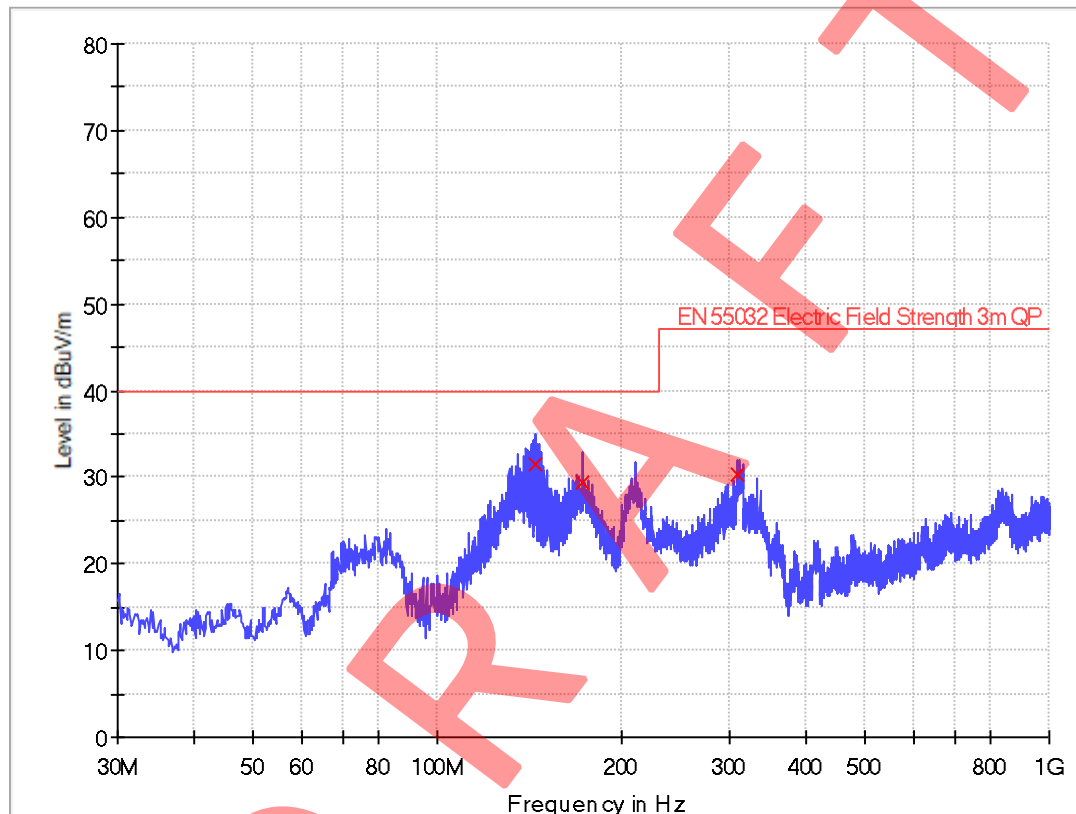


Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
144.217500	31.4	1000.0	120.000	H	9.5	8.6	40.0
172.953750	29.4	1000.0	120.000	H	11.0	10.6	40.0
308.875000	30.3	1000.0	120.000	H	15.4	16.7	47.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit QPK (dBμV/m) – QuasiPeak (dBμV/m)

Horizontal

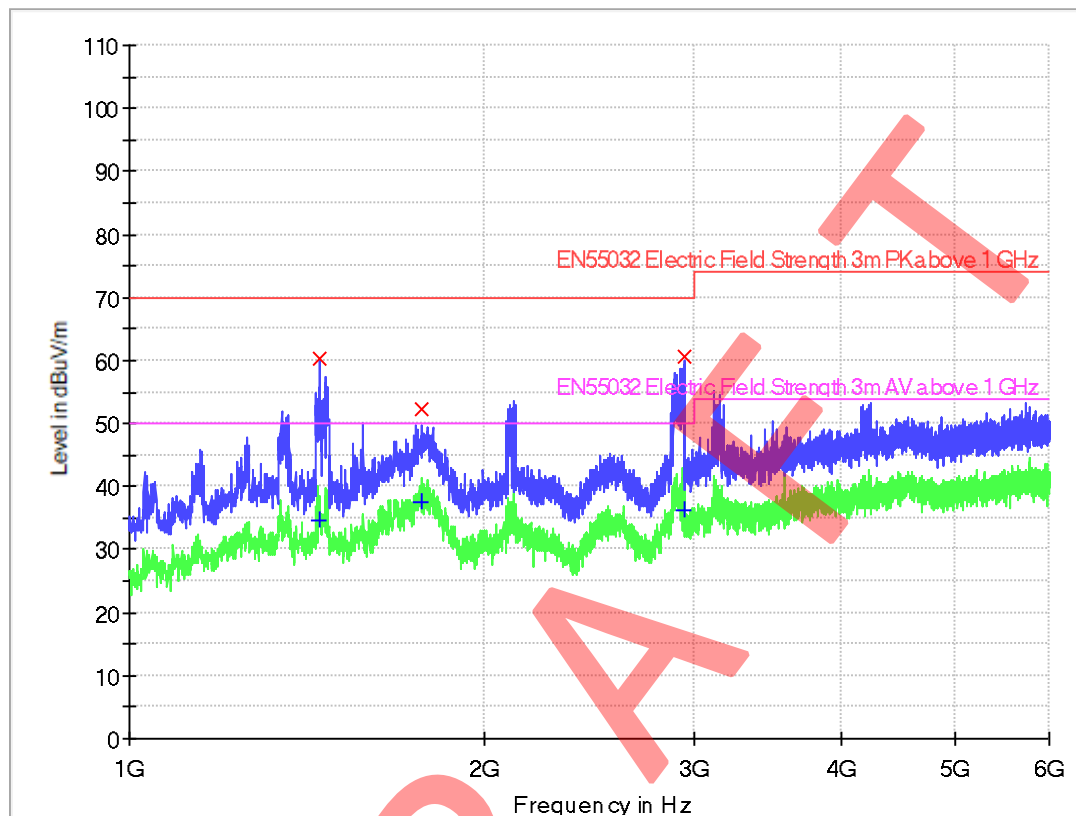

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1446.875000	60.3	1000.0	1000.000	H	-7.2	9.7	70.0
1766.250000	52.2	1000.0	1000.000	H	-6.3	17.8	70.0
2946.875000	60.5	1000.0	1000.000	H	0.8	9.5	70.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1446.875000	34.6	1000.0	1000.000	H	-7.2	15.4	50.0
1766.250000	37.7	1000.0	1000.000	H	-6.3	12.3	50.0
2946.875000	36.4	1000.0	1000.000	H	0.8	13.6	50.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV) - Max peak/Average (dBμV)


TEST REPORT

Intertek Report No. : 260508031SZN-003

Worst Case Test mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Panel Model: HF500QUB

Radiated Disturbance
Pursuant to EN55032: Class B Emissions Requirement
(30M to 1G) Hz

Vertical

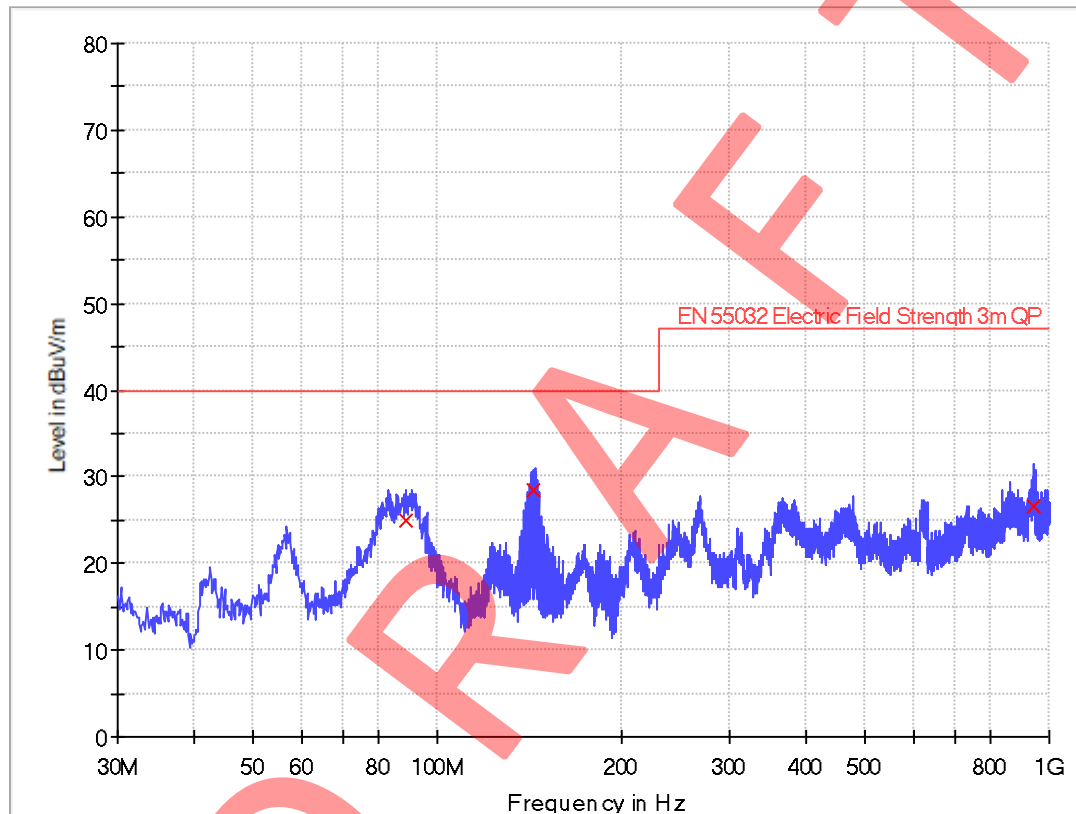


Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - QPK (dB)	Limit - QPK (dBμV/m)
88.927500	24.9	1000.0	120.000	V	8.7	15.1	40.0
143.490000	28.5	1000.0	120.000	V	9.4	11.5	40.0
944.467500	26.6	1000.0	120.000	V	25.7	20.4	47.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB)
2. QuasiPeak (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit QPK (dBμV/m) – QuasiPeak (dBμV/m)

Vertical

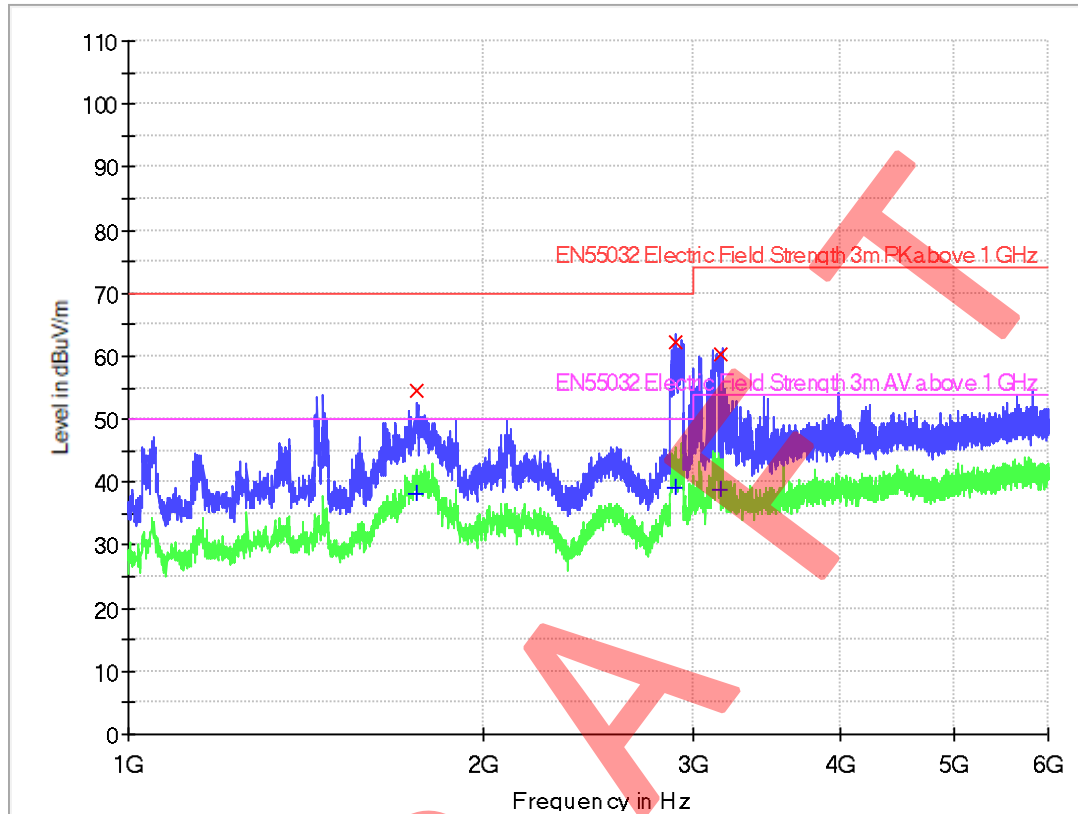

Limit and Margin PK

Frequency (MHz)	MaxPeak (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - PK+ (dB)	Limit - PK+ (dBμV/m)
1755.000000	54.4	1000.0	1000.000	V	-6.3	15.6	70.0
2898.750000	62.3	1000.0	1000.000	V	0.4	7.7	70.0
3171.250000	60.3	1000.0	1000.000	V	2.0	13.7	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV/m)	Meas. Time (ms)	Bandwidth (kHz)	Polarization	Corr. (dB/m)	Margin - AVG (dB)	Limit - AVG (dBμV/m)
1755.000000	38.0	1000.0	1000.000	V	-6.3	12.0	50.0
2898.750000	39.1	1000.0	1000.000	V	0.4	10.9	50.0
3171.250000	38.9	1000.0	1000.000	V	2.0	15.1	54.0

Remark:

1. Corr. (dB/m) = Antenna Factor (dB/m) + Cable Loss (dB) - Amp. Gain (dB)
2. Emission (dBμV/m) = Corr. (dB/m) + Read Level (dBμV)
3. Margin (dB) = Limit (dBμV) - Max peak/Average (dBμV)

3.2.4 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: ± 4.8 dB. The measured result is above the specification limit by a margin less than the measurement uncertainty; it is therefore not possible to state compliance based on the 95% level of confidence. However, the result indicates that compliance is more probable than non-compliance with the specification limit.

TEST REPORT


Intertek Report No. : 260508031SZN-003

3.3 CONDUCTED EMISSION TEST

3.3.1 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2024-07-09	2025-07-09
SZ187-01	Two-Line V-Network	R & S	ENV216	2023-10-18	2024-10-18
SZ187-02	Two-Line V-Network	R & S	ENV216	2024-04-23	2025-04-23
SZ188-03	Shielding Room	ETS	RFD-100	2022-12-20	2025-12-20

Test Setup:

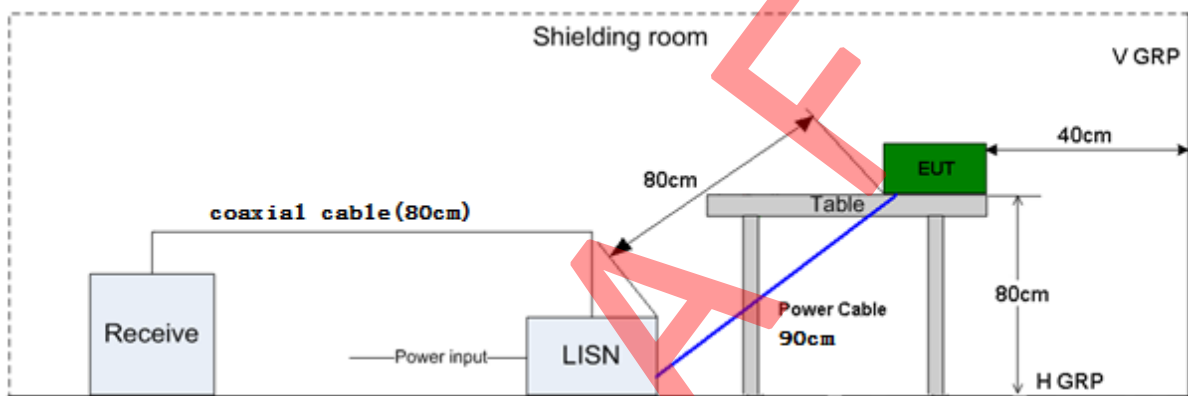

TEST REPORT


Intertek Report No. : 260508031SZN-003

3.3.2 TEST RESULT

Worst Case Operating Mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Phase: Live
Panel Model: V500D17-QE1

Test Data

**RFI Voltage Test
Pursuant to EN55032: Class B Emissions Requirement**

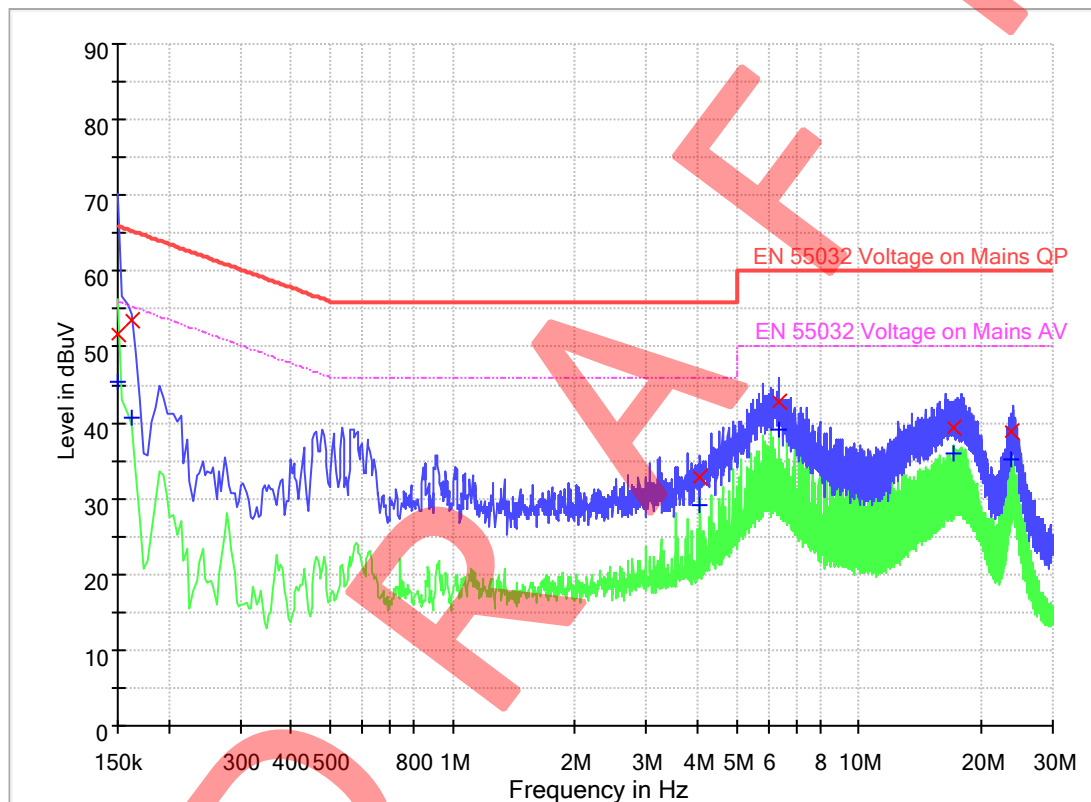

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	51.7	9.000	L	9.6	14.3	66.0
0.162000	53.6	9.000	L	9.6	11.8	65.4
4.066000	32.7	9.000	L	9.7	23.3	56.0
6.374000	42.7	9.000	L	9.8	17.3	60.0
17.154000	39.4	9.000	L	10.3	20.6	60.0
23.798000	38.8	9.000	L	10.7	21.2	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.3	9.000	L	9.6	10.7	56.0
0.162000	40.8	9.000	L	9.6	14.6	55.4
4.066000	29.1	9.000	L	9.7	16.9	46.0
6.374000	39.2	9.000	L	9.8	10.8	50.0
17.154000	35.9	9.000	L	10.3	14.1	50.0
23.798000	35.2	9.000	L	10.7	14.8	50.0

Remark:


1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – QuasiPeak/Average (dBμV)

TEST REPORT

Intertek Report No. : 260508031SZN-003

Worst Case Operating Mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Phase: Neutral
Panel Model: V500D17-QE1

Test Data
RFI Voltage Test
Pursuant to EN55032: Class B Emissions Requirement

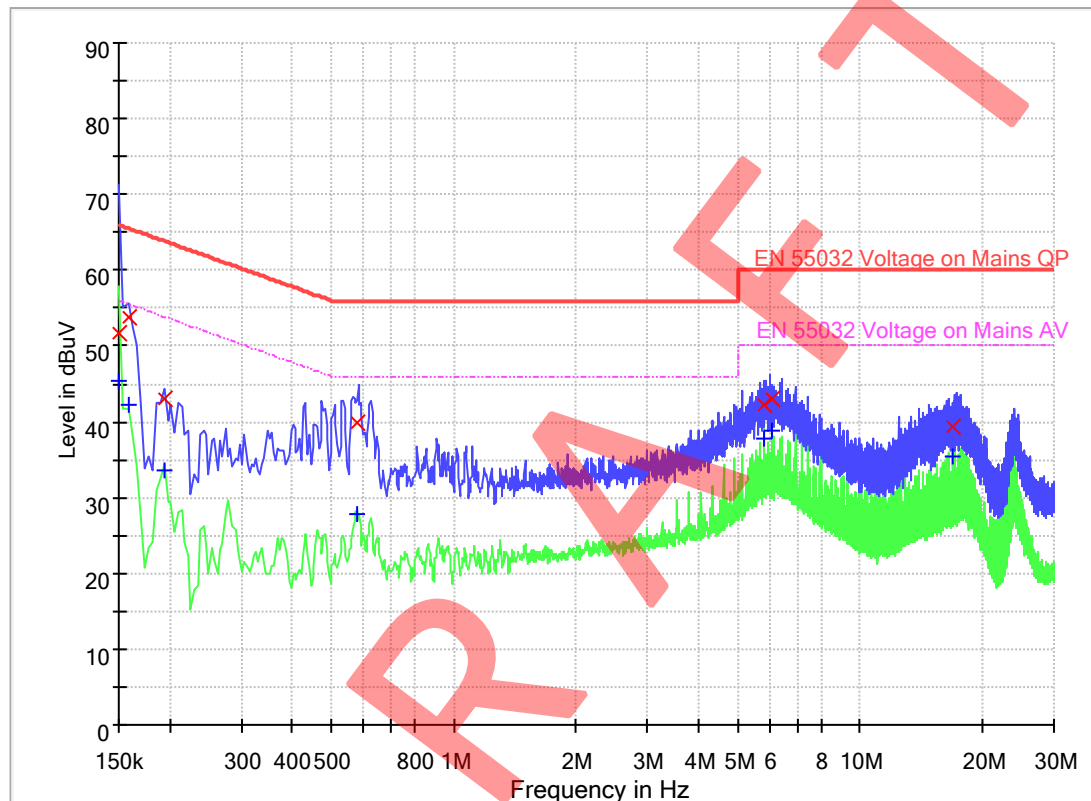

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	51.7	9.000	N	9.6	14.3	66.0
0.194000	43.1	9.000	N	9.6	20.8	63.9
0.578000	39.9	9.000	N	9.6	16.1	56.0
5.830000	42.2	9.000	N	9.8	17.8	60.0
6.102000	43.0	9.000	N	9.8	17.0	60.0
16.882000	39.5	9.000	N	10.3	20.5	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBμV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBμV)
0.150000	45.3	9.000	N	9.6	10.7	56.0
0.194000	33.6	9.000	N	9.6	20.3	53.9
0.578000	27.9	9.000	N	9.6	18.1	46.0
5.830000	37.9	9.000	N	9.8	12.1	50.0
6.102000	38.9	9.000	N	9.8	11.1	50.0
16.882000	35.5	9.000	N	10.3	14.5	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBμV) – QuasiPeak/Average (dBμV)


TEST REPORT

Intertek Report No. : 260508031SZN-003

Worst Case Operating Mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Phase: Live
Panel Model: HF500QUB

Test Data

RFI Voltage Test
Pursuant to EN55032: Class B Emissions Requirement

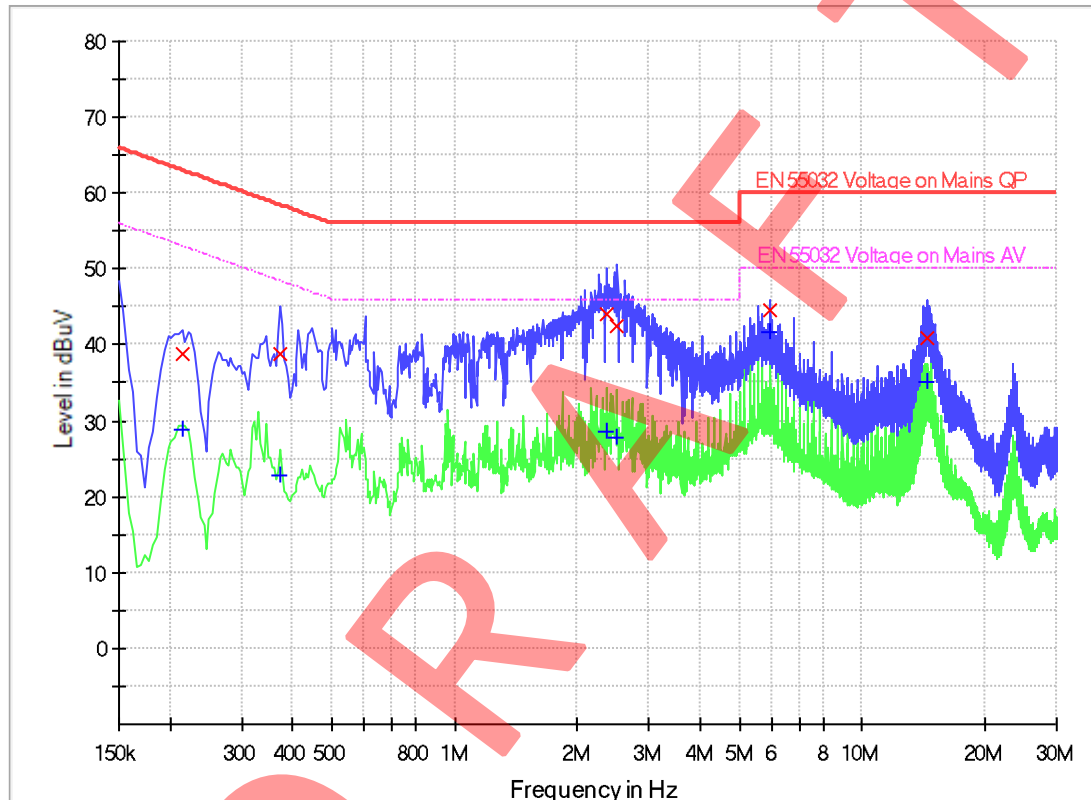

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.214000	38.8	9.000	L	9.6	24.2	63.0
0.374000	38.8	9.000	L	9.6	19.6	58.4
2.362000	44.1	9.000	L	9.7	11.9	56.0
2.510000	42.5	9.000	L	9.7	13.5	56.0
5.966000	44.5	9.000	L	9.8	15.5	60.0
14.410000	40.9	9.000	L	10.4	19.1	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.214000	28.8	9.000	L	9.6	24.2	53.0
0.374000	22.9	9.000	L	9.6	25.5	48.4
2.362000	28.6	9.000	L	9.7	17.4	46.0
2.510000	27.8	9.000	L	9.7	18.2	46.0
5.966000	41.7	9.000	L	9.8	8.3	50.0
14.410000	35.1	9.000	L	10.4	14.9	50.0

Remark:


1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

TEST REPORT

Intertek Report No. : 260508031SZN-003

Worst Case Operating Mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Phase: Neutral
Panel Model: HF500QUB

Test Data
RFI Voltage Test
Pursuant to EN55032: Class B Emissions Requirement

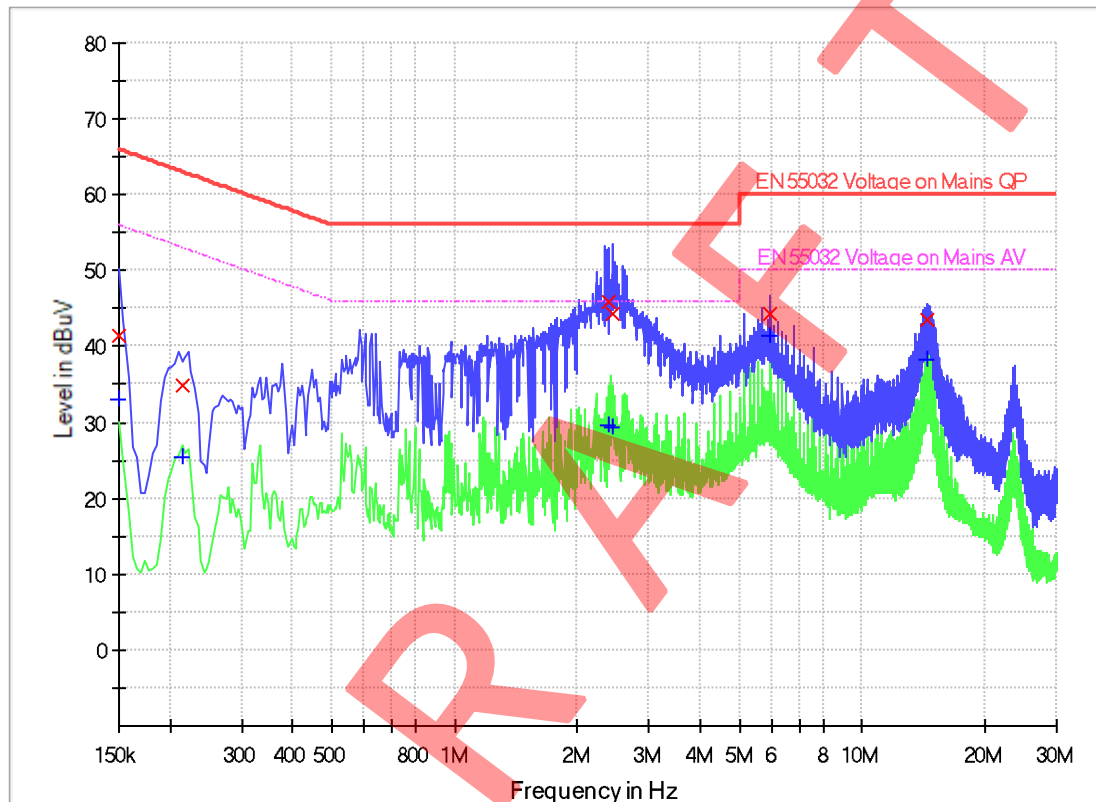

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	41.4	9.000	N	9.6	24.6	66.0
0.214000	34.8	9.000	N	9.6	28.2	63.0
2.382000	45.8	9.000	N	9.7	10.2	56.0
2.446000	44.4	9.000	N	9.7	11.6	56.0
5.966000	44.4	9.000	N	9.8	15.6	60.0
14.510000	43.4	9.000	N	10.4	16.6	60.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Line	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.150000	33.1	9.000	N	9.6	22.9	56.0
0.214000	25.5	9.000	N	9.6	27.5	53.0
2.382000	29.6	9.000	N	9.7	16.4	46.0
2.446000	29.3	9.000	N	9.7	16.7	46.0
5.966000	41.5	9.000	N	9.8	8.5	50.0
14.510000	38.2	9.000	N	10.4	11.8	50.0

Remark:

1. Corr. Factor (dB) = LISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

3.3.3 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: ± 3.2 dB.

TEST REPORT


Intertek Report No. : 260508031SZN-003

3.4 ASYMMETRIC MODE CONDUCTED EMISSIONS TEST

3.4.1 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-02	EMI Receiver	R & S	ESCI	2024-07-09	2025-07-09
SZ187-01	LISN	R & S	ENV216	2023-10-18	2024-10-18
SZ184-02	Impedance Stabilization Network	Teseq	ISN T4A	2023-12-12	2024-12-12
SZ188-03	Shielding Room	ETS	RFD-100	2022-12-20	2025-12-20

3.4.2 TEST SETUP

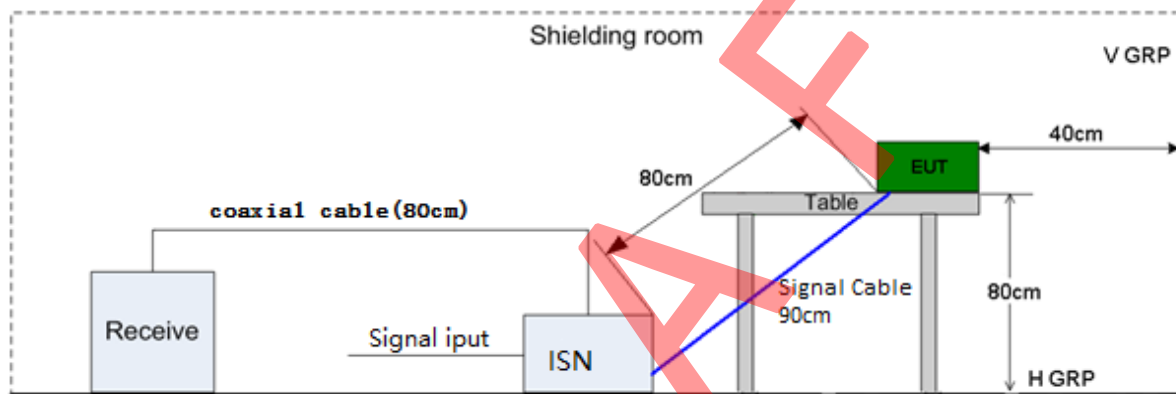

Test set-up of conducted disturbance for power port

TEST REPORT

Intertek Report No. : 260508031SZN-003

3.4.3 TEST RESULT

Worst Case Operating Mode: WiFi mode


Worst Case Test Voltage: AC 230V, 50Hz

Port: Wired network port

Panel Model: V500D17-QE1

Test Data

**Asymmetric Mode Conducted Emissions (LAN Port)
Pursuant to EN55032: Emissions Requirement**

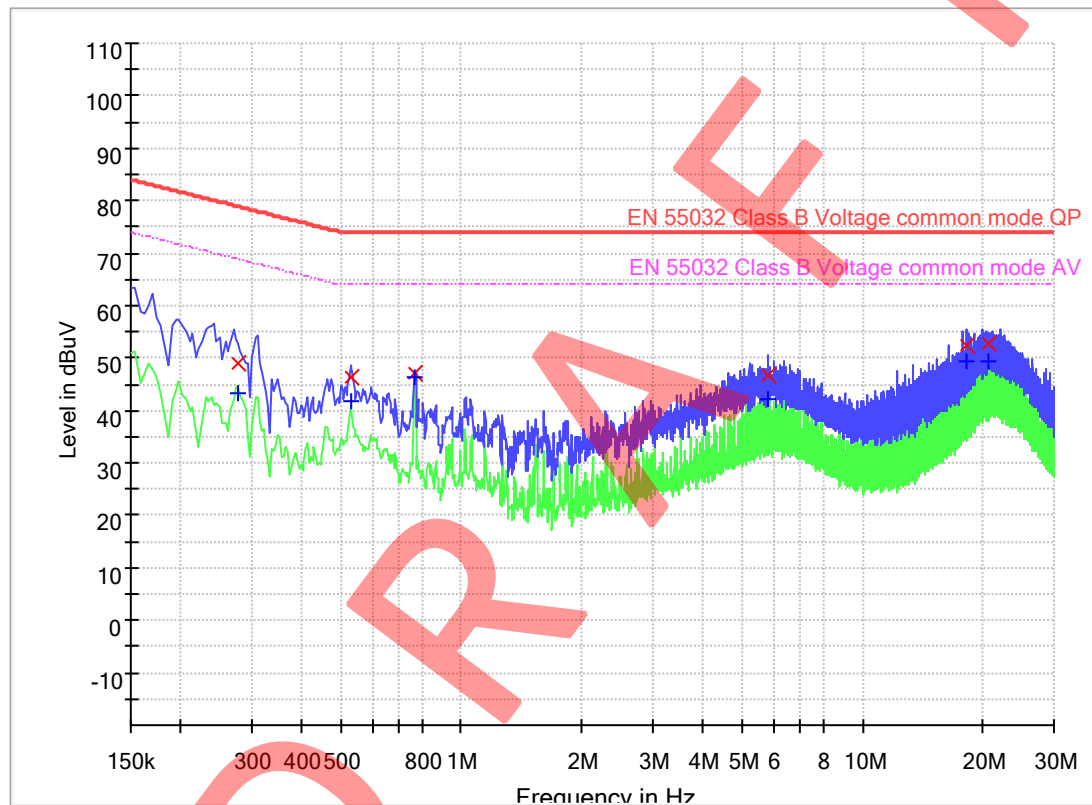

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.278000	48.9	9.000	9.7	30.0	78.9
0.530000	46.4	9.000	9.7	27.6	74.0
0.766000	47.1	9.000	9.7	26.9	74.0
5.830000	46.5	9.000	9.3	27.5	74.0
18.242000	52.3	9.000	9.4	21.7	74.0
20.542000	52.7	9.000	9.4	21.3	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.278000	43.5	9.000	9.7	25.4	68.9
0.530000	41.8	9.000	9.7	22.2	64.0
0.766000	46.5	9.000	9.7	17.5	64.0
5.830000	42.3	9.000	9.3	21.7	64.0
18.242000	49.5	9.000	9.4	14.5	64.0
20.542000	49.3	9.000	9.4	14.7	64.0

Remark:


1. Corr. Factor (dB) = ISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

TEST REPORT

Intertek Report No. : 260508031SZN-003

Worst Case Operating Mode: WiFi mode
Worst Case Test Voltage: AC 230V, 50Hz
Port: Wired network port
Panel Model: HF500QUB

Test Data
Asymmetric Mode Conducted Emissions (LAN Port)
Pursuant to EN55032: Emissions Requirement

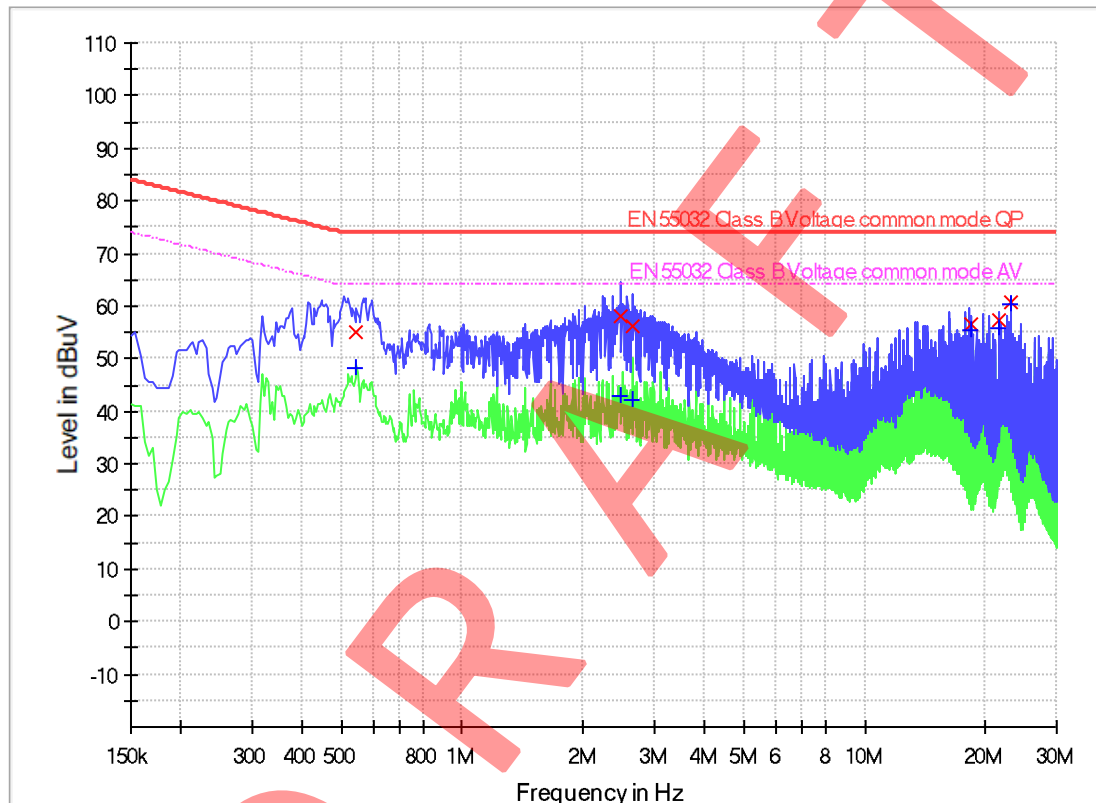

Limit and Margin QP

Frequency (MHz)	QuasiPeak (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.546000	55.0	9.000	9.7	19.0	74.0
2.478000	58.1	9.000	9.4	15.9	74.0
2.650000	56.1	9.000	9.4	17.9	74.0
18.306000	56.5	9.000	9.4	17.5	74.0
21.662000	57.3	9.000	9.4	16.7	74.0
23.130000	60.9	9.000	9.4	13.1	74.0

Limit and Margin AV

Frequency (MHz)	Average (dBuV)	Bandwidth (kHz)	Corr. (dB)	Margin (dB)	Limit (dBuV)
0.546000	48.1	9.000	9.7	15.9	64.0
2.478000	43.0	9.000	9.4	21.0	64.0
2.650000	42.2	9.000	9.4	21.8	64.0
18.306000	55.3	9.000	9.4	8.7	64.0
21.662000	55.8	9.000	9.4	8.2	64.0
23.130000	60.3	9.000	9.4	3.7	64.0

Remark:

1. Corr. Factor (dB) = ISN Factor (dB) + Cable Loss (dB)
2. Margin (dB) = Limit (dBuV) – QuasiPeak/Average (dBuV)

3.4.4 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: ± 3.2 dB.

TEST REPORT

Intertek Report No. : 260508031SZN-003

4 HARMONIC EMISSION TEST


4.1 TEST METHOD AND SUMMARY

Basic Standard :	EN IEC61000-3-2: 2019+A1:2021
Classification :	Class D
Port :	AC Mains Input Port

4.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ064-01	Compliance Test System	California Instruments	5001iX-CTS-400	2023-12-12	2024-12-12
SZ064-01-01	Power Analyzer and Conditioning System	California Instruments	PACS-1	2023-12-12	2024-12-12

4.3 Test Setup Diagram

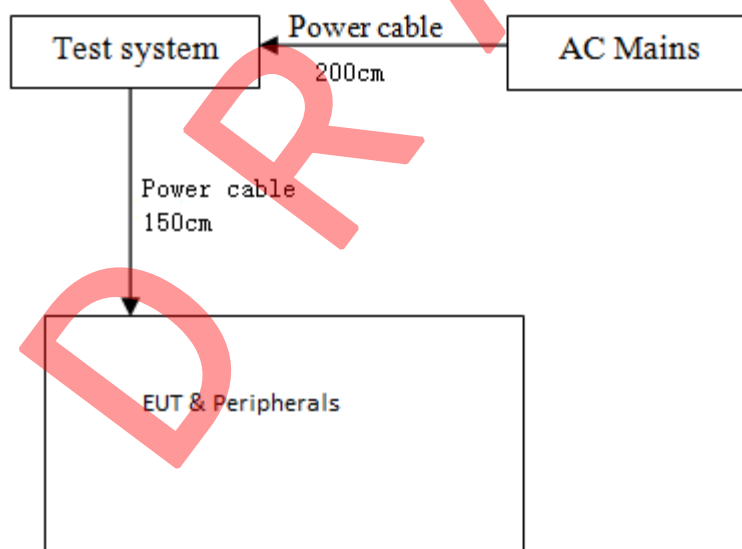

TEST REPORT

Intertek Report No. : 260508031SZN-003


4.4 TEST RESULT

Harmonics – Class-D per Ed. Ed. 5.0 (2018)(Run time)

Test Result: N/L


Source qualification: Normal

Current & voltage waveforms

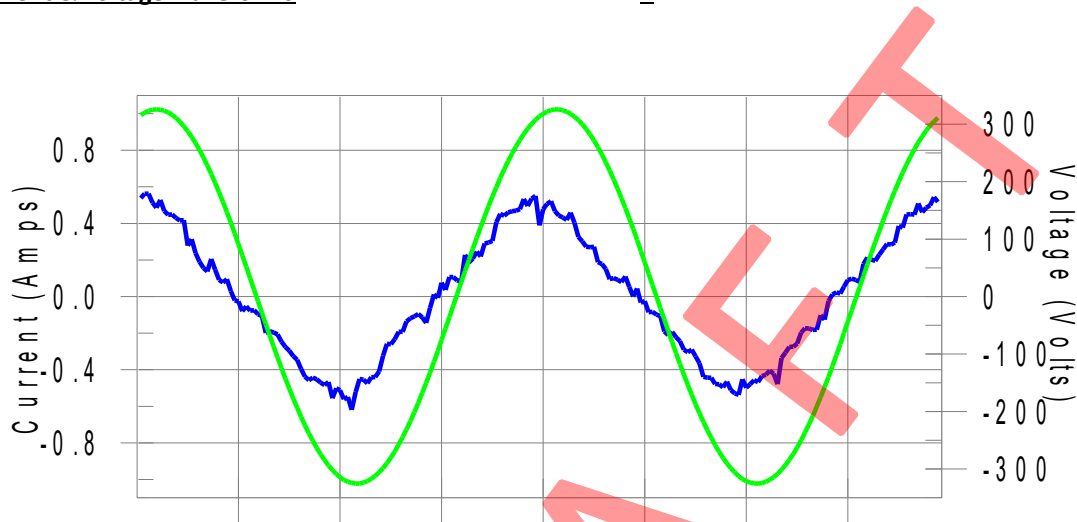

Harmonics and Class D limit line

European Limits

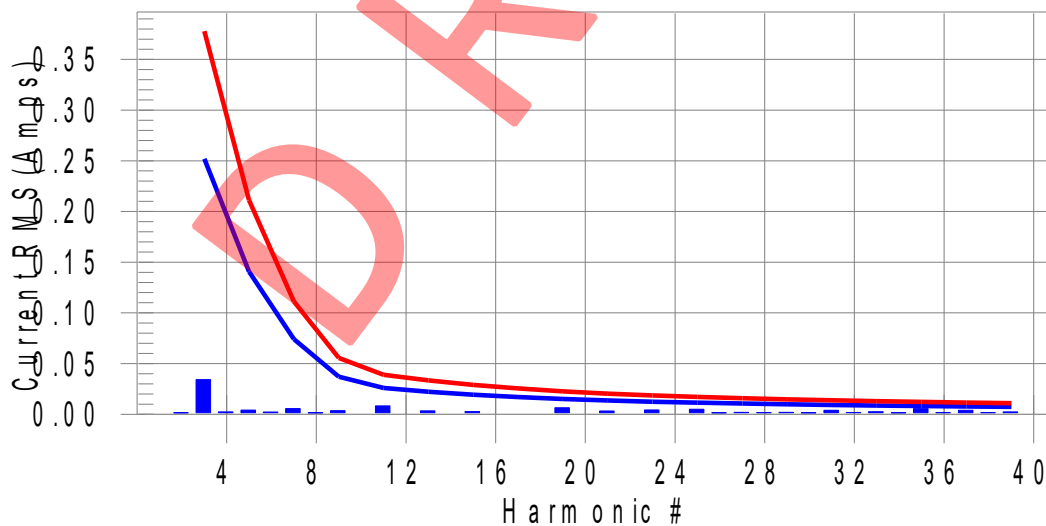

Test result: N/L Worst harmonics H0-0.0% of 150% limit, H0-0% of 100% limit

TEST REPORT

Intertek Report No. : 260508031SZN-003

Current Test Result Summary (Run time)

Test Result: N/L
THC(A): 0.039

Source qualification: Normal
I-THD(%): 11.7

POHC(A): 0.012

POHC Limit(A): 0.032

Highest parameter values during test:

V_RMS (Volts): 230.34
I_Peak (Amps): 0.759
I_Fund (Amps): 0.336
Power (Watts): 74.1

Frequency(Hz): 50.00
I_RMS (Amps): 0.341
Crest Factor: 2.230
Power Factor: 0.950

Harm#	Harms(avg)	100%Limit	%of Limit	Harms(max)	150%Limit	%of Limit	Status
2	0.002	0.000	N/A	0.002	0.000	N/A	N/L
3	0.034	0.252	N/A	0.035	0.378	N/A	N/L
4	0.002	0.000	N/A	0.003	0.000	N/A	N/L
5	0.004	0.141	N/A	0.004	0.211	N/A	N/L
6	0.002	0.000	N/A	0.003	0.000	N/A	N/L
7	0.006	0.074	N/A	0.006	0.111	N/A	N/L
8	0.002	0.000	N/A	0.002	0.000	N/A	N/L
9	0.004	0.037	N/A	0.004	0.056	N/A	N/L
10	0.001	0.000	N/A	0.002	0.000	N/A	N/L
11	0.008	0.026	N/A	0.009	0.039	N/A	N/L
12	0.001	0.000	N/A	0.002	0.000	N/A	N/L
13	0.003	0.022	N/A	0.004	0.033	N/A	N/L
14	0.001	0.000	N/A	0.002	0.000	N/A	N/L
15	0.003	0.019	N/A	0.003	0.029	N/A	N/L
16	0.001	0.000	N/A	0.002	0.000	N/A	N/L
17	0.001	0.017	N/A	0.002	0.026	N/A	N/L
18	0.001	0.000	N/A	0.002	0.000	N/A	N/L
19	0.006	0.015	N/A	0.007	0.023	N/A	N/L
20	0.001	0.000	N/A	0.002	0.000	N/A	N/L
21	0.003	0.014	N/A	0.004	0.020	N/A	N/L
22	0.001	0.000	N/A	0.002	0.000	N/A	N/L
23	0.004	0.012	N/A	0.005	0.019	N/A	N/L
24	0.001	0.000	N/A	0.002	0.000	N/A	N/L
25	0.005	0.011	N/A	0.005	0.017	N/A	N/L
26	0.002	0.000	N/A	0.002	0.000	N/A	N/L
27	0.002	0.011	N/A	0.002	0.016	N/A	N/L
28	0.002	0.000	N/A	0.002	0.000	N/A	N/L
29	0.002	0.010	N/A	0.002	0.015	N/A	N/L
30	0.002	0.000	N/A	0.002	0.000	N/A	N/L
31	0.004	0.009	N/A	0.004	0.014	N/A	N/L
32	0.002	0.000	N/A	0.002	0.000	N/A	N/L
33	0.003	0.009	N/A	0.003	0.013	N/A	N/L
34	0.002	0.000	N/A	0.002	0.000	N/A	N/L
35	0.006	0.008	N/A	0.006	0.012	N/A	N/L
36	0.002	0.000	N/A	0.002	0.000	N/A	N/L
37	0.004	0.008	N/A	0.004	0.012	N/A	N/L
38	0.002	0.000	N/A	0.002	0.000	N/A	N/L
39	0.002	0.007	N/A	0.003	0.011	N/A	N/L
40	0.001	0.000	N/A	0.001	0.000	N/A	N/L

Note: The EUT power level is below 75.0 Watts and therefore has no defined limits

4.5 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: 0.03%.

TEST REPORT

Intertek Report No. : 260508031SZN-003

5 VOLTAGE FLUCTUATIONS AND FLICKER


5.1 TEST METHOD AND SUMMARY

Basic Standard :	EN 61000-3-3: 2013+A2:2021
Port :	AC Mains Input Port

5.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ064-01	Compliance Test System	California Instruments	5001iX-CTS-400	2023-12-12	2024-12-12
SZ064-01-01	Power Analyzer and Conditioning System	California Instruments	PACS-1	2023-12-12	2024-12-12

5.3 Test Setup Diagram

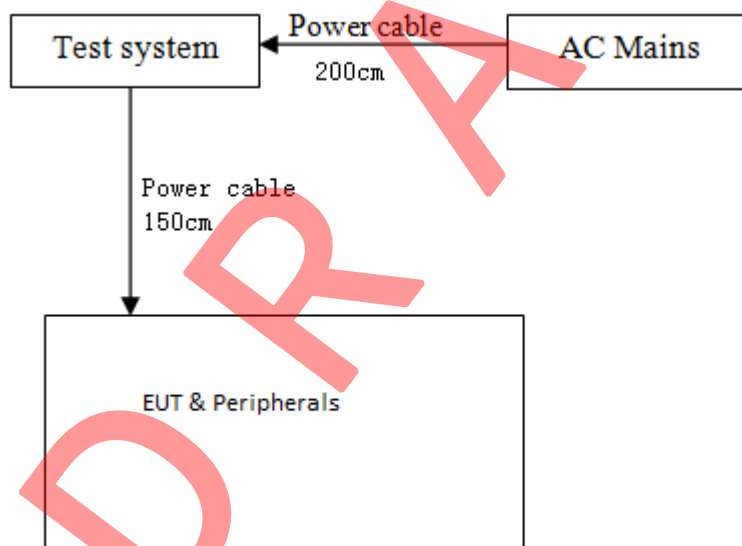

TEST REPORT

Intertek Report No. : 260508031SZN-003

5.3 TEST RESULT


Flicker Test Summary per EN/IEC61000-3-3 (Run time)

Worst Case Test Mode: Wi-Fi mode

Test Result: Pass

Status: Test Completed

Pst_i and limit line

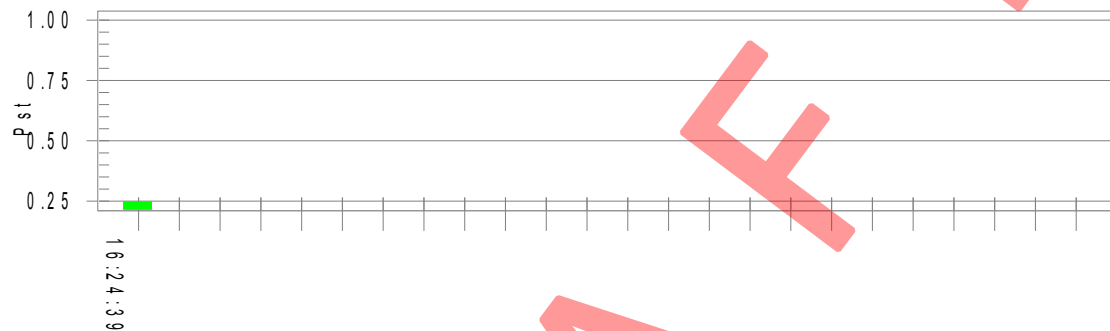

Parameter values recorded during the test:

Vrms at the end of test (Volt): 230.25

T-max (mS): 0

Highest dc (%): 0.00

Highest dmax (%): 0.00

Highest Pst (10 min. period): 0.248

Test limit (mS): 500.0 Pass

Test limit (%): 3.30 Pass

Test limit (%): 4.00 Pass

Test limit: 1.000 Pass

5.4 MEASUREMENT UNCERTAINTY

Measurement Uncertainties: $\pm 0.25\%$.

6 ELECTROSTATIC DISCHARGE


6.1 TEST METHOD AND SUMMARY

Basic Standard :	EN 61000-4-2: 2009
Port :	Enclosure
Required Performance Criterion :	B
Level :	± 2.0, ± 4.0, ±8.0 kV (Air Discharge) ±4.0 kV (Contact Discharge) ±4.0 kV (Indirect Contact Discharge)
Temperature :	23.9 °C
Relative Humidity :	51.1 %
No. of Discharge(s) :	Minimum of 10 Discharges per Each Polarity
Time Between Each Discharge :	1 second
Test Mode :	Wi-Fi Link, Wi-Fi Idle
Test Setup :	Table-top
Test of Post-installation :	N/A

6.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ189-05	ESD Simulator	TESEQ	NSG 437	2024-06-07	2025-06-07

6.3 Test Setup Diagram

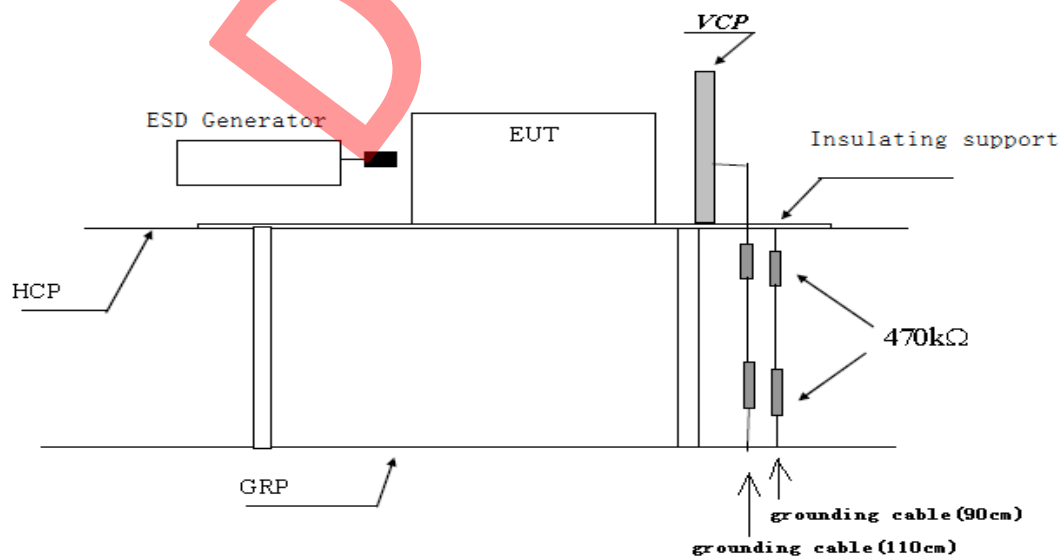

TEST REPORT

Intertek Report No. : 260508031SZN-003

6.4 TEST RESULT

6.4.1 TEST RESULT

Discharge Type	Applied Voltage	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion B)
Contact Discharge	$\pm 4\text{kV}$	Complied
Air Discharge	$\pm 2, \pm 4, \pm 8\text{kV}$	Complied
Indirect HCP Discharge	$\pm 4\text{kV}$	Complied
Indirect VCP Discharge	$\pm 4\text{kV}$	Complied

6.4.2 ADDITIONAL RESULT INFORMATION

The screen flash during Contact Discharge $\pm 4\text{kV}$ and Direct Air Discharge $\pm 8\text{kV}$ test, but it can be resumed by itself after test

TEST REPORT

Intertek Report No. : 260508031SZN-003

7 RADIO FREQUENCY ELECTROMAGNETIC FIELD

7.1 TEST METHOD AND SUMMARY


Basic Standard :	EN 61000-4-3: 2006 + A1: 2008 + A2: 2010
Port :	Enclosure
Required Performance Criterion :	A
Level :	3.0 V/m (rms)
Test Modulation :	1kHz, 80% AM
Frequency :	80 MHz to 6 GHz
Dwell Time :	1s
Frequency Step :	1%
Temperature :	23.2°C
Relative Humidity :	53.3%
Test Facility :	Full Anechoic Chamber
Antenna Polarization :	Horizontal and Vertical
Test Distance :	3m
Test Mode :	Wi-Fi Link, Wi-Fi Idle
Test Setup :	Table-top

7.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ188-02	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2024-12-12
SZ061-03	Biconilog Antenna	ETS	3142C	2024-07-09	2027-07-09
SZ061-16	Stacked double log. -Per. Antenna	SCHWARZBECK	STLP 9149	2021-11-14	2024-11-14
SZ180-15	Signal Generator	R&S	SMB100A	2023-12-12	2024-12-12
SZ181-01	Amplifier	PRANA	AP32 MT215	2023-12-12	2024-12-12
SZ190-07	RF Amplifier	Milmega	AS0860-75/45	2023-12-12	2024-12-12

* The Equipment would be verified together with the test system before testing.

7.3 Test Setup Diagram

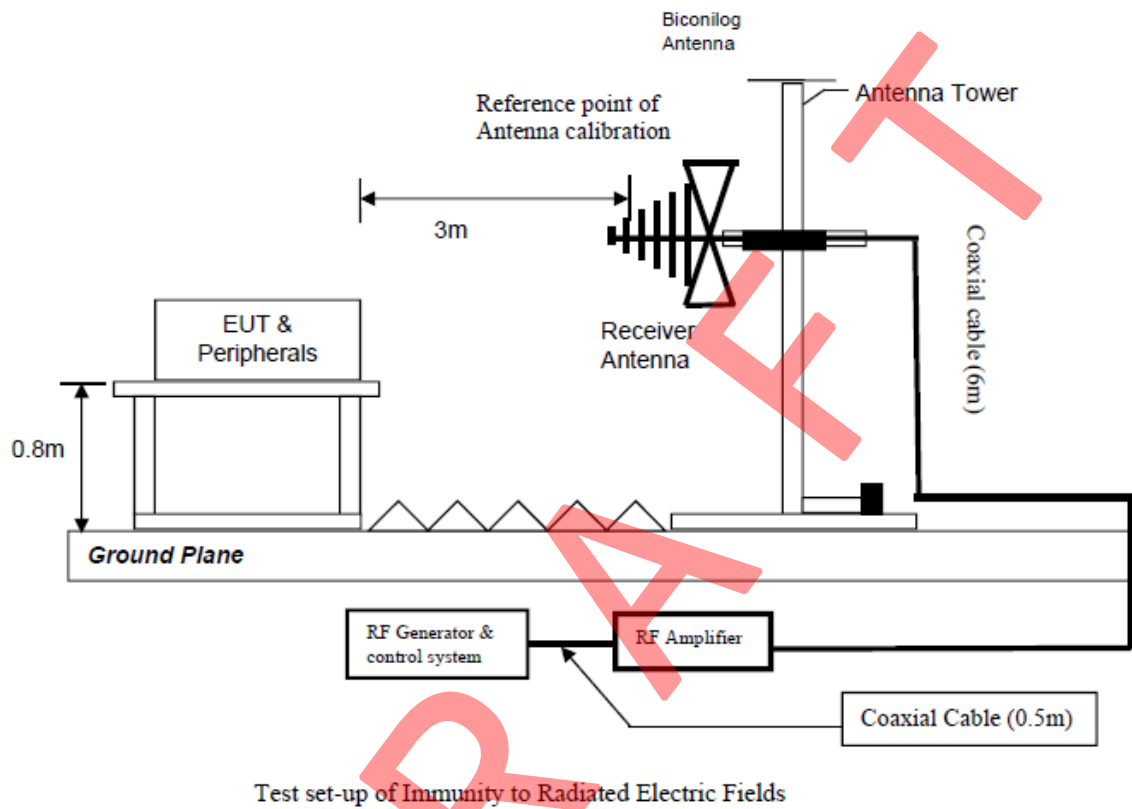

TEST REPORT

Intertek Report No. : 260508031SZN-003

7.4 TEST RESULT

7.4.1 TEST RESULT

Frequency (MHz)	Exposed Side	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion A)
80 to 6000	Front	Complied
80 to 6000	Left	Complied
80 to 6000	Rear	Complied
80 to 6000	Right	Complied

7.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

7.5 DECLARATION INFORMATION FROM APPLICANT

None.

8 FAST TRANSIENTS


8.1 TEST METHOD AND SUMMARY

Basic Standard :	EN 61000-4-4: 2012	
Port :	A.C. Power Lines	Telecommunication Lines, D.C. Power Lines, Signal Lines and Control Lines
Required Performance Criterion :	B	
Level :	$\pm 1.0\text{kV}$	$\pm 0.5\text{kV}$
Temperature :	19.4 °C	
Relative Humidity :	49.8 %	
Test Duration	1 minute per each polarity	
Test Mode :	Wi-Fi Link, Wi-Fi Idle	
Test Setup :	Table-top	
Generator Drive :	Internal	
Sequence of Application :	Each One	

8.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2021-12-26 2022-12-26	2022-12-26 2023-12-26
SZ063-01-01	Capacitive Coupling Clamp	Haefely	IP4A	2021-12-28 2022-12-27	2022-12-28 2023-12-27

8.3 Test Setup Diagram

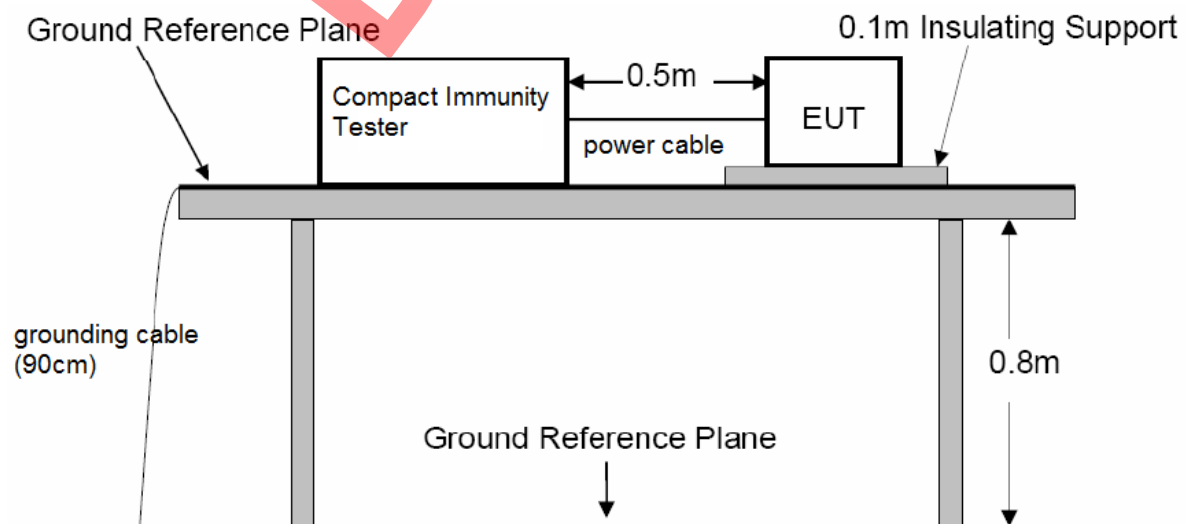

TEST REPORT

Intertek Report No. : 260508031SZN-003

8.4 TEST RESULT

8.4.1 TEST RESULT

Port	Level	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion B)
A.C. Power Lines	$\pm 1\text{kV}$	Complied
Telecommunication Lines	$\pm 0.5\text{kV}$	Complied
D.C. Power Lines	$\pm 0.5\text{kV}$	N/A
Signal Lines	$\pm 0.5\text{kV}$	Complied
Control Lines	$\pm 0.5\text{kV}$	N/A

8.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

8.5 DECLARATION INFORMATION FROM APPLICANT

None.

TEST REPORT

Intertek Report No. : 260508031SZN-003

9 SURGES


9.1 TEST METHOD AND SUMMARY

Basic Standard :	EN 61000-4-5 : 2006		
Port :	A.C. Power Lines		
	Phase And Neutral	Phase And Earth	Neutral And Earth
Level :	5 Positive And 5 Negative Surges		
	±1kV	N/A	N/A
Generator Impedance :	2 ohm	12 ohm	12 ohm
Required Performance Criterion :	B		
Temperature :	19.4 °C		
Relative Humidity :	49.8 %		
Repetition Rate :	1 minute		
Test Mode :	Wi-Fi Link, Wi-Fi Idle		
Test Setup :	Capacitive Coupling		
Surge Generator Trigger :	Internal		
Installation Condition :	Class 3: Electrical environment where cables run in parallel.		
Phase Angle :	0°, 90°, 180°, 270°		

9.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2021-12-26 2022-12-26	2022-12-26 2023-12-26

9.3 Test Setup Diagram

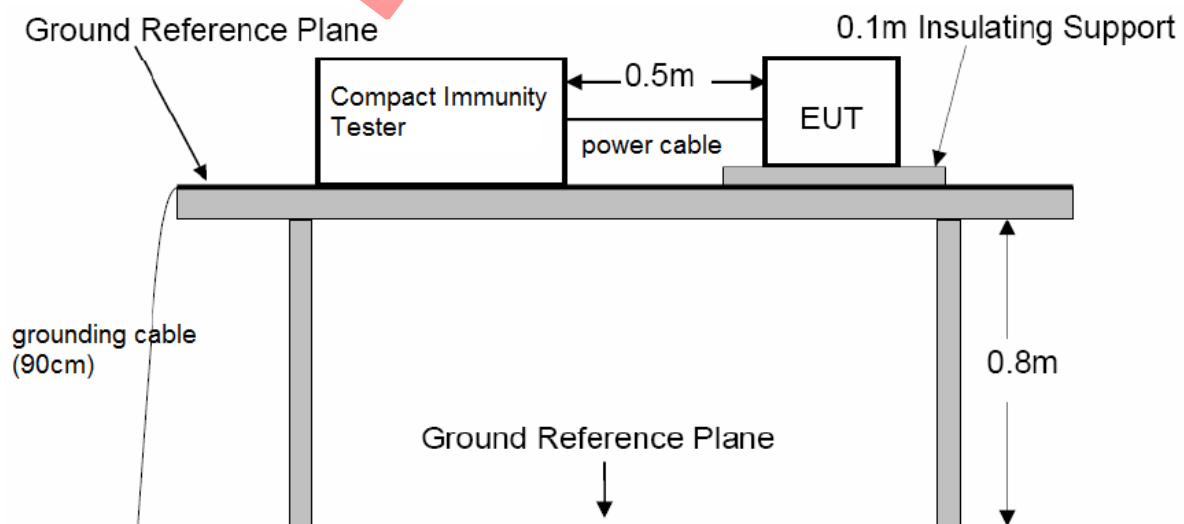

TEST REPORT

Intertek Report No. : 260508031SZN-003

9.4 TEST RESULT

9.4.1 TEST RESULT

Level		Result (Pursuant to ETSI EN 301 489-3/-17 Criterion B)
Between Phase And Neutral :	± 1kV	Complied
Between Phase And Earth :	± 2kV	N/A
Between Neutral And Earth :	± 2kV	N/A

9.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

9.5 DECLARATION INFORMATION FROM APPLICANT

None.

TEST REPORT

Intertek Report No. : 260508031SZN-003

10 CONDUCTED RF IMMUNITY

10.1 TEST METHOD AND SUMMARY


Basic Standard :	EN 61000-4-6: 2009
Port :	A.C. Power Lines, Telecommunication Lines, D.C. Power Lines, Signal Lines and Control Lines
Required Performance Criterion :	A
Level :	3.0V (rms)
Test Modulation :	1 kHz, 80% AM
Frequency :	0.15 MHz to 80 MHz
Dwell Time :	1s
Frequency Step :	1%
Temperature :	24.0°C
Relative Humidity :	58.2%
Coupling Factor of CDN :	-1.0dB ~ -1.7dB
Test Mode :	Wi-Fi Link, Wi-Fi Idle
Test Setup :	Table-top
Equipment Under Test (EUT):	Single Unit

10.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ180-02	Signal Generator	Aeroflex	2023A	2021-12-28 2022-12-19	2022-12-28 2023-12-19
SZ181-03	Amplifier	AR-WORLDWIDE	75A250	2021-12-28 2022-12-19	2022-12-28 2023-12-19
SZ181-03-01	Attenuator	AR-WORLDWIDE	6dB/50FH-006-100	2021-12-28 2022-12-19	2022-12-28 2023-12-19
SZ183-01	RF CURRENT-INJECTION CLAMP	LUTHI	EM101	2021-12-27 2022-12-27	2022-12-27 2023-12-27
SZ184-01	Coupling-Decoupling Network	LUTHI	CDN L-801 M2/M3	2021-12-27 2022-12-27	2022-12-27 2023-12-27
SZ089-03	Audio Analyzer	AP	ATS-1A	2021-12-28 2022-12-19	2022-12-28 2023-12-19
SZ188-04	Shielding Room	Jiang yin Tian De	5*6*2.9m/5*2.5*2.7m	2020-01-07	2023-01-07

* The Equipment would be verified together with the test system before testing.

10.3 Test Setup Diagram

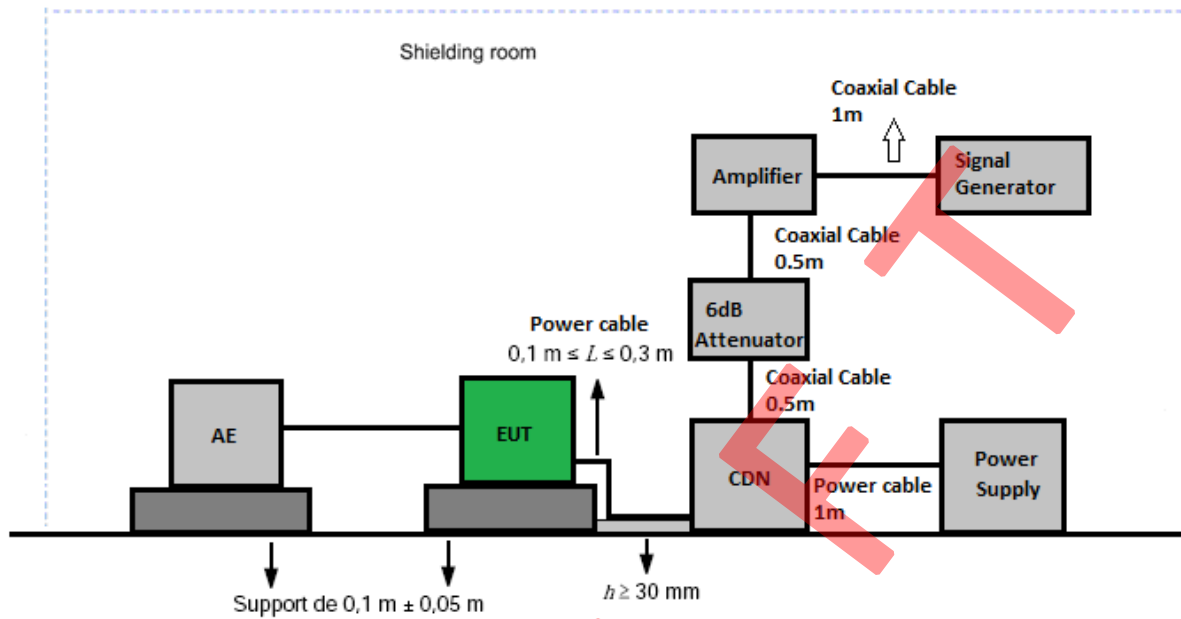

TEST REPORT

Intertek Report No. : 260508031SZN-003

10.4 TEST RESULT

10.4.1 TEST RESULT

Port	Level	Result (Pursuant to ETSI EN 301 489-3/-17 Criterion A)
A.C. Power Lines	3V (rms)	Complied
Telecommunication Lines	3V (rms)	Complied
D.C. Power Lines	3V (rms)	N/A
Signal Lines	3V (rms)	Complied
Control Lines	3V (rms)	N/A

10.4.2 ADDITIONAL RESULT INFORMATION

No degradation of performance or loss of function was occurred during and after the test.

10.5 DECLARATION INFORMATION FROM APPLICANT

None.

TEST REPORT

Intertek Report No. : 260508031SZN-003

11 VOLTAGE DIPS & INTERRUPTIONS

11.1 TEST METHOD AND SUMMARY

Basic Standard :	EN 61000-4-11: 2004			
Port :	A.C. Power Lines			
Level :	Test level in %U _r	Duration(s)	Required Performance Criterion	
			Transmitter	Receiver
	0	0.01	B	B
	0	0.02	B	B
	70	0.5	B	B
	0	5	C	C
No. of Dips/Interruptions :	3			
Temperature :	19.4 °C			
Relative Humidity :	49.8 %			
Test Mode :	Wi-Fi Link, Wi-Fi Idle			
Test Setup :	Test generator causes the interference to the EUT AC mains			


U_r is the rated voltage for the equipment.

11.2 TEST EQUIPMENT

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ063-01	Compact Immunity Tester	Haefely	ECOMPACT 4	2021-12-26 2022-12-26	2022-12-26 2023-12-26

* The Equipment would be verified together with the test system before testing.

11.3 TEST EQUIPMENT

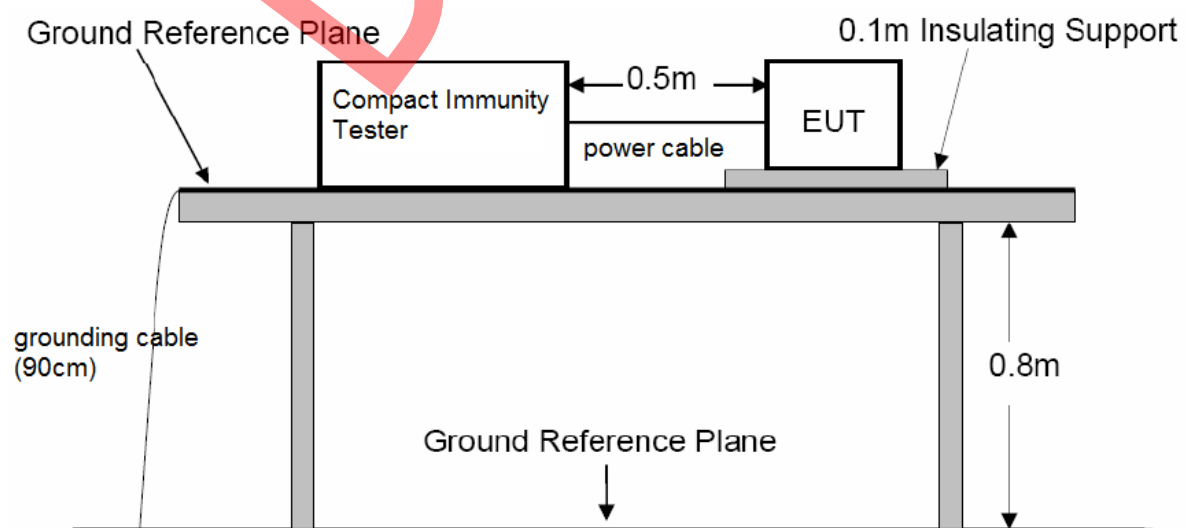

TEST REPORT

Intertek Report No. : 260508031SZN-003

11.4 TEST RESULT

11.4.1 TEST RESULT FOR TRANSMITTER

Test Condition		Result (Pursuant to ETSI EN 301 489-3/-17)	
Test Level in %U _T	Duration(s)	Meet Criterion A	Meet Criterion B & C
0	0.01	N/A	Complied
0	0.02	N/A	Complied
70	0.5	N/A	Complied
0	5	N/A	Complied

U_T is the rated voltage for the equipment.

11.4.2 ADDITIONAL RESULT INFORMATION

EUT stopped operation and could be reset by operator at test level 0%U_T, 5s of Interrupt.

11.5 DECLARATION INFORMATION FROM APPLICANT

None.

EXHIBIT 3

PHOTOS OF EUT

DRAFT

12. PHOTOS OF TEST SET-UP

Please refer to Annex of EUT Photos_260508031SZN.

***** End of Report *****