

Shen Zhen MTC Co., LTD

TEST REPORT

SCOPE OF WORK

RADIO FREQUENCY TESTING—MUDV50B0-90106-T2, MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **-*50***** (* can from 0 to 9, A to Z or blank), PR50U3421SKB.

REPORT NUMBER

260508031SZN-004

ISSUE DATE

21 May 2026

[REVISED DATE]

[-----]

PAGES

41

DOCUMENT CONTROL NUMBER

ETSI EN300328_c

© 2017 INTERTEK



Intertek Report No. : 260508031SZN-004

RADIO COMMUNICATIONS TESTING REPORT

Shen Zhen MTC Co., LTD

MUDV50B0-90106-T2

Additional Model: MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **-*50*****(* can from 0 to 9, A to Z or blank), PR50U3421SKB.

TV/LCD LED TV/LED LCD TV

2.4GHz Transceiver

Test Report: 260508031SZN-004

Report Prepared and Checked By:	Bruce Zheng Project Engineer	
Report Approved By :	Rode Liu Project Engineer	
Date :	21 May 2026	

This report is for the exclusive use of Intertek's Client and is provided pursuant to the agreement between Intertek and its Client. Intertek's responsibility and liability are limited to the terms and conditions of the agreement. Intertek assumes no liability to any party, other than to the Client in accordance with the agreement, for any loss, expense or damage occasioned by the use of this report. Only the Client is authorized to permit copying or distribution of this report and then only in its entirety. Any use of the Intertek name or one of its marks for the sale or advertisement of the tested material, product or service must first be approved in writing by Intertek. The observations and test results in this report are relevant only to the sample tested. This report by itself does not imply that the material, product, or service is or has ever been under an Intertek certification program.

RADIO PERFORMANCE MEASUREMENTS

RESULT SUMMARY

Requirements	ETSI EN 300 328		Condition	Compliance
	Technical requirements	Test Specification		
	Clause Number			
RF Output Power	4.3.2.2	5.4.2		Complied
Power Spectral Density	4.3.2.3	5.4.3	Only for modulations other than FHSS	Complied
Duty cycle, Tx-Sequence, Tx-gap	4.3.2.4	5.4.2	Only for non-adaptive equipment and RF Output Power>10dBm	N/A
Medium Utilisation	4.3.2.5	5.4.2	Only for non-adaptive equipment and RF Output Power>10dBm	N/A
Adaptivity	4.3.2.6	5.4.6	Only for adaptive equipment and RF Output Power>10dBm	Complied
Occupied Channel Bandwidth	4.3.2.7	5.4.7		Complied
Transmitter unwanted emission in the OOB domain	4.3.2.8	5.4.8		Complied
Transmitter unwanted emission in the spurious domain	4.3.2.9	5.4.9		Complied
Receiver spurious emissions	4.3.2.10	5.4.10		Complied
Receiver Blocking	4.3.2.11	5.4.11		Complied
Geo-location capability	4.3.2.12	N/A	Only applies to equipment with geo-location capability	N/A
Technical requirements for FHSS modulation	4.3.1	5.4	Only for FHSS	N/A
When determining the test conclusion, the Measurement Uncertainty of test has been considered. Note: N/A means Not applicable.				

**EQUIPMENT UNDER TEST (EUT)
INFORMATION**

Applicant: Shen Zhen MTC Co., LTD
MTC Industry Park, 1st Lilang Road, Xialilang community, Nanwan street,
Longgang district, Shenzhen, China

Description of EUT: TV/LCD LED TV/LED LCD TV

Type Number (s): Model: MUDV50B0-90106-T2

Brand Name(s): AMTC, Sharp, Polaroid

Serial Number (s): Not Labelled

Equipment Received: 05 December 2022

Test Date (s): 05 December 2022 to 06 January 2023

WiFi Version: 802.11b,
802.11g,
802.11n-HT20 (SISO & MIMO),
802.11n-HT40 (SISO & MIMO)

Test Site and Location: Intertek Testing Services Shenzhen Ltd.
No. 101&201, Building B, No. 308 Wuhe Avenue, Zhangkengjing
Community, GuanHu Subdistrict, LongHua District, ShenZhen, P.R. China

Test Specification (s): ETSI EN 300 328 V2.2.2 (2019-07)

CONTENTS

EXHIBIT 1	GENERAL DESCRIPTION	5
1	INTRODUCTION	6
2	TEST SPECIFICATION	6
EXHIBIT 2	TEST RESULT OF RADIO PERFORMANCE MEASUREMENTS	8
3	RF Output Power	9
4	Power Spectral Density	15
5	Adaptivity	19
6	Occupied Channel Bandwidth	21
7	Transmitter unwanted emissions in the out-of-band domain	23
8	Transmitter unwanted emissions in the spurious domain	28
9	Receiver spurious emission	32
10	Receiver Blocking	36
EXHIBIT 3	PHOTOS OF EUT	40
11	EUT PHOTOS	41

EXHIBIT 1

GENERAL DESCRIPTION

DRAFT

1 INTRODUCTION

Intertek Testing Services Shenzhen Limited has tested the TV/LCD LED TV/LED LCD TV MUDV50B0-90106-T2. The sample was tested to the relevant performance specification published by the European Telecommunications Standards Institute. This report contains the results of these tests and is submitted TV/LCD LED TV/LED LCD TV as the final test results.

The equipment under test (EUT) is a TV/LCD LED TV/LED LCD TV with WIFI function; The EUT was powered 220-240V~, 50/60Hz, 128W, the detail please see the user manual.

The Model: MUDV50B0-90106-S2, MUDV50B0-90106, MUDV50****-90106-## (*, # can from 0 to 9, A to Z or blank), 4T-C50FJ2KL1FB, 4T-C50FJ2EL2NB, 4T-C50HJ4020EB, 4T-C50HJ4020KB, **_50*****(* can from 0 to 9, A to Z or blank), PR50U3421SKB are the same as the Model: MUDV50B0-90106-T2 in hardware aspect except the different appearance. The difference in model number serves as marketing strategy.

This report is based on previous report with report number 240731081SZN-002 dated 10 September 2024(original signatory: Bruce Zheng, Rode Liu on file). Owing to adding the models, no test was required after evaluation.

The production units are required to conform to the initial sample as received when the units are placed on the market.

2 TEST SPECIFICATION

2.1 RELEVANT PERFORMANCE SPECIFICATION

The relevant performance specifications for Shen Zhen MTC Co., LTD MUDV50B0-90106-T2 are ETSI EN 300 328 V2.2.2 (2019-07). The harmonised standards are ETSI EN 300 328 V2.2.2 (2019-07).

The tests performed are those required to demonstrate compliance with the technical specifications and the essential requirements of Article 3.2 of the Radio Equipment Directive (2014/53/EU) - RED for regulatory purposes.

2.2 TEST ENVIRONMENT

The tests were performed in the Radio communications and Electromagnetic Compatibility Test Facility at Intertek Testing Services Shenzhen Limited. The sample was subjected to the ambient conditions in the laboratory and indoor test site except during tests at extremes of temperatures and the Radiated Emissions Tests. The temperature and relative humidity recorded during the period of each test are given in the results.

2.3 CONFIGURATION OF TEST SAMPLE

The test sample consisted of one transceiver and under manufacturer's specified test mode, only the worst case data were reported.

During testing channel & power controlling software provide by the applicant was used to control the operation channel as well as the output power level. The RF output power selection is for the setting of RF output power expected by the applicant and is going to be fixed on the firmware of the final end product.

2.4 TEST POWER SOURCES

The TV/LCD LED TV/LED LCD TV is intended to operate from 220-240V~, 50/60Hz, 128W. The test power source voltages were:

Nominal test voltage AC 230V

2.5 TEST FREQUENCIES

For 802.11b/g and n-HT20 the sample supplied operated on 13 channels, nominally at 2.412 - 2.472 GHz for Transceiver. The channel is separated by 5 MHz channel spacing. The tests were carried out on channel 1, 7 and 13 channels of the frequency of the alignment range.

For 802.11n-HT40 the sample supplied operated on 9 channels, nominally at 2.422 - 2.462 GHz for Transceiver. The channel is separated by 5 MHz channel spacing. The tests were carried out on channel 3, 7 and 11 channels of the frequency of the alignment range.

2.6 GENERAL REQUIREMENTS

2.6.1 MODULATION

1. Constant envelope digital frequency modulation is used with CCK / DSSS / OFDM technique,
2. The product is a TV/LCD LED TV/LED LCD TV with WiFi IEEE 802.11b/g/n-HT20/n-HT40 radio functions.

2.6.2 ANTENNA

The antenna used in Transceiver is permanent Integrate antenna.

Antenna Gain: 2.0dBi

2.6.3 Test Condition

Manufacturer's declared operating temperature: -10°C to +55°C.

2.7 MEASUREMENT UNCERTAINTY

All measurement uncertainties stated in this report are estimated to a 95% confidence level.

2.8 SUPPORT EQUIPMENT – RADIO PERFORMANCE MEASUREMENTS

1. Laptop (Lenovo X1) (Provided by Intertek)
2. USB Cable (Detachable, un-shielded, 120cm) (Provided by Applicant)
3. Test Software (Provided by Applicant) was installed on the EUT

EXHIBIT 2

**TEST RESULT
OF
RADIO PERFORMANCE MEASUREMENTS**

DRAFT

3 RF OUTPUT POWER


3.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.2
Test method	Conducted measurements

3.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ016-12	Temperature & Humidity Chamber	Terchy	MHK-120NK	2022-01-05	2023-01-05
SZ182-02	RF Power Meter	Anritsu	ML2496A	2022-05-16	2023-05-16
SZ070-24	Open Switch and Control Unit with TS8997 option for power measurement test	R&S	OSP120+B157	2022-12-22	2023-12-22
SZ182-02-01	Pulse Power Sensor	Anritsu	MA2411B	2022-05-16	2023-05-16
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15

3.3 TEST SETUP

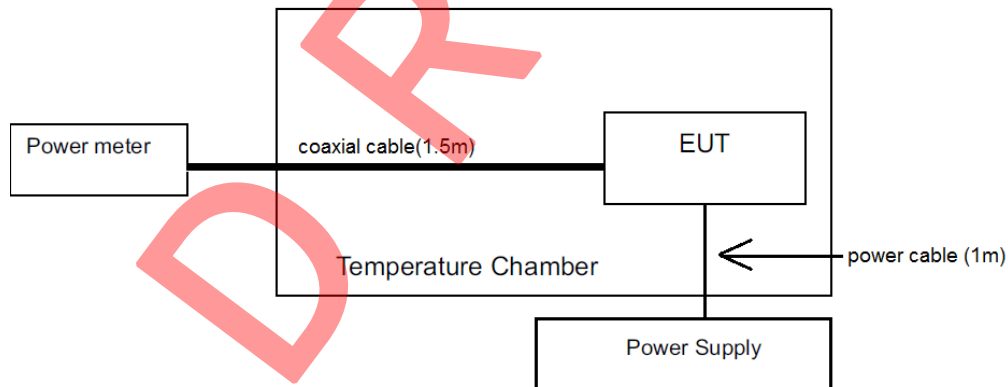

TEST REPORT

Intertek Report No. : 260508031SZN-004

3.4 WORSE CASE TEST RESULT (AC Power Supply)

(802.11b) ANT1

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 1	17.8	20	-2.2
T _{min} -10°C H _{min} 0%		17.5	20	-2.5
T _{max} 55°C H _{max} 50%		17.5	20	-2.5
Ambient	Channel 7	18.1	20	-1.9
T _{min} -10°C H _{min} 0%		17.6	20	-2.4
T _{max} 55°C H _{max} 50%		18.0	20	-2.0
Ambient	Channel 13	18.1	20	-1.9
T _{min} -10°C H _{min} 0%		17.9	20	-2.1
T _{max} 55°C H _{max} 50%		17.6	20	-2.4

(802.11b) ANT2

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 1	16.9	20	-3.1
T _{min} -10°C H _{min} 0%		16.7	20	-3.3
T _{max} 55°C H _{max} 50%		16.5	20	-3.5
Ambient	Channel 7	17.1	20	-2.9
T _{min} -10°C H _{min} 0%		16.9	20	-3.1
T _{max} 55°C H _{max} 50%		16.9	20	-3.1
Ambient	Channel 13	17.1	20	-2.9
T _{min} -10°C H _{min} 0%		16.7	20	-3.3
T _{max} 55°C H _{max} 50%		16.9	20	-3.1

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11g) ANT1

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 1	18.2	20	-1.8
T _{min} -10°C H _{min} 0%		17.8	20	-2.2
T _{max} 55°C H _{max} 50%		17.9	20	-2.1
Ambient	Channel 7	18.2	20	-1.8
T _{min} -10°C H _{min} 0%		18.1	20	-1.9
T _{max} 55°C H _{max} 50%		17.8	20	-2.2
Ambient	Channel 13	18.3	20	-1.7
T _{min} -10°C H _{min} 0%		18.0	20	-2.0
T _{max} 55°C H _{max} 50%		17.8	20	-2.2

(802.11g) ANT2

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 1	17.2	20	-2.8
T _{min} -10°C H _{min} 0%		16.8	20	-3.2
T _{max} 55°C H _{max} 50%		16.8	20	-3.2
Ambient	Channel 7	17.2	20	-2.8
T _{min} -10°C H _{min} 0%		16.7	20	-3.3
T _{max} 55°C H _{max} 50%		17.1	20	-2.9
Ambient	Channel 13	17.2	20	-2.8
T _{min} -10°C H _{min} 0%		17.0	20	-3.0
T _{max} 55°C H _{max} 50%		16.9	20	-3.1

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11n-HT20 SISO) ANT1

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 1	15.3	20	-4.7
T _{min} -10°C H _{min} 0%		14.8	20	-5.2
T _{max} 55°C H _{max} 50%		15.0	20	-5.0
Ambient	Channel 7	15.4	20	-4.6
T _{min} -10°C H _{min} 0%		14.9	20	-5.1
T _{max} 55°C H _{max} 50%		15.3	20	-4.7
Ambient	Channel 13	15.6	20	-4.4
T _{min} -10°C H _{min} 0%		15.4	20	-4.6
T _{max} 55°C H _{max} 50%		15.3	20	-4.7

(802.11n-HT20 SISO) ANT2

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 1	14.4	20	-5.6
T _{min} -10°C H _{min} 0%		13.9	20	-6.1
T _{max} 55°C H _{max} 50%		14.2	20	-5.8
Ambient	Channel 7	14.5	20	-5.5
T _{min} -10°C H _{min} 0%		14.2	20	-5.8
T _{max} 55°C H _{max} 50%		14.3	20	-5.7
Ambient	Channel 13	14.4	20	-5.6
T _{min} -10°C H _{min} 0%		14.2	20	-5.8
T _{max} 55°C H _{max} 50%		14.1	20	-5.9

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11n-HT20 MIMO)

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 1	18.1	20	-1.9
T _{min} -10°C H _{min} 0%		18.0	20	-2.0
T _{max} 55°C H _{max} 50%		17.7	20	-2.3
Ambient	Channel 7	18.1	20	-1.9
T _{min} -10°C H _{min} 0%		17.9	20	-2.1
T _{max} 55°C H _{max} 50%		17.9	20	-2.1
Ambient	Channel 13	18.1	20	-1.9
T _{min} -10°C H _{min} 0%		17.6	20	-2.4
T _{max} 55°C H _{max} 50%		17.9	20	-2.1

(802.11n-HT40 SISO) ANT1

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 3	15.4	20	-4.6
T _{min} -10°C H _{min} 0%		14.9	20	-5.1
T _{max} 55°C H _{max} 50%		15.2	20	-4.8
Ambient	Channel 7	15.4	20	-4.6
T _{min} -10°C H _{min} 0%		15.2	20	-4.8
T _{max} 55°C H _{max} 50%		15.1	20	-4.9
Ambient	Channel 11	15.3	20	-4.7
T _{min} -10°C H _{min} 0%		15.1	20	-4.9
T _{max} 55°C H _{max} 50%		14.9	20	-5.1

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11n-HT40 SISO) ANT2

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 3	14.3	20	-5.7
T _{min} -10°C H _{min} 0%		13.9	20	-6.1
T _{max} 55°C H _{max} 50%		13.8	20	-6.2
Ambient	Channel 7	14.4	20	-5.6
T _{min} -10°C H _{min} 0%		14.0	20	-6.0
T _{max} 55°C H _{max} 50%		13.9	20	-6.1
Ambient	Channel 11	14.4	20	-5.6
T _{min} -10°C H _{min} 0%		14.1	20	-5.9
T _{max} 55°C H _{max} 50%		14.0	20	-6.0

(802.11n-HT40 MIMO)

Test Conditions		Measured Power (dBm)	Limit (dBm)	Margin (dB)
Temperature (°C) Humidity (%)	Channel			
Ambient	Channel 3	17.9	20	-2.1
T _{min} -10°C H _{min} 0%		17.5	20	-2.5
T _{max} 55°C H _{max} 50%		17.8	20	-2.2
Ambient	Channel 7	18.1	20	-1.9
T _{min} -10°C H _{min} 0%		17.7	20	-2.3
T _{max} 55°C H _{max} 50%		17.8	20	-2.2
Ambient	Channel 11	18.0	20	-2.0
T _{min} -10°C H _{min} 0%		17.7	20	-2.3
T _{max} 55°C H _{max} 50%		17.6	20	-2.4

Notes:

- Negative sign (-) in the margin column signify levels below the limit.
- 20 dBm corresponds to 100mW.
- Measurement Uncertainty: ± 1.49 dB.
- Remark: Power setting and Power level in the test software provided by the client.

4 POWER SPECTRAL DENSITY

4.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.3
Test method	Conducted measurements

4.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19


4.3 LIMIT FOR POWER SPECTRUM DENSITY

For equipment using wide band modulations other than FHSS, the maximum Power Spectral Density is limited to 10 dBm per MHz.

4.4 MEASURING INSTRUMENT SETTING

Spectrum analyzer settings	
Spectrum Analyzer function	Setting
Start Frequency	2400MHz
Stop Frequency	2483.5MHz
Detector	RMS
RBW	10 kHz
VBW	30 kHz
Sweep	Auto couple
Trace	Max hold
Sweep points	> 8350
Attenuation	Auto

4.5 TEST SETUP

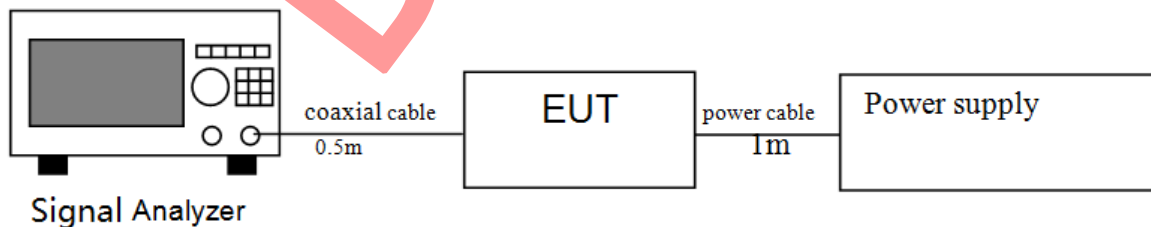

TEST REPORT

Intertek Report No. : 260508031SZN-004

4.6 WORSE CASE TEST RESULTS- AC TEST VOLTAGE

(802.11b) ANT1

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 1	2412	9.07	10	-0.93
Channel 7	2442	9.13	10	-0.87
Channel 13	2472	8.99	10	-1.01

(802.11b) ANT2

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 1	2412	8.76	10	-1.24
Channel 7	2442	9.16	10	-0.84
Channel 13	2472	8.97	10	-1.03

(802.11g) ANT1

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 1	2412	7.49	10	-2.51
Channel 7	2442	7.56	10	-2.44
Channel 13	2472	7.87	10	-2.13

(802.11g) ANT2

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 1	2412	6.62	10	-3.38
Channel 7	2442	6.74	10	-3.26
Channel 13	2472	6.65	10	-3.35

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11n20 SISO) ANT1

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 1	2412	4.45	10	-5.55
Channel 7	2442	4.56	10	-5.44
Channel 13	2472	4.74	10	-5.26

(802.11n20 SISO) ANT2

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 1	2412	3.65	10	-6.35
Channel 7	2442	3.59	10	-6.41
Channel 13	2472	3.59	10	-6.41

(802.11n20 MIMO)

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 1	2412	7.32	10	-2.68
Channel 7	2442	7.22	10	-2.78
Channel 13	2472	7.32	10	-2.68

(802.11n40 SISO) ANT1

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 3	2422	1.73	10	-8.27
Channel 7	2442	1.82	10	-8.18
Channel 11	2462	1.71	10	-8.29

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11n40 SISO) ANT2

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 3	2422	0.56	10	-9.44
Channel 7	2442	0.82	10	-9.18
Channel 11	2462	0.90	10	-9.10

(802.11n40 MIMO)

Channel	Frequency (MHz)	Measured Power Density (dBm/1MHz)	Limit (dBm/1MHz)	Margin (dB)
Channel 3	2422	4.20	10	-5.80
Channel 7	2442	4.59	10	-5.41
Channel 11	2462	4.57	10	-5.43

Notes:

1. Negative sign (-) in the margin column signify levels below the limit.
2. Measurement Uncertainty: ± 3.0 dB.
3. Remark: Power setting and Power level in the test software provided by the client.

5 ADAPTIVITY

5.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.6
Test method	Conducted measurements

5.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19
SZ180-13	MXG Vector Signal Generator	Keysight	N5182B	2022-10-17	2023-10-17
SZ070-05	Directional Coupler	Agilent	87300C	2021-12-28 2022-12-27	2022-12-28 2023-12-27
SZ070-20	Combiner	Mini-Circuits	ZN2PD-63-S+	2022-05-16	2023-05-16
SZ070-21	Combiner	Mini-Circuits	ZN2PD-63-S+	2022-05-16	2023-05-16
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15

5.3 LIMIT

5.3.1 LIMIT FOR LOAD BASED EQUIPMENT

The equipment shall observe the operating channel for the duration of the CCA observation time which shall be not less than 18 μ s.

If the equipment finds the channel occupied, it shall not transmit on this channel (see note 2). The equipment shall perform an Extended CCA check in which the channel is observed for a random duration in the range between 18 μ s and at least 160 μ s. If the extended CCA check has determined the channel to be no longer occupied, the equipment may resume transmissions on this channel. If the Extended CCA time has determined the channel still to be occupied, it shall perform new Extended CCA checks until the channel is no longer occupied.

The total time that an equipment makes use of a RF channel is defined as the Channel Occupancy Time. This Channel Occupancy Time shall be less than 13 ms, after which the device shall perform a new CCA as described in step 1) above.

The energy detection threshold for the CCA shall be proportional to the transmit power of the transmitter: for a 20 dBm e.i.r.p. transmitter the CCA threshold level (TL) shall be equal to or less than -70 dBm/MHz at the input to the receiver assuming a 0 dBi (receive) antenna assembly. This threshold level (TL) may be corrected for the (receive) antenna assembly gain (G); however, beamforming gain (Y) shall not be taken into account. For power levels less than 20 dBm e.i.r.p., the CCA threshold level may be relaxed to:

$$TL = -70 \text{ dBm/MHz} + 10 \times \log_{10} (100 \text{ mW} / P_{out}) \text{ (Pout in mW e.i.r.p.)}$$


The equipment shall comply with the requirements defined in step 1 to step 4 of the present clause in the presence of an unwanted CW signal as defined in below table.

Wanted signal mean power from companion device	Unwanted signal frequency (MHz)	Unwanted CW signal power (dBm)
sufficient to maintain the link (see note 2)	2 395 or 2 488,5 (see note 1)	-35 (see note 3)
NOTE 1: The highest frequency shall be used for testing operating channels within the range 2400 MHz to 2442 MHz, while the lowest frequency shall be used for testing operating channels within the range 2 442 MHz to 2 483,5 MHz. See clause 5.4.6.1.		
NOTE 2: A typical value which can be used in most cases is -50 dBm/MHz.		
NOTE 3: The level specified is the level in front of the UUT antenna. In case of conducted measurements, this level has to be corrected by the actual antenna assembly gain.		

5.3.2 LIMIT FOR SHORT CONTROL SIGNALLING TRANSMISSIONS

If implemented, Short Control Signalling Transmissions of adaptive equipment using wide band modulations other than FHSS shall have a maximum TxOn / (TxOn + TxOff) ratio of 10 % within any observation period of 50 ms.

5.4 TEST SETUP

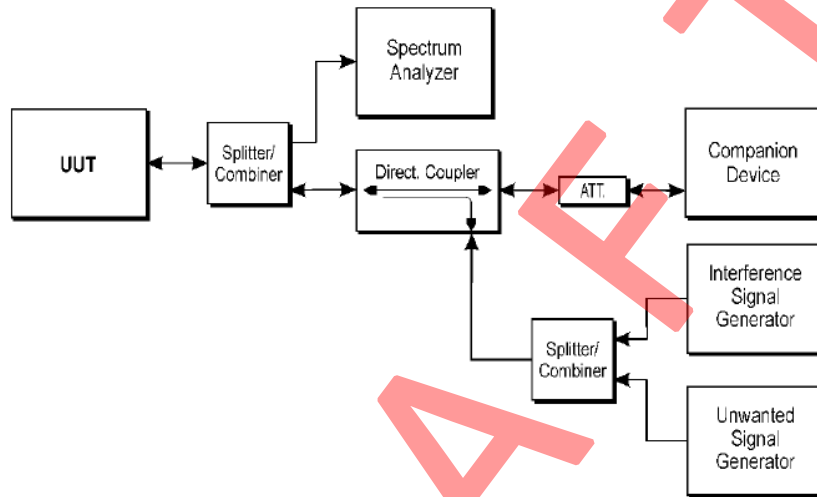

5.5 TEST RESULT

Mode	Test Channel	Adaptivity	Maximum Channel Occupancy Time(ms)	COT limit(ms)	COT Result	Short Control Signalling Transmissions	Short Control Signalling Transmissions Limit (within any observation period of 50 ms)	Duty Cycle Result
802.11b	1	Pass	1.3143	13	Pass	0.43%	10%	Pass
802.11b	13	Pass	1.3143	13	Pass	0.43%	10%	Pass
802.11g	1	Pass	0.2826	13	Pass	0.11%	10%	Pass
802.11g	13	Pass	0.2515	13	Pass	0.12%	10%	Pass
802.11n (HT 20)	1	Pass	2.2090	13	Pass	0.42%	10%	Pass
802.11n (HT 20)	13	Pass	0.2281	13	Pass	0.67%	10%	Pass
802.11n (HT 40)	3	Pass	0.6115	13	Pass	0.15%	10%	Pass
802.11n (HT 40)	11	Pass	1.6298	13	Pass	0.15%	10%	Pass

Mode	Channel	Wanted signal mean power from companion device (dBm/MHz)	Unwanted signal frequency (MHz)	Unwanted signal power (dBm)	Result
802.11b	1	-50	2488.5	-35	Pass
802.11b	13	-50	2395	-35	Pass
802.11g	1	-50	2488.5	-35	Pass
802.11g	13	-50	2395	-35	Pass
802.11n (HT 20)	1	-50	2488.5	-35	Pass
802.11n (HT 20)	13	-50	2488.5	-35	Pass
802.11n (HT 40)	3	-50	2488.5	-35	Pass
802.11n (HT 40)	11	-50	2488.5	-35	Pass

6 OCCUPIED CHANNEL BANDWIDTH

6.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.7
Test method	Conducted measurements

6.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19


Note: Measurement Uncertainty: $\pm 5\%$.

6.3 LIMIT FOR OCCUPIED CHANNEL BANDWIDTH

The Occupied Channel Bandwidth shall fall completely within the band given in 2.4 GHz to 2.4835 GHz.

For non-adaptive equipment using wide band modulations other than FHSS and with e.i.r.p greater than 10dBm, the Occupied Channel Bandwidth shall be less than 20MHz.

6.4 TEST SETUP

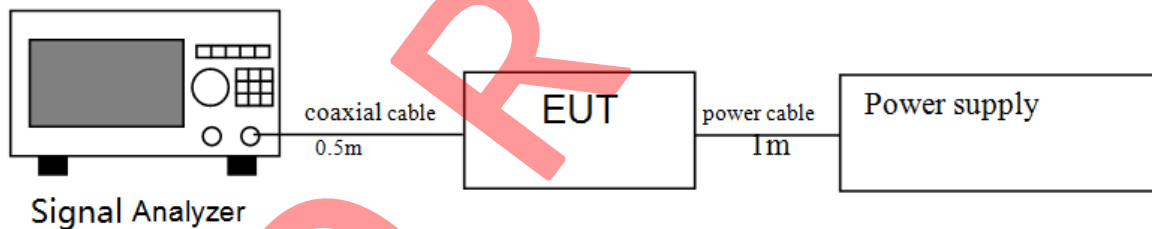

6.5 TEST RESULT

6.5.1 TEST RESULT - AC TEST VOLTAGE

(802.11b) ANT1

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2412	13.413	2405.293	2418.706	Pass
2472	13.413	2465.293	2478.706	Pass

(802.11g) ANT1

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2412	16.926	2403.537	2420.463	Pass
2472	16.926	2463.537	2480.463	Pass

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11n-HT20 SISO) ANT1

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2412	17.804	2403.138	2420.942	Pass
2472	17.804	2463.138	2480.942	Pass

(802.11n-HT40 SISO) ANT1

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2422	36.248	2403.956	2440.204	Pass
2462	36.248	2443.956	2480.204	Pass

(802.11b) ANT2

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2412	13.413	2405.293	2418.706	Pass
2472	13.413	2465.293	2478.706	Pass

(802.11g) ANT2

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2412	16.846	2403.537	2420.383	Pass
2472	16.926	2463.537	2480.463	Pass

(802.11n-HT20 SISO) ANT2

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2412	17.724	2403.138	2420.862	Pass
2472	17.804	2463.138	2480.942	Pass

(802.11n-HT40 SISO) ANT2

Frequency (MHz)	99% Bandwidth (MHz)	F _L at 99% BW (MHz)	F _H at 99% BW (MHz)	Result
2422	36.408	2403.796	2440.204	Pass
2462	36.248	2443.956	2480.204	Pass

7 TRANSMITTER UNWANTED EMISSIONS IN THE OUT-OF-BAND DOMAIN

7.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.8
Test method	Conducted measurements


7.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19


7.3 LIMIT

The transmitter unwanted emissions in the out-of-band domain but outside the allocated band, shall not exceed the values provided by the mask in figure 3.

NOTE: Within the 2 400 MHz to 2 483.5 MHz band, the Out-of-band emissions are fulfilled by compliance with the Occupied Channel Bandwidth requirement in clause 4.3.2.7.

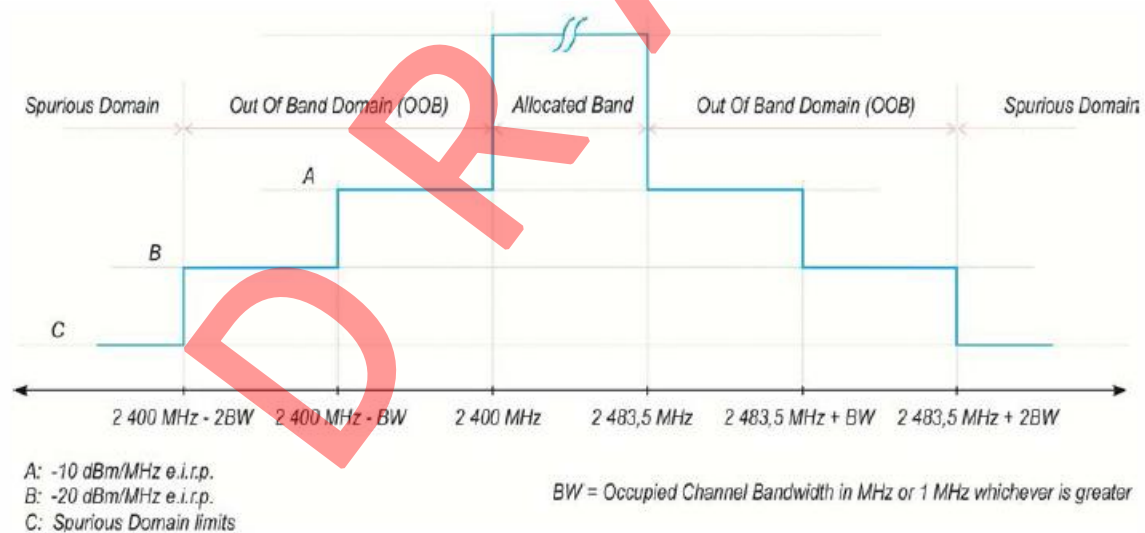

7.4 TEST SETUP

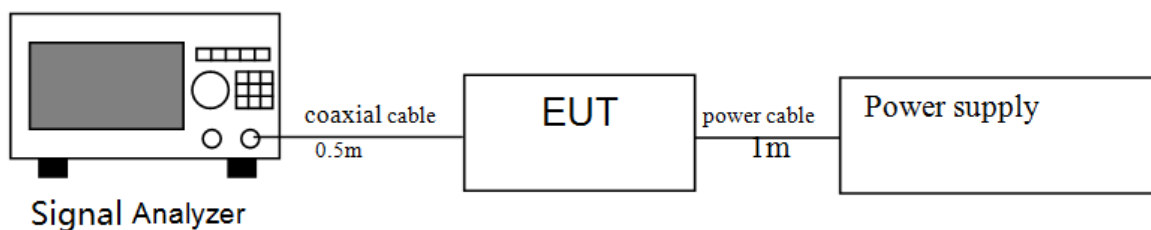

TEST REPORT

Intertek Report No. : 260508031SZN-004

7.5 TEST RESULT

(802.11b) ANT1

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-52.1	-20	-32.1
2400-BW to 2400	-41.1	-10	-31.1
2483.5 to 2483.5+BW	-43.7	-10	-33.7
2483.5+BW to 2483.5+2*BW	-54.2	-20	-34.2

- Notes:
1. Negative sign (-) in the margin column signify levels below the limit.
 2. Measurement Uncertainty: ± 3.0 dB.

(802.11b) ANT2

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-54.5	-20	-34.5
2400-BW to 2400	-44.7	-10	-34.7
2483.5 to 2483.5+BW	-46.0	-10	-36.0
2483.5+BW to 2483.5+2*BW	-54.5	-20	-34.5

- Notes:
1. Negative sign (-) in the margin column signify levels below the limit.
 2. Measurement Uncertainty: ± 3.0 dB.

(802.11g) ANT1

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-46.9	-20	-26.9
2400-BW to 2400	-41.0	-10	-31.0
2483.5 to 2483.5+BW	-39.5	-10	-29.5
2483.5+BW to 2483.5+2*BW	-51.3	-20	-31.3

- Notes:
1. Negative sign (-) in the margin column signify levels below the limit.
 2. Measurement Uncertainty: ± 3.0 dB.

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11g) ANT2

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-51.1	-20	-31.1
2400-BW to 2400	-40.9	-10	-30.9
2483.5 to 2483.5+BW	-41.1	-10	-31.1
2483.5+BW to 2483.5+2*BW	-51.4	-20	-31.4

- Notes:
1. Negative sign (-) in the margin column signify levels below the limit.
 2. Measurement Uncertainty: ± 3.0 dB.

(802.11n-HT20 SISO) ANT1

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-47.7	-20	-27.7
2400-BW to 2400	-40.9	-10	-30.9
2483.5 to 2483.5+BW	-39.2	-10	-29.2
2483.5+BW to 2483.5+2*BW	-51.7	-20	-31.7

- Notes:
1. Negative sign (-) in the margin column signify levels below the limit.
 2. Measurement Uncertainty: ± 3.0 dB.

(802.11n-HT20 SISO) ANT2

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-51.9	-20	-31.9
2400-BW to 2400	-41.3	-10	-31.3
2483.5 to 2483.5+BW	-41.0	-10	-31.0
2483.5+BW to 2483.5+2*BW	-52.7	-20	-32.7

- Notes:
1. Negative sign (-) in the margin column signify levels below the limit.
 2. Measurement Uncertainty: ± 3.0 dB.

TEST REPORT

Intertek Report No. : 260508031SZN-004

(802.11n-HT20 MIMO)

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-50.9	-20	-30.9
2400-BW to 2400	-40.5	-10	-30.5
2483.5 to 2483.5+BW	-40.6	-10	-30.6
2483.5+BW to 2483.5+2*BW	-51.3	-20	-31.3

- Notes: 1. Negative sign (-) in the margin column signify levels below the limit.
2. Measurement Uncertainty: ± 3.0 dB.

(802.11n-HT40 SISO) ANT1

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-63.0	-20	-43.0
2400-BW to 2400	-45.8	-10	-35.8
2483.5 to 2483.5+BW	-43.5	-10	-33.5
2483.5+BW to 2483.5+2*BW	-64.0	-20	-44.0

- Notes: 1. Negative sign (-) in the margin column signify levels below the limit.
2. Measurement Uncertainty: ± 3.0 dB.

(802.11n-HT40 SISO) ANT2

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-65.5	-20	-45.5
2400-BW to 2400	-52.9	-10	-42.9
2483.5 to 2483.5+BW	-51.2	-10	-41.2
2483.5+BW to 2483.5+2*BW	-61.8	-20	-41.8

- Notes: 1. Negative sign (-) in the margin column signify levels below the limit.

TEST REPORT

Intertek Report No. : 260508031SZN-004

2. Measurement Uncertainty: $\pm 3.0\text{dB}$.

(802.11n-HT40 MIMO)

Worst case test data:

Test Segment (MHz)	Measured Power (dBm)	Limit (dBm)	Margin (dB)
2400-2*BW to 2400-BW	-63.9	-20	-43.9
2400-BW to 2400	-53.3	-10	-43.3
2483.5 to 2483.5+BW	-51.4	-10	-41.4
2483.5+BW to 2483.5+2*BW	-62.7	-20	-42.7

Notes: 1. Negative sign (-) in the margin column signify levels below the limit.
2. Measurement Uncertainty: $\pm 3.0\text{dB}$.

TEST REPORT

Intertek Report No. : 260508031SZN-004

8 TRANSMITTER UNWANTED EMISSIONS IN THE SPURIOUS DOMAIN

8.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.9
Test method	Radiated measurements

8.2 EQUIPMENT LIST



Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-03	EMI Receiver	R & S	ESCI	2021-12.26 2022-12-26	2022-12.26 2023-12-26
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19
SZ061-12	Biconilog Antenna	ETS	3142E	2021-08-04	2024-08-04
SZ061-09	Double - Ridged Waveguide Horn Antenna	ETS	3115	2022-10-14	2025-10-14
SZ181-04	Preamplifier	Agilent	8449B	2022-05-16	2023-05-16
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2024-12-12
SZ062-23	RF Cable	RADIAL	SF104PE	2022-10-17	2023-10-17
SZ062-35	RF Cable	RADIAL	A50-3.5M3.5M-8M	2022-10-17	2023-10-17
SZ062-30	RF Cable	RADIAL	A50-3.5M3.5M-4.5M	2022-10-17	2023-10-17
SZ062-31	RF Cable	RADIAL	A50-3.5M3.5M-1M	2022-10-17	2023-10-17

8.3 LIMIT



The transmitter unwanted emissions in the spurious domain shall not exceed the values.

Frequency Range	Maximum power	Bandwidth
30 MHz to 47 MHz	-36 dBm	100 kHz
47 MHz to 74 MHz	-54 dBm	100 kHz
74 MHz to 87,5 MHz	-36 dBm	100 kHz
87,5 MHz to 118 MHz	-54 dBm	100 kHz
118 MHz to 174 MHz	-36 dBm	100 kHz
174 MHz to 230 MHz	-54 dBm	100 kHz
230 MHz to 470 MHz	-36 dBm	100 kHz
470 MHz to 694 MHz	-54 dBm	100 kHz
694 MHz to 1 GHz	-36 dBm	100 kHz
1 GHz to 12,75 GHz	-30 dBm	1 MHz

8.4 TEST SETUP DIAGRAM:

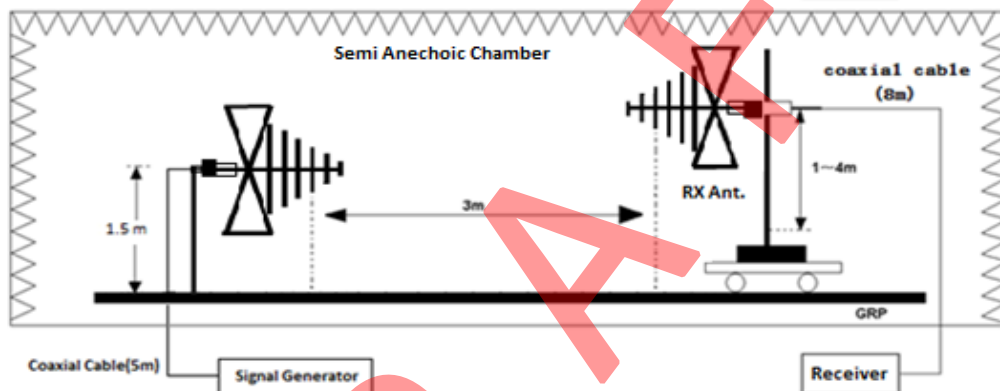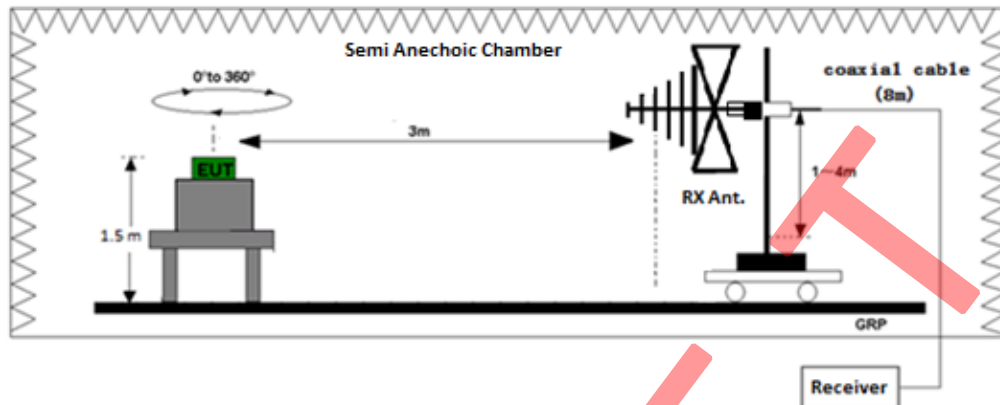

Test set-up of radiated disturbance (30MHz-1GHz)

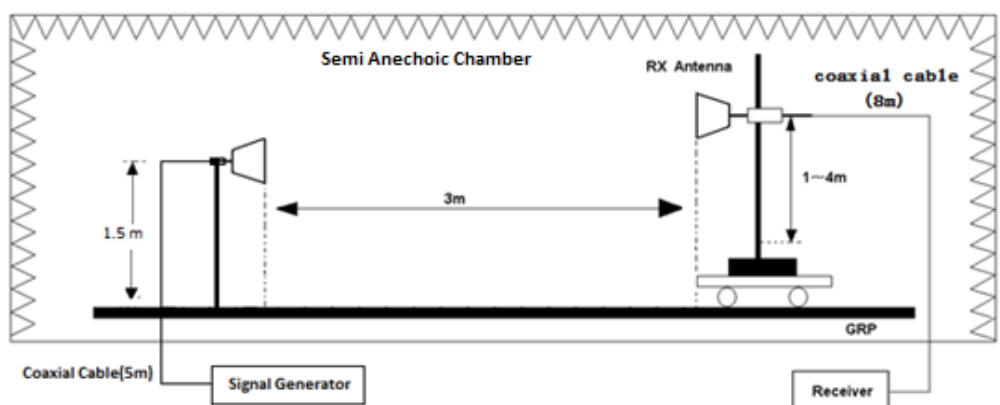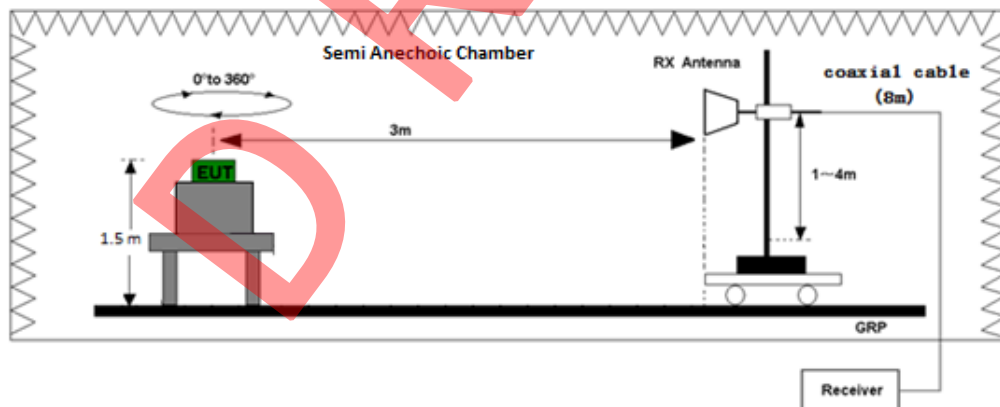

Test set-up of radiated disturbance (above 1GHz)

TEST REPORT


Intertek Report No. : 260508031SZN-004

8.5 TEST RESULT

(802.11b) - Worst case: ANT 1

Channel 1

Antenna Polarization Horizontal:

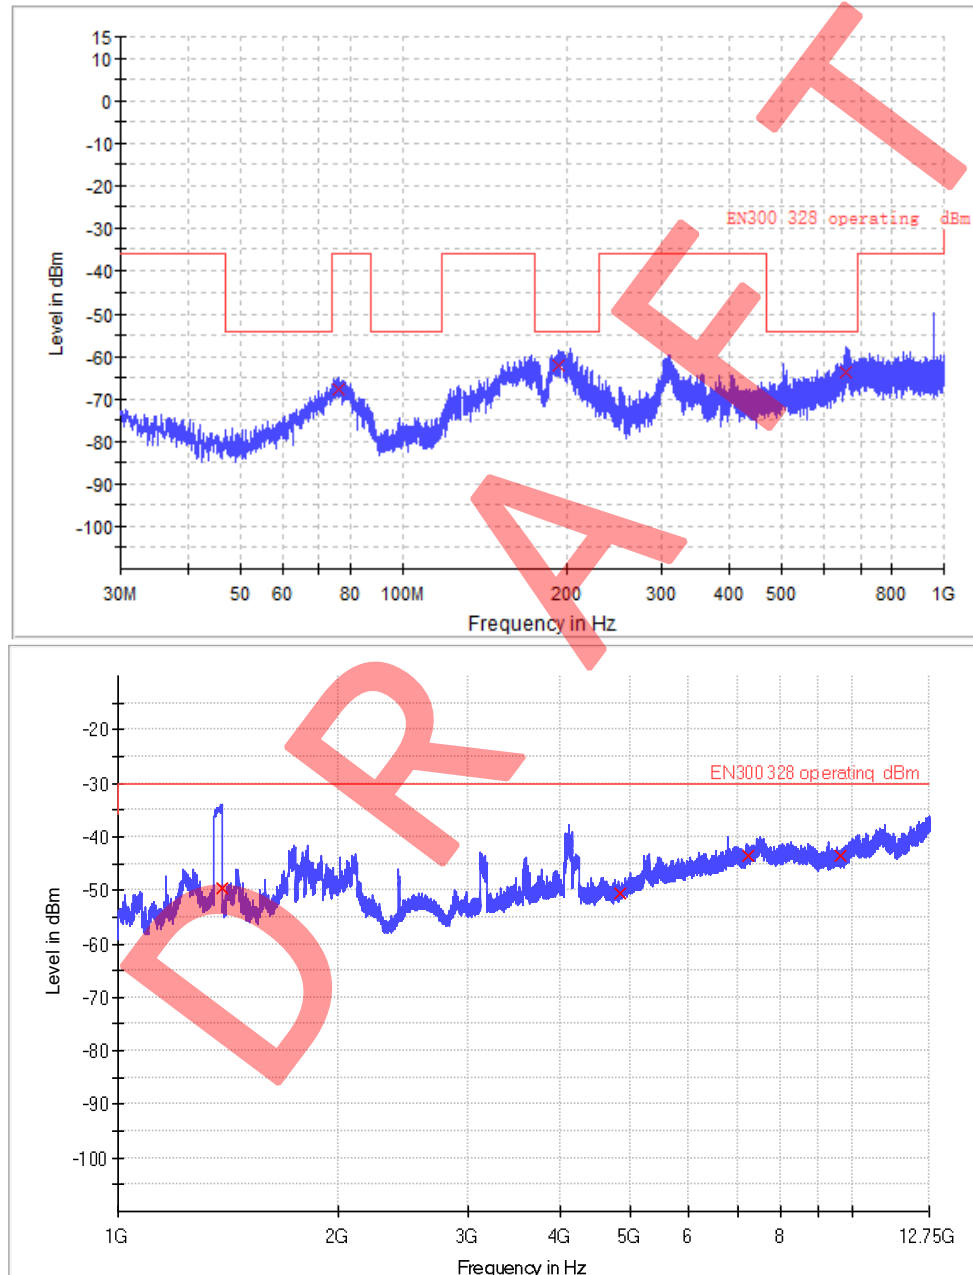


Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Pol	Azimuth (deg)	Corr. (dB)	Margin - RMS (dB)	Limit - RMS (dBm)
75.978000	-67.5	1000.0	H	-1.0	-83.8	31.5	-36.0
193.057000	-62.1	1000.0	H	-1.0	-79.0	8.1	-54.0
660.403000	-63.8	1000.0	H	-1.0	-66.7	9.8	-54.0
1383.441667	-49.5	1000.0	H	-1.0	-102.9	19.5	-30.0
4824.000000	-50.6	1000.0	H	-1.0	-90.7	20.6	-30.0
7236.000000	-43.6	1000.0	H	-1.0	-82.0	13.6	-30.0

TEST REPORT

Intertek Report No. : 260508031SZN-004

Channel 13

Antenna Polarization Horizontal:

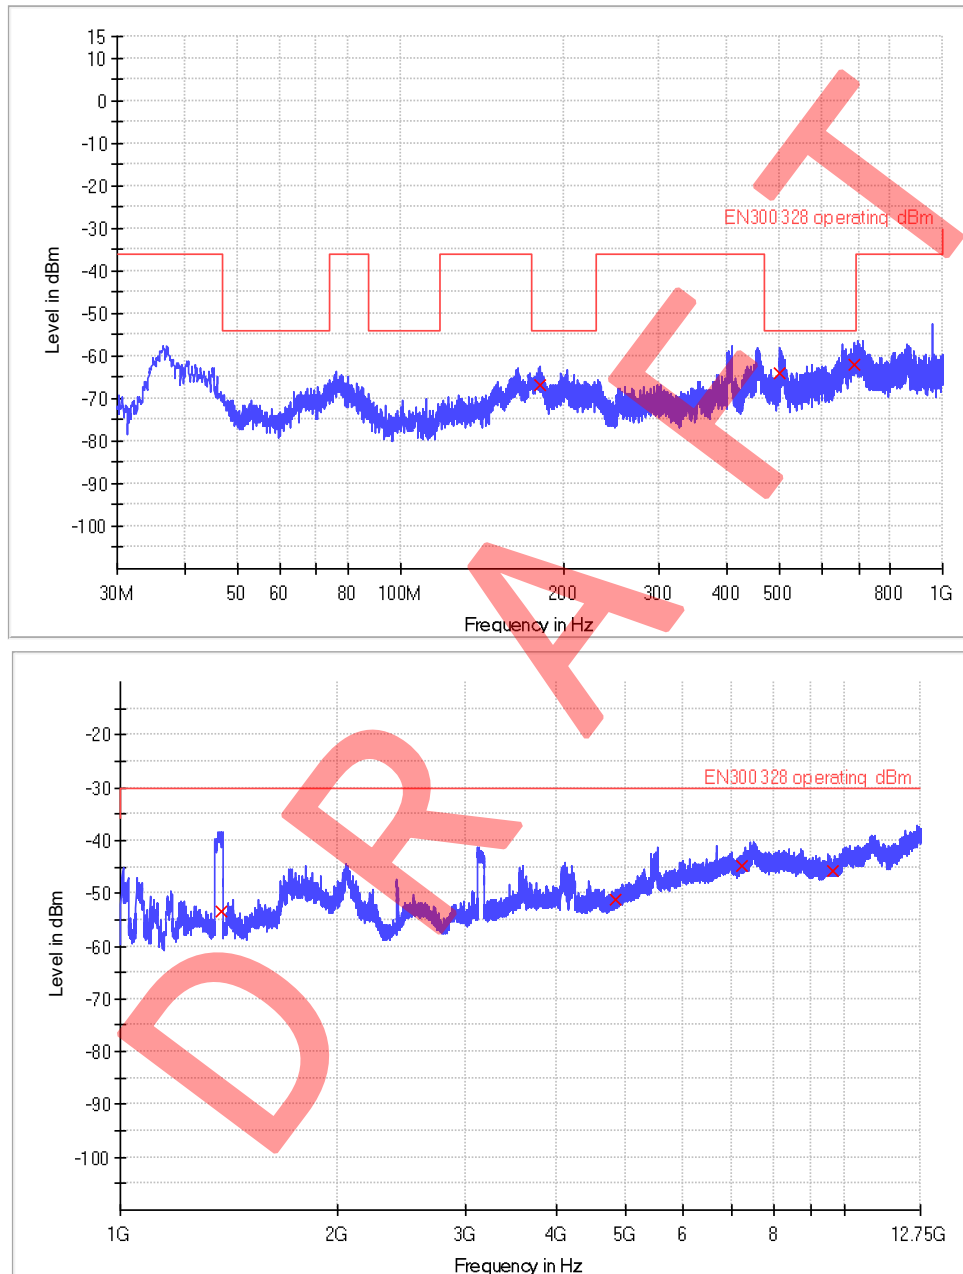

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Pol	Azimuth (deg)	Corr. (dB)	Margin - RMS (dB)	Limit - RMS (dBm)
181.320000	-66.8	1000.0	H	-1.0	-79.8	12.8	-54.0
501.905000	-64.2	1000.0	H	-1.0	-70.7	10.2	-54.0
687.336667	-62.0	1000.0	H	-1.0	-65.8	8.0	-54.0
1380.700000	-53.6	1000.0	H	-1.0	-103.1	23.6	-30.0
4824.000000	-51.3	1000.0	H	-1.0	-103.1	21.3	-30.0
7236.000000	-44.8	1000.0	H	-1.0	-103.1	14.8	-30.0

TEST REPORT

Intertek Report No. : 260508031SZN-004

9 RECEIVER SPURIOUS EMISSION

9.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.10
Test method	Radiated measurements
Test Mode	Receive-only mode

9.2 EQUIPMENT LIST


Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ185-03	EMI Receiver	R & S	ESCI	2021-12-26 2022-12-26	2022-12-26 2023-12-26
SZ056-06	Signal Analyzer	R&S	FSV40	2021-12-20 2022-12-19	2022-12-20 2023-12-19
SZ061-12	Biconilog Antenna	ETS	3142E	2021-08-04	2024-08-04
SZ061-09	Double - Ridged Waveguide Horn Antenna	ETS	3115	2022-10-14	2025-10-14
SZ181-04	Preamplifier	Agilent	8449B	2022-05-16	2023-05-16
SZ188-01	Anechoic Chamber	ETS	RFD-F/A-100	2021-12-12	2024-12-12
SZ062-23	RF Cable	RADIAL	SF104PE	2022-10-17	2023-10-17
SZ062-35	RF Cable	RADIAL	A50-3.5M3.5M-8M	2022-10-17	2023-10-17
SZ062-30	RF Cable	RADIAL	A50-3.5M3.5M-4.5M	2022-10-17	2023-10-17
SZ062-31	RF Cable	RADIAL	A50-3.5M3.5M-1M	2022-10-17	2023-10-17

9.3 LIMIT

The transmitter unwanted emissions in the spurious domain shall not exceed the values.

Frequency Range	Maximum power	Bandwidth
30 MHz to 1 GHz	-57 dBm	100 kHz
1 GHz to 12.75 GHz	-47 dBm	1 MHz

9.4 TEST SETUP DIAGRAM:

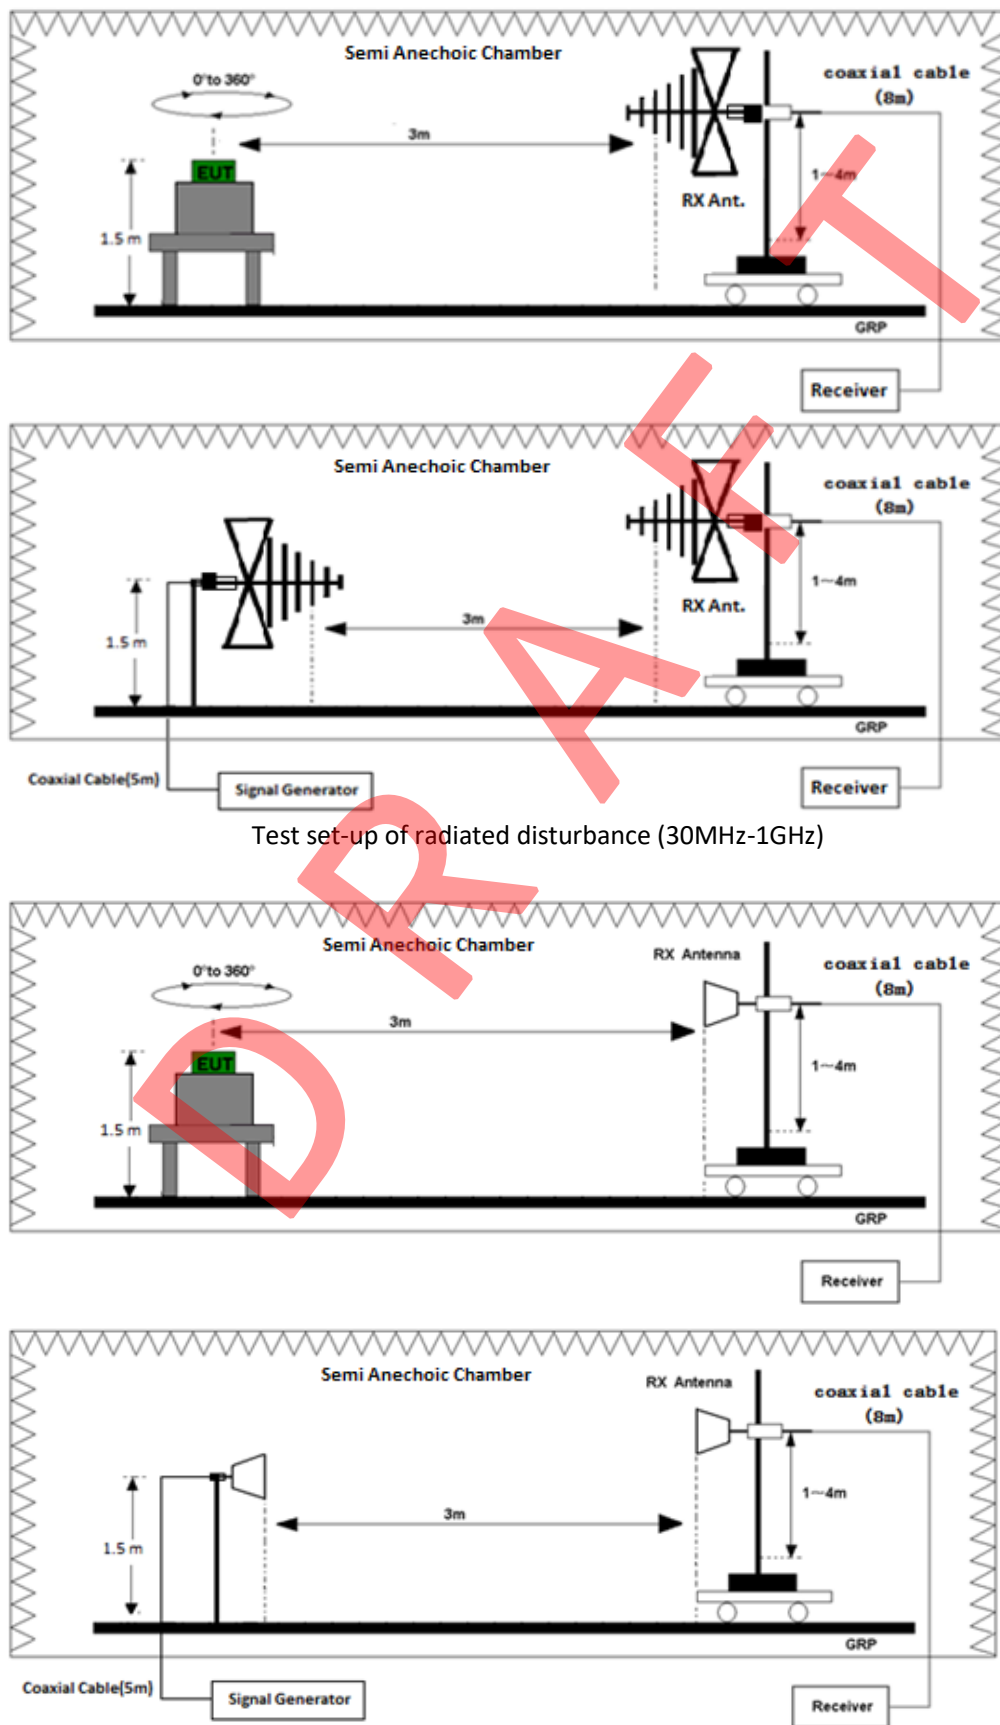


Test set-up of radiated disturbance (30MHz-1GHz)

Test set-up of radiated disturbance (above 1GHz)

9.5 TEST RESULT


(802.11b) - Worst case: ANT 1
Channel 1

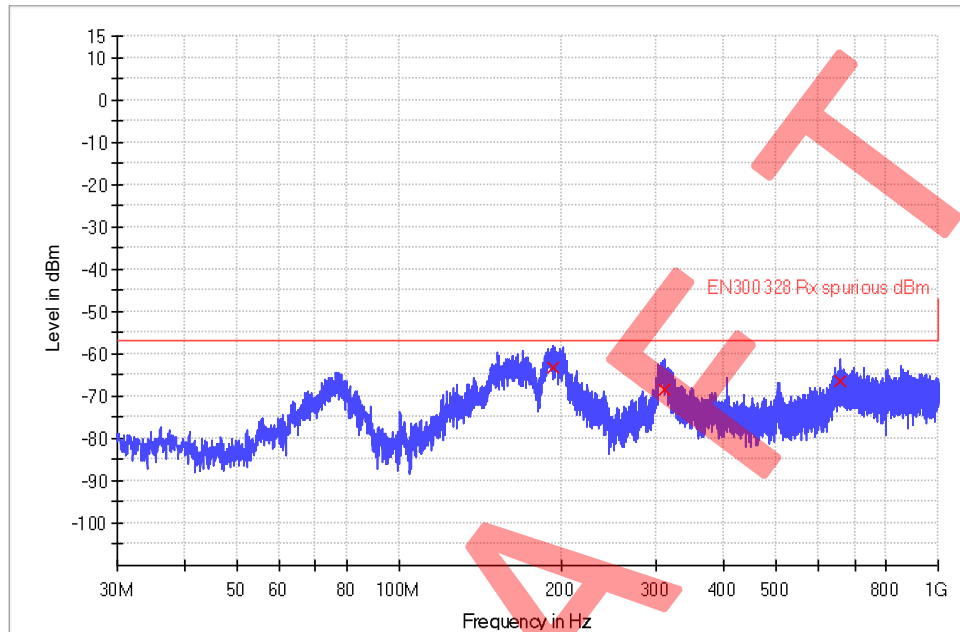

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Polarization	Corr. (dB)	Margin - RMS (dB)	Limit - RMS (dBm)
192.636667	-63.1	1000.0	H	-79.1	6.1	-57.0
310.718000	-68.4	1000.0	H	-76.5	11.4	-57.0
656.911000	-66.6	1000.0	H	-66.8	9.6	-57.0

☒ 1G-12.75G no emissions significantly above equipment noise floor.

Channel 13

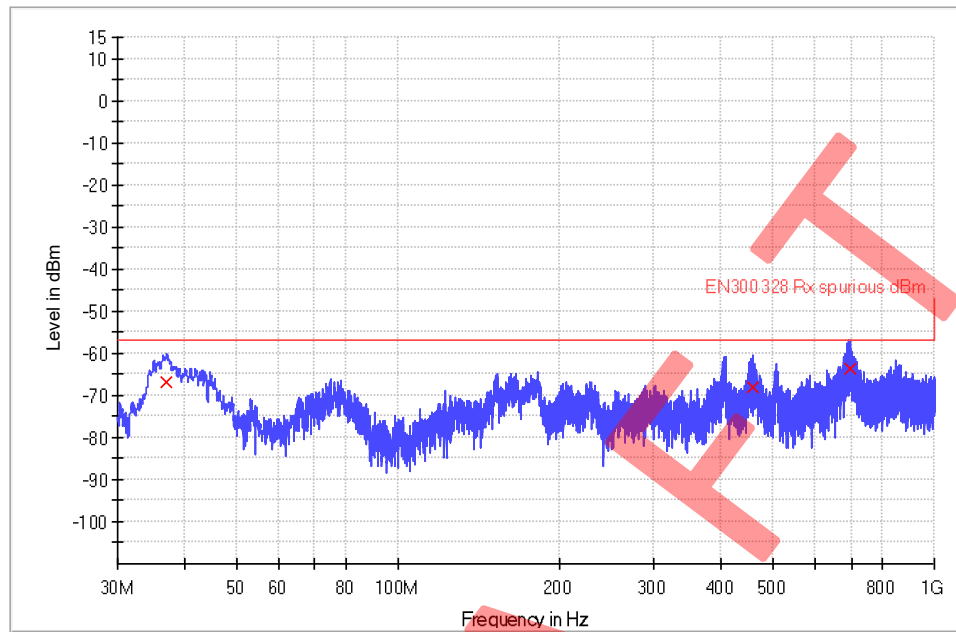

Frequency (MHz)	RMS (dBm)	Meas. Time (ms)	Polarization	Corr. (dB)	Margin - RMS (dB)	Limit - RMS (dBm)
37.113333	-66.9	1000.0	H	-78.8	9.9	-57.0
459.257333	-68.1	1000.0	H	-71.4	11.1	-57.0
695.064333	-63.5	1000.0	H	-65.6	6.5	-57.0

☒ 1G-12.75G no emissions significantly above equipment noise floor.

10 RECEIVER BLOCKING

10.1 TEST METHOD AND SUMMARY

Basic Standard :	ETSI EN 300 328 V2.2.2 (2019-07)
Clause :	5.4.11
Test method	Conducted measurements

10.2 EQUIPMENT LIST

Equip No.	Description	Manufacturer	Model No.	Cal. Date	Due Date
SZ056-05	Spectrum Analyzer	Agilent	E4407B	2021-12-21 2022-12-19	2022-12-21 2023-12-19
SZ070-20	Combiner	Mini-Circuits	ZN2PD-63-S+	2022-05-16	2023-05-16
SZ070-21	Combiner	Mini-Circuits	ZN2PD-63-S+	2022-05-16	2023-05-16
SZ180-15	Signal Generator	Wiltron	SMB100A	2021-10-25 2022-12-20	2022-10-25 2023-12-20
SZ180-13	MXG Vector Signal Generator	Keysight	N5182B	2022-10-17	2023-10-17
SZ062-14	RF cable	BELDEN	RG59-BN	2022-11-15	2023-05-15
SZ065-06	Wideband Radio Communication Tester	R&S	CMW500	2022-05-10	2023-05-10

10.3 PERFORMANCE CRITERIA

The minimum performance criterion shall be a PER less than or equal to 10 %. The manufacturer may declare alternative performance criteria as long as that is appropriate for the intended use of the equipment (see clause 5.4.1.t)).

10.4 LIMIT

TEST REPORT

Intertek Report No. : 260508031SZN-004

Receiver Blocking parameters for Receiver Category 1 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 4)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 4)	Type of blocking signal
(-139 dBm + 10 log ₁₀ (OCBW)) Or -68 dBm whichever is less (see note 2)	2 380 2 504	-34	CW
(-139 dBm + 10 log ₁₀ (OCBW)) Or -74 dBm whichever is less (see note 3)	2 300 2 330 2 360 2 524 2 584 2 674		

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 20 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 4: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Receiver Blocking parameters receiver category 2 equipment

Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 log ₁₀ (OCBW)+10) or (-74 dBm +10) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to P_{min} + 26 dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

Receiver Blocking parameters receiver category 3 equipment


Wanted signal mean power from companion device (dBm) (see notes 1 and 3)	Blocking signal frequency (MHz)	Blocking signal power (dBm) (see note 3)	Type of blocking signal
(-139 dBm + 10 log ₁₀ (OCBW)+20) or (-74 dBm +20) whichever is less (see note 2)	2 380 2 504 2 300 2 584	-34	CW

NOTE 1: OCBW is in Hz.

NOTE 2: In case of radiated measurements using a companion device and the level of the wanted signal from the companion device cannot be determined, a relative test may be performed using a wanted signal up to $P_{min} + 30$ dB where P_{min} is the minimum level of wanted signal required to meet the minimum performance criteria as defined in clause 4.3.1.12.3 in the absence of any blocking signal.

NOTE 3: The level specified is the level at the UUT receiver input assuming a 0 dBi antenna assembly gain. In case of conducted measurements, this level has to be corrected for the (in-band) antenna assembly gain (G). In case of radiated measurements, this level is equivalent to a power flux density (PFD) in front of the UUT antenna with the UUT being configured/positioned as recorded in clause 5.4.3.2.2.

10.5 Test Setup Diagram:

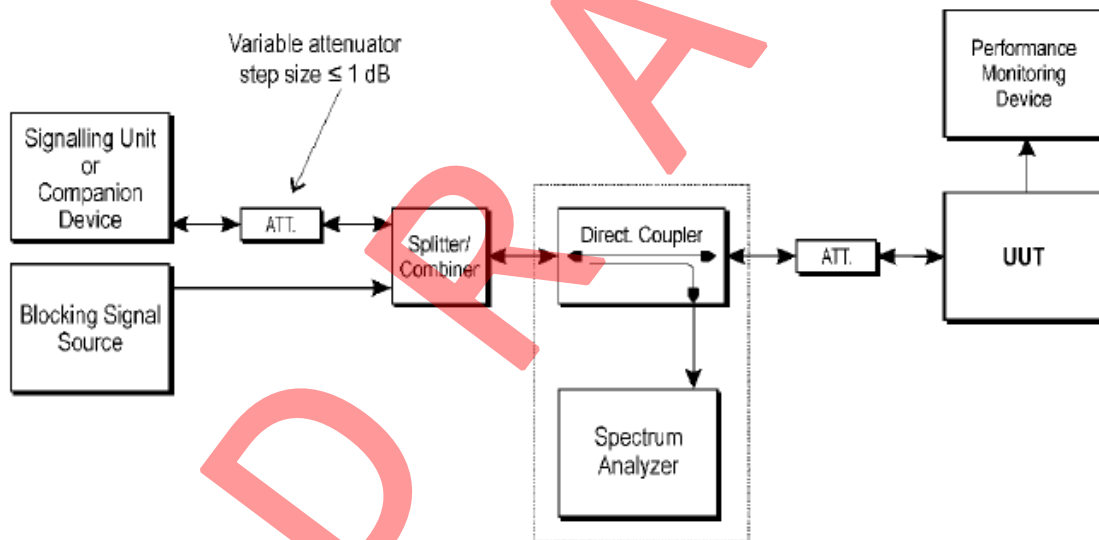

10.5 TEST RESULT

Worth case data: 802.11B

Wanted signal mean power from companion device (dBm)	Blocking signal frequency (MHz)	Blocking signal power (dBm)	PER (%)	Result
-68.0	2380	-32	3.2	Pass
	2504	-32	2.6	Pass
-74.0	2300	-32	2.1	Pass
	2330	-32	2.4	Pass
	2360	-32	1.8	Pass
	2524	-32	1.6	Pass
	2584	-32	1.9	Pass
	2674	-32	2.7	Pass

Notes: 1. As the UUT is adaptive equipment with a maximum RF output power greater than 10 dBm e.i.r.p., it shall be considered as receiver category 1 equipment.

2. Wanted signal mean power from companion device:

The OCBW of High CH = 13.493MHz,

$(-139 \text{ dBm} + 10 \log_{10}(\text{OCBW})) = -67.699 \text{ dBm} > -74 \text{ dBm}$

$(-133 \text{ dBm} + 10 \log_{10}(\text{OCBW})) = -61.699 \text{ dBm} > -68 \text{ dBm}$

The OCBW of Low CH = 13.413MHz,

$(-139 \text{ dBm} + 10 \log_{10}(\text{OCBW})) = -67.725 \text{ dBm} > -74 \text{ dBm}$

$(-133 \text{ dBm} + 10 \log_{10}(\text{OCBW})) = -61.725 \text{ dBm} > -68 \text{ dBm}$

3. Antenna gain is considered during the test.

EXHIBIT 3

PHOTOS OF EUT

DRAFT

11. PHOTOS OF TEST SET-UP

Please refer to Annex of EUT Photos_260508031SZN.

***** End of Report*****

DRAFT