

EC-R3576PC-FD Powered by the Rockchip RK3576, an octa-core 64-bit AIOT processor, features an advanced lithography process to deliver high performance while maintaining low power consumption. It




[Docs](#) » Product Introduction

Product Introduction

EC-R3576PC-FD Powered by the Rockchip RK3576, an octa-core 64-bit AIOT processor, EC-R3576PC FD features an advanced lithography process to deliver high performance while maintaining low power consumption. It is equipped with an ARM Mali G52 MC3 GPU and a 6 TOPS NPU, supporting the private deployment of large-scale models under the Transformer architecture. With support for 4K@120fps decoding/4K@60fps encoding, the computer boasts a powerful display capability with 4K resolution at a high frame rate of 120 fps. Its industrial-grade metal enclosure and fanless design enable passive cooling. With an external watchdog, it provides industrial-grade stability, making it an excellent choice for AI applications requiring local deployment.




Specification

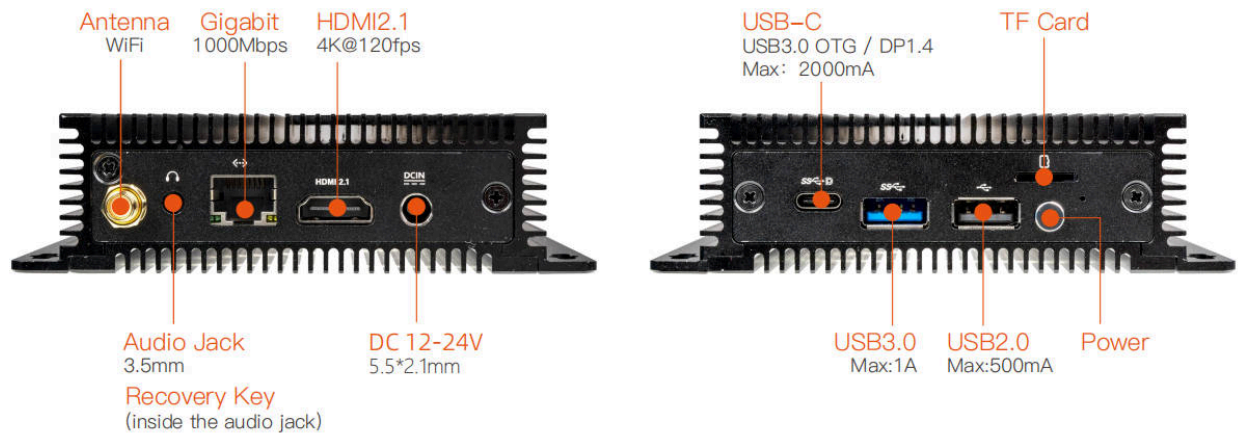

Specifications		
Basic Specifications	SOC	Rockchip RK3576
	CPU	Octa-core 64-bit processor (4×A72 + 4×A53), up to 2.2GHz
	GPU	G52 MC3 @ 1GHz, support OpenGL ES 1.1/2.0/3.2, OpenCL 2.0, Vulkan 1.1, with high-performance 2D acceleration hardware embedded
	NPU	6 TOPS NPU, support mixed operations of INT4/8/16/FP16/BF16/TF32
	Decoding/Encoding	Decode: 8K@30fps/4K@120fps: H.265/HEVC, VP9, AVS2, AV1, 4K@60fps: H.264/AVC Encode: 4K@60fps: H.265/HEVC, H.264/AVC
	RAM	LPDDR4/LPDDR4x/LPDDR5 (4GB/8GB/16GB optional)
	Storage	eMMC (16GB/32GB/64GB/128GB/256GB optional), UFS2.0 (optional)
	Storage Expansion	1 × M.2 (Scalable 2242 PCIe NVMe/SATA SSD) (Inside the Computer), 1 × TF Card
	Power	DC 12V (5.5mm×2.1mm, support 12V~24V wide voltage input)
	Power consumption	Normal: 1.32W(12V/110mA), Max: 8.4W(12V/700mA), Min: 0.024W(12V/2mA)
	OS	Android14, Linux OS, Buildroot+QT
	Software support	- Support the privatization deployment of ultra-large-scale parametric models under the Transformer architecture, such as Gemma-2B, ChatGLM3-6B, Qwen-1.8B, Phi-3-3.8B and other large language models - It supports traditional network architectures such as CNN, RNN, and LSTM, and supports the import and export of RKNN models; Support a variety of deep learning frameworks, including TensorFlow, TensorFlow Lite, PyTorch, Caffe, ONNX and Darknet. It also supports the development of custom operators - Support Docker container management technology
	Size	116.0mm × 105.2mm × 31.5mm
	Weight	≈0.43kg
	Environment	Operating Temperature: -20°C- 60°C Storage Temperature: -20°C- 60°C Storage Humidity: 10% ~ 90%RH (non-condensing)
Interface Specifications	Internet	1 × Gigabit Ethernet (1000Mbps/RJ45), 2.4GHz/5GHz Dual-band WiFi (802.11a/b/g/n/ac), Bluetooth 5.0
	Video output	1 × HDMI2.1 (4K@120fps), 1 × DP1.4 (4K@120fps)
	Watchdog	External watchdogs
	USB	1 × USB3.0, 1 × USB2.0
	Expansion interface	1 × Type-C (OTG/DP1.4), 1 × 3.5mm Audio jack (Support MIC recording, American Standard CTIA)

Size

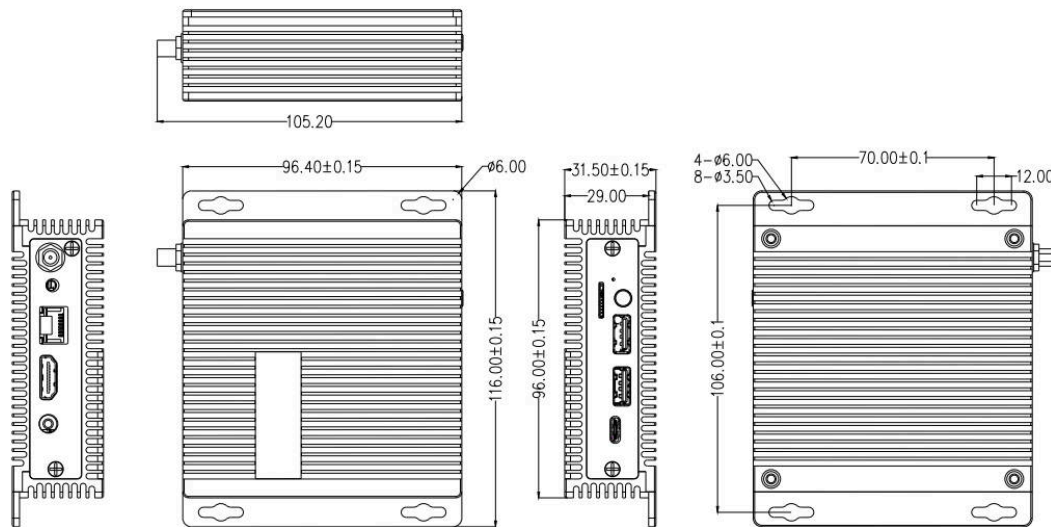

Resources

- [Manual](#) Includes building instructions, system usage, interfaces usage, etc. (ROC-RK3576-PC wiki)
- [Download Page](#) Includes firmware, rootfs and tools download links.
- [Forum](#) Tech communication platform for over 100K company and individual customers.

Support

Contact E-commerce customer service or post on forum for general supports. Professional tech supports or detail informations please contact us:

- Email: sales@t-firefly.com
- Mobile: (+86) 186 8811 7175
- Landline: 0760-89881218
- Service Hotline: 4001-511-533
- Address: Room 2101, Hongyu Building, No. 57 Zhongshan 4th Road, East District, Zhongshan City, Guangdong Province