

Date: 2026-07-29

Enquiry dated:

Project:

Quotation-no.:

Item:

Reference:

Air cooler coil		GCO F/2/12/4.00/1200/ACS/ /015030 (FT09)	
Capacity:	5.0 kW ⁽¹⁾⁽²⁾	Construction for:	Casing
Surface:	17.3 m ²	Connections:	right side
Rqrd. surface:	25.4 m ²	Tube pattern:	staggered
Surface reserve:	-31.7 %	Frost thickness:	0.0 mm
Air	Inlet	Outlet	Medium:
Volume flow:		3000 m ³ /h	Ethylene glycol 34 Vol. % ⁽³⁾
Temperature:	20.0 °C	16.4 °C	Inlet: 6.0 °C
			Outlet: 12.0 °C
			Volume flow: 0.78 m ³ /h
Air pressure:	1013 mbar		
Pressure drop:	5 Pa		Pressure drop: 0.37 bar
Tube volume:	3.9 l		Tubes: Copper ⁽⁴⁾
Fin spacing:	4.00 mm		Fins: Aluminium ⁽⁴⁾
Empty weight:	18.9 kg		Header: Copper
Finned length:	1200 mm		Frame: Galv. Steel
Finned height:	600 mm		Circuits: 1N
Total length:	1362 mm		Passes: 12
Frame length:	1300 mm		Distributions: 2
Frame height:	700 mm		Support tubes: 4
Frame depth:	150 mm		
Tube rows in depth:	2		
Max. operating pressure:	10.0 bar		PED classification: Art. 4(3) ⁽⁵⁾
Inlet header:	22 * 1.00 mm		Outlet header: 22 * 1.00 mm
Inlet connection:	22 * 1.00 mm		Outlet: 22 * 1.00 mm

	Piece(s)
Accessories	
Ventilation/Drain	1
Cover and bottom plates beaded with drain hole	1

Terms of delivery:

Payment cond.:

Delivery time: 15 weeks (Status: 2026-07-22)


Validity:

Our general terms of sales and delivery apply!

Subject to technical modifications

Air cooler coil
F/2/12/4.00/1200/ACS/ /015030
Construction for casing
Without varnishing

Quotation-no.:
Item:

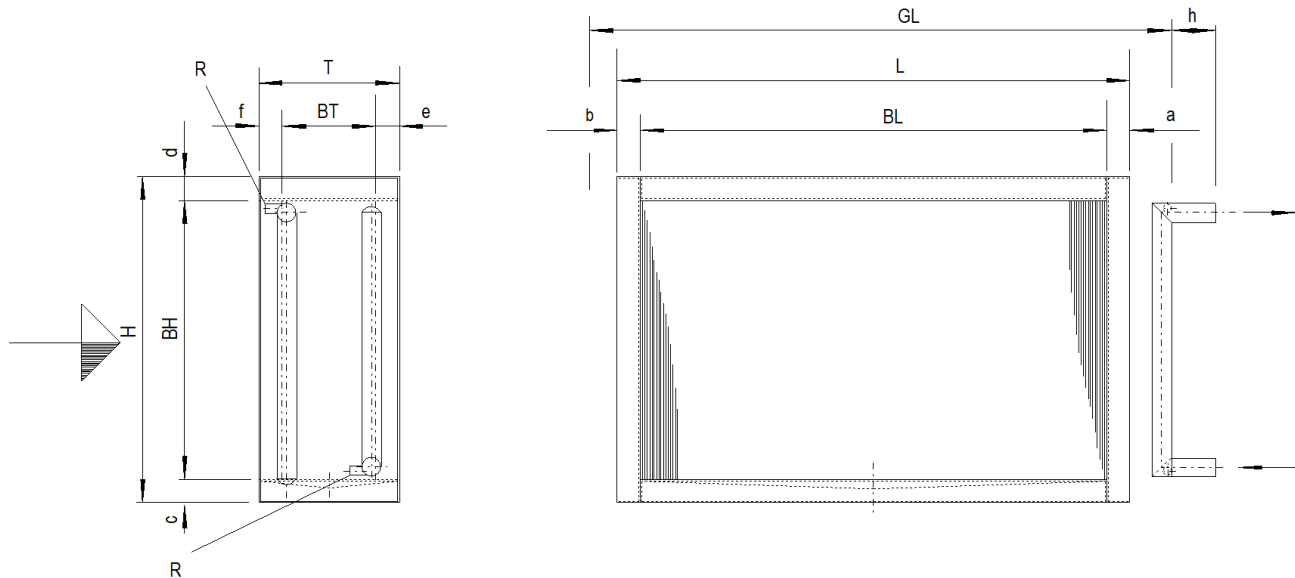


Bottom sheet with drain hole

File: EMF\028-J_UNI.emf

GL	1362 mm	L	1300 mm	BL	1200 mm
T	150 mm	BT	50 mm	H	700 mm
BH	600 mm	a	50 mm	b	50 mm
c	50 mm	d	50 mm	e	50 mm
f	50 mm	h	150 mm	R	3/8"

Attention: Drawing and dimensions not valid for all accessory options!



Headers: 22 * 1.00 mm
Connections: 22 * 1.00 mm

Tube volume: 3.9 l
Medium: Ethylene glycol 34 Vol. %
Empty weight: 18.9 kg
Surface: 17.3 m²
Distributions: 2
Passes: 12

Important remarks / explanatory notes:

- (1) Calculations and capacity tests are based on the following standards: condensers/gas coolers EN 327, evaporators/air coolers EN 328, dry coolers EN 1048.
- (2) Capacity including humidity factor
- (3) Fluid group 2 in accordance with Pressure Equipment Directive 2014/68/EU



- (4) When using the unit in aggressive atmospheres, it is imperative to select the materials according to the specific application, see material recommendation brochure in the GPC programme menu "?".
- (5) Pipe (DN = 20.0 mm, TSmax = 100 °C, liquid). Final classification in accordance with Pressure Equipment Directive 2014/68/EU when the order is processed.