

Date: 2026-07-29
 Enquiry dated:
 Project:
 Quotation-no.:
 Item:
 Reference:

Condenser coil		GCO F/4/10/2.40/1000/AXS/ /015032 (FT09)	
Capacity:	8.4 kW ⁽¹⁾	Construction for:	Casing
Surface:	39.0 m ²	Connections:	right side
Rqrd. surface:	39.1 m ²	Tube pattern:	staggered
Surface reserve:	-0.1 %		
Heat transf. coeff.:	28.62 W/(m ² ·K)		
LMTD:	7.52 K		
Air	Inlet	Outlet	Refrigerant:
Volume flow:	5000 m ³ /h	5085 m ³ /h	R404A ⁽²⁾
Temperature:	32.0 °C	37.2 °C	Condensation temp. (dew pt.): 40.0 °C
Rel. humidity:	40 %	30 %	Condensate outlet: 38.4 °C
Velocity:		2.8 m/s	Hot gas temp.: 70.0 °C
Air pressure:		1013 mbar	Volume flow (gas): 2.07 m ³ /h
Pressure drop:		80 Pa	Mass flow: 186 kg/h
			Pressure drop: 0.11 bar / 0.24 K
Tube volume:	5.2 l	Tubes:	Copper ⁽³⁾
Fin spacing:	2.40 mm	Fins:	Aluminium ⁽³⁾
Empty weight:	24.5 kg	Header:	Copper
Finned length:	1000 mm	Connections per coil:	Copper
Finned height:	500 mm	Inlet connection:	16 * 1.00 mm
Total length:	1158 mm	Outlet:	16 * 1.00 mm
Frame length:	1100 mm	Frame:	Galv. Steel
Frame height:	600 mm	Circuits:	1N
Frame depth:	200 mm	Passes:	20
Tube rows in depth:	4	Distributions:	2
Max. operating pressure:	32.0 bar	Support tubes:	4
Inlet header:	18 * 1.00 mm		
Outlet header:	18 * 1.00 mm	PED classification:	Art. 4(3) ⁽⁴⁾

Piece(s)

Accessories

Smooth cover and bottom plates

1

Terms of delivery:

Payment cond.:

Delivery time: 15 weeks (Status: 2026-07-22)


Validity:

Our general terms of sales and delivery apply!

Subject to technical modifications

Condenser coil
F/4/10/2.40/1000/AXS/ /015032
Construction for casing
Without varnishing

Quotation-no.:
Item:

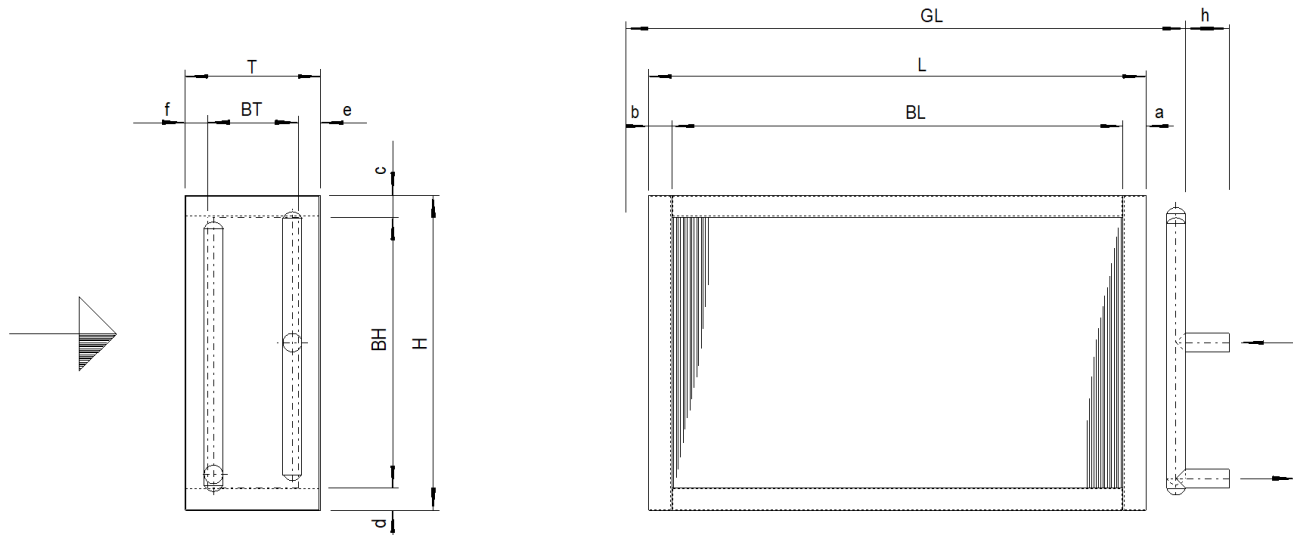


Bottom sheet without drain hole

File: EMF\023-A_UNI.emf

GL	1158 mm	L	1100 mm	BL	1000 mm
T	200 mm	BT	100 mm	H	600 mm
BH	500 mm	a	50 mm	b	50 mm
c	50 mm	d	50 mm	e	50 mm
f	50 mm	h	150 mm		

Attention: Drawing and dimensions not valid for all accessory options!

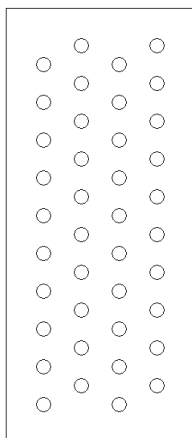

Inlet header:	18 * 1.00 mm
Inlet connection:	16 * 1.00 mm
Outlet header:	18 * 1.00 mm
Outlet:	16 * 1.00 mm
Tube volume:	5.2 l
Refrigerant:	R404A
Empty weight:	24.5 kg
Surface:	39.0 m ²
Distributions:	2
Passes:	20

Important remarks / explanatory notes:

- (1) Calculations and capacity tests are based on the following standards: condensers/gas coolers EN 327, evaporators/air coolers EN 328, dry coolers EN 1048.
- (2) Fluid group 2 in accordance with Pressure Equipment Directive 2014/68/EU
- (3) When using the unit in aggressive atmospheres, it is imperative to select the materials according to the specific application, see material recommendation brochure in the GPC programme menu "?".
- (4) Pipe (DN = 16.0 mm, TSmax = 100 °C, gaseous). Final classification in accordance with Pressure Equipment Directive 2014/68/EU when the order is processed.