

Date: 2026-07-29

Enquiry dated:

Project:

Quotation-no.:

Item:

Reference:

Dry cooler coil		GCO F/2/12/4.00/1000/ACS/ /015030 (FT09)	
Capacity:	20.0 kW ⁽¹⁾	Construction for:	Casing
Surface:	14.4 m ²	Connections:	right side
Rqrd. surface:	25.1 m ²	Tube pattern:	staggered
Surface reserve:	-42.5 %		
Heat transf. coeff.:	80.52 W/(m ² ·K)		
LMTD:	9.90 K		
Air		Heating medium: Ethylene glycol 34 Vol. %⁽²⁾	
Volume flow:	Inlet 69798 m ³ /h Outlet 70000 m ³ /h	Inlet:	45.0 °C
Temperature:	32.0 °C 32.9 °C	Outlet:	40.0 °C
Rel. humidity:	40 % 38 %	Volume flow:	3.72 m ³ /h
Mass flow dry:	79170.4 kg/h	Mass flow:	3898 kg/h
Air pressure:	1013 mbar	Pressure drop:	0.23 bar
Velocity:	32.4 m/s		
Pressure drop:	1717 Pa		
Tube volume:	3.5 l	Tubes:	Copper ⁽³⁾
Fin spacing:	4.00 mm	Fins:	Aluminium ⁽³⁾
Empty weight:	17.6 kg	Header:	Copper
Finned length:	1000 mm	Frame:	Galv. Steel
Finned height:	600 mm	Circuits:	1N
Total length:	1168 mm	Passes:	4
Frame length:	1100 mm	Distributions:	6
Frame height:	700 mm	Connections per coil:	Copper
Frame depth:	150 mm	Inlet connection:	28 * 1.50 mm
PED classification:	Art. 4(3) ⁽⁴⁾	Outlet:	28 * 1.50 mm
Tube rows in depth:	2	Outlet header:	28 * 1.50 mm
Max. operating pressure:	16.0 bar	Inlet header:	28 * 1.50 mm
Support tubes:	4		

Piece(s)

Accessories

Ventilation/Drain	1
Smooth cover and bottom plates	1

Terms of delivery:

Payment cond.:

Delivery time: 15 weeks (Status: 2026-07-22)



Validity:

Our general terms of sales and delivery apply!

Subject to technical modifications

Dry cooler coil
F/2/12/4.00/1000/ACS/ /015030
Construction for casing
Without varnishing

Quotation-no.:
Item:

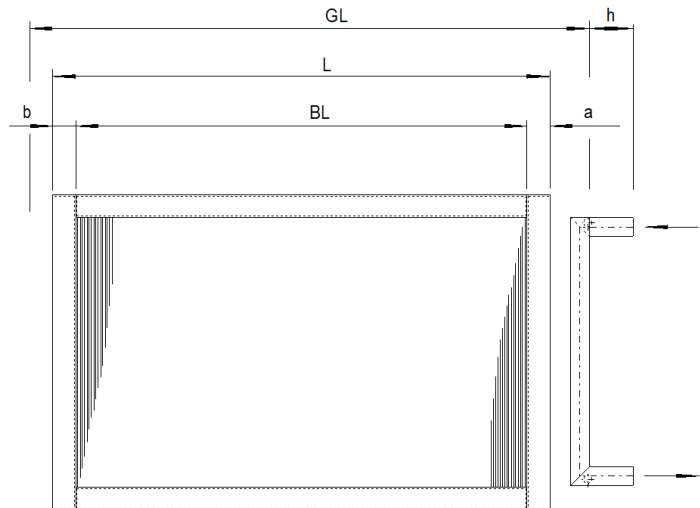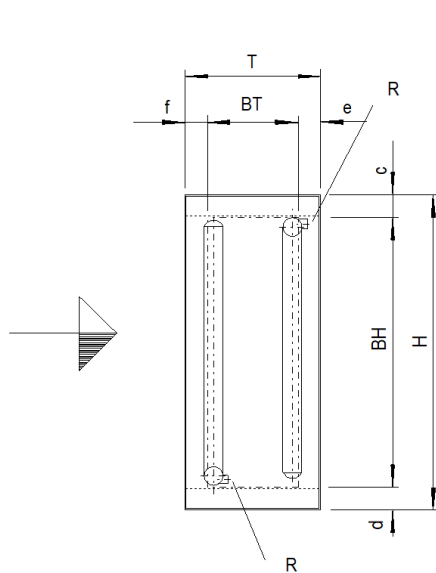


Bottom sheet without drain hole

File: EMF\021-A_UNI.emf

GL	1168 mm	L	1100 mm	BL	1000 mm
T	150 mm	BT	50 mm	H	700 mm
BH	600 mm	a	50 mm	b	50 mm
c	50 mm	d	50 mm	e	50 mm
f	50 mm	h	150 mm	R	3/8"

Attention: Drawing and dimensions not valid for all accessory options!



Headers: 28 * 1.50 mm
Connections: 28 * 1.50 mm

Tube volume: 3.5 l
Heating medium: Ethylene glycol 34 Vol. %
Empty weight: 17.6 kg
Surface: 14.4 m²
Distributions: 6
Passes: 4

Important remarks / explanatory notes:

- (1) Calculations and capacity tests are based on the following standards: condensers/gas coolers EN 327, evaporators/air coolers EN 328, dry coolers EN 1048.
- (2) Fluid group 2 in accordance with Pressure Equipment Directive 2014/68/EU



- (3) When using the unit in aggressive atmospheres, it is imperative to select the materials according to the specific application, see material recommendation brochure in the GPC programme menu "?".
- (4) Pipe (DN = 25.0 mm, TSmax = 100 °C, liquid). Final classification in accordance with Pressure Equipment Directive 2014/68/EU when the order is processed.