

Date: 2026-07-29
 Enquiry dated:
 Project:
 Quotation-no.:
 Item:
 Reference:

Oil cooler coil		GCO F/10/12/7.00/1000/ACS/ /025050 (FT09) (No insertions)	
Capacity:	20.0 kW ⁽¹⁾	Construction for:	Casing
Surface:	43.2 m ²	Connections:	right side
Rqrd. surface:	111.2 m ²	Tube pattern:	staggered
Surface reserve:	-61.2 %		
Heat transf. coeff.:	18.14 W/(m ² ·K)		
LMTD:	9.91 K		
Air		Heating medium:	Bitzer B100⁽²⁾
Volume flow:	Inlet 69798 m ³ /h Outlet 70000 m ³ /h	Inlet:	45.0 °C
Temperature:	32.0 °C 32.9 °C	Outlet:	40.0 °C
Rel. humidity:	40 % 38 %	Volume flow:	8.64 m ³ /h
Mass flow dry:	79170.4 kg/h	Mass flow:	7346 kg/h
Air pressure:	1013 mbar	Pressure drop:	0.72 bar
Velocity:	32.4 m/s		
Pressure drop:	8812 Pa		
Tube volume:	17.0 l	Tubes:	Copper ⁽³⁾
Fin spacing:	7.00 mm	Fins:	Aluminium ⁽³⁾
Empty weight:	57.4 kg	Header:	Copper
Finned length:	1000 mm	Frame:	Galv. Steel
Finned height:	600 mm	Circuits:	1N
Total length:	1204 mm	Passes:	4
Frame length:	1100 mm	Distributions:	30
Frame height:	700 mm	Connections per coil:	Copper
Frame depth:	350 mm	Inlet connection:	64 * 2.80 mm
PED classification:	Category I, module A ⁽⁴⁾	Outlet:	64 * 2.80 mm
Tube rows in depth:	10	Outlet header:	64 * 2.80 mm
Max. operating pressure:	32.0 bar	Inlet header:	64 * 2.80 mm
Support tubes:	4		

Piece(s)

Accessories

Smooth cover and bottom plates

1

Terms of delivery:

Payment cond.:

Delivery time: 15 weeks (Status: 2026-07-22)

Validity:



Our general terms of sales and delivery apply!

Subject to technical modifications



Oil cooler coil
F/10/12/7.00/1000/ACS/ /025050
Construction for casing
Without varnishing

Quotation-no.:
Item:

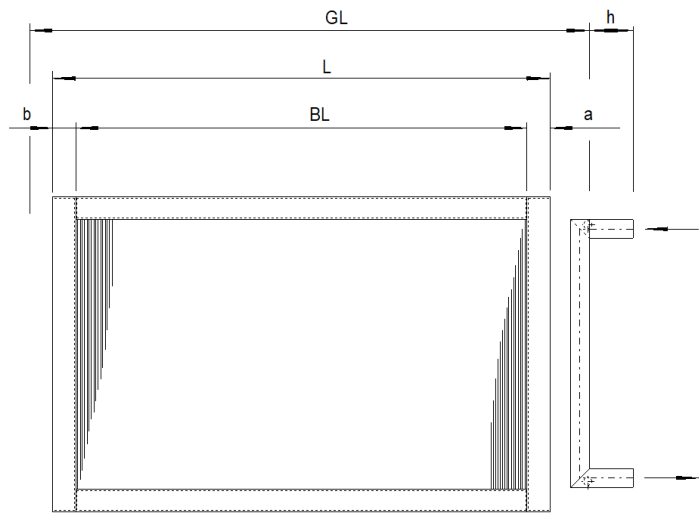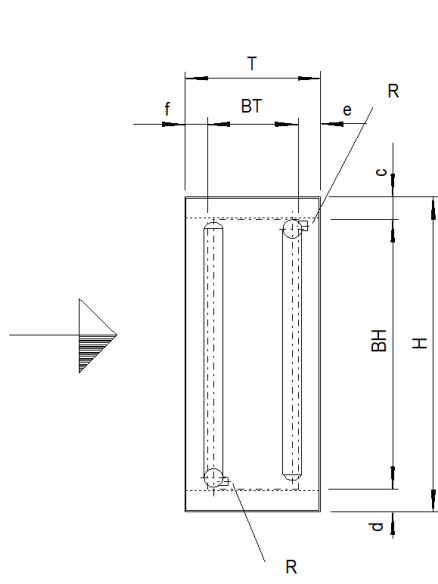


Bottom sheet without drain hole

File: EMF\021-A_UNI.emf

GL	1204 mm	L	1100 mm	BL	1000 mm
T	350 mm	BT	250 mm	H	700 mm
BH	600 mm	a	50 mm	b	50 mm
c	50 mm	d	50 mm	e	50 mm
f	50 mm	h	150 mm	R	1/2"

Attention: Drawing and dimensions not valid for all accessory options!

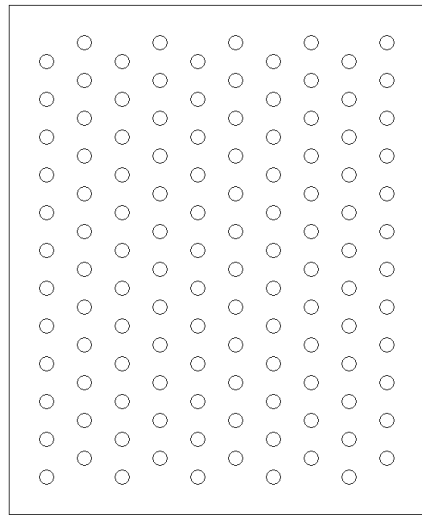

Headers:	64 * 2.80 mm
Connections:	64 * 2.80 mm
Tube volume:	17.0 l
Heating medium:	Bitzer B100
Empty weight:	57.4 kg
Surface:	43.2 m²
Distributions:	30
Passes:	4

Important remarks / explanatory notes:

- (1) Calculations and capacity tests are based on the following standards: condensers/gas coolers EN 327, evaporators/air coolers EN 328, dry coolers EN 1048.
- (2) Fluid group 2 in accordance with Pressure Equipment Directive 2014/68/EU



- (3) When using the unit in aggressive atmospheres, it is imperative to select the materials according to the specific application, see material recommendation brochure in the GPC programme menu "?".
- (4) Pipe (DN = 58.4 mm, TSmax = 100 °C, gaseous). Final classification in accordance with Pressure Equipment Directive 2014/68/EU when the order is processed.