

Date: 2026-03-27
 Enquiry dated:
 Project:
 Quotation-no.:
 Item:
 Reference:

Evaporator coil		GCO F/2/8/4.00/1000/ARS/ /015032 (FT09) For calculation only!	
Capacity:	5.0 kW ⁽¹⁾⁽²⁾	Construction for:	Casing
Surface:	9.6 m ²	Connections:	right side
Rqrd. surface:	17.0 m ²	Tube pattern:	staggered
Surface reserve:	-43.6 %	Frost thickness:	0.0 mm
Air	Inlet	Outlet	Refrigerant:
Volume flow:		5000 m ³ /h	R22 ⁽³⁾
Temperature:	0.0 °C	-2.4 °C	Evaporation temp.: -8.0 °C
			Superheating: 5.0 K
			Condensation temp.: 35.0 °C
			Subcooled temp.: 34.0 °C
Air pressure:	1013 mbar		
Pressure drop:	36 Pa	Pressure drop:	0.024 bar / 0.18 K
Tube volume:	2.1 l	Tubes:	Copper ⁽⁴⁾
Fin spacing:	4.00 mm	Distributor:	Brass
Empty weight:	13.8 kg	Capillary tubes:	Copper
Finned length:	1000 mm	Fins:	Aluminium ⁽⁴⁾
Finned height:	400 mm	Outlet header:	Copper
		Outlet connection:	Copper
Total length:	1158 mm	Frame:	Galv. Steel
Frame length:	1100 mm	Circuits:	1N
Frame height:	500 mm	Passes:	4
Frame depth:	150 mm	Distributions:	4
Tube rows in depth:	2	Support tubes:	4
Max. operating pressure:	32.0 bar	PED classification:	Art. 4, par. 3 ⁽⁵⁾
		Capillaries:	4.0 * 0.75 mm
Inlet connection:	16 mm	Length:	500 mm
Outlet header:	18 * 1.00 mm	Distr. press. drop:	1.5 bar
Outlet connection:	16 * 1.00 mm	Part of total:	16 %

Piece(s)

Accessories

Cover and bottom plates beaded with drain hole 1

Terms of delivery:

Payment cond.:

Delivery time: on request (Status: 2026-03-26)


Validity:

Our general terms of sales and delivery apply!

Subject to technical modifications

Evaporator coil
F/2/8/4.00/1000/ARS/ /015032
Construction for casing
Without varnishing

Quotation-no.:
Item:

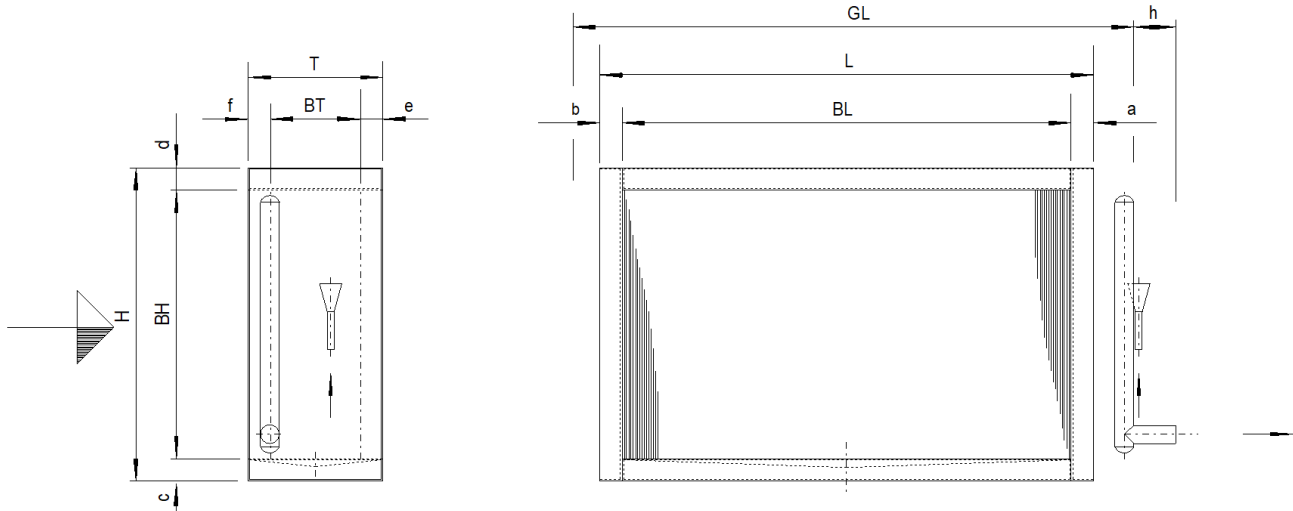


Bottom sheet with drain hole

File: EMF\022-F_UNI.emf

GL	1158 mm	L	1100 mm	BL	1000 mm
T	150 mm	BT	50 mm	H	500 mm
BH	400 mm	a	50 mm	b	50 mm
c	50 mm	d	50 mm	e	50 mm
f	50 mm	h	150 mm		

Attention: Drawing and dimensions not valid for all accessory options!



Capillary tubes:	4.0 * 0.75 mm, 500 mm
Pieces:	4
Outlet header:	18 * 1.00 mm
Outlet connection:	16 * 1.00 mm
Tube volume:	2.1 l
Refrigerant:	R22
Empty weight:	13.8 kg
Surface:	9.6 m ²
Distributions:	4
Passes:	4

Important remarks / explanatory notes:

- (1) Calculations and capacity tests are based on the following standards: condensers/gas coolers EN 327, evaporators/air coolers EN 328, dry coolers EN 1048.
- (2) Capacity including Humidity Factor
- (3) Fluid group 2 according to pressure equipment directive 2014/68/EU
- (4) When using the unit in aggressive atmospheres, it is imperative to select the materials according to the specific application, see material recommendation brochure in the GPC programme menu "?".
- (5) Piping (DN = 16.0 mm, TSmax = 100 °C, gaseous). Final classification according to pressure equipment directive 2014/68/EU during order processing.

Please pay attention ...



The coil is only for calculation:

The prices are no longer valid.