

1500V Containerized Energy Storage & Transformer

BCS10000K-C-HUD/T8



Product Features



Safe

- On-line insulation detection
- Adapt to extreme environment, such as high temperature, salt, and extreme cold etc.
- Real-time transformer condition monitoring



Simple


- Integrated design of converter and transformer system, integrated system, Integrated data acquisition and optic fiber network
- Wide DC voltage operation range, flexible configuration
- Adapt to multiple scenarios, including power generation side, grid side and user side application, supporting multi-device parallel



Smart

- Grid forming technology, providing extra inertial support
- Millisecond-level power response, stable power grid operation
- Multiple functions, including Black-Start and VSG etc.

Circuit diagram

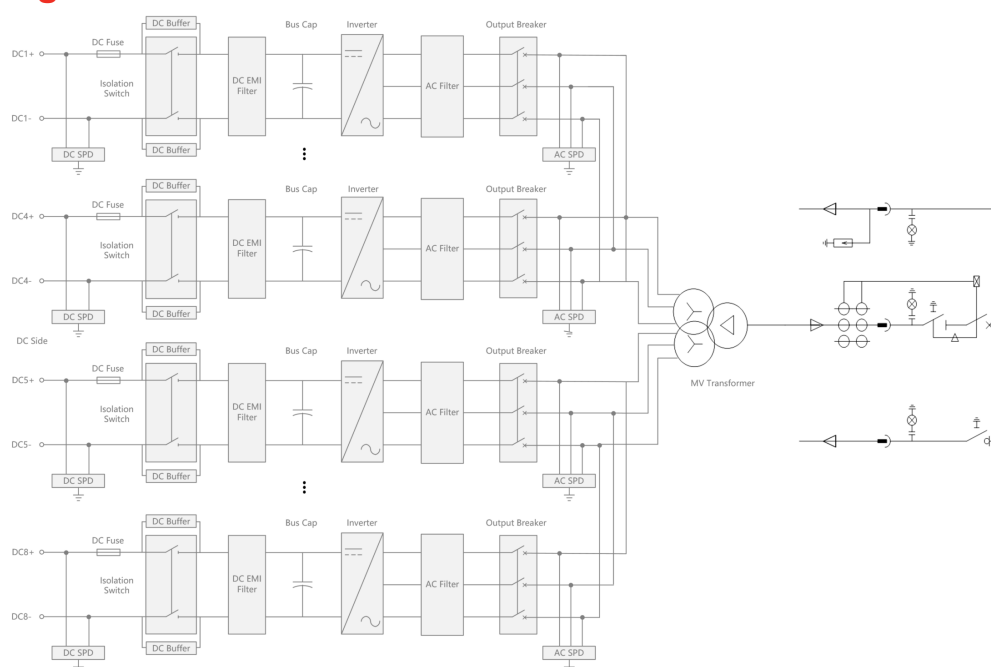

Technical Specification

Items	BCS10000K-C-HUD/T8
DC input	
Max. DC voltage	1500Vdc
Full load DC voltage range	1060~1500 Vdc
Max. DC current	1402A*8
Soft start	Yes
AC output (On-grid,Low voltage side)	
Rated AC output power	10000kW
Max. AC output power	11000kVA
Rated grid-tied voltage	690Vac
Grid voltage range	-15%~10%(settable)
Rated grid frequency	50/60Hz
Max. output current	9204A
Power factor/Adjustable range	>0.99(rated power)/-1(leading)~1(lagging)
Range of reactive power	-100 % - 100 %
THDi	<3% (rated power)
AC output (Off-grid,Low voltage side)	
Rated AC output voltage	690Vac
Output voltage accuracy	1%
Max. output current	9204A
THDu	<3%(linear load)
Rated output frequency	50/60Hz
Overload capacity	110% overload
PCS Efficiency	
Max. efficiency	≥99%*
Transformer	
Rated power	10000kVA
Voltage transformation ratio	0.69/35kV (Can be customized)
Isolation mode	Oil-immersed transformer
Transformer vector	Dy11-y11
General data	
IP rating	IP65(PCS) IP54(Skid)
Operation temperature	-35°C~60°C(> 45°C derating)
Relatively humidity	0~100%(no-condensing)
Cooling type	Intelligent air cooling
*Dimensions(W×H×D)	12192×2896×2438mm
*Weight	≤ 38000kg
Altitude	4000m(>2000m derating)
Display	LED
Communication Protocol	Modbus-RTU / Modbus-TCP / IEC61850 /IEC104
Communication Interface	RS485/CAN/Ethernet
Compliance	EN/IEC 62477-1,EN/IEC 61000-6-2,EN50549-2/10,IEC62116,IEC61727,IEC60068-2-1/2/14/30,EN55011

- *This efficiency value was measured in a laboratory environment.
- *Specification indexes may be subject to changes without further notice.

XIAMEN KEHUA DIGITAL ENERGY TECH CO.,LTD

Add: Room 208 - 38, Hengye Building, No. 100 Xiangxing Road, Torch High-tech Zone (Xiang'an) Industrial Zone, Xiamen, China(361000)

Tel: +86-592-5160516

Email: Intertrade@kehua.com

Fax: +86-592-5162166

Web: www.kehua.com