

S6 AC Switch - disconnecter base mounting 2P - 3P - 3P+N

Size 1

A 200|250|315|400



Accessories



» Direct handle

CODE DS-SI11



» External handle

included shaft ^{*(e1)}

IP65

CODE DS-SA11



» External handle

without shaft

IP65

CODE DS-SA14



» Emergency external handle

included shaft ^{*(e1)}

IP65

CODE DS-SR11



» Terminal shrouds

CODE DR-CU11 (1 unit)

CODE DR-CU12 (1 unit)

CODE DR-CU13 (1 unit)



» Phase barriers

CODE DR-SF11 (1 unit)

CODE DR-SF12 (2 units)

CODE DR-SF13 (3 units)



» Spacers

CODE DR-EL11 (4 units)



» Safety key lock device

Simple CODE DS-CA11



Double CODE DS-CE11

For external handle, lock the handle by means of a key in position "OFF" (under request, in "ON"), the key can only be removed with the handle locked

Door drilling for handle and key lock device

Simple

Double

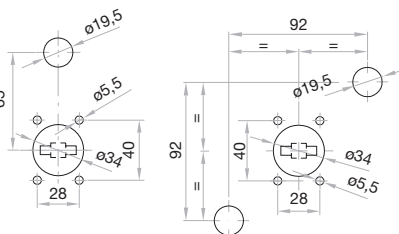

» Shafts

Standard shaft included ^{*(e1)}

L (mm)

227

P (mm)

103... 256

Shaft extensions

Type 1

L (mm)

375

P (mm)

103... 415

CODE

DS-EP14

Type 2

L (mm)

536

P (mm)

103... 576

CODE

DS-EP15



» Auxiliary contacts

1NO+1NC CODE D5LAU01




2NO+2NC CODE D5LAU02

Ie = 16 A (resistive loads)

4 A (inductive loads) at 250 Vac.

Dimensions (mm)

Door drilling for external handle

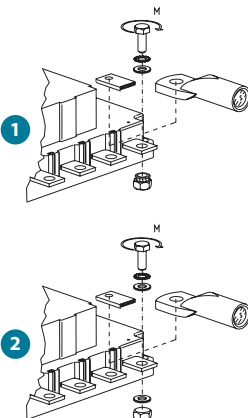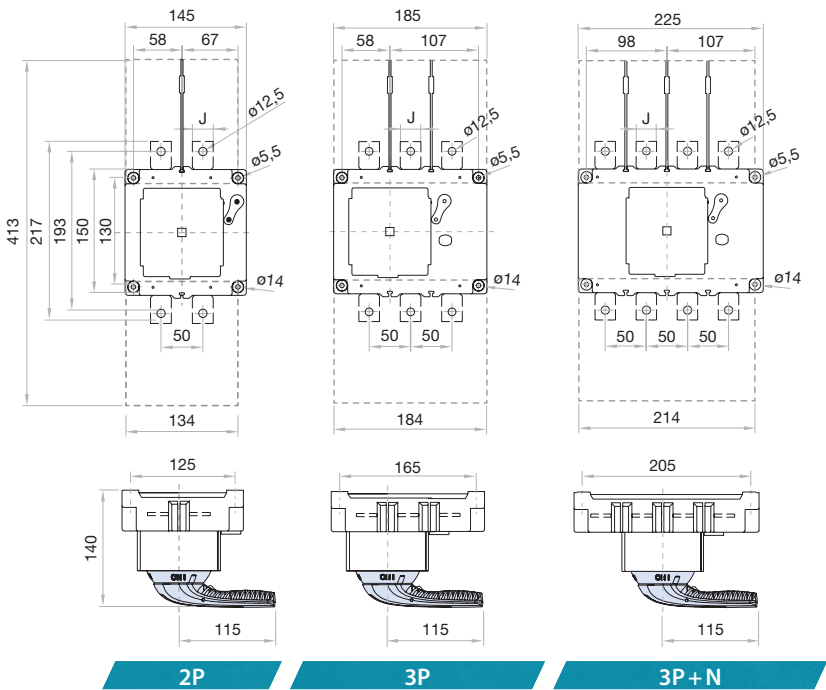

	S max (Cu) mm ²	H max (Cu) mm	L max (Cu) mm	T mm	M Nxmm
200 A	185	8	25	M10	18
250 A	185	8	25	M10	18
315 A	185	8	25	M10	18
400 A	240 ^{*(1)}	8	30	M10	18

^{*(1)} Using phase barriers DR-SF__ to maintain the required clearance.

Technical information

According to IEC 60947-3



tests:



										200	250	315	400											200	250	315	400
Rated thermal current in ambient at	Ith	40° C		A		200	250	315	400	Short - circuit behaviour																	
		50° C		A		200	250	315	400	Rated short-circuit making capacity ^{*(2)}										1cm kA (peak)	20	20	20	20			
		60° C		A		200	250	315	400	Rated short-time withstand current (1sec)										1cw kA rms	12	12	12	12			
Rated insulation voltage	Ui			V		1000	1000	1000	1000	Mechanical features																	
Rated impulse withstand voltage	Uimp			kV		12	12	12	12	Number of mechanical operations (according to the standards, for other values please consult)										Cycles	8000	8000	8000	8000			
AC Rated operational current ^{*(1)}	Ie	Triphasic	Ue 400V	AC23A	A	200	250	315	400	Maximum weight 2P										kg	1,65	1,65	1,65	1,68			
			Ue 690V	AC21A	A	200	250	315	400	Maximum weight 3P										kg	2,17	2,17	2,17	2,21			
			Ue 800V	AC21B	A	-	-	-	250 ^{*(3)}	Maximum weight 3P+N										kg	2,70	2,70	2,70	2,76			
Rated breaking capacity	400V, cos φ=0,35-0,45				A	1600	2000	2520	3200																		
Rated making capacity	400V, cos φ=0,45				A	2000	2500	3150	4000											┃	┃	┃	┃				

^{*(1)} Other voltages and / or utilization categories. Please consult

^{*(2)} Without limiting protective device (short-circuit maintained 50... 100 ms.)


^{*(3)} 3P/3P+N

Short - circuit behaviour

Rated short-circuit making capacity ^{*(2)} I _{cm} kA (peak)	20	20	20	20
Rated short-time withstand current (1sec) I _{cw} kA rms	12	12	12	12

Mechanical features

Number of mechanical operations (according to the standards, for other values please consult)	Cycles	8000	8000	8000	8000
Maximum weight 2P	kg	1,65	1,65	1,65	1,68
Maximum weight 3P	kg	2,17	2,17	2,17	2,21
Maximum weight 3P+N	kg	2,70	2,70	2,70	2,76



Also available 4P switch-disconnectors under request, please consult

