

35
SIDE HEIGHT

PG: to be used indoors in almost dry atmosphere

LIGHT DUTY CABLE TRAYS

- made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description	Thks. (mm)
50	32A-3V-050/M/PG	CABLE TRAY 50/35	0,6
100	32A-3V-100/M/PG	CABLE TRAY 100/35	0,6
150	32A-3V-150/M/PG	CABLE TRAY 150/35	0,6
200	32A-3V-200/M/PG	CABLE TRAY 200/35	0,6
300	32A-3V-300/M/PG	CABLE TRAY 300/35	0,7

MEDIUM DUTY CABLE TRAYS

- made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description	Thks. (mm)
50	32A-3V-050/N/PG	CABLE TRAY 50/35	1,0
100	32A-3V-100/N/PG	CABLE TRAY 100/35	1,0
150	32A-3V-150/N/PG	CABLE TRAY 150/35	1,0
200	32A-3V-200/N/PG	CABLE TRAY 200/35	1,0
300	32A-3V-300/N/PG	CABLE TRAY 300/35	1,0
400	32A-3V-400/N/PG	CABLE TRAY 400/35	1,0
500	32A-3V-500/N/PG	CABLE TRAY 500/35	1,0
600	32A-3V-600/N/PG	CABLE TRAY 600/35	1,0

Standard Length: 3 m.

Rolled edges for reinforcement and cable protection.



Perforation in bottom and side walls for ventilation and cable fastening.

Also available in non perforated version (Part Nr. 32A-3O-... Instead of 32A-3V-...)


Further dimensions available upon request

For each standard length 2 connectors Part Nr. 10NCR.317 have to be ordered separately.

Classification acc. to EN 61537

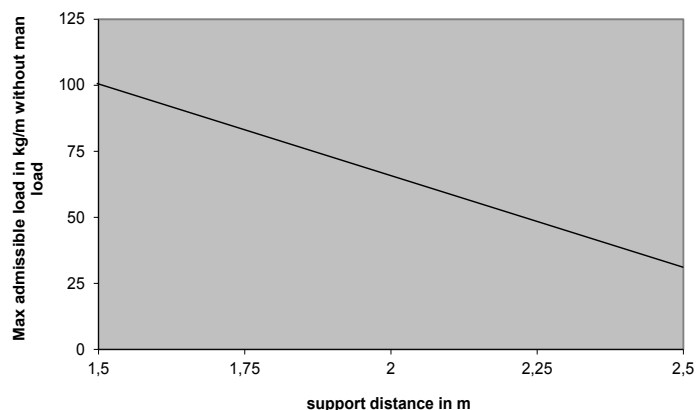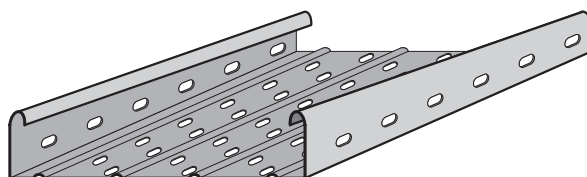

LOADING GRAPH Thks. 0,6 mm

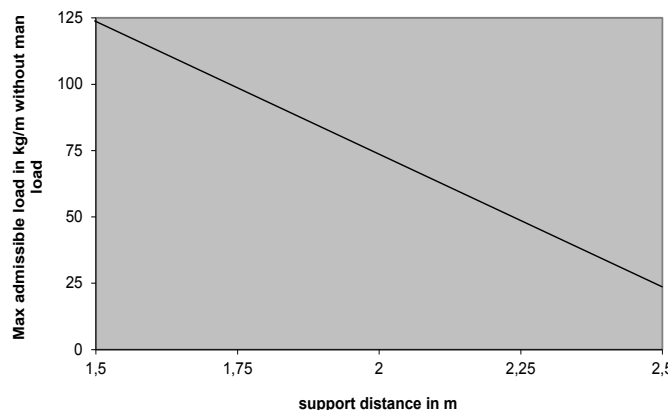

LOADING GRAPH Thks. 1,0 mm

35
SIDE HEIGHT

PG: to be used indoors in almost dry atmosphere

DG: to be used outdoors or indoors in humid atmosphere

MEDIUM DUTY CABLE TRAYS

- made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description	Thks.(mm)
50	32A-3V-050/S/PG	CABLE TRAY 50/35	1,25
100	32A-3V-100/S/PG	CABLE TRAY 100/35	1,25
150	32A-3V-150/S/PG	CABLE TRAY 150/35	1,25
200	32A-3V-200/S/PG	CABLE TRAY 200/35	1,25
300	32A-3V-300/S/PG	CABLE TRAY 300/35	1,25
400	32A-3V-400/S/PG	CABLE TRAY 400/35	1,25
500	32A-3V-500/S/PG	CABLE TRAY 500/35	1,25
600	32A-3V-600/S/PG	CABLE TRAY 600/35	1,25

Standard Length: 3 m.

Rolled edges for reinforcement and cable protection.

Perforation in bottom and side walls for ventilation and cable fastening.

Also available in non perforated version (Part Nr. 32A-3O-... Instead of 32A-3V-...)

Further dimensions available upon request

For each standard length 2 connectors Part Nr. 10NCR.317 have to be ordered separately.

Classification acc. to EN 61537



HEAVY DUTY CABLE TRAYS

- made of galvanized sheet steel acc. to EN 10327


Width B (mm)	Part Nr.	Description	Thks. (mm)
50	32A-3V-050/P/PG	CABLE TRAY 50/35	1,5
100	32A-3V-100/P/PG	CABLE TRAY 100/35	1,5
150	32A-3V-150/P/PG	CABLE TRAY 150/35	1,5
200	32A-3V-200/P/PG	CABLE TRAY 200/35	1,5
300	32A-3V-300/P/PG	CABLE TRAY 300/35	1,5
400	32A-3V-400/P/PG	CABLE TRAY 400/35	1,5
500	32A-3V-500/P/PG	CABLE TRAY 500/35	1,5
600	32A-3V-600/P/PG	CABLE TRAY 600/35	1,5
750	32A-3V-750/P/PG	CABLE TRAY 750/35	1,5
900	32A-3V-900/P/PG	CABLE TRAY 900/35	1,5

- hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description	Thks. (mm)
50	32A-3V-050/P/DG	CABLE TRAY 50/35	1,5
100	32A-3V-100/P/DG	CABLE TRAY 100/35	1,5
150	32A-3V-150/P/DG	CABLE TRAY 150/35	1,5
200	32A-3V-200/P/DG	CABLE TRAY 200/35	1,5
300	32A-3V-300/P/DG	CABLE TRAY 300/35	1,5
400	32A-3V-400/P/DG	CABLE TRAY 400/35	1,5
500	32A-3V-500/P/DG	CABLE TRAY 500/35	1,5
600	32A-3V-600/P/DG	CABLE TRAY 600/35	1,5
750	32A-3V-750/P/DG	CABLE TRAY 750/35	1,5
900	32A-3V-900/P/DG	CABLE TRAY 900/35	1,5

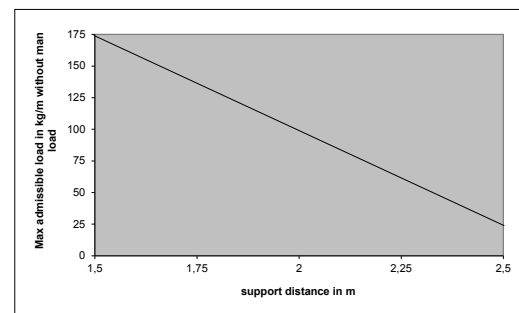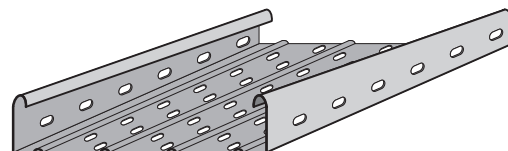

LOADING GRAPH Thks. 1,5 mm

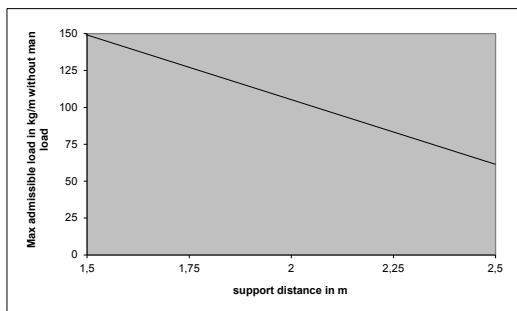

LOADING GRAPH Thks. 1,25 mm

35
SIDE HEIGHT

PG: to be used indoors in almost dry atmosphere

DG: to be used outdoors or indoors in humid atmosphere

BENDS 90

● made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description
50	32BK-3V-050/PG	BEND 90 50/35
100	32BK-3V-100/PG	BEND 90 100/35
150	32BK-3V-150/PG	BEND 90 150/35
200	32BK-3V-200/PG	BEND 90 200/35
300	32BK-3V-300/PG	BEND 90 300/35
400	32BK-3V-400/PG	BEND 90 400/35
500	32BK-3V-500/PG	BEND 90 500/35
600	32BK-3V-600/PG	BEND 90 600/35
750	32BK-3V-750/PG	BEND 90 750/35
900	32BK-3V-900/PG	BEND 90 900/35

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32BK-3V-050/DG	BEND 90 50/35
100	32BK-3V-100/DG	BEND 90 100/35
150	32BK-3V-150/DG	BEND 90 150/35
200	32BK-3V-200/DG	BEND 90 200/35
300	32BK-3V-300/DG	BEND 90 300/35
400	32BK-3V-400/DG	BEND 90 400/35
500	32BK-3V-500/DG	BEND 90 500/35
600	32BK-3V-600/DG	BEND 90 600/35
750	32BK-3V-750/DG	BEND 90 750/35
900	32BK-3V-900/DG	BEND 90 900/35


BENDS 45

● made of galvanized sheet steel acc. to EN 10327


Width B (mm)	Part Nr.	Description
50	32BL-3V-050/PG	BEND 45 50/35
100	32BL-3V-100/PG	BEND 45 100/35
150	32BL-3V-150/PG	BEND 45 150/35
200	32BL-3V-200/PG	BEND 45 200/35
300	32BL-3V-300/PG	BEND 45 300/35
400	32BL-3V-400/PG	BEND 45 400/35
500	32BL-3V-500/PG	BEND 45 500/35
600	32BL-3V-600/PG	BEND 45 600/35
750	32BL-3V-750/PG	BEND 45 750/35
900	32BL-3V-900/PG	BEND 45 900/35

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32BL-3V-050/DG	BEND 45 50/35
100	32BL-3V-100/DG	BEND 45 100/35
150	32BL-3V-150/DG	BEND 45 150/35
200	32BL-3V-200/DG	BEND 45 200/35
300	32BL-3V-300/DG	BEND 45 300/35
400	32BL-3V-400/DG	BEND 45 400/35
500	32BL-3V-500/DG	BEND 45 500/35
600	32BL-3V-600/DG	BEND 45 600/35
750	32BL-3V-750/DG	BEND 45 750/35
900	32BL-3V-900/DG	BEND 45 900/35

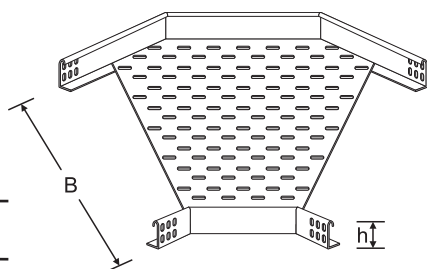

No connectors needed, to connect to straight lengths of cable trays
Internal radius R=200 mm

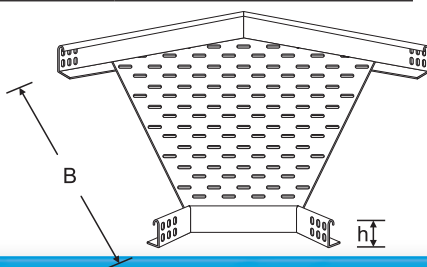

No connectors needed, to connect to straight lengths of cable trays
Internal radius R=200 mm

35
SIDE HEIGHT

PG: to be used indoors in almost dry atmosphere

DG: to be used outdoors or indoors in humid atmosphere

TEES

● made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description
50	32E-3V-050/PG	TEE 50/35
100	32E-3V-100/PG	TEE 100/35
150	32E-3V-150/PG	TEE 150/35
200	32E-3V-200/PG	TEE 200/35
300	32E-3V-300/PG	TEE 300/35
400	32E-3V-400/PG	TEE 400/35
500	32E-3V-500/PG	TEE 500/35
600	32E-3V-600/PG	TEE 600/35
750	32E-3V-750/PG	TEE 750/35
900	32E-3V-900/PG	TEE 900/35

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32E-3V-050/DG	TEE 50/35
100	32E-3V-100/DG	TEE 100/35
150	32E-3V-150/DG	TEE 150/35
200	32E-3V-200/DG	TEE 200/35
300	32E-3V-300/DG	TEE 300/35
400	32E-3V-400/DG	TEE 400/35
500	32E-3V-500/DG	TEE 500/35
600	32E-3V-600/DG	TEE 600/35
750	32E-3V-750/DG	TEE 750/35
900	32E-3V-900/DG	TEE 900/35


CROSSES

● made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description
50	32F-3V-050/PG	CROSS 50/35
100	32F-3V-100/PG	CROSS 100/35
150	32F-3V-150/PG	CROSS 150/35
200	32F-3V-200/PG	CROSS 200/35
300	32F-3V-300/PG	CROSS 300/35
400	32F-3V-400/PG	CROSS 400/35
500	32F-3V-500/PG	CROSS 500/35
600	32F-3V-600/PG	CROSS 600/35
750	32F-3V-750/PG	CROSS 750/35
900	32F-3V-900/PG	CROSS 900/35

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32F-3V-050/DG	CROSS 50/35
100	32F-3V-100/DG	CROSS 100/35
150	32F-3V-150/DG	CROSS 150/35
200	32F-3V-200/DG	CROSS 200/35
300	32F-3V-300/DG	CROSS 300/35
400	32F-3V-400/DG	CROSS 400/35
500	32F-3V-500/DG	CROSS 500/35
600	32F-3V-600/DG	CROSS 600/35
750	32E-3V-750/DG	CROSS 750/35
900	32E-3V-900/DG	CROSS 900/35

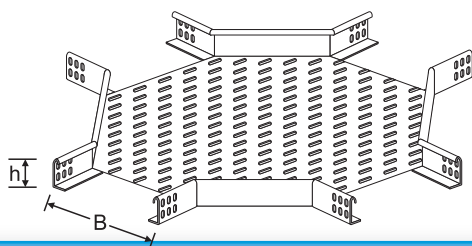

No connectors needed, to connect to straight lengths of cable trays
Internal radius R=200 mm

No connectors needed, to connect to straight lengths of cable trays
Internal radius R=200 mm

35
SIDE HEIGHT

PG: to be used indoors in almost dry atmosphere

DG: to be used outdoors or indoors in humid atmosphere

VERTICAL BENDS

● made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description
50	32GC-3V-050/PG	VERTICAL BEND 50/35
100	32GC-3V-100/PG	VERTICAL BEND 100/35
150	32GC-3V-150/PG	VERTICAL BEND 150/35
200	32GC-3V-200/PG	VERTICAL BEND 200/35
300	32GC-3V-300/PG	VERTICAL BEND 300/35
400	32GC-3V-400/PG	VERTICAL BEND 400/35
500	32GC-3V-500/PG	VERTICAL BEND 500/35
600	32GC-3V-600/PG	VERTICAL BEND 600/35
750	32GC-3V-750/PG	VERTICAL BEND 750/35
900	32GC-3V-900/PG	VERTICAL BEND 900/35

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32GC-3V-050/DG	VERTICAL BEND 50/35
100	32GC-3V-100/DG	VERTICAL BEND 100/35
150	32GC-3V-150/DG	VERTICAL BEND 150/35
200	32GC-3V-200/DG	VERTICAL BEND 200/35
300	32GC-3V-300/DG	VERTICAL BEND 300/35
400	32GC-3V-400/DG	VERTICAL BEND 400/35
500	32GC-3V-500/DG	VERTICAL BEND 500/35
600	32GC-3V-600/DG	VERTICAL BEND 600/35
750	32GC-3V-750/DG	VERTICAL BEND 750/35
900	32GC-3V-900/DG	VERTICAL BEND 900/35

Each Vertical Bend includes:
2 Vertical Bend Elements GR
4 pairs of Vertical Adjustable Connectors VCR
20 Bolts M6X12

Vertical Bends have adjustable radius



VERTICAL BEND ELEMENTS

● made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description
50	32GR-3V-050/PG	VERTICAL BEND ELEMENT 50/35
100	32GR-3V-100/PG	VERTICAL BEND ELEMENT 100/35
150	32GR-3V-150/PG	VERTICAL BEND ELEMENT 150/35
200	32GR-3V-200/PG	VERTICAL BEND ELEMENT 200/35
300	32GR-3V-300/PG	VERTICAL BEND ELEMENT 300/35
400	32GR-3V-400/PG	VERTICAL BEND ELEMENT 400/35
500	32GR-3V-500/PG	VERTICAL BEND ELEMENT 500/35
600	32GR-3V-600/PG	VERTICAL BEND ELEMENT 600/35
750	32GR-3V-750/PG	VERTICAL BEND ELEMENT 750/35
900	32GR-3V-900/PG	VERTICAL BEND ELEMENT 900/35

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32GR-3V-050/DG	VERTICAL BEND ELEMENT 50/35
100	32GR-3V-100/DG	VERTICAL BEND ELEMENT 100/35
150	32GR-3V-150/DG	VERTICAL BEND ELEMENT 150/35
200	32GR-3V-200/DG	VERTICAL BEND ELEMENT 200/35
300	32GR-3V-300/DG	VERTICAL BEND ELEMENT 300/35
400	32GR-3V-400/DG	VERTICAL BEND ELEMENT 400/35
500	32GR-3V-500/DG	VERTICAL BEND ELEMENT 500/35
600	32GR-3V-600/DG	VERTICAL BEND ELEMENT 600/35
750	32GR-3V-750/DG	VERTICAL BEND ELEMENT 750/35
900	32GR-3V-900/DG	VERTICAL BEND ELEMENT 900/35

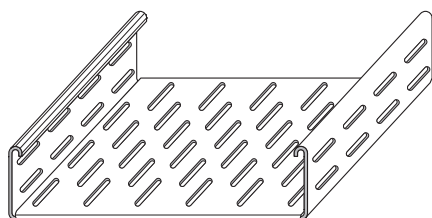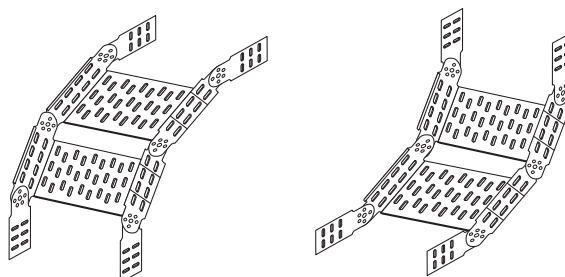

Vertical Bend Elements are connected to each other using:
Vertical Adjustable Connectors VCR
Bolts M6X12

By connecting more than 2 Vertical Bend Elements, we can have a Vertical Bend of any radius

35
SIDE HEIGHT


PG: to be used indoors in almost dry atmosphere

DG: to be used outdoors or indoors in humid atmosphere

VERTICAL TEE

● made of galvanized sheet steel acc. to EN 10327


Width B (mm)	Part Nr.	Description
50	10VTA-3V-050/PG	VERTICAL TEE 50/35
100	10VTA-3V-100/PG	VERTICAL TEE 100/35
150	10VTA-3V-150/PG	VERTICAL TEE 150/35
200	10VTA-3V-200/PG	VERTICAL TEE 200/35
300	10VTA-3V-300/PG	VERTICAL TEE 300/35
400	10VTA-3V-400/PG	VERTICAL TEE 400/35
500	10VTA-3V-500/PG	VERTICAL TEE 500/35
600	10VTA-3V-600/PG	VERTICAL TEE 600/35
750	10VTA-3V-750/PG	VERTICAL TEE 750/35
900	10VTA-3V-900/PG	VERTICAL TEE 900/35

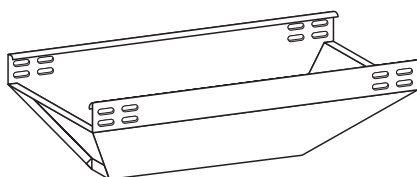

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32VTA-3V-050/DG	VERTICAL TEE 50/35
100	32VTA-3V-100/DG	VERTICAL TEE 100/35
150	32VTA-3V-150/DG	VERTICAL TEE 150/35
200	32VTA-3V-200/DG	VERTICAL TEE 200/35
300	32VTA-3V-300/DG	VERTICAL TEE 300/35
400	32VTA-3V-400/DG	VERTICAL TEE 400/35
500	32VTA-3V-500/DG	VERTICAL TEE 500/35
600	32VTA-3V-600/DG	VERTICAL TEE 600/35
750	32VTA-3V-750/DG	VERTICAL TEE 750/35
900	32VTA-3V-900/DG	VERTICAL TEE 900/35


6 Flat Connectors NCF included



VERTICAL TEE

● made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description
50	32VTB-3V-050/PG	VERTICAL TEE 50/35
100	32VTB-3V-100/PG	VERTICAL TEE 100/35
150	32VTB-3V-150/PG	VERTICAL TEE 150/35
200	32VTB-3V-200/PG	VERTICAL TEE 200/35
300	32VTB-3V-300/PG	VERTICAL TEE 300/35
400	32VTB-3V-400/PG	VERTICAL TEE 400/35
500	32VTB-3V-500/PG	VERTICAL TEE 500/35
600	32VTB-3V-600/PG	VERTICAL TEE 600/35
750	32VTB-3V-750/PG	VERTICAL TEE 750/35
900	32VTB-3V-900/PG	VERTICAL TEE 900/35

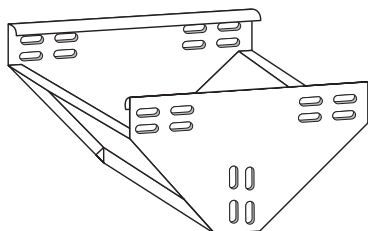

● hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	32VTB-3V-050/DG	VERTICAL TEE 50/35
100	32VTB-3V-100/DG	VERTICAL TEE 100/35
150	32VTB-3V-150/DG	VERTICAL TEE 150/35
200	32VTB-3V-200/DG	VERTICAL TEE 200/35
300	32VTB-3V-300/DG	VERTICAL TEE 300/35
400	32VTB-3V-400/DG	VERTICAL TEE 400/35
500	32VTB-3V-500/DG	VERTICAL TEE 500/35
600	32VTB-3V-600/DG	VERTICAL TEE 600/35
750	32VTB-3V-750/DG	VERTICAL TEE 750/35
900	32VTB-3V-900/DG	VERTICAL TEE 900/35

6 Flat Connectors NCF included



35
SIDE HEIGHT

PG: to be used indoors in almost dry atmosphere

DG: to be used outdoors or indoors in humid atmosphere

REDUCERS / BLIND END PIECES


- made of galvanized sheet steel acc. to EN 10327

Width B (mm)	Part Nr.	Description
50	10RA-3-050/PG	REDUCER 50/35
100	10RA-3-100/PG	REDUCER 100/35
150	10RA-3-150/PG	REDUCER 150/35
200	10RA-3-200/PG	REDUCER 200/35
300	10RA-3-300/PG	REDUCER 300/35
400	10RA-3-400/PG	REDUCER 400/35
500	10RA-3-500/PG	REDUCER 500/35
600	10RA-3-600/PG	REDUCER 600/35
750	10RA-3-750/PG	REDUCER 750/35
900	10RA-3-900/PG	REDUCER 900/35

RA piece can be used:


either as a reducer (to reduce the cable trays width)
or
as a blind end piece

depending on the direction we bend it's ends

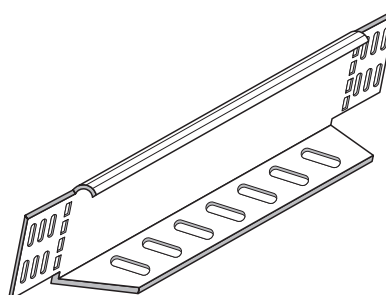


- hot-dip galvanized acc. to ISO 1461

Width B (mm)	Part Nr.	Description
50	10RA-3-050/DG	REDUCER 50/35
100	10RA-3-100/DG	REDUCER 100/35
150	10RA-3-150/DG	REDUCER 150/35
200	10RA-3-200/DG	REDUCER 200/35
300	10RA-3-300/DG	REDUCER 300/35
400	10RA-3-400/DG	REDUCER 400/35
500	10RA-3-500/DG	REDUCER 500/35
600	10RA-3-600/DG	REDUCER 600/35
750	10RA-3-750/DG	REDUCER 750/35
900	10RA-3-900/DG	REDUCER 900/35



Blind End Piece

Applications

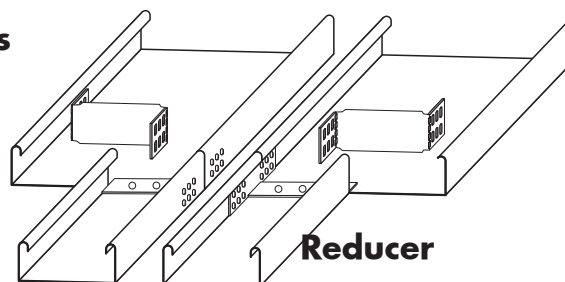

Reducer