

1500V Containerized Energy Storage & Transformer

BCS4000K~5000K-C-HUD/T4 Series



Product Features



Safe

- On-line insulation detection
- Adapt to extreme environment, such as high temperature, salt, and extreme cold etc.
- Real-time transformer condition monitoring



Simple


- Integrated design of converter and transformer system, integrated system, Integrated data acquisition and optic fiber network
- Wide DC voltage operation range, flexible configuration
- Adapt to multiple scenarios, including generator side, grid side and user side application, supporting multi-device parallel



Smart

- Grid forming technology, providing extra inertial support
- Millisecond-level power response, stable power grid operation
- Multiple functions, including Black-Start and VSG etc.

Circuit diagram

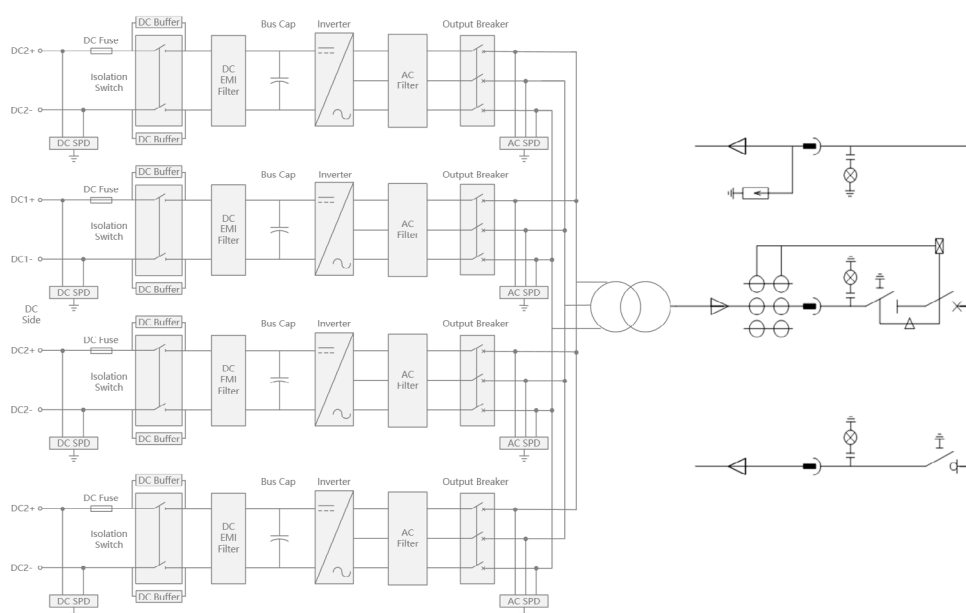

Technical Specification

Items	BCS4000K-C-HUD/T4		BCS5000K-C-HUD/T4	
DC input				
Max. DC voltage	1500Vdc			
Full load DC voltage range	1060~1500 Vdc			
Max. DC current	1122A*4		1403A*4	
Soft start	Yes			
AC output (On-grid,Low voltage side)				
Rated AC output power	4000kW		5000kW	
Max. AC output power	4400kVA		5500kVA	
Rated grid-tied voltage	690Vac			
Grid voltage range	-15%~10%(settable)			
Rated grid frequency	50Hz			
Max. output current	3681A		4602A	
Power factor/Adjustable range	>0.99(rated power)/-1(leading)~1(lagging)			
Range of reactive power	-100 % ~ 100 %			
THDi	<3% (rated power)			
AC output (Off-grid,Low voltage side)				
Rated AC output voltage	690Vac			
Output voltage accuracy	1%			
Max. output current	3681A		4602A	
THDu	<3%(linear load)			
Rated output frequency	50Hz			
Overload capacity	110% overload			
PCS Efficiency				
Max. efficiency	≥99%			
Transformer				
Rated power	4000kVA		5000kVA	
Voltage transformation ratio	0.69/(6~35)kV			
Isolation mode	Oil-immersed transformer			
General data				
IP rating	IP65(PCS) IP54(Skid)			
Operation temperature	-35°C~60°C(> 45°C derating)			
Relatively humidity	0~100%(no-condensing)			
Cooling type	Intelligent air cooling			
*Dimensions(W×H×D)	12192×2896×2438mm			
*Weight	<23000kg		<25000kg	
Altitude	4000m(>2000m derating)			
Display	LED			
Communication Protocol	Modbus-RTU / Modbus-TCP / IEC61850 /IEC104			
Communication Interface	RS485/CAN/Ethernet			
Compliance	EN/IEC 62477-1,EN/IEC 61000-6-2,EN50549-2/10,IEC62116,IEC61727,IEC60068-2-1/2/14/30,EN55011			

■ *This efficiency value was measured in a laboratory environment.

■ *Specification indexes may be subject to changes without further notice.

XIAMEN KEHUA DIGITAL ENERGY TECH CO.,LTD.

Add: Room 208 - 38, Hengye Building, No. 100 Xiangxing Road, Torch High-tech Zone
(Xiang'an) Industrial Zone, Xiamen, China(361000)

Tel: +86-592-5160516

Fax: +86-592-5162166

Email: Intertrade@kehua.com

Web: www.kehua.com

