

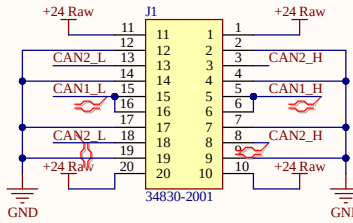
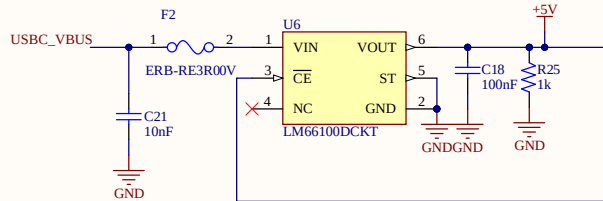



MX150 CAN Connector

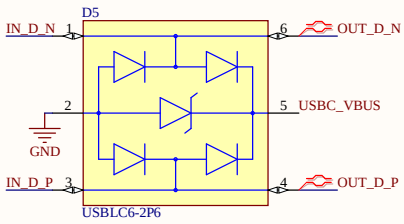


USBC Full Speed

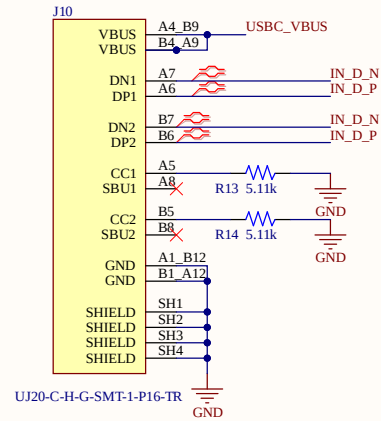


Testpoints

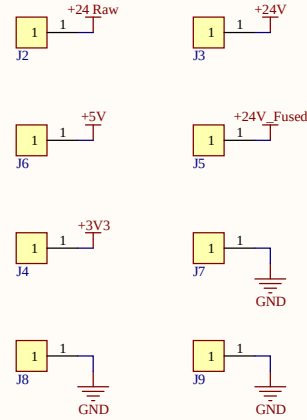


MicroBasic

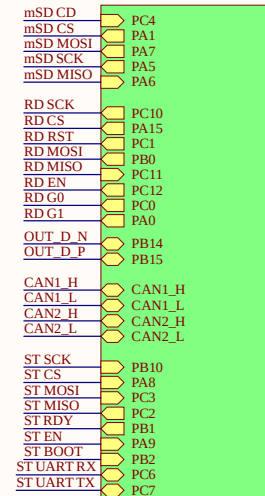



Radio

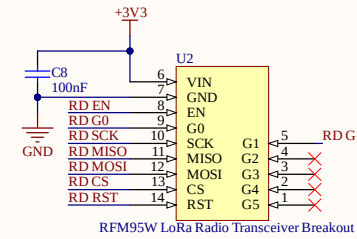


SD Card

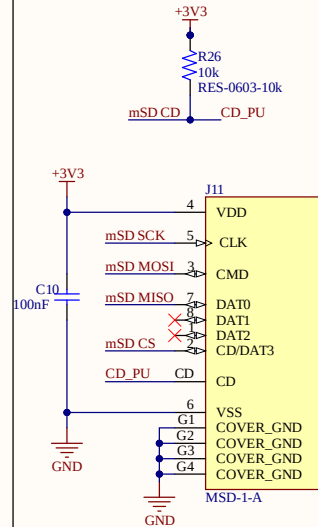


WIFI Module

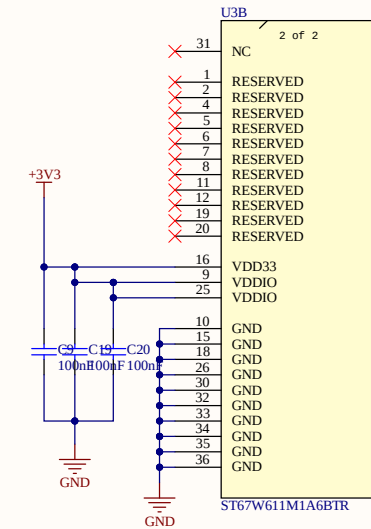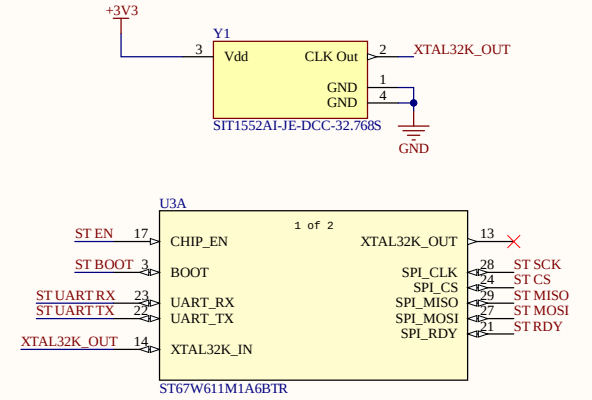


- PLLM = 8
- PLLN = 336
- PLLQ = 7

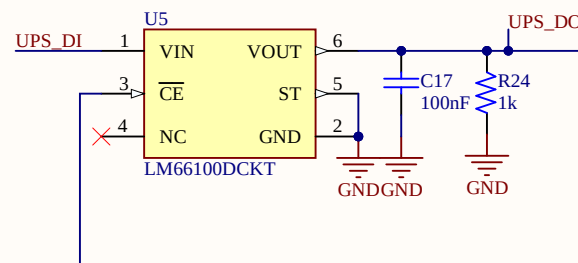


The section adjacent to this note is a UPS circuit that prevents SD card corruption. C7 is charged via the +5v rail. If the +5v rail fails, C7 will discharge, maintaining the the +5v CAP rail which powers the mSD card connector for enough time to safely finish data transfer and shut down the circuit. The PA4 GPIO pin is set up to detect if +5v fails so data transfer can safely shut down. The ideal diode U5 exists to prevent C7 from discharging back into the +5v rail.

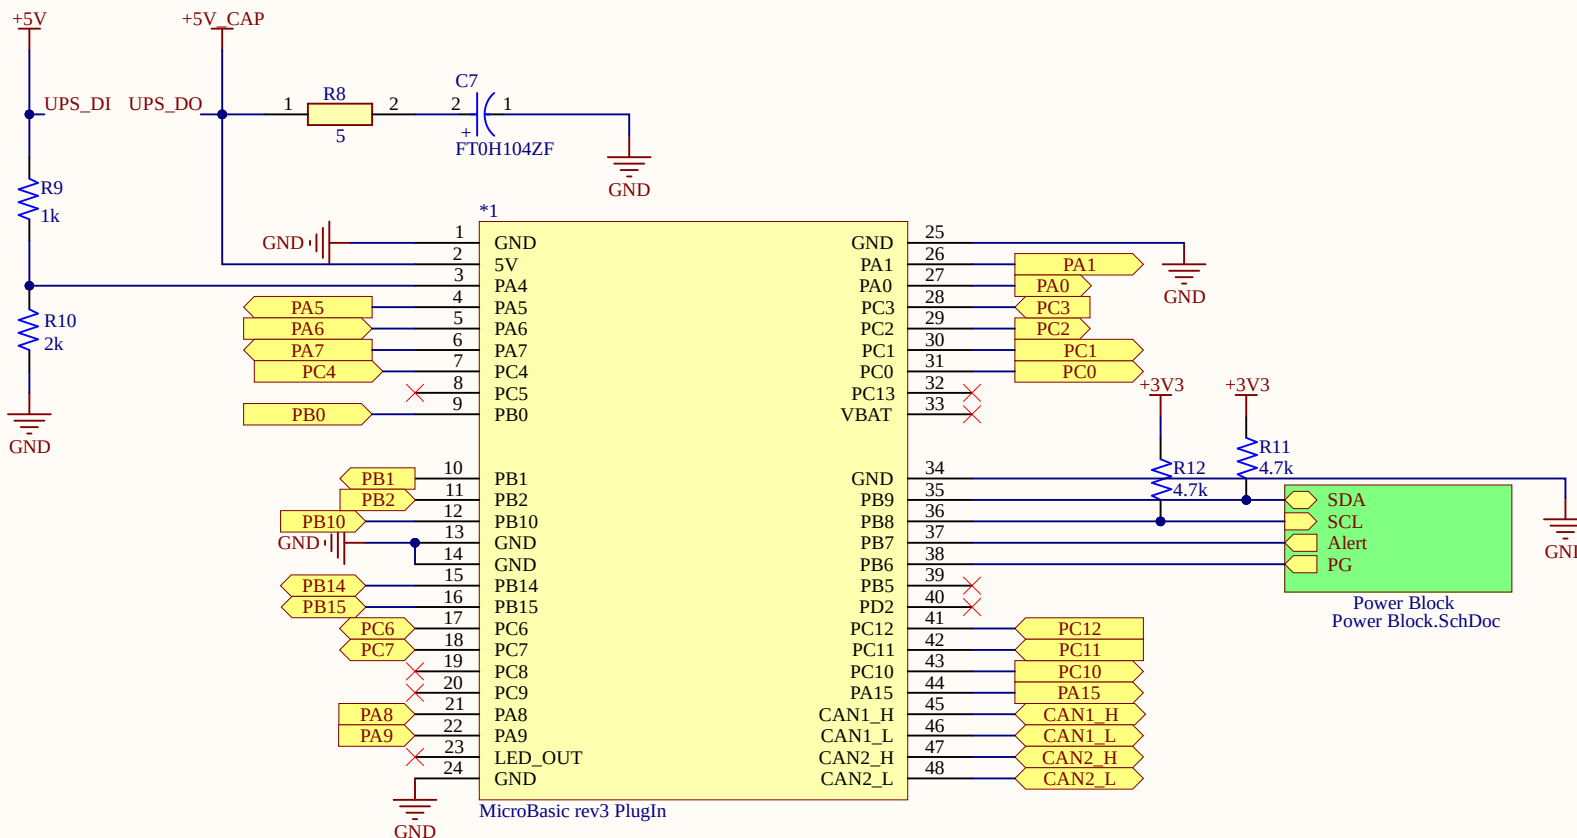


TPS

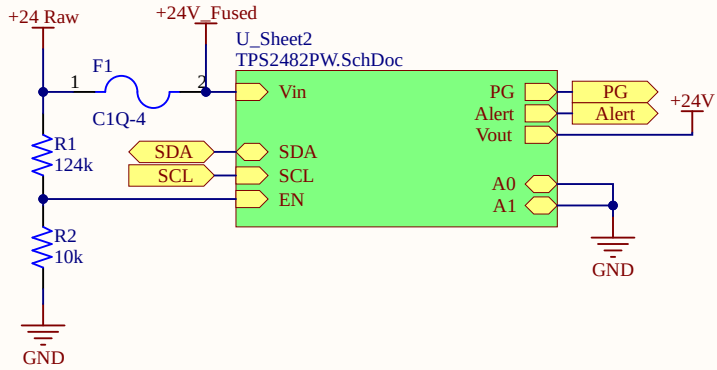


Power Indicator LEDs

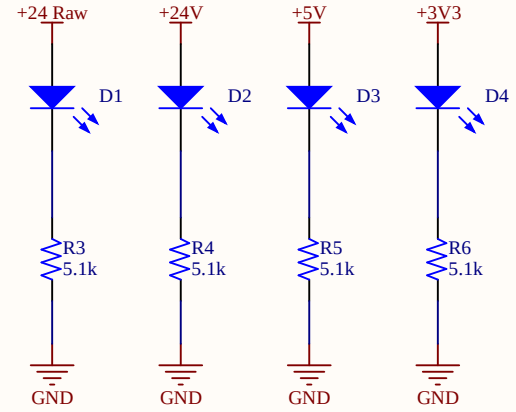


Power Converters

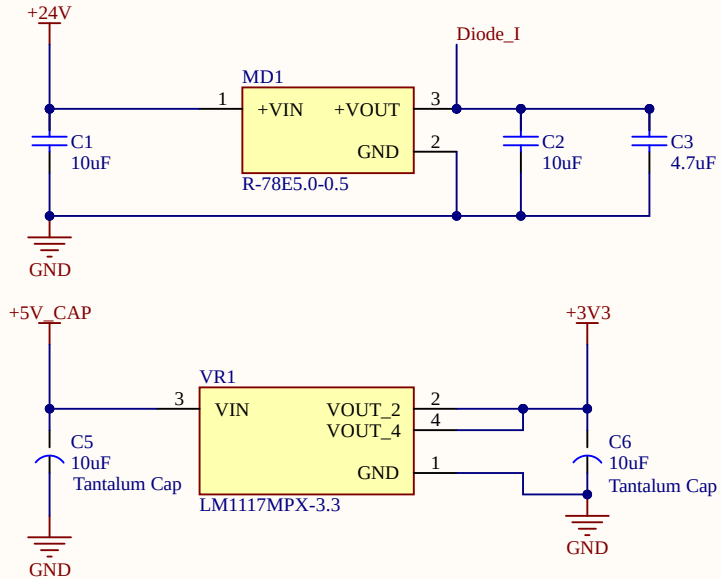

Buck Reverse Current Protection Diode

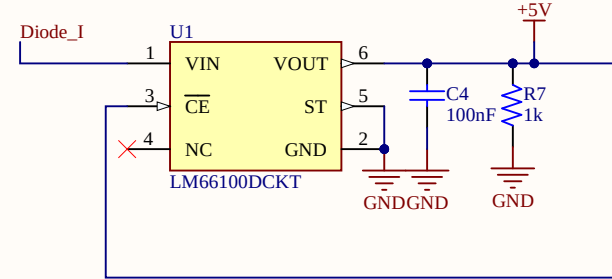

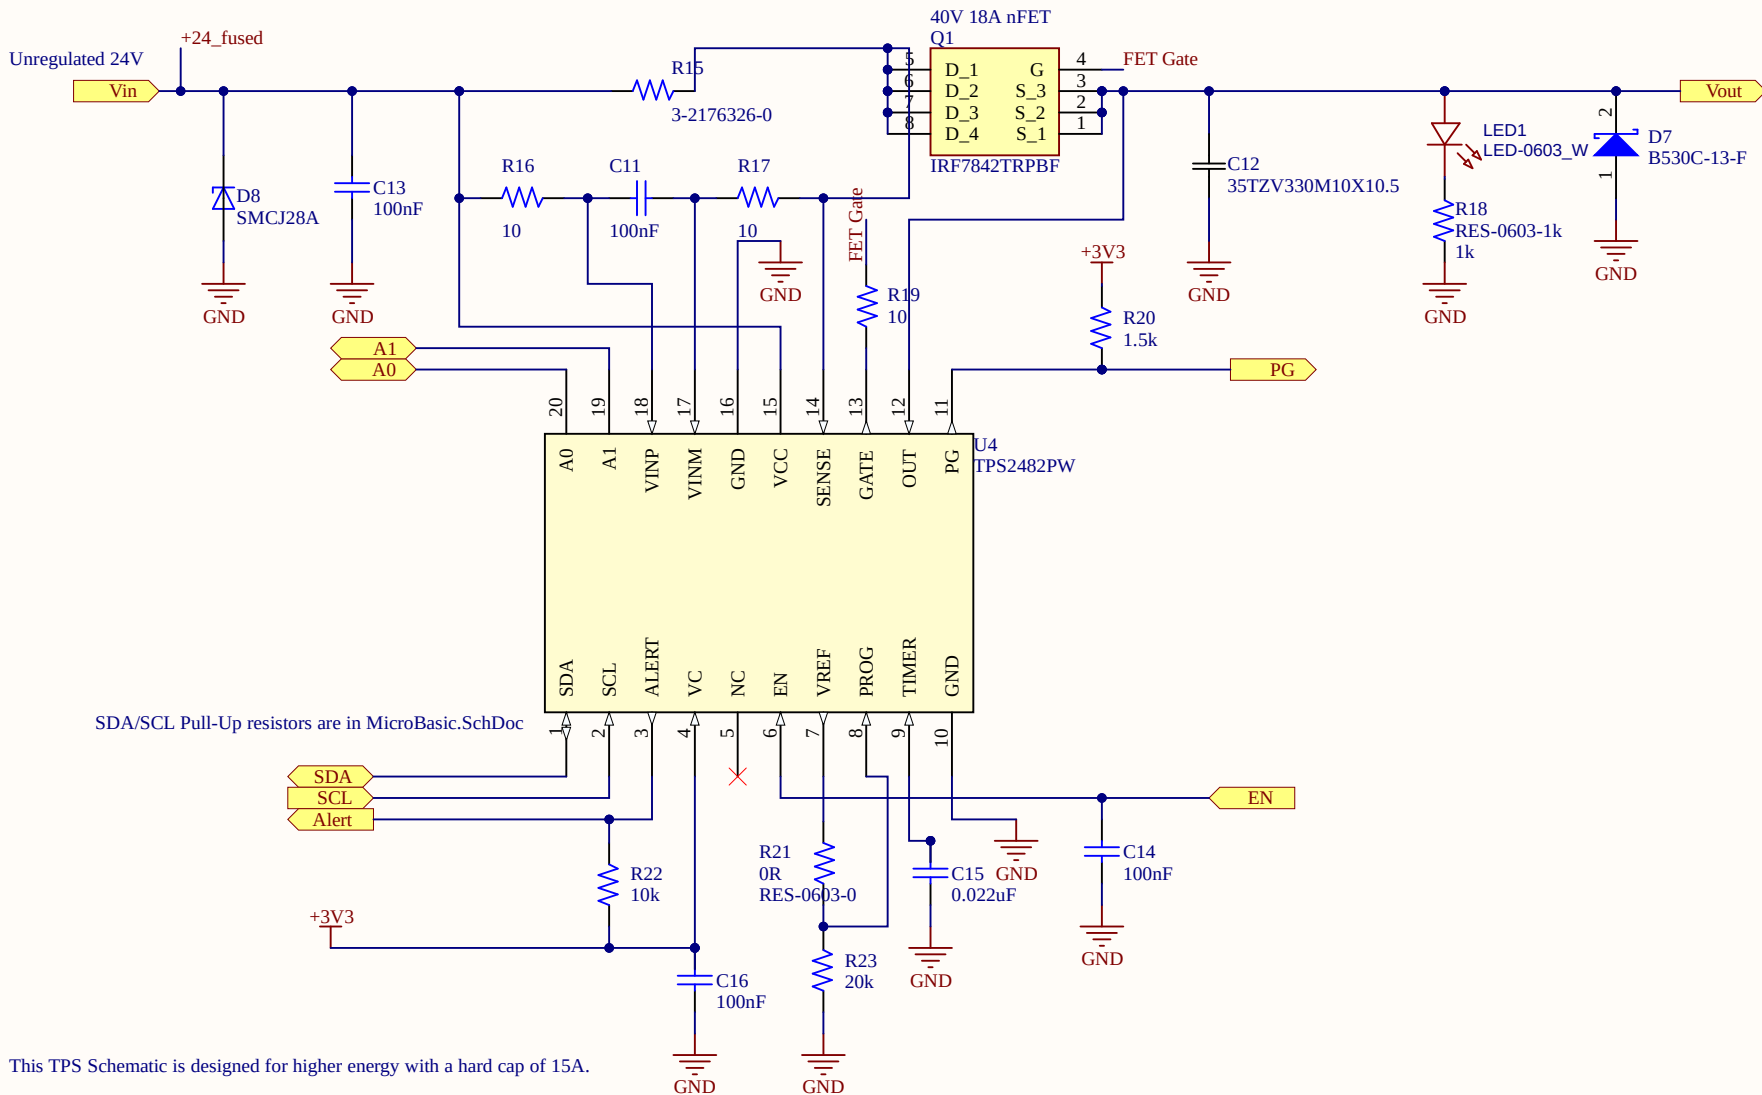

Title		
Size	Number	Revision
A		
Date:	9/27/2026	Sheet of
File:	C:\Users\...\TPS2482PW.SchDoc	Drawn By:

