



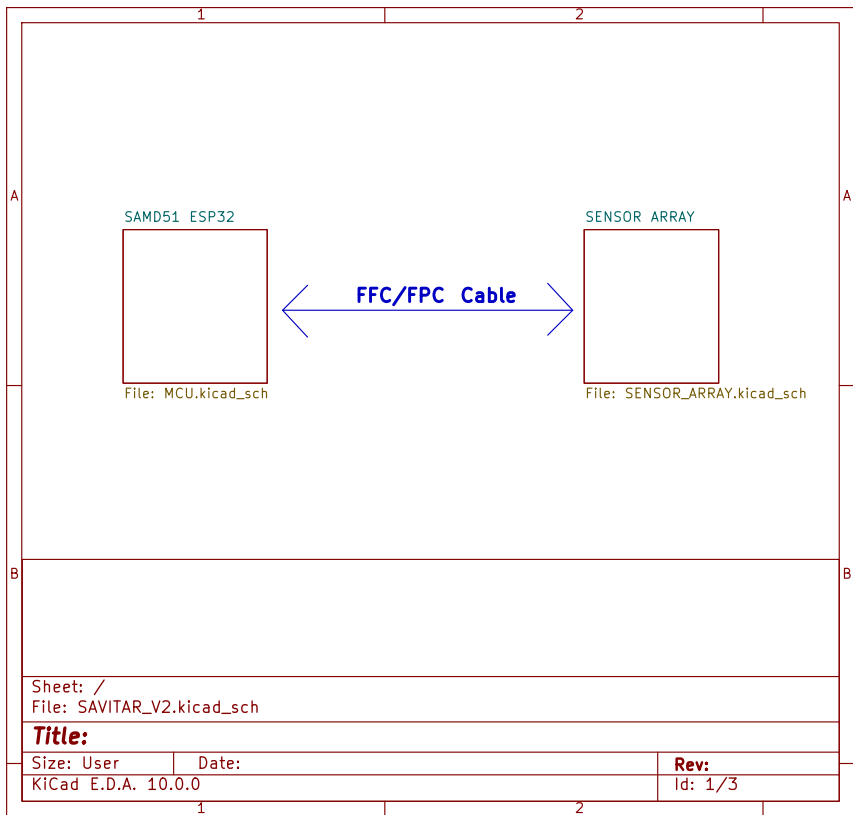


USB 2.0


PROGRAMMING ONLY

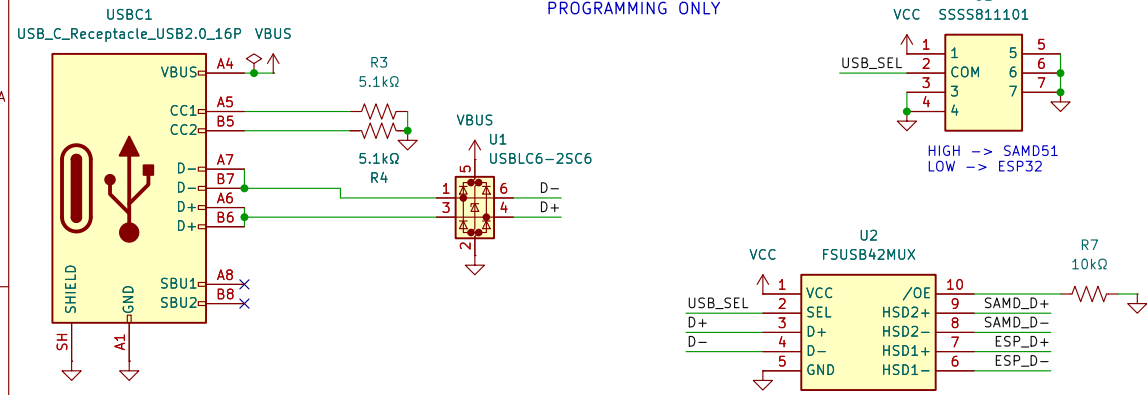


STATUS LED



DC/DC BUCK

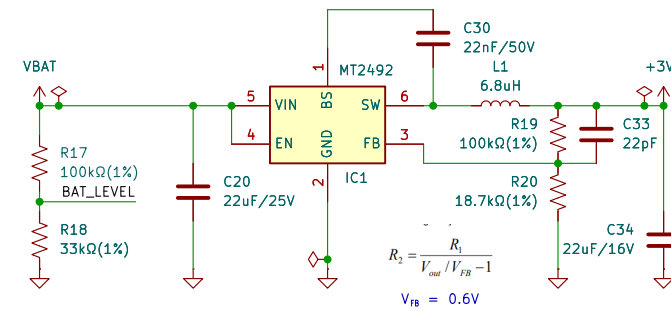


LDO

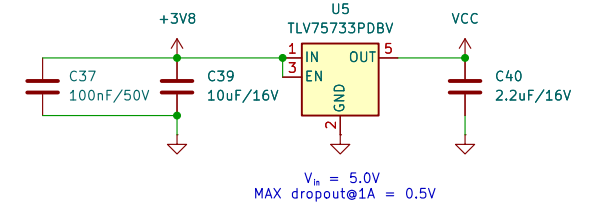


POWER REGULATION


ESP32-C3-MINI-1

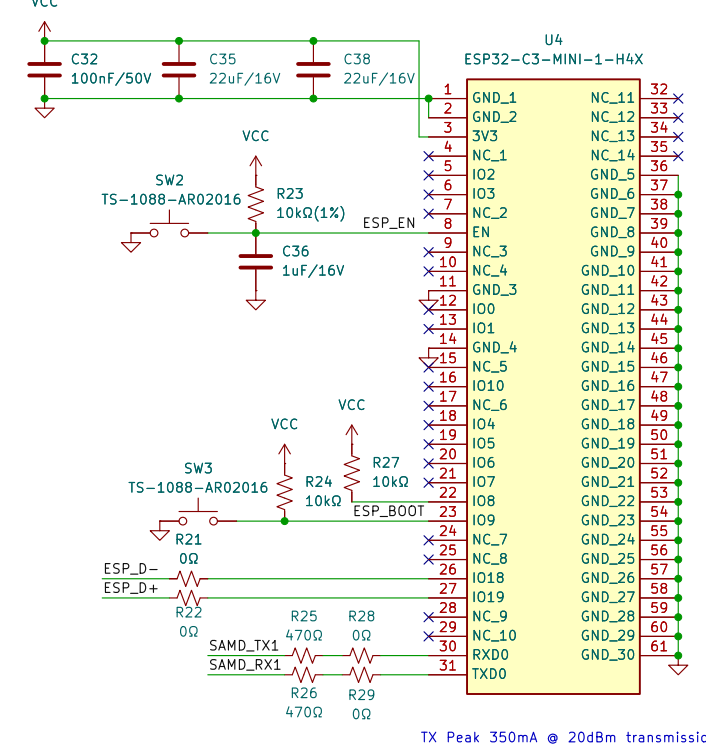


MOTOR CURRENT SENSING

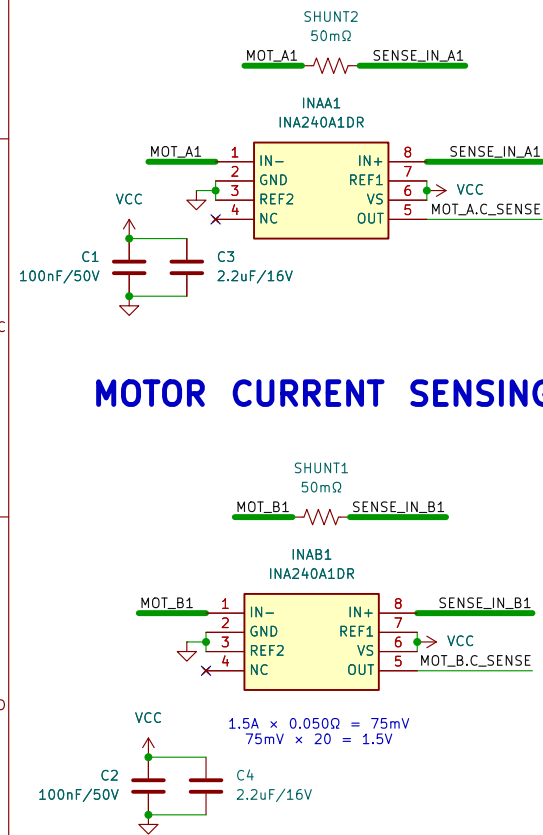


SAMD51

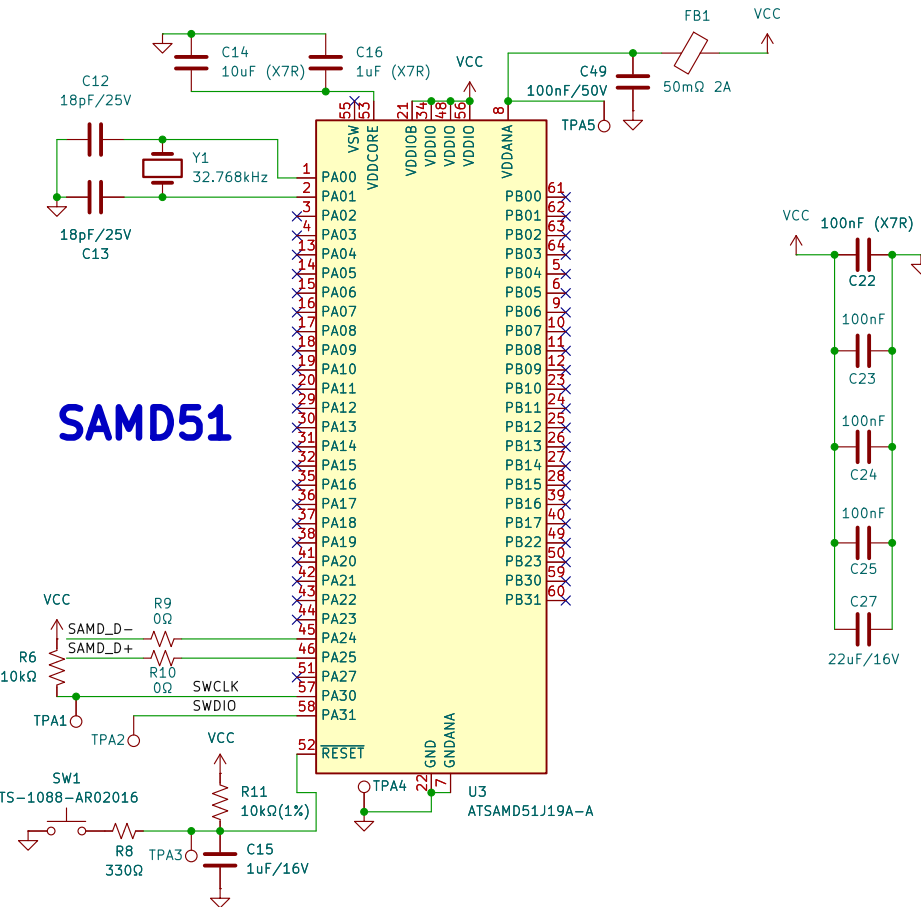





MOTOR DRIVERS

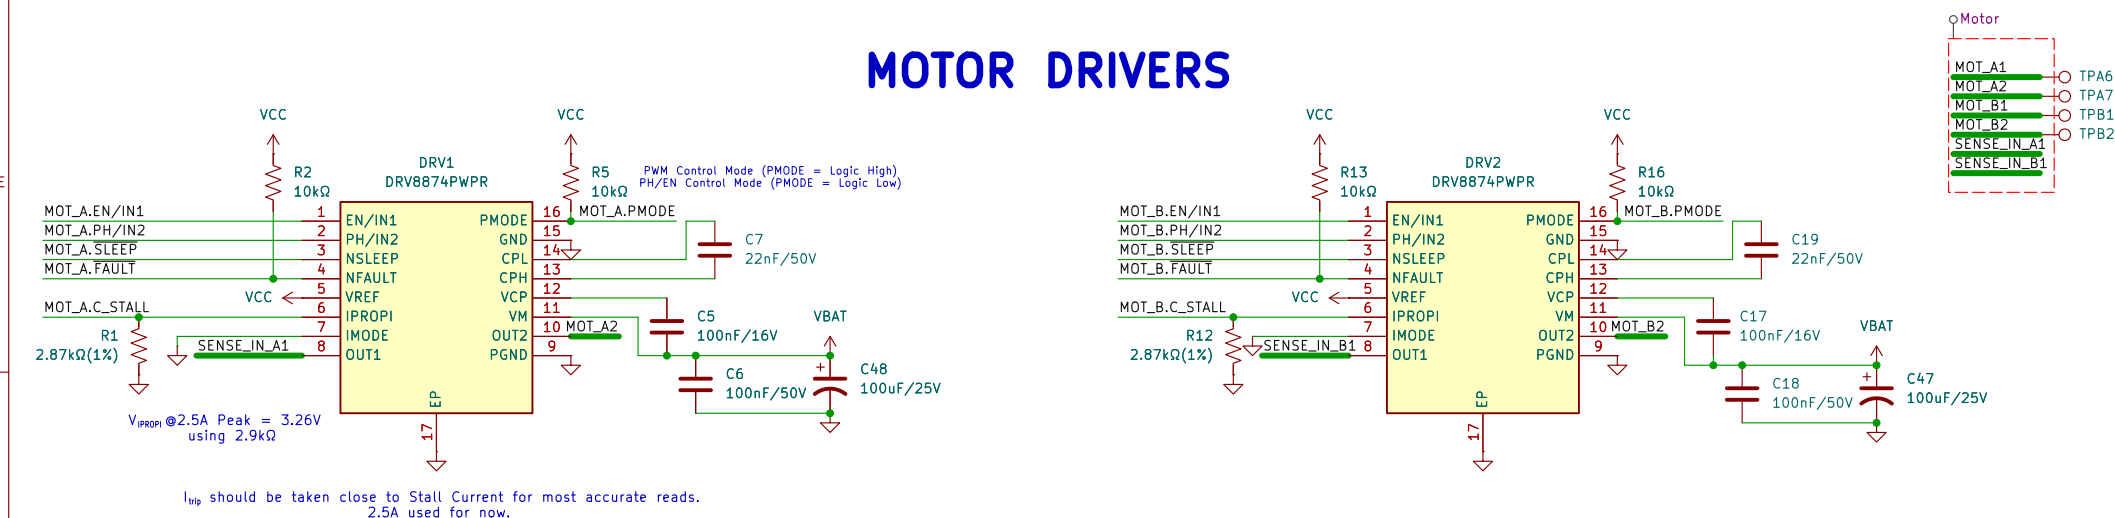

SENSOR ARRAY CONNECTOR




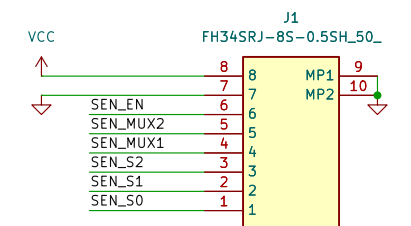


SENSOR ARRAY

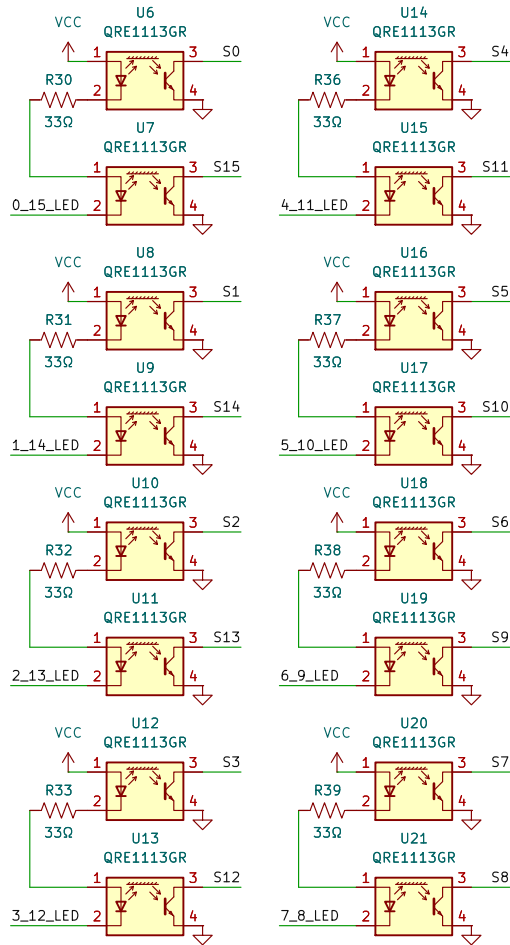


POWER PAIR


READ PAIR

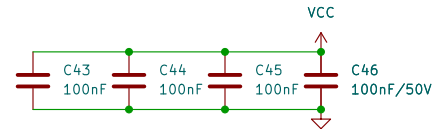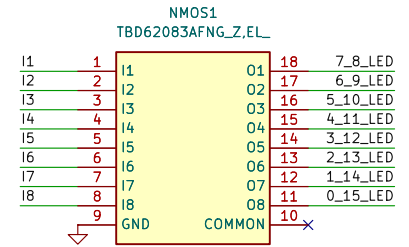

One for each IC.



STATUS LED



Each sensor of MUX1 and MUX2 is powered and read in parallel.

READING SEQUENCE

Alexandru Mot

Sheet: /SENSOR ARRAY/

File: SENSOR_ARRAY.kicad_sch

Title: SAVITAR Version 2

Size: User Date:

KiCad E.D.A. 10.0.0

Rev:

Id: 3/3