



USB 2.0


PROGRAMMING ONLY

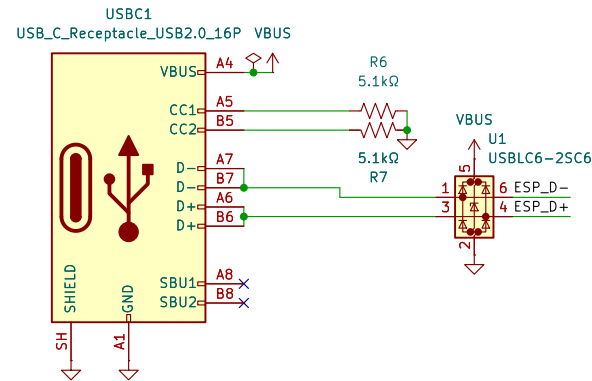


STATUS LED



DC/DC BUCK

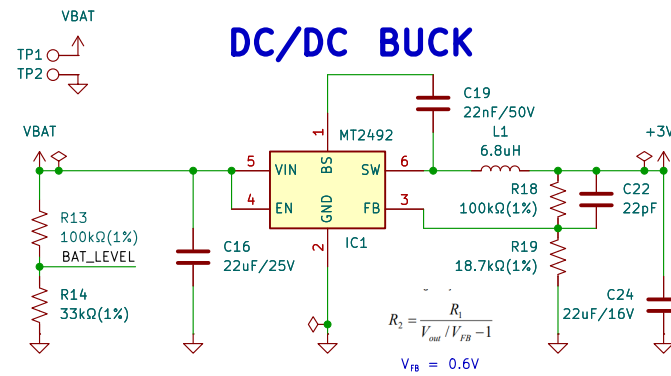

LDO

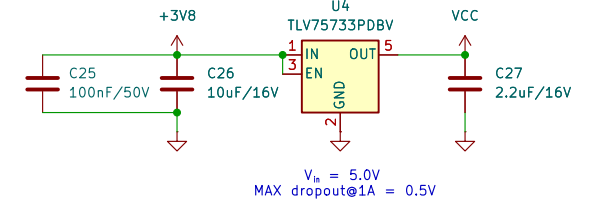


POWER REGULATION


- Checklist
- No need for RTC so no OSC on either MCU
 - Automatic reset is done over Native USB
 - Peripheral multiplexer on SAMD51
 - Ditch current sensing?

SAMD51


FOOTPRINT CONNECTOR

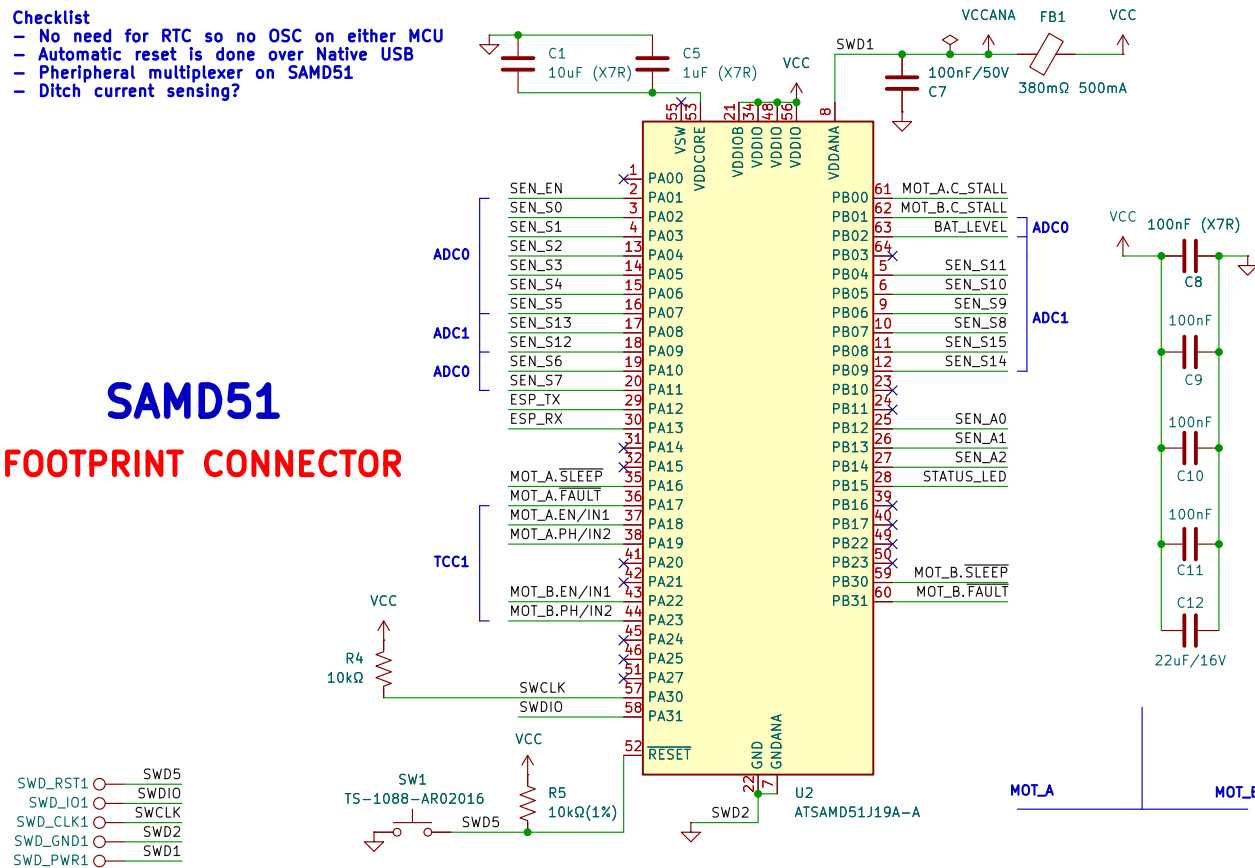



STRAPPING PINS:
GPIO2
GPIO8
GPIO9

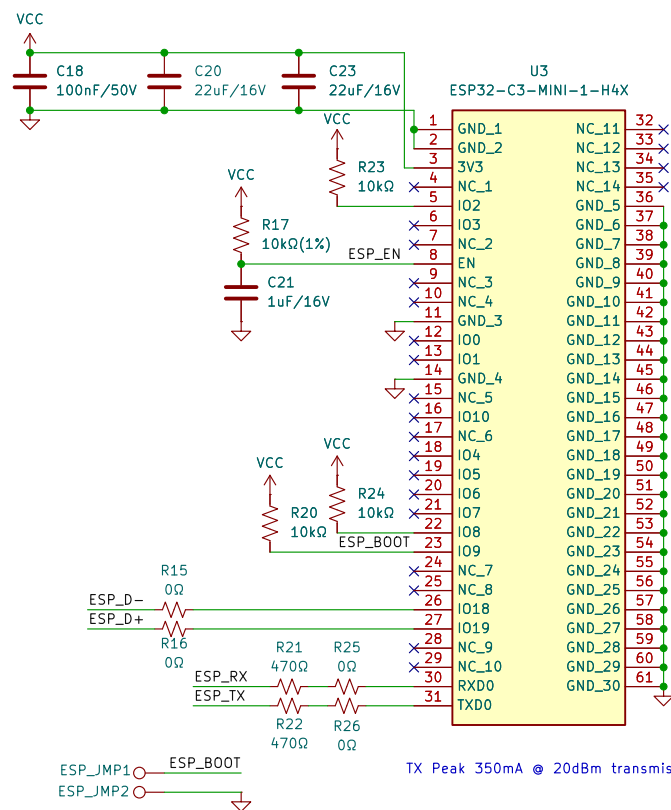

ESP32-C3

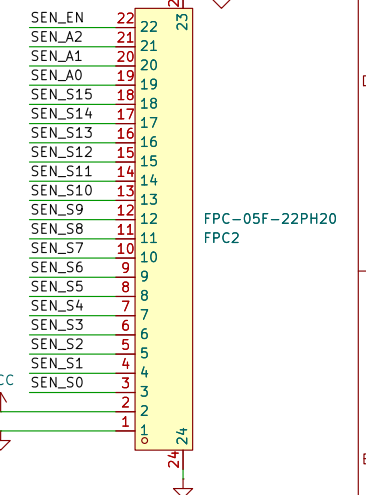

MOTOR DRIVERS

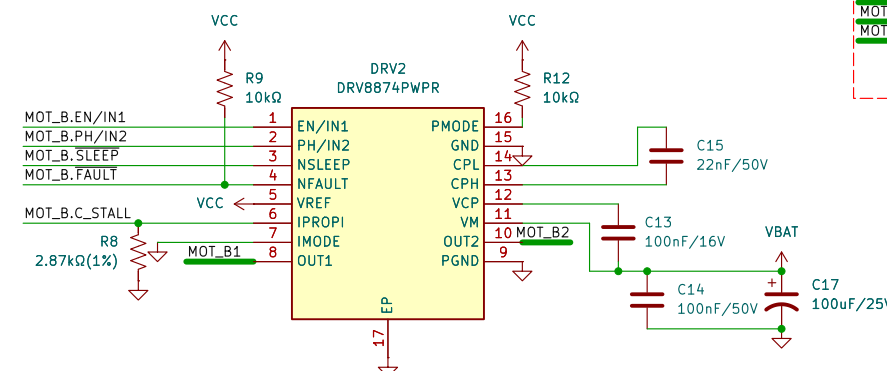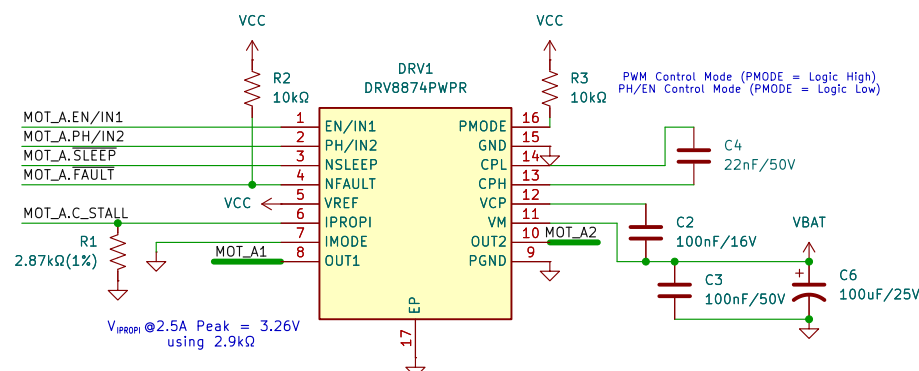

SENSOR ARRAY CONNECTOR

Sheet: /SAMD51 ESP32/
File: MCU.kicad_sch

Title: TEENSY 4 ESP32 MCU

Size: A3 Date:
KiCad E.D.A. 10.0.0

Rev:
Id: 2/3