

A Position Allocation Approach to the Scheduling of Battery Electric Bus Charging

Alexander Brown^{1,*}, Greg Droge²

¹*Department of Electrical and Computer Engineering, Logan, UT, USA*

²*Department of Electrical and Computer Engineering, Logan, UT, USA*

Correspondence*:

Alexander Brown
A01704744@usu.edu

corresponding Author2

Laboratory X2, Institute X2, Department X2, Organization X2, Street X2, City X2 ,
State XX2 (only USA, Canada and Australia), Zip Code2, X2 Country X2,
email2@uni2.edu

2 ABSTRACT

To do: revisit Dependable charging schedules for an increasing interest of battery electric bus (BEB) fleets is a critical component to a successful adoption. In this paper, a BEB charging scheduling framework that considers spatiotemporal schedule constraints, route schedules, fast and slow charging, and battery charging dynamics is modeled as a mixed integer linear program (MILP). The MILP is modeled after the berth allocation problem (BAP) in a modified form known as the position allocation problem (PAP). Linear battery dynamics are included to model the charging and discharging of buses while at the station and during their routes, respectively. The optimization coordinates BEB charging to ensure each BEB has sufficient charge while using slow chargers where possible for sake of battery health. The model validity is demonstrated with a randomly generated set of routes for 40 buses and 220 visits to the charging station. The results show that the slow chargers are more readily selected and the charging and spatiotemporal constraints are met while considering the battery dynamics.

Keywords: Berth Allocation Problem (BAP), Position Allocation Problem (PAP), Mixed Integer Linear Program (MILP), Battery Electric Bus (BEB), Scheduling

1 INTRODUCTION

The public transportation system is crucial in any urban area; however, the increased awareness and concern of environmental impacts of petroleum based public transportation has driven an effort to reduce the pollutant footprint [4, 22, 6, 10]. Particularly, the electrification of public bus transportation via battery power, i.e., battery electric buses (BEBs), has received significant attention [10]. Although the technology provides benefits beyond reduction in emissions, such as lower driving costs, lower maintenance costs, and reduced vehicle noise, battery powered systems introduce new challenges such as larger upfront costs, and potentially several hours long “refueling” periods [22, 10]. Furthermore, the problem is exacerbated by the constraints of the transit schedule to which the fleet must adhere, the limited amount of chargers available, and the adverse affects in the health of the battery due to fast charging [12]. This paper presents a continuous scheduling framework for a BEB fleet that shares limited fast and slow chargers. This framework takes into consideration linear charging dynamics and a fixed bus schedule while meeting a certain battery charge threshold throughout the day.

Many recent efforts have been made simultaneously solve the problems of scheduling and charging fleets and determining the infrastructure upon which they rely, e.g., [21, 17, 8, 20]. The added complexity of considering both the BEB charge scheduling and the infrastructure problems necessitates simplifications for sake of computation. First, only fast chargers are utilized in planning [21, 17, 20, 24, 11, 23, 19, 15]. Second, significant simplifications to the charging models are made. Some approaches assume full charge [21, 20, 24, 19]. Others have assumed that the charge received is proportional to the time spent on the

charger [11, 23], which can be a valid assumption when the battery state-of-charge (SOC) is below 80% charge [11].

To do: Need a better literature review A host of techniques have been used to generate the optimal charging schedule. [17] uses simulation alongside an optimization strategy to identify charging station locations and average stop times to supply enough charge for BEBs to complete their routes. [21] utilizes a network flow approach to optimize the deployment strategy of BEBs; however, the focus is primarily on replacing diesel or CNG buses. In [8], the focus is on developing a strategy to optimally charge batteries for electric vehicles considering different sources of battery degradation. [20] addresses a similar problem as this paper where the overall objective is to minimize the annual total electric bus recharging system operating costs. Similarly to other works, such as [21], discrete network flow approaches are utilized. Although effective, having to discretize the system introduces variables scaled proportionally to the fidelity of the discretization of the model. This work attempts to remedy this by utilizing the Position Allocation Problem (PAP) which utilizes a continuous model to describe the system.

This work builds upon the Position Allocation Problem, a modification of the Berth Allocation Problem (BAP), as a means to schedule the charging of electric vehicles [14]. The BAP solves the problem of allocating space for incoming vessels to be berthed. Each arriving vessel requires both time and space to be serviced and is assigned a berthing location [9]. Vessels are lined up parallel to the berth to be serviced and are horizontally queued as shown in Fig 1. The PAP utilizes this notion of queuing for scheduling vehicles to be charged, as shown in Fig 2. The PAP is formulated as a rectangle packing problem by assuming that vehicle charging will take a fixed amount of time, the amount of vehicles that can charge is limited by the physical width of the vehicles, and each vehicle visits the charger a single time [14].

The main contribution of this work is the extension of the PAP to BEB charger scheduling. This includes modeling and incorporation of a proportional charging model into the MILP framework, consideration of multiple charger types, and inclusion of the route schedule for each bus. The result is a MILP formulation that coordinates charging times and charger type for every visit that each bus makes to the station while considering a dynamic charge model and scheduling constraints.

The remainder of the paper proceeds as follows: In Section 2, the PAP is introduced with a formulation of the resulting MILP. Section 3 constructs the MILP for BEB scheduling, including modifications to the PAP queuing constraints and development of a dynamic charging model. Section 4 demonstrates an example of using the formulation to coordinate 40 buses over 220 total visits to the station. The paper ends in Section 5 with concluding remarks.

2 THE POSITION ALLOCATION PROBLEM

The BEB charge schedule formulation in this work builds upon the PA, which, in turn, builds upon the BAP. This section provides a brief overview of the BAP and a detailed formulation of PAP as presented in [14].

2.1 Overview of BAP

The BAP is a rectangle packing problem where a set of rectangles (\odot) are attempted to be optimally placed in a larger rectangle (O) as shown in Fig 3. The rectangle packing problem is an NP-hard problem that can be used to describe many real life problems [3, 13]. In some of these problems, the dimensions of \odot are held constant such as in the problem of packing modules on a chip, where the widths and height of the rectangles represent the physical width and heights of the modules [13]. Other problems, such as the BAP, in some formulations, allow one side of the rectangle to vary depending on its assigned position (i.e. the handling time is dependent on the berth) [1].

The BAP solves the problem of optimally assigning incoming vessels to berth positions to be serviced (Fig 1). The width and height of O represent the berth length S and time horizon T , respectively. Similarly, the width and height for \odot represent the time spent to service vessel i and the space taken by docking vessel i , respectively. The vessel characteristics (length of the vessel, arrival time, handling time, desired departure time) are assumed to be known for all N vessels to be serviced. A representation of a BAP solution is shown in Fig 4.

The BAP objective is generally represented as minimizing some operational time for a given vessel i . The operational time may be chosen to minimize the difference between arrival and departure times, time spent

84 being serviced, or overall waiting time [18, 1, 5]. The model must then constrain the vessel placement as to
85 not allow overlap spatially or temporally.

86 2.2 The PAP Formulation

87 The BAP formulation forms the basis of the PAP; however, there are some differences in the way the
88 variables are perceived. For the i^{th} visit, starting service time, u_i , is now the starting charge time, the berth
89 location, v_i , is now the charger queue for assignment, and the service time, p_i , is now the time to charge.
90 The PAP utilizes a number of parameters. The following parameters are constants.

- 91 • S : charger length
- 92 • T : time horizon
- 93 • N : number of incoming vehicles
- 94 • p_i : charging time for vehicle i ; $1 \leq i \leq N$
- 95 • s_i : width of vehicle i ; $1 \leq i \leq N$
- 96 • a_i : arrival time of vehicle i ; $1 \leq i \leq N$

97 These constants define the problem bounds. The following list provides a series of decision variables used
98 in the formulation.

- 99 • u_i : starting time of service for vehicle i ; $1 \leq i \leq N$
- 100 • v_i : charge location i ; $1 \leq i \leq N$
- 101 • c_i : departure time for vehicle i ; $1 \leq i \leq N$
- 102 • σ_{ij} : binary variable that determines ordering of vehicles i and j in time
- 103 • δ_{ij} : binary variable that determines relative position of vehicles i and j when charging simultaneously

104 To determine the values for each of these decision variables, a MILP is formulated in [14] and shown here
105 for sake of completeness.

$$\min \sum_{i=1}^N (c_i - a_i) \quad (1)$$

Subject to:

$$u_j - u_i - p_i - (\sigma_{ij} - 1)T \geq 0 \quad (2a)$$

$$v_j - v_i - s_i - (\delta_{ij} - 1)S \geq 0 \quad (2b)$$

$$\sigma_{ij} + \sigma_{ji} + \delta_{ij} + \delta_{ji} \geq 1 \quad (2c)$$

$$\sigma_{ij} + \sigma_{ji} \leq 1 \quad (2d)$$

$$\delta_{ij} + \delta_{ji} \leq 1 \quad (2e)$$

$$p_i + u_i = c_i \quad (2f)$$

$$a_i \leq u_i \leq (T - p_i) \quad (2g)$$

$$\sigma_{ij} \in \{0, 1\}, \delta_{ij} \in \{0, 1\} \quad (2h)$$

$$v_i \in [0, S] \quad (2i)$$

106 The objective function (1) minimizes the time spent to service each vehicle by minimizing over the sum
107 of differences between the departure time, c_i , and arrival time, a_i . i.e., It seeks to get each vehicle charged
108 and on its way as quickly as possible.

109 Constraints 2a-2e are used to ensure that individual rectangles do not overlap. For the PAP, they ensure
110 that two vehicles charging simultaneously are at different positions and, similarly, two vehicles that have
111 overlapping positions do not overlap temporally. Constraint (2a) establishes temporal ordering when active

($\sigma_{ij} = 1$). Similarly, when $\delta_{ij} = 1$ in (2b) then spatial ordering is established. Constraints 2c-2e enforce that spatial and/or temporal ordering is established between each possible vehicle pair. Constraints (2d) and (2e) enforce consistency. For example, (2d) enforces that vehicle i cannot come before vehicle j and vehicle j simultaneously come before vehicle i .

The last constraints force relationships between arrival time, charge start time, and departure time. Constraint (2f) states that the service start time, u_i , plus the time to service vehicle i , p_i , must equal the departure time, c_i . Constraint (2g) enforces the arrival time, a_i , to be less than or equal to the service start time, u_i , which in turn must be less than or equal to the latest time the vehicle may begin to be serviced to stay within the time horizon. Constraint (2h) ensures that σ_{ij} and δ_{ij} are binary. Constraint (2i) ensures that the assigned value of v_i is a valid charging position.

3 PROBLEM FORMULATION

Applying the PAP to BEB charging requires four fundamental changes. The first is that the time that a BEB spends charging is allowed to vary. Thus, p_i becomes a variable of optimization. Second, in the PAP each charging visit is assumed to be a different vehicle. For the BEB charging problem, each bus may make multiple visits to the station throughout the day and the resulting charge for a bus at a given time is dependent upon each of the prior visits made. Third, in the PAP, the charger is one continuous bar with vehicle width effectively restricting the number of vehicles charging simultaneously. For the BEB, it is assumed that a specific number of chargers exist and these chargers can charge the vehicle at a different rate. The fourth fundamental change is related to the first three. The charge of each bus must be tracked in the optimization to ensure that charging across multiple visits is sufficient to allow each bus to execute its route throughout the day.

Table 1. Notation used throughout the paper

Variable	Description	Variable
Input values		
n_B	Number of buses	M
n_V	Number of total visits	n_Q
n_C	Number of chargers	
\mathbb{V}	Set of visit indices, $\mathbb{V} = \{1, \dots, n_V\}$	\mathbb{B}
\mathbb{Q}	Set of queue indices, $\mathbb{Q} = \{1, \dots, n_Q\}$	
i, j	Indices used to refer to visits	b
q	Index used to refer to a queue	
Problem definition parameters		
Γ	$\Gamma : \mathbb{V} \rightarrow \mathbb{B}$ with Γ_i used to denote the bus for visit i	α_i
β_i	Final charge percentage for bus i at the end of the time horizon	ϵ_q
Υ	$\Upsilon : \mathbb{V} \rightarrow \mathbb{V}$ mapping a visit to the next visit by the same bus with Υ_i being the shorthand.	κ_b
λ_i	Discharge of visit over route i	ν_b
τ_i	Time visit i must depart the station	ζ_b
a_i	Arrival time of visit i	i_0
i_f	Indices associated with the final arrival for every bus in A	m_q
r_q	Charge rate of charger q per unit time	
Decision Variables		
δ_{ij}	Binary variable determining temporal ordering of vehicles i and j	η_i
σ_{ij}	Binary variable determining the queue ordering between vehicles i and j	c_i
g_{iq}	The charge gain for visit i from charger q	p_i
u_i	Starting charge time of visit i	v_i
w_{iq}	Binary assignment variable for visit i to queue q	

The discussion of the four changes are separated into two sections. Section 3.1 discusses the changes in the spatial-temporal constraint formulation to form a queuing constraint. Section 3.2 then discusses the addition of the bus charge management. This section ends with a brief discussion of a modified objective in

Section ?? and the statement of the full problem in Section 3.3. The notation is explained throughout and summarized in Table 2.

3.1 Queuing Constraints

The queuing constraints help to ensure that the busses enter queues for charging or waiting as they come into the station. There are three sets to differentiate between different entities. $\mathbb{B} = \{1, \dots, n_B\}$ is the set of bus indices with index b used to denote an individual bus, $\mathbb{Q} = \{1, \dots, n_Q\}$ is the set of queues with index q used to denote an individual queue, and $\mathbb{V} = \{1, \dots, n_V\}$ is a set of visits to the station with i, j used to refer to individual visits. The mapping $\Gamma : \mathbb{V} \rightarrow \mathbb{B}$ is used to map a visit index to a bus index with the shorthand Γ_i used to refer to the bus index for visit i .

Most variables are now defined in terms of a visit. Two separate visits could correspond to different buses or visits by the same bus. The spatial variable s_i is removed and v_i is made to be an integer corresponding to which queue visit i will be using. Thus, when $\delta_{ij} = 1$, the visits must be at different chargers, i.e., $v_i - v_j \geq 1$. The variable S is likewise replaced with n_Q . Note that $n_Q = n_B + n_C$, where n_B is the number of busses and n_C is the number of chargers. The rationale for having extra queues is to allow buses to sit idle instead of charging. The modified queuing constraints can be written as follows.

$$u_i - u_j - p_j - (\sigma_{ij} - 1)T \geq 0 \quad (3a)$$

$$v_i - v_j - (\delta_{ij} - 1)n_Q \geq 1 \quad (3b)$$

$$\sigma_{ij} + \sigma_{ji} + \delta_{ij} + \delta_{ji} \geq 1 \quad (3c)$$

$$\sigma_{ij} + \sigma_{ji} \leq 1 \quad (3d)$$

$$\delta_{ij} + \delta_{ji} \leq 1 \quad (3e)$$

$$p_i + u_i = c_i \quad (3f)$$

$$a_i \leq u_i \leq (T - p_i) \quad (3g)$$

$$c_i \leq \tau_i \quad (3h)$$

$$p_i \geq 0 \quad (3i)$$

$$\sigma_{ij} \in \{0, 1\}, \delta_{ij} \in \{0, 1\} \quad (3j)$$

$$v_i \in \mathbb{Q} \quad (3k)$$

Constraints (3a)-(3g) and (3j) are nearly identical to those described in Section 2 with the sole change in (3b) being described above to conform to a queue. Constraint (3h) is added to ensure that the ending charge time, c_i , must be less than or equal to the required departure time from the station, τ_i . This enables the bus schedules to be considered during optimization. Finally, (3k) enforces v_i to be an integer in the set of possible queues.

3.2 Battery Charge Dynamic Constraints

Using purely the constraints in (3) with the objective in (1) would result in c_i being chosen as small as possible by employing $p_i = 0$, $u_i = c_i$. Thus, the vehicles would not charge. Furthermore, it does not encode any revisiting of the BEB to the charging station. To remedy this, battery dynamic constraints are introduced.

Battery charge dynamic constraints are used to model the charge in each bus with the purpose of ensuring sufficient time is spent charging. Two constraints are enforced on the bus charge: busses must always have sufficient charge to execute their respective routes and each bus must end the day with a specific charge threshold, preparatory to execution for the next day.

The charge at the beginning of visit i is denoted as η_i . As a charge on the bus is dependent upon the visits that bus makes to the station, the mapping $\Upsilon : \mathbb{V} \rightarrow \mathbb{V} \cup \{\emptyset\}$ is used to determine the next visit that corresponds to the same bus, with Υ_i being shorthand notation. Thus, Γ_i and Γ_{Υ_i} would both map to the same bus index as long as Υ_i is not the null element, \emptyset . The null element is used to denote that there are no future visits by that same bus.

163 **To do: Need to fix the following notation** to drive time spent on the charger, p_i , as well as define initial,
 164 final, and intermediate bus charges for each visit i . The initial and final bus charges are predefined and
 165 are represented by the equations $\eta_{i_0} = \alpha_{i_0} \kappa_{i_0}$ and $\eta_{i_f} = \beta_{i_f} \kappa_{i_f}$, respectively, where α_{i_0} and β_{i_f} are
 166 percentages of the battery capacity for the first and final visits for each bus, b , respectively. The intermediate
 167 charges must be determined at solve time.

168 It is assumed that the charge received is proportional to the time spent charging. The charge rate for
 169 charger q is denoted as r_q . Note that a value of $r_q = 0$ corresponds to a queue where no charging occurs.
 170 A bus in such a queue is simply waiting for the departure time. Thus, $n_Q = n_C + n_B$ where the final n_B
 171 queues have $r_q = 0$ to allow an arbitrary number of buses to not charge at any given moment in time. The
 172 amount of discharge between visits i and Υ_i , the next visit of the same bus, is denoted as λ_i . If visit i
 173 occurred at charger q , the charge of the bus coming into visit Υ_i would be

$$\eta_{\Upsilon_i} = \eta_i + p_i r_q - \lambda_i. \quad (4)$$

The binary decision variable w_{iq} is introduced to determine whether visit i uses charger q . This allows the charge of the bus coming into visit Υ_i to be written in summation form as

$$\eta_{\Upsilon_i} = \eta_i + \sum_{q=1}^{n_Q} p_i w_{iq} r_q - \lambda_i \quad (5a)$$

$$\sum_{q=1}^{n_Q} w_{iq} = 1 \quad (5b)$$

$$w_{iq} \in \{0, 1\} \quad (5c)$$

174 The choice of queue for visit i , v_i , becomes a slack variable and is defined in terms of w_{iq} as

$$v_i = \sum_{q=1}^{n_Q} q w_{iq} \quad (6)$$

Maximum and minimum values for the charges are included to ensure the battery is not overcharged and to guarantee sufficient charge for subsequent visits. The upper and lower battery charge bounds for bus b are κ_b and ν_b , respectively. As η_i corresponds to the charge at the beginning of the visit, the upper bound constraint must also include the charge received during the visit as follows. **To do: I changed the lower bound constraint as there is no real need to include the charge, but we may need to add in a final constraint.**

$$\eta_i + \sum_{q=1}^{n_Q} p_i w_{iq} r_q \leq \kappa_{\Upsilon_i} \quad (7a)$$

$$\eta_i + \geq \nu_{\Upsilon_i} \quad (7b)$$

175 Note that the term $p_i w_{iq}$ is a bilinear term (two decision variables being multiplied together) which
 176 is nonlinear [16]. A standard way of linearizing a bilinear term that contains an integer variable is by
 177 introducing a slack variable with an either/or constraint [2, 16]. Allowing the slack variable g_{iq} to be equal
 178 to $p_i w_{iq}$, g_{iq} can be defined as

$$g_{iq} = \begin{cases} p_i & w_{iq} = 1 \\ 0 & w_{iq} = 0 \end{cases}. \quad (8)$$

Equation (8) can be expressed as a mixed integer constraint using big-M notation with the following four constraints. **To do: Check to see if modification is correct**

$$p_i - (1 - w_{iq})M \leq g_{iq} \quad (9a)$$

$$p_i \geq g_{iq} \quad (9b)$$

$$Mw_{iq} \geq g_{iq} \quad (9c)$$

$$0 \leq g_{iq} \quad (9d)$$

179 where M is a large value. If $w_{iq} = 1$ then (9a) and (9b) become $p_i \leq g_{iq}$ and $p_i \geq g_{iq}$, effectively stating
180 $p_i = g_{iq}$ with (9c) being inactive. If $w_{iq} = 0$, (9a) is inactive and (9c) and (9d) force $g_{iq} = 0$.

181 3.3 The BEB Charging Problem

182 The goal of the MILP is to utilize chargers as little as possible to reduce energy costs with the fast
183 charging penalized greater to reduce battery damage. **To do: Can we just eliminate the $w_{iq}m_q$ term?**
184 Thus, an assignment cost m_q and usage cost ϵ_q are associated with each charger, q . The cost for both the
185 assignment and utilization of slow chargers is less than that of the fast chargers. The objective function has
186 an assignment term, $w_{iq}m_q$, which is non-zero if charger q is used for visit i . Similarly, a usage term $g_{iq}\epsilon_q$
187 is non-zero only if charge is received for visit i at charger q . The resulting objective is defined in Eq 10.
188 The assignment cost, $w_{iq}m_q$, and the usage cost, $g_{iq}\epsilon_q$, are summed over each visit, i , and charger, q .

$$\min \sum_{i=1}^N \sum_{q=1}^{n_Q} (w_{iq}m_q + g_{iq}\epsilon_q) \quad (10)$$

Subject to the constraints in Eq 11.

$$u_i - u_j - p_j - (\sigma_{ij} - 1)T \geq 0 \quad (11a)$$

$$v_i - v_j - (\delta_{ij} - 1)n_Q \geq 1 \quad (11b)$$

$$\sigma_{ij} + \sigma_{ji} + \delta_{ij} + \delta_{ji} \geq 1 \quad (11c)$$

$$\sigma_{ij} + \sigma_{ji} \leq 1 \quad (11d)$$

$$\delta_{ij} + \delta_{ji} \leq 1 \quad (11e)$$

$$p_i + u_i = c_i \quad (11f)$$

$$a_i \leq u_i \leq (T - p_i) \quad (11g)$$

$$c_i \leq \tau_i \quad (11h)$$

$$\eta_{i_0} = \alpha_{i_0} \kappa_{\Gamma_{i_0}} \quad (11i)$$

$$\eta_i + \sum_{q=1}^{n_Q} g_{iq} r_q - \lambda_i = \eta_{\gamma_i} \quad (11j)$$

$$\eta_i + \sum_{q=1}^{n_Q} g_{iq} r_q - \lambda_i \geq \nu \kappa_{\Gamma_i} \quad (11k)$$

$$\eta_i + \sum_{q=1}^{n_Q} g_{iq} r_q \leq \kappa_{\Gamma_i} \quad (11l)$$

$$\eta_{i_f} \geq \beta_{i_f} \kappa_{\Gamma_{i_f}} \quad (11m)$$

$$p_i - (1 - w_{iq})M \leq g_{iq} \quad (11n)$$

$$p_i \geq g_{iq} \quad (11o)$$

$$M w_{iq} \geq g_{iq} \quad (11p)$$

$$0 \leq g_{iq} \quad (11q)$$

$$v_i = \sum_{q=1}^{n_Q} q w_{iq} \quad (11r)$$

$$\sum_{q=1}^{n_Q} w_{iq} = 1 \quad (11s)$$

$$w_{iq} \in \{0, 1\} \quad (11t)$$

$$\sigma_{ij} \in \{0, 1\}, \delta_{ij} \in \{0, 1\} \quad (11u)$$

$$v_i \in \mathbb{Q} \quad (11v)$$

$$i \in \mathbb{V} \quad (11w)$$

$$q \in \mathbb{Q} \quad (11x)$$

189 Constraints (11a)-(11h) are reiterations of the queuing constraints in (3). Constraints (11i)-(11m) provide
 190 initialization and terminal conditions as well as intermediate constraints to provide continuity in vehicle
 191 charges. Constraint (11i) states the first arrival for each bus is initialized with a charge of **To do: fix:** $\alpha \kappa_{\Gamma_{i_0}}$.
 192 Constraints (11j), (11k), and (11l) define the battery charge dynamics using (5) and (7) with the gain
 193 slack variables g_{iq} used in place of the bilinear term. Constraints (11n) through (11q) define g_{iq} using
 194 (9). Constraint (11l) ensures that the charging done for visit i cannot be greater than the capacity of the
 195 battery, κ_{Γ_i} . Constraint (11m) states that the last visit for each vehicle must have a minimum charge of

196 To do: update $\beta\kappa_{\Gamma_i}$, guaranteeing a minimum initial charge for the next working day. The last constraints
 197 (11t)-(11x) define the sets of valid values for each variable.

4 EXAMPLE

198 An example will now be presented to demonstrate the utility of the developed MILP. A description of the
 199 scenario is first presented followed by results.

200 4.1 Scenario

201 The given example utilizes $A = 40$ buses with $N = 220$ visits to the station divided between the A
 202 buses. Each bus has a 388 KWh battery that is required to stay above 25% charge (97 KWh) to maintain
 203 battery health, and the bus is assumed to begin the working day with 90% charge (349 KWh). Additionally,
 204 each bus is required to end the day with a minimum charge of 95% (368 KWh). Planning is done over
 205 a 24-hour time horizon. $n_C = 9$ chargers are utilized where five of the chargers are slow charging (100
 206 KWh) and four are fast charging (400 KWh). As discussed in Section ??, the slow chargers take longer, but
 207 are better for battery health than the fast chargers. Therefore, the slow chargers are modeled with a lower
 208 cost than the fast chargers for both assignment, $m_q = r_q$, and utilization, $\epsilon_q = r_q$, in the objective, (10).

209 The bus schedules are randomly generated. It is assumed that each bus has no more than 30 minutes
 210 between route departures. Bus routes are created by generating a random list of arrival times, assigning
 211 bus ID's to each visit, then generating route durations. They may vary anywhere from a minimum of the
 212 average time between the current and next arrival to a maximum of the next arrival time (i.e. $\frac{a_i + a_{\Gamma_i}}{2}$ to a_{Γ_i}).
 213 The discharge is assumed to be linear and is calculated via $\lambda_i = \text{rand}(\frac{a_i + a_{\Gamma_i}}{2}, a_{\Gamma_i})\zeta_{\Gamma_i}$ where $1 \leq i \leq N$
 214 and ζ_i is the discharge rate for each bus.

215 The optimization was performed using the Gurobi MILP solver [7] on a machine running a quad-core
 216 Intel i7-9700 4.7 GHz processor. The optimizer ran for 5 seconds to completion to produce the optimal
 217 solution.

218 4.2 Results

219 The schedule generated by the MILP is shown in Fig 6. The top graph indicates the slow charger usage,
 220 and the bottom indicates the fast charger usage. Although 9 chargers were used, Fig 6 shows that only five
 221 chargers were utilized.

222 Each color in Fig 6 is used to identify the bus ID assigned. It is noted that the overlaps in Fig 6 indicate
 223 the waiting time of vehicle j while vehicle i charges. This is recognized by viewing the vertical bars.
 224 These bars indicate the time bus i is set to charge. The area before indicate waiting time and the area after
 225 indicates the time spent on the charger. Note that, based upon vehicles needs, bus i may arrive before bus j ,
 226 but wait until after bus j charges before starting its charge (Fig 7). This is an unintuitive schedule caused
 227 by the cost of assignment parameter in the objective function, m_q . This type of constraint would not be
 228 achieved through a greedy scheduling algorithm.

229 Fig 9 depicts the charge for every bus over the time horizon. Every vehicle begins at 90% charge, finishes
 230 at 95% charge, and never goes below 25% in the intermediate arrivals as stated in the constraints (11). Fig
 231 8 represents the usage of each charger over the time horizon. The maximum amount of slow chargers used
 232 at any given time is three and only one fast charger is utilized at a time.

233 The pattern, for the most part, in Fig 6 is to populate the first charger and supply the other chargers as
 234 needed. Where this pattern primarily breaks down is around hour 15. Having moved each bus one charger
 235 down would have resulted in the same cost. This behavior is due to a lack of cost for the amount of total
 236 chargers being utilized. Adding a cost in the objective function to minimize the total amount of unique
 237 chargers would resolve this problem by effectively attempting to "pack" the chargers down reducing the
 238 peak of Fig 8.

239 Although this formulation effectively discourages the use of fast chargers to utilize the more cost-
 240 effective slow charges more readily, there is no consideration for the cost consumption and demand
 241 cost. Consumption cost accounts for peak use of power in the system and demand cost accounts for

the total energy used. These metrics are used to calculate the monetary cost of the system. Calculating the demand cost would create more bilinear terms as the objective function would have to sum over $\sum_{i=1}^N \sum_{q=1}^{n_Q} w_{iq} r_q(p_i)$, creating yet another linearization term. Furthermore, the demand cost would require discretization of the system. The demand utilizes the peak energy consumption over 15 minute intervals and uses the largest peak as the rate to charge. This would require tracking of when a charger is active and including another variable to enable and disable $w_{iq} r_q$. This example displays the limitation of the MILP solver as it adds effort and complexity to the system as a trade-off for calculating the optimal schedule. Other metaheuristic solvers, such as simulated annealing (SA), would allow the problem to be solved without having to linearize the system. [To do: get the citation for this](#)

5 CONCLUSION

This work developed a MILP scheduling framework that optimally assigns slow and fast chargers to a BEB bus fleet assuming a constant schedule. The BAP was introduced with an example formulation and was then compared to the PAP. The PAP constructed on the BAP to allow the time spent on the charger, p_i , to be a decision variable. Because the original PAP required service time, p_i , to be given, linear battery dynamics were introduced to drive charging times. Additional constraints were also introduced to provide limits for the battery dynamics.

An example was presented that demonstrated the ability of the formulation to optimally select slow and fast chargers to meet the requirements of the time schedule and the charge consumed during the bus routes. It was also observed that the formulation was able to successfully create a charging schedule without creating conflicts (Fig 6). The charge for each bus was tracked in Fig 9 and shows that the schedule maintained the charges between the maximum charge, 100%, and the minimum charge, 25%.

Limitations were demonstrated in the lack of objective to limit the total amount of chargers utilized and to calculate the demand and consumption costs. Further fields of interest are to utilize the formulation (Eq (10) and (11)) with nonlinear battery dynamics, calculation and utilization of the demand and consumption cost in the objective function, and utilizing this formulation in a metaheuristic solver.

REFERENCES

- [1]Katja Buhkrkal, Sara Zuglian, Stefan Ropke, Jesper Larsen, and Richard Lusby. Models for the discrete berth allocation problem: A computational comparison. *Transportation Research Part E: Logistics and Transportation Review*, 47(4):461–473, 2011.
- [2]Der-San Chen, Robert G Batson, and Yu Dang. *Applied integer programming*. Wiley, 2010.
- [3]Flores de Bruin. Rectangle packing. Master’s thesis, University of Amsterdam, 2013.
- [4]Giovanni De Filippo, Vincenzo Marano, and Ramteen Sioshansi. Simulation of an electric transportation system at the ohio state university. *Applied Energy*, 113:1686–1691, 2014.
- [5]Pablo Frojan, Juan Francisco Correcher, Ramon Alvarez-Valdes, Gerasimos Koulouris, and Jose Manuel Tamarit. The continuous berth allocation problem in a container terminal with multiple quays. *Expert Systems with Applications*, 42(21):7356–7366, 2015.
- [6]U Guida and A Abdulah. Zeeus ebus report# 2-an updated overview of electric buses in europe. Technical Report 2, International Association of Public Transport (UITP), 2017.
- [7]Joao P Hespanha. *Linear systems theory*. Princeton university press, 2018.
- [8]Anderson Hoke, Alexander Brissette, Kandler Smith, Annabelle Pratt, and Dragan Maksimovic. Accounting for lithium-ion battery degradation in electric vehicle charging optimization. *IEEE Journal of Emerging and Selected Topics in Power Electronics*, 2(3):691–700, 2014.
- [9]Akio Imai, Etsuko Nishimura, and Stratos Papadimitriou. The dynamic berth allocation problem for a container port. *Transportation Research Part B: Methodological*, 35(4):401–417, may 2001.
- [10]Jing-Quan Li. Battery-electric transit bus developments and operations: A review. *International Journal of Sustainable Transportation*, 10(3):157–169, 2016.
- [11]Tao Liu and Avishai (Avi) Ceder. Battery-electric transit vehicle scheduling with optimal number of stationary chargers. *Transportation Research Part C: Emerging Technologies*, 114:118–139, 2020.
- [12]Nic Lutsey and Michael Nicholas. Update on electric vehicle costs in the united states through 2030. *The International Council on Clean Transportation*, 2, 2019.

- [13] H. Murata, K. Fujiyoshi, S. Nakatake, and Y. Kajitani. Rectangle-packing-based module placement. In *Proceedings of IEEE International Conference on Computer Aided Design (ICCAD)*, pages 472–479, 1995.
- [14] Ahad Javandoust Qarebagh, Farnaz Sabahi, and Dariush Nazarpour. Optimized scheduling for solving position allocation problem in electric vehicle charging stations. In *2019 27th Iranian Conference on Electrical Engineering (ICEE)*, pages 593–597, 2019.
- [15] Nan Qin, Azwirman Gusrialdi, R. Paul Brooker, and Ali T-Raissi. Numerical analysis of electric bus fast charging strategies for demand charge reduction. *Transportation Research Part A: Policy and Practice*, 94:386–396, 2016.
- [16] Maria Analia Rodriguez and Aldo Vecchiotti. A comparative assessment of linearization methods for bilinear models. *Computers and Chemical Engineering*, 48:218–233, 2013.
- [17] Mariana Teixeira Sebastiani, Ricardo Lüders, and Keiko Verônica Ono Fonseca. Evaluating electric bus operation for a real-world brt public transportation using simulation optimization. *IEEE Transactions on Intelligent Transportation Systems*, 17(10):2777–2786, 2016.
- [18] Stefan Voss. *Container terminal operation and operations research – Recent challenges*, pages 387–396. Hong Kong Society for Transportation Studies, 01 2007.
- [19] Xiumin Wang, Chau Yuen, Naveed Ul Hassan, Ning An, and Weiwei Wu. Electric vehicle charging station placement for urban public bus systems. *IEEE Transactions on Intelligent Transportation Systems*, 18(1):128–139, 2017.
- [20] Yusheng Wang, Yongxi Huang, Jiuping Xu, and Nicole Barclay. Optimal recharging scheduling for urban electric buses: A case study in davis. *Transportation Research Part E: Logistics and Transportation Review*, 100:115–132, 2017.
- [21] Ran Wei, Xiaoyue Liu, Yi Ou, and S Kiavash Fayyaz. Optimizing the spatio-temporal deployment of battery electric bus system. *Journal of Transport Geography*, 68:160–168, 2018.
- [22] Maria Xylia and Semida Silveira. The role of charging technologies in upscaling the use of electric buses in public transport: Experiences from demonstration projects. *Transportation Research Part A: Policy and Practice*, 118:399–415, 2018.
- [23] Chao Yang, Wei Lou, Junmei Yao, and Shengli Xie. On charging scheduling optimization for a wirelessly charged electric bus system. *IEEE Transactions on Intelligent Transportation Systems*, 19(6):1814–1826, 2018.
- [24] Yirong Zhou, Xiaoyue Cathy Liu, Ran Wei, and Aaron Golub. Bi-objective optimization for battery electric bus deployment considering cost and environmental equity. *IEEE Transactions on Intelligent Transportation Systems*, 22(4):2487–2497, 2020.

FIGURE CAPTIONS

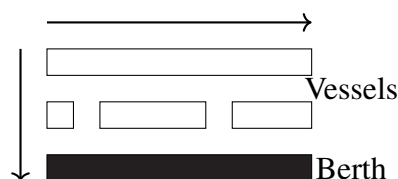


Figure 1. Example of berth allocation. Vessels are docked in berth locations (horizontal) and are queued over time (vertical). The vertical arrow represents the movement direction of queued vessels and the horizontal arrow represents the direction of departure.

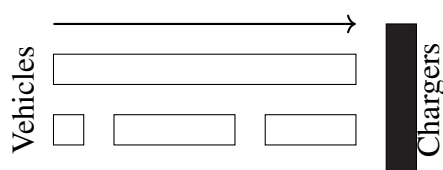


Figure 2. Example of position allocation. Vehicles are placed in queues to be charged and move in the direction indicated by the arrow.

Table 2. Notation used throughout the paper

Variable	Description	Variable
Input values		
n_B	Number of buses	M
n_V	Number of total visits	n_Q
n_C	Number of chargers	
\mathbb{V}	Set of visit indices, $\mathbb{V} = \{1, \dots, n_V\}$	\mathbb{B}
\mathbb{Q}	Set of queue indices, $\mathbb{Q} = \{1, \dots, n_Q\}$	
i, j	Indices used to refer to visits	b
q	Index used to refer to a queue	
Problem definition parameters		
Γ	$\Gamma : \mathbb{V} \rightarrow \mathbb{B}$ with Γ_i used to denote the bus for visit i	α_i
β_i	Final charge percentage for bus i at the end of the time horizon	ϵ_q
Υ	$\Upsilon : \mathbb{V} \rightarrow \mathbb{V}$ mapping a visit to the next visit by the same bus with Υ_i being the shorthand.	κ_b
λ_i	Discharge of visit over route i	ν_b
τ_i	Time visit i must depart the station	ζ_b
a_i	Arrival time of visit i	i_0
i_f	Indices associated with the final arrival for every bus in A	m_q
r_q	Charge rate of charger q per unit time	
Decision Variables		
δ_{ij}	Binary variable determining temporal ordering of vehicles i and j	η_i
σ_{ij}	Binary variable determining the queue ordering between vehicles i and j	c_i
g_{iq}	The charge gain for visit i from charger q	p_i
u_i	Starting charge time of visit i	v_i
w_{iq}	Binary assignment variable for visit i to queue q	




Figure 3. Example of rectangle packing problem

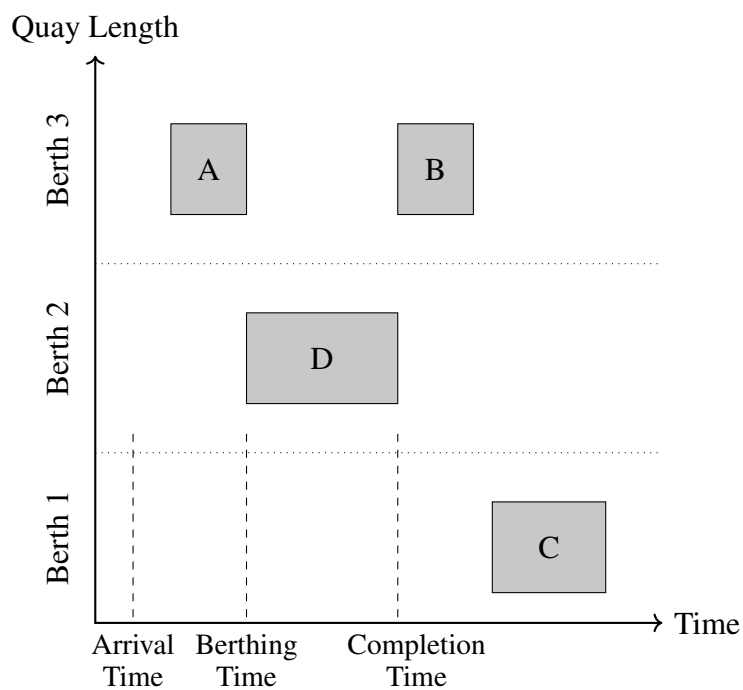


Figure 4. The representation of the berth-time space

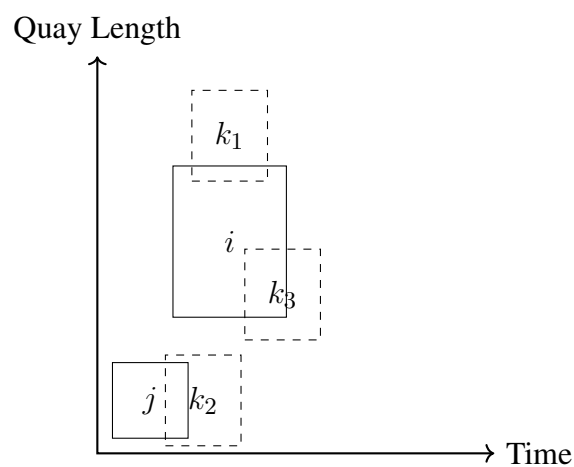


Figure 5. Examples of different methods of overlapping. Space overlap: $v_{k_1} < v_i + s_i \therefore \delta_{k_1 i} = 0$. Time overlap $u_{k_1} < u_j + p_j \therefore \sigma_{k_2 j} = 0$. Both space and time overlap $\sigma_{k_3 i} = 0$ and $\delta_{k_3 j} = 0$.

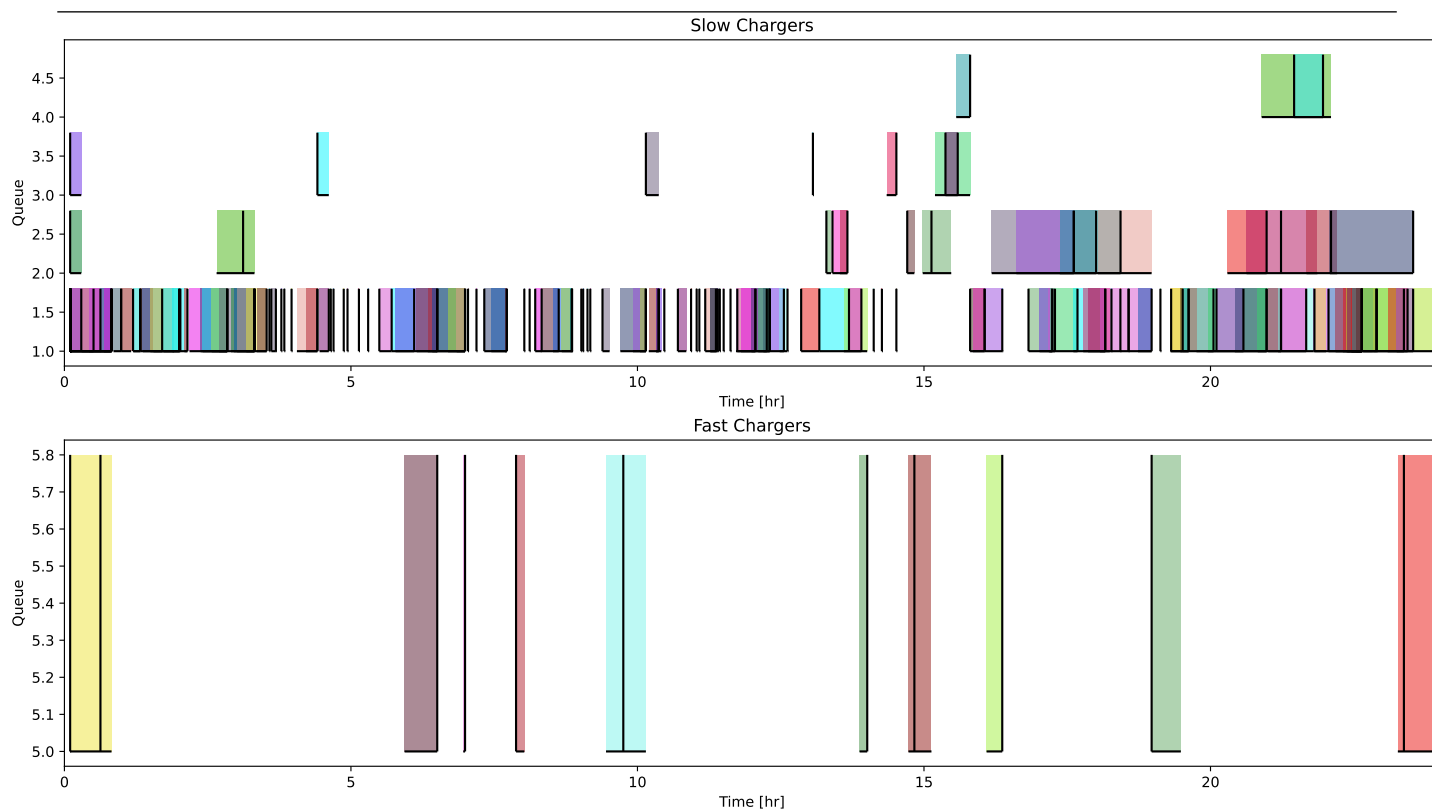


Figure 6. Bus schedule generated with PAP MILP. Each color is assigned to a specific bus ID. The vertical bars indicate the time the vehicles are set to charge, the area before said bars indicate the waiting times for each visit $1 \leq i \leq N$. Similarly, the area after the bars indicate the time spent on the charger.

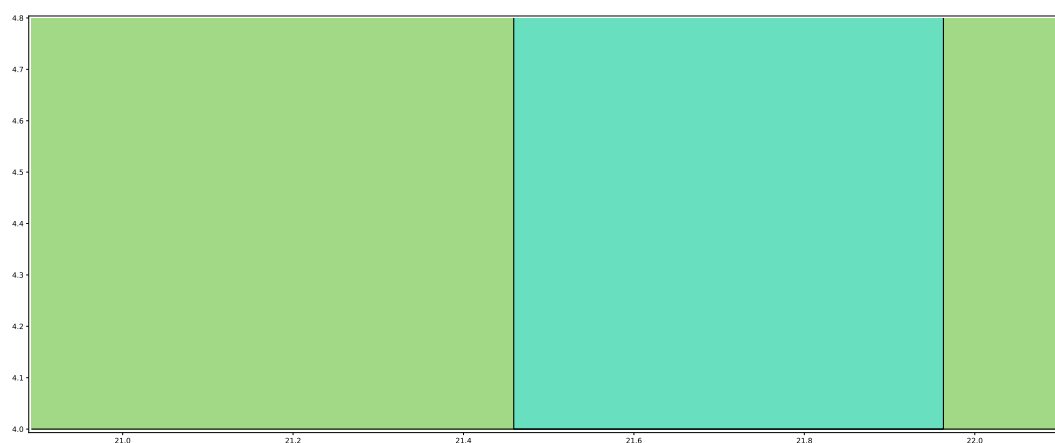


Figure 7. An example, from Fig 6, of a bus i arriving before j , having i wait for j to arrive, and charge i after j is detached.

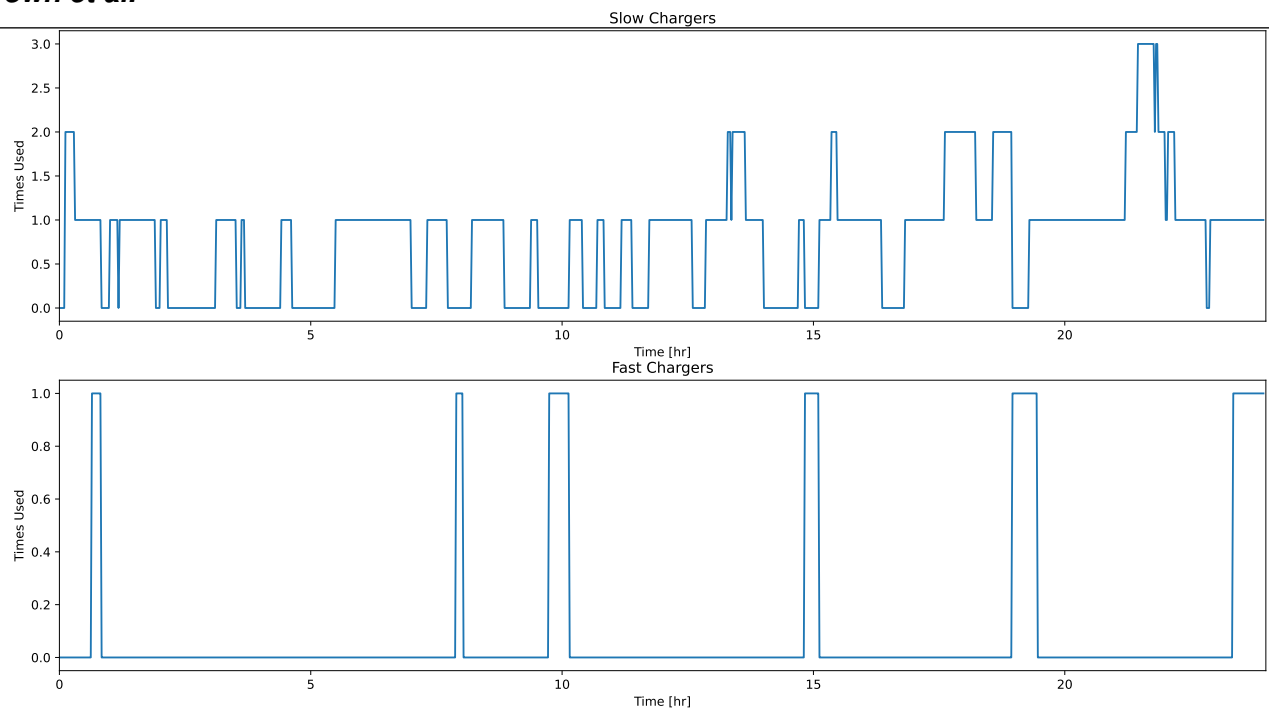


Figure 8. Amount of slow and fast chargers used at any given time.

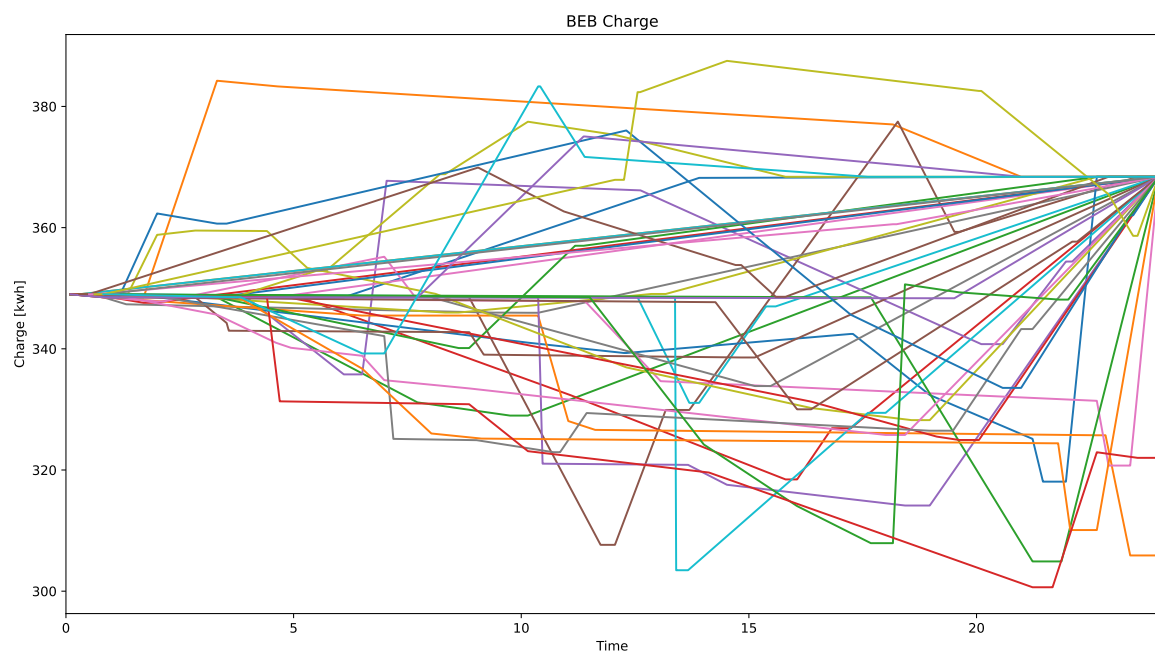


Figure 9. Charge for each bus over the time horizon.