A Position Allocation Approach to the Scheduling of Battery Electric Bus Charging

Alexander Brown [1,*]**, Greg Droge** [2]

[1]*Department of Electrical and Computer Engineering, Logan, UT, USA*
[2]*Department of Electrical and Computer Engineering, Logan, UT, USA*

Correspondence*:
Alexander Brown
A01704744@usu.edu

ABSTRACT

To do: revisitDependable charging schedules for an increasing interest of battery electric bus (BEB) fleets is a critical component to a successful adoption. In this paper, a BEB charging scheduling framework that considers spatiotemporal schedule constraints, route schedules, fast and slow charging, and battery charging dynamics is modeled as a mixed integer linear program (MILP). The MILP is modeled after the berth allocation problem (BAP) in a modified form known as the position allocation problem (PAP). Linear battery dynamics are included to model the charging and discharging of buses while at the station and during their routes, respectively. The optimization coordinates BEB charging to ensure each BEB has sufficient charge while using slow chargers where possible for sake of battery health. The model also minimizes the total number of chargers utilized and prioritizes slow chargers. The model validity is demonstrated with a randomly generated set of routes for 35 buses and 338 visits to the charging station. The results show that the slow chargers are more readily selected and the charging and spatiotemporal constraints are met while considering the battery dynamics.

Keywords: Berth Allocation Problem (BAP), Position Allocation Problem (PAP), Mixed Integer Linear Program (MILP), Battery Electric Bus (BEB), Scheduling at least 5 are mandatory.

1 INTRODUCTION

The public transportation system is crucial in any urban area; however, the increased awareness and concern of environmental impacts of petroleum based public transportation has driven an effort to reduce the pollutant footprint [4, 26, 7, 12]. Particularly, the electrification of public bus transportation via battery power, i.e., battery electric buses (BEBs), has received significant attention [12]. Although the technology provides benefits beyond reduction in emissions, such as lower driving costs, lower maintenance costs, and reduced vehicle noise, battery powered systems introduce new challenges such as larger upfront costs, and potentially several hours long "refueling" periods [26, 12]. Furthermore, the problem is exacerbated by the constraints of the transit schedule to which the fleet must adhere, the limited amount of chargers available, and the adverse affects in the health of the battery due to fast charging [14]. This paper presents a continuous scheduling framework for a BEB fleet that shares limited fast and slow chargers. This framework takes into consideration linear charging dynamics and a fixed bus schedule while meeting a certain battery charge threshold throughout the day.

Many recent efforts have been made simultaneously solve the problems of scheduling and charging fleets and determining the infrastructure upon which they rely, e.g., [25, 20, 10, 24]. The added complexity of considering both the BEB charge scheduling and the infrastructure problems necessitates simplifications for sake of computation of the charge scheduling problem. Further complexities are introduced in the form of schemes to introduce BEBs into existing fleets by replacing existing buses [28, 18, 5], assigning BEBs to routes, and introducing uncertainties into the models [21, 5]. These simplifications to the charge scheduling model include utilizing only fast chargers while planning [25, 20, 24, 29, 13, 27, 23, 17]. If slow chargers are used, they are only employed at the depot and not the station [9, 21]. Some approaches assume full charge [25, 24, 29, 23]. Others have assumed that the charge received is proportional to the time spent on

the charger [13, 27], which can be a valid assumption when the battery state-of-charge (SOC) is below 80% charge [13].

This work builds upon the Position Allocation Problem, a modification of the well studied Berth Allocation Problem (BAP), as a means to schedule the charging of electric vehicles [16, 1, 6, 11]. The BAP is a continuous time model that solves the problem of allocating space for incoming vessels to be berthed. Each arriving vessel requires both time and space to be serviced and is assigned a berthing location [11]. Vessels are lined up parallel to the berth to be serviced and are horizontally queued as shown in Fig 1. The PAP utilizes this notion of queuing for scheduling vehicles to be charged, as shown in Fig 2. The PAP is formulated as a rectangle packing problem by assuming that vehicle charging will take a fixed amount of time, the amount of vehicles that can charge is limited by the physical width of the vehicles, and each vehicle visits the charger a single time [16].

The main contribution of this work is the extension of the PAP novel approach to BEB charger scheduling. This includes modeling and incorporation of a proportional charging model into the MILP framework, consideration of multiple charger types, and inclusion of the route schedule for each bus. The result is a MILP formulation that coordinates charging times and charger type for every visit that each bus makes to the station while considering a dynamic charge model and scheduling constraints.

The remainder of the paper proceeds as follows: In Section 2, the PAP is introduced with a formulation of the resulting MILP. Section 3 constructs the MILP for BEB scheduling, including modifications to the PAP queuing constraints and development of a dynamic charging model. Section 4 demonstrates an example of using the formulation to coordinate 35 buses over 338 total visits to the station. The paper ends in Section 5 with concluding remarks.

2 THE POSITION ALLOCATION PROBLEM

The BEB charge schedule formulation in this work builds upon the PA, which, in turn, builds upon the BAP. This section provides a brief overview of the BAP and a detailed formulation of PAP as presented in [16].

2.1 Overview of BAP

The BAP is a rectangle packing problem where a set of rectangles ($\mathbb{O}$) are attempted to be optimally placed in a larger rectangle (O) as shown in Fig 3. The rectangle packing problem is an NP-hard problem that can be used to describe many real life problems [3, 15]. In some of these problems, the dimensions of $\mathbb{O}$ are held constant such as in the problem of packing modules on a chip, where the widths and height of the rectangles represent the physical width and heights of the modules [15]. Other problems, such as the BAP, in some formulations, allow one side of the rectangle to vary depending on its assigned position (i.e. the handling time is dependent on the berth) [1].

The BAP solves the problem of optimally assigning incoming vessels to berth positions to be serviced (Fig 1). The width and height of O represent the berth length S and time horizon T, respectively. Similarly, the width and height for $\mathbb{O}$ represent the time spent to service vessel i and the space taken by docking vessel i, respectively. The vessel characteristics (length of the vessel, arrival time, handling time, desired departure time) are assumed to be known for all N vessels to be serviced. A representation of a BAP solution is shown in Fig 4.

The BAP objective is generally represented as minimizing some operational time for a given vessel i. The operational time may be chosen to minimize the difference between arrival and departure times, time spent being serviced, or overall waiting time [22, 1, 6]. The model must then constrain the vessel placement as to not allow overlap spatially or temporally.

2.2 The PAP Formulation

The BAP formulation forms the basis of the PAP; however, there are some differences in the way the variables are perceived. For the i^{th} visit, starting service time, u_i, is now the starting charge time, the berth location, v_i, is now the charger queue for assignment, and the service time, p_i, is now the time to charge. The PAP utilizes a number of parameters. The following parameters are constants.

- S : charger length

86 • T : time horizon

87 • N : number of incoming vehicles

88 • p_i : charging time for vehicle i; $1 \leq i \leq N$

89 • s_i : width of vehicle i; $1 \leq i \leq N$

90 • a_i : arrival time of vehicle i; $1 \leq i \leq N$

91 These constants define the problem bounds. The following list provides a series of decision variables
92 used in the formulation.

93 • u_i : starting time of service for vehicle i; $1 \leq i \leq N$

94 • v_i : charge location i; $1 \leq i \leq N$

95 • c_i : departure time for vehicle i; $1 \leq i \leq N$

96 • σ_{ij} : binary variable that determines ordering of vehicles i and j in time

97 • δ_{ij} : binary variable that determines relative position of vehicles i and j when charging simultaneously

98 To determine the values for each of these decision variables, a MILP is formulated in [16] and shown
99 here for sake of completeness.

$$\min \sum_{i=1}^{N}(c_i - a_i) \tag{1}$$

Subject to:

$$u_j - u_i - p_i - (\sigma_{ij} - 1)T \geq 0 \tag{2a}$$
$$v_j - v_i - s_i - (\delta_{ij} - 1)S \geq 0 \tag{2b}$$
$$\sigma_{ij} + \sigma_{ji} + \delta_{ij} + \delta_{ji} \geq 1 \tag{2c}$$
$$\sigma_{ij} + \sigma_{ji} \leq 1 \tag{2d}$$
$$\delta_{ij} + \delta_{ji} \leq 1 \tag{2e}$$
$$p_i + u_i = c_i \tag{2f}$$
$$a_i \leq u_i \leq (T - p_i) \tag{2g}$$
$$\sigma_{ij} \in \{0,1\}, \; \delta_{ij} \in \{0,1\} \tag{2h}$$
$$v_i \in [0 \; S] \tag{2i}$$

100 The objective function (1) minimizes the time spent to service each vehicle by minimizing over the sum
101 of differences between the departure time, c_i, and arrival time, a_i. i.e., It seeks to get each vehicle charged
102 and on its way as quickly as possible.

103 Constraints 2a-2e are used to ensure that individual rectangles do not overlap. For the PAP, they ensure
104 that two vehicles charging simultaneously are at different positions and, similarly, two vehicles that have
105 overlapping positions do not overlap temporally. Constraint (2a) establishes temporal ordering when active
106 ($\sigma_{ij} = 1$). Similarly, when $\delta_{ij} = 1$ in (2b) then spatial ordering is established. Constraints 2c-2e enforce
107 that spatial and/or temporal ordering is established between each possible vehicle pair. Constraints (2d)
108 and (2e) enforce consistency. For example, (2d) enforces that vehicle i cannot come before vehicle j and
109 vehicle j simultaneously come before vehicle i.

110 The last constraints force relationships between arrival time, charge start time, and departure time.
111 Constraint (2f) states that the service start time, u_i, plus the time to service vehicle i, p_i, must equal the
112 departure time, c_i. Constraint (2g) enforces the arrival time, a_i, to be less than or equal to the service start
113 time, u_i, which in turn must be less than or equal to the latest time the vehicle may begin to be serviced to
114 stay within the time horizon. Constraint (2h) ensures that σ_{ij} and δ_{ij} are binary. Constraint (2i) ensures
115 that the assigned value of v_i is a valid charging position.

3 PROBLEM FORMULATION

116 Applying the PAP to BEB charging requires four fundamental changes. The first is that the time that a
117 BEB spends charging is allowed to vary. Thus, p_i becomes a variable of optimization. Second, in the PAP
118 each charging visit is assumed to be a different vehicle. For the BEB charging problem, each bus may
119 make multiple visits to the station throughout the day and the resulting charge for a bus at a given time is
120 dependent upon each of the prior visits made. Third, in the PAP, the charger is one continuous bar with
121 vehicle width effectively restricting the number of vehicles charging simultaneously. For the BEB, it is
122 assumed that a specific number of chargers exist, and these chargers can charge the vehicle at a different
123 rate. The fourth fundamental change is related to the first three. The charge of each bus must be tracked in
124 the optimization to ensure that charging across multiple visits is sufficient to allow each bus to execute its
125 route throughout the day.

126   The discussion of the four changes are separated into two sections. Section 3.1 discusses the changes in
127 the spatial-temporal constraint formulation to form a queuing constraint. Section 3.2 then discusses the
128 addition of the bus charge management. This section ends with a brief discussion of a modified objective in
129 Section **??** and the statement of the full problem in Section 3.3. The notation is explained throughout and
130 summarized in Table 1.

3.1 Queuing Constraints

132 The queuing constraints help to ensure that the busses enter queues for charging or waiting as they come
133 into the station. There are three sets to differentiate between different entities. $\mathbb{B} = \{1, ..., n_B\}$ is the set of
134 bus indices with index b used to denote an individual bus, $\mathbb{Q} = \{1, ..., n_Q\}$ is the set of queues with index q
135 used to denote an individual queue, and $\mathbb{V} = \{1, ..., n_V\}$ is a set of visits to the station with i, j used to
136 refer to individual visits. The mapping $\Gamma : \mathbb{V} \to \mathbb{B}$ is used to map a visit index to a bus index with the
137 shorthand Γ_i used to refer to the bus index for visit i.

138   Most variables are now defined in terms of a visit. Two separate visits could correspond to different buses
139 or visits by the same bus. The spatial variable s_i is removed and v_i is made to be an integer corresponding
140 to which queue visit i will be using. Thus, when $\delta_{ij} = 1$, the visits must be at different chargers, i.e.,
141 $v_i - v_j \geq 1$. The variable S is likewise replaced with n_Q. Note that $n_Q = n_B + n_C$, where n_B is the
142 number of busses and n_C is the number of chargers. The rationale for having extra queues is to allow buses
143 to sit idle instead of charging. The modified queuing constraints can be written as follows.

$$u_i - u_j - p_j - (\sigma_{ij} - 1)T \geq 0 \tag{3a}$$
$$v_i - v_j - (\delta_{ij} - 1)n_Q \geq 1 \tag{3b}$$
$$\sigma_{ij} + \sigma_{ji} + \delta_{ij} + \delta_{ji} \geq 1 \tag{3c}$$
$$\sigma_{ij} + \sigma_{ji} \leq 1 \tag{3d}$$
$$\delta_{ij} + \delta_{ji} \leq 1 \tag{3e}$$
$$p_i + u_i = c_i \tag{3f}$$
$$a_i \leq u_i \leq (T - p_i) \tag{3g}$$
$$c_i \leq \tau_i \tag{3h}$$
$$p_i \geq 0 \tag{3i}$$
$$\sigma_{ij} \in \{0, 1\}, \ \delta_{ij} \in \{0, 1\} \tag{3j}$$
$$v_i \in \mathbb{Q} \tag{3k}$$

144   Constraints (3a)-(3g) and (3j) are nearly identical to those described in Section 2 with the sole change
145 in (3b) being described above to conform to a queue. Constraint (3h) is added to ensure that the ending
146 charge time, c_i, must be less than or equal to the required departure time from the station, τ_i. This enables
147 the bus schedules to be considered during optimization. Finally, (3k) enforces v_i to be an integer in the set
148 of possible queues.

3.2 Battery Charge Dynamic Constraints

Using purely the constraints in (3) with the objective in (1) would result in c_i being chosen as small as possible by employing $p_i = 0$, $u_i = c_i$. Thus, the vehicles would not charge. Furthermore, it does not encode any revisiting of the BEB to the charging station. To remedy this, battery dynamic constraints are introduced.

Battery charge dynamic constraints are used to model the charge in each bus with the purpose of ensuring sufficient time is spent charging. Two constraints are enforced on the bus charge: busses must always have sufficient charge to execute their respective routes and each bus must end the day with a specific charge threshold, preparatory to execution for the next day.

The charge at the beginning of visit i is denoted as η_i. As a charge on the bus is dependent upon the visits that bus makes to the station, the mapping $\Upsilon : \mathbb{V} \to \mathbb{V} \bigcup \{\varnothing\}$ is used to determine the next visit that corresponds to the same bus, with Υ_i being shorthand notation. Thus, Γ_i and Γ_{Υ_i} would both map to the same bus index as long as Υ_i is not the null element, $\varnothing$. The null element is used to denote that there are no future visits by that same bus.

To drive time spent on the charger, p_i, as well as define initial, final, and intermediate bus charges for each visit i, the sets for initial and final visits must be defined. Let the mapping of the first visit by each bus be denoted as $\Gamma_i^0 : \mathbb{V} \to \mathbb{V} \bigcup \{\varnothing\}$. The indexed value of Γ_i^0 represents the index for the first visit of bus b or the null element, $\varnothing$. Similarly, let $\Gamma_i^f : \mathbb{V} \to \mathbb{V} \bigcup \{\varnothing\}$ contain the indexes for the final visit of each bus b or the null element. The initial and final bus charges can then be represented by the constraint equations $\eta_{\Gamma_i^0} = \alpha \kappa_{\Gamma_i^0}$ and $\eta_{\Gamma_i^f} = \beta \kappa_{\Gamma_i^f}$, respectively, where α and β are percentages of the battery for first and final visit, respectively. The intermediate charges must be determined at solve time.

It is assumed that the charge received is proportional to the time spent charging. The charge rate for charger q is denoted as r_q. Note that a value of $r_q = 0$ corresponds to a queue where no charging occurs. A bus in such a queue is simply waiting for the departure time. Thus, $n_Q = n_C + n_B$ where the final n_B queues have $r_q = 0$ to allow an arbitrary number of buses to not charge at any given moment in time. The amount of discharge between visits i and Υ_i, the next visit of the same bus, is denoted as λ_i. If visit i occurred at charger q, the charge of the bus coming into visit Υ_i would be

$$\eta_{\Upsilon_i} = \eta_i + p_i r_q - \lambda_i. \tag{4}$$

The binary decision variable w_{iq} is introduced to determine whether visit i uses charger q. This allows the charge of the bus coming into visit Υ_i to be written in summation form as

$$\eta_{\Upsilon_i} = \eta_i + \sum_{q=1}^{n_Q} p_i w_{iq} r_q - \lambda_i \tag{5a}$$

$$\sum_{q=1}^{n_Q} w_{iq} = 1 \tag{5b}$$

$$w_{iq} \in \{0, 1\} \tag{5c}$$

The choice of queue for visit i, v_i, becomes a slack variable and is defined in terms of w_{iq} as

$$v_i = \sum_{q=1}^{n_Q} q w_{iq} \tag{6}$$

Maximum and minimum values for the charges are included to ensure the battery is not overcharged and to guarantee sufficient charge for subsequent visits. The upper and lower battery charge bounds for bus b

181 are κ_b and ν_b, respectively. As η_i corresponds to the charge at the beginning of the visit, the upper bound
182 constraint must also include the charge received during the visit as follows.

$$\eta_i + \sum_{q=1}^{n_Q} p_i w_{iq} r_q \leq \kappa_{\Gamma_i} \tag{7a}$$

$$\eta_i \geq \nu_{\Gamma_i} \kappa_{\Gamma_i} \tag{7b}$$

183 Note that the term $p_i w_{iq}$ is a bilinear term (two decision variables being multiplied together) which
184 is nonlinear [19]. A standard way of linearizing a bilinear term that contains an integer variable is by
185 introducing a slack variable with an either/or constraint [2, 19]. Allowing the slack variable g_{iq} to be equal
186 to $p_i w_{iq}$, g_{iq} can be defined as

$$g_{iq} = \begin{cases} p_i & w_{iq} = 1 \\ 0 & w_{iq} = 0 \end{cases}. \tag{8}$$

187 Equation (8) can be expressed as a mixed integer constraint using big-M notation with the following four
188 constraints.

$$p_i - (1 - w_{iq})M \leq g_{iq} \tag{9a}$$
$$p_i \geq g_{iq} \tag{9b}$$
$$M w_{iq} \geq g_{iq} \tag{9c}$$
$$0 \leq g_{iq} \tag{9d}$$

189 where M is a large value. If $w_{iq} = 1$ then (9a) and (9b) become $p_i \leq g_{iq}$ and $p_i \geq g_{iq}$, effectively stating
190 $p_i = g_{iq}$ with (9c) being inactive. If $w_{iq} = 0$, (9a) is inactive and (9c) and (9d) force $g_{iq} = 0$.

3.3 The BEB Charging Problem

192 The goal of the MILP is to utilize chargers as little as possible to reduce energy costs with the fast
193 charging penalized greater to reduce battery damage. Thus, an assignment cost m_q and usage cost ϵ_q are
194 associated with each charger, q. The cost for both the assignment and utilization of slow chargers is less
195 than that of the fast chargers. The objective function has an assignment term, $w_{iq} m_q$, which is non-zero if
196 charger q is used for visit i. Similarly, a usage term $g_{iq}\epsilon_q$ is non-zero only if charge is received for visit i at
197 charger q. The resulting objective is defined in Eq 10. The assignment cost, $w_{iq} m_q$, and the usage cost,
198 $g_{iq}\epsilon_q$, are summed over each visit, i, and charger, q.

$$\min \sum_{i=1}^{N} \sum_{q=1}^{n_Q} \left(w_{iq} m_q + g_{iq}\epsilon_q \right) \tag{10}$$

199 Subject to the constraints in Eq 11.

$$u_i - u_j - p_j - (\sigma_{ij} - 1)T \geq 0 \tag{11a}$$

$$v_i - v_j - (\delta_{ij} - 1)n_Q \geq 1 \tag{11b}$$

$$\sigma_{ij} + \sigma_{ji} + \delta_{ij} + \delta_{ji} \geq 1 \tag{11c}$$

$$\sigma_{ij} + \sigma_{ji} \leq 1 \tag{11d}$$

$$\delta_{ij} + \delta_{ji} \leq 1 \tag{11e}$$

$$p_i + u_i = c_i \tag{11f}$$

$$a_i \leq u_i \leq (T - p_i) \tag{11g}$$

$$c_i \leq \tau_i \tag{11h}$$

$$\eta_{\Gamma_i^0} = \alpha \kappa_{\Gamma_i^0} \tag{11i}$$

$$\eta_i + \sum_{q=1}^{n_Q} g_{iq} r_q - \lambda_i = \eta_{\gamma_i} \qquad (11j)$$

$$\eta_i + \sum_{q=1}^{n_Q} g_{iq} r_q - \lambda_i \geq \nu \kappa_{\Gamma_i} \qquad (11k)$$

$$\eta_i + \sum_{q=1}^{n_Q} g_{iq} r_q \leq \kappa_{\Gamma_i} \qquad (11l)$$

$$\eta_{\Gamma_i^f} \geq \beta \kappa_{\Gamma_i^f} \qquad (11m)$$

$$p_i - (1 - w_{iq})M \leq g_{iq} \qquad (11n)$$

$$p_i \geq g_{iq} \qquad (11o)$$

$$M w_{iq} \geq g_{iq} \qquad (11p)$$

$$0 \leq g_{iq} \qquad (11q)$$

$$v_i = \sum_{q=1}^{n_Q} q w_{iq} \qquad (11r)$$

$$\sum_{q=1}^{n_Q} w_{iq} = 1 \qquad (11s)$$

$$w_{iq} \in \{0, 1\} \qquad (11t)$$

$$\sigma_{ij} \in \{0, 1\}, \ \delta_{ij} \in \{0, 1\} \qquad (11u)$$

$$v_i \in \mathbb{Q} \qquad (11v)$$

$$i \in \mathbb{V} \qquad (11w)$$

$$q \in \mathbb{Q} \qquad (11x)$$

Constraints (11a)-(11h) are reiterations of the queuing constraints in (3). Constraints (11i)-(11m) provide initialization and terminal conditions as well as intermediate constraints to provide continuity in vehicle charges. Constraint (11i) states the first arrival for each bus is initialized with a charge of $\alpha \kappa_{\Gamma_i^0}$. Constraints (11j), (11k), and (11l) define the battery charge dynamics using (5) and (7) with the gain slack variables g_{iq} used in place of the bilinear term. Constraints (11n) through (11q) define g_{iq} using (9).

Constraint (11l) ensures that the charging done for visit i cannot be greater than the capacity of the battery, κ_{Γ_i}. Constraint (11m) states that the last visit for each vehicle must have a minimum charge of $\beta \kappa_{\Gamma_i^f}$, guaranteeing a minimum initial charge for the next working day. The last constraints (11t)-(11x) define the sets of valid values for each variable.

4 EXAMPLE

An example will now be presented to demonstrate the utility of the developed MILP charge scheduling techique. A description of the scenario is first presented followed a description of an alternative heuristic based planning strategy called Quin-Modified which is used as a comparison to the MILP PAP. Results are then presented for each of planning strategies are presented, analyzed, and discussed.

4.1 BEB Scenario

The utilizes $A = 35$ buses with $N = 338$ visits to the station divided between the A buses. Each bus has a 388 KWh battery that is required to stay above 25% charge (3589 KWh) to maintain battery health, and the bus is assumed to begin the working day with 90% charge (349.2 KWh). Additionally, each bus is required to end the day with a minimum charge of 70% (271.6 KWh). Each bus is assumed to discharge at a rate of 30 KWh every hour while on route. Note that there are many factors that play a factor in the rate of discharge; however, for the sake of simplicity an average rate is used. Planning is done over a 24-hour time horizon. $n_C = 30$ chargers are utilized where 15 of the chargers are slow charging (30 KWh) and 15 are fast charging (911 KWh).

To encourage the MILP PAP problem to utilize the fewest number of chargers, the value of m_q in the objective function, (10), is $\forall q \in Q; m_q = 1000q$. The value of $\epsilon = 1$ for all chargers. This effectively means that the effort to reduce time on every charger is the same.

Another heuristic-based optimization strategy, known as Quin-Modified, is also employed as a means of comparison with the results of the MILP PAP. The Quin-Modified strategies is a based on the threshold strategy of [17]. The strategy has been modified slightly to accommodate the case of multiple charger types and without exhaustive search for the best charger types. The heuristic is based on a set of rules that revolve around the charge of the bus. There are three different thresholds, low (60%), medium (75%), and high

253 (90%). Buses below the low threshold is prioritized to fast chargers then slow chargers. Buses between
254 low and medium prioritize slow chargers first and utilize fast chargers only if no slow are available. Buses
255 above the medium threshold and below high will only be assigned to slow chargers. Buses above the high
256 threshold will not be charged. Once a bus has been assigned to a charger, it remains on the charger for the
257 duration of the time it is at the station or it reaches 90% charge, whichever comes first.

258 The schedule is sampled from UTA To do: is it? bus routing data that occurs over a 24-hour time period.
259 The total number of constraints resulted in 8750 continuous and 132500 integer/binary constraints. The
260 optimization was performed using the Gurobi MILP solver [8] on a machine running an AMD Ryzen 9
261 5900X 12- Processor (24 core) at 4.95GHz. The solver was allowed to run for 10000 seconds and converged
262 on the optimal result in 9999 seconds.

4.2 Results

264 The schedule generated by the Quin-Modified strategy and the MILP PAP is shown in Fig 6a and Fig 6b,
265 respectively. The x-axis represents the horizon in hours. The y-axis represents the assigned charger. Points
266 between zero and 14 are active times for slow chargers, and points between the range of 14 and 29 are
267 active times for fast chargers. The hollow circle represents the staring charge time for bus b and the line to
268 the vertical tick signifies the region of time the charger is active. Each color in Fig 6a and 6b are used to
269 identify the bus assigned.

270 To do: Compare schedules

271 Fig 7a and 7b depicts the charge for every bus over the time horizon. Every vehicle begins at 90% charge,
272 finishes at 70% charge in the MILP PAP schedule, and never goes below 25% in the intermediate arrivals as
273 stated in the constraints (11). There is no guarantee for this in the Quin-Modified strategy. Fig ?? represents
274 the usage of each charger over the time horizon. The maximum amount of slow chargers used at any given
275 time is three and only one fast charger is utilized at a time.

276 The pattern, for the most part, in Fig ?? is to populate the first charger and supply the other chargers as
277 needed. Where this pattern primarily breaks down is around hour 15. Having moved each bus one charger
278 down would have resulted in the same cost. This behavior is due to a lack of cost for the amount of total
279 chargers being utilized. Adding a cost in the objective function to minimize the total amount of unique
280 chargers would resolve this problem by effectively attempting to "pack" the chargers down reducing the
281 peak of Fig ??.

282 Although this formulation effectively discourages the use of fast chargers to utilize the more cost-
283 effective slow charges more readily, there is no consideration for the cost consumption and demand
284 cost. Consumption cost accounts for peak use of power in the system and demand cost accounts for
285 the total energy used. These metrics are used to calculate the monetary cost of the system. Calculating
286 the demand cost would create more bilinear terms as the objective function would have to sum over
287 $\sum_{i=1}^{N} \sum_{q=1}^{n_Q} w_{iq} r_q(p_i)$, creating yet another linearization term. Furthermore, the demand cost would
288 require discretization of the system. The demand utilizes the peak energy consumption over 15 minute
289 intervals and uses the largest peak as the rate to charge. This would require tracking of when a charger is
290 active and including another variable to enable and disable $w_{iq} r_q$. This example displays the limitation of
291 the MILP solver as it adds effort and complexity to the system as a trade-off for calculating the optimal
292 schedule. Other metaheuristic solvers, such as simulated annealing (SA), would allow the problem to be
293 solved without having to linearize the system. To do: get the citation for this

5 CONCLUSION

294 To do: Rewrite

295 This work developed a MILP scheduling framework that optimally assigns slow and fast chargers to a
296 BEB bus fleet assuming a constant schedule. The BAP was introduced with an example formulation and
297 was then compared to the PAP. The PAP constructed on the BAP to allow the time spent on the charger, p_i,
298 to be a decision variable. Because the original PAP required service time, p_i, to be given, linear battery
299 dynamics were introduced to drive charging times. Additional constraints were also introduced to provide
300 limits for the battery dynamics.

An example was presented that demonstrated the ability of the formulation to optimally select slow and fast chargers to meet the requirements of the time schedule and the charge consumed during the bus routes. It was also observed that the formulation was able to successfully create a charging schedule without creating conflicts (Fig **??**). The charge for each bus was tracked in Fig **??** and shows that the schedule maintained the charges between the maximum charge, 100%, and the minimum charge, 25%.

Limitations were demonstrated in the lack of objective to limit the total amount of chargers utilized and to calculate the demand and consumption costs. Further fields of interest are to utilize the formulation (Eq (10) and (11)) with nonlinear battery dynamics, calculation and utilization of the demand and consumption cost in the objective function, and utilizing this formulation in a metaheuristic solver.

REFERENCES

[1] Katja Buhrkal, Sara Zuglian, Stefan Ropke, Jesper Larsen, and Richard Lusby. Models for the discrete berth allocation problem: A computational comparison. *Transportation Research Part E: Logistics and Transportation Review*, 47(4):461–473, 2011.

[2] Der-San Chen, Robert G Batson, and Yu Dang. *Applied integer programming*. Wiley, 2010.

[3] Flores de Bruin. Rectangle packing. Master's thesis, University of Amsterdam, 2013.

[4] Giovanni De Filippo, Vincenzo Marano, and Ramteen Sioshansi. Simulation of an electric transportation system at the ohio state university. *Applied Energy*, 113:1686–1691, 2014.

[5] Mengyuan Duan, Geqi Qi, Wei Guan, Chaoru Lu, and Congcong Gong. Reforming mixed operation schedule for electric buses and traditional fuel buses by an optimal framework. *IET Intelligent Transport Systems*, 15(10):1287–1303, Jul 2021.

[6] Pablo Frojan, Juan Francisco Correcher, Ramon Alvarez-Valdes, Gerasimos Koulouris, and Jose Manuel Tamarit. The continuous berth allocation problem in a container terminal with multiple quays. *Expert Systems with Applications*, 42(21):7356–7366, 2015.

[7] U Guida and A Abdulah. Zeeus ebus report# 2-an updated overview of electric buses in europe. Technical Report 2, International Association of Public Transport (UITP), 2017.

[8] Gurobi Optimization, LLC. Gurobi Optimizer Reference Manual, 2021.

[9] Yi He, Zhaocai Liu, and Ziqi Song. Optimal charging scheduling and management for a fast-charging battery electric bus system. *Transportation Research Part E: Logistics and Transportation Review*, 142:102056, Oct 2020.

[10] Anderson Hoke, Alexander Brissette, Kandler Smith, Annabelle Pratt, and Dragan Maksimovic. Accounting for lithium-ion battery degradation in electric vehicle charging optimization. *IEEE Journal of Emerging and Selected Topics in Power Electronics*, 2(3):691–700, 2014.

[11] Akio Imai, Etsuko Nishimura, and Stratos Papadimitriou. The dynamic berth allocation problem for a container port. *Transportation Research Part B: Methodological*, 35(4):401–417, may 2001.

[12] Jing-Quan Li. Battery-electric transit bus developments and operations: A review. *International Journal of Sustainable Transportation*, 10(3):157–169, 2016.

[13] Tao Liu and Avishai (Avi) Ceder. Battery-electric transit vehicle scheduling with optimal number of stationary chargers. *Transportation Research Part C: Emerging Technologies*, 114:118–139, 2020.

[14] Nic Lutsey and Michael Nicholas. Update on electric vehicle costs in the united states through 2030. *The International Council on Clean Transportation*, 2, 2019.

[15] H. Murata, K. Fujiyoshi, S. Nakatake, and Y. Kajitani. Rectangle-packing-based module placement. In *Proceedings of IEEE International Conference on Computer Aided Design (ICCAD)*, pages 472–479, 1995.

[16] Ahad Javandoust Qarebagh, Farnaz Sabahi, and Dariush Nazarpour. Optimized scheduling for solving position allocation problem in electric vehicle charging stations. In *2019 27th Iranian Conference on Electrical Engineering (ICEE)*, pages 593–597, 2019.

[17] Nan Qin, Azwirman Gusrialdi, R. Paul Brooker, and Ali T-Raissi. Numerical analysis of electric bus fast charging strategies for demand charge reduction. *Transportation Research Part A: Policy and Practice*, 94:386–396, 2016.

[18] Marco Rinaldi, Erika Picarelli, Andrea D'Ariano, and Francesco Viti. Mixed-fleet single-terminal bus scheduling problem: Modelling, solution scheme and potential applications. *Omega*, 96:102070, Oct 2020.

[19] Maria Analia Rodriguez and Aldo Vecchietti. A comparative assessment of linearization methods for bilinear models. *Computers and Chemical Engineering*, 48:218–233, 2013.

354 [20]Mariana Teixeira Sebastiani, Ricardo Lüders, and Keiko Verônica Ono Fonseca. Evaluating electric bus
355   operation for a real-world brt public transportation using simulation optimization. *IEEE Transactions*
356   *on Intelligent Transportation Systems*, 17(10):2777–2786, 2016.
357 [21]Xindi Tang, Xi Lin, and Fang He. Robust scheduling strategies of electric buses under stochastic traffic
358   conditions. *Transportation Research Part C: Emerging Technologies*, 105:163–182, Aug 2019.
359 [22]Stefan Voss. *Container terminal operation and operations research – Recent challenges*, pages
360   387–396. Hong Kong Society for Transportation Studies, 01 2007.
361 [23]Xiumin Wang, Chau Yuen, Naveed Ul Hassan, Ning An, and Weiwei Wu. Electric vehicle charging
362   station placement for urban public bus systems. *IEEE Transactions on Intelligent Transportation*
363   *Systems*, 18(1):128–139, 2017.
364 [24]Yusheng Wang, Yongxi Huang, Jiuping Xu, and Nicole Barclay. Optimal recharging scheduling
365   for urban electric buses: A case study in davis. *Transportation Research Part E: Logistics and*
366   *Transportation Review*, 100:115–132, 2017.
367 [25]Ran Wei, Xiaoyue Liu, Yi Ou, and S Kiavash Fayyaz. Optimizing the spatio-temporal deployment of
368   battery electric bus system. *Journal of Transport Geography*, 68:160–168, 2018.
369 [26]Maria Xylia and Semida Silveira. The role of charging technologies in upscaling the use of electric
370   buses in public transport: Experiences from demonstration projects. *Transportation Research Part A:*
371   *Policy and Practice*, 118:399–415, 2018.
372 [27]Chao Yang, Wei Lou, Junmei Yao, and Shengli Xie. On charging scheduling optimization for a
373   wirelessly charged electric bus system. *IEEE Transactions on Intelligent Transportation Systems*,
374   19(6):1814–1826, 2018.
375 [28]Guang-Jing Zhou, Dong-Fan Xie, Xiao-Mei Zhao, and Chaoru Lu. Collaborative optimization of
376   vehicle and charging scheduling for a bus fleet mixed with electric and traditional buses. *IEEE Access*,
377   8:8056–8072, 2020.
378 [29]Yirong Zhou, Xiaoyue Cathy Liu, Ran Wei, and Aaron Golub. Bi-objective optimization for battery
379   electric bus deployment considering cost and environmental equity. *IEEE Transactions on Intelligent*
380   *Transportation Systems*, 22(4):2487–2497, 2020.

FIGURE CAPTIONS
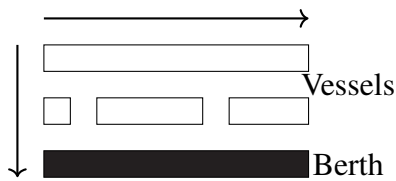
Figure 1. Example of berth allocation. Vessels are docked in berth locations (horizontal) and are queued over time (vertical). The vertical arrow represents the movement direction of queued vessels and the horizontal arrow represents the direction of departure.
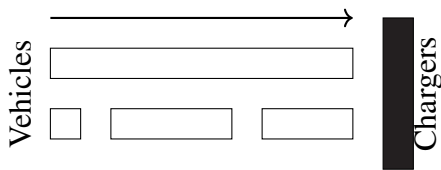
Figure 2. Example of position allocation. Vehicles are placed in queues to be charged and move in the direction indicated by the arrow.
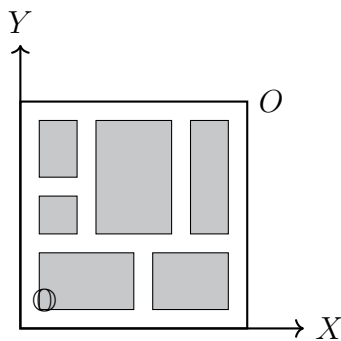

Figure 3. Example of rectangle packing problem

381

382

383

Table 1. Notation used throughout the paper

| Variable	Description
Input values	
n_B	Number of buses
M	An arbitrary very large upper bound value
n_V	Number of total visits
n_Q	Number of queues
n_C	Number of chargers
$\mathbb{V}$	Set of visit indices, $\mathbb{V} = \{1, ..., n_V\}$
$\mathbb{B}$	Set of bus indices, $\mathbb{B} = \{1, ..., n_B\}$
$\mathbb{Q}$	Set of queue indices, $\mathbb{Q} = \{1, ..., n_Q\}$
i, j	Indices used to refer to visits
b	Index used to refer to a bus
q	Index used to refer to a queue
Problem definition parameters	
Γ	$\Gamma : \mathbb{V} \to \mathbb{B}$ with Γ_i used to denote the bus for visit i
α_i	Initial charge percentage time for visit i
β_i	Final charge percentage for bus i at the end of the time horizon
ϵ_q	Cost of using charger q per unit time
Υ	$\Upsilon : \mathbb{V} \to \mathbb{V}$ mapping a visit to the next visit by the same bus with Υ_i being the shorthand.
κ_b	Battery capacity for bus b
λ_i	Discharge of visit over route i
ν_b	Minimum charge allowed for bus b
τ_i	Time visit i must depart the station
ζ_b	Discharge rate for bus b
a_i	Arrival time of visit i
i_0	Indices associated with the initial arrival for every bus in A
i_f	Indices associated with the final arrival for every bus in A
m_q	Cost of a visit being assigned to charger q
r_q	Charge rate of charger q per unit time
Decision Variables	
δ_{ij}	Binary variable determining temporal ordering of vehicles i and j
η_i	Initial charge for visit i
σ_{ij}	Binary variable determining the queue ordering between vehicles i and j
c_i	Ending charge time for visit i
g_{iq}	The charge gain for visit i from charger q
p_i	Amount of time spent on charger for visit i
u_i	Starting charge time of visit i
v_i	Assigned queue for visit i
w_{iq}	Binary assignment variable for visit i to queue q
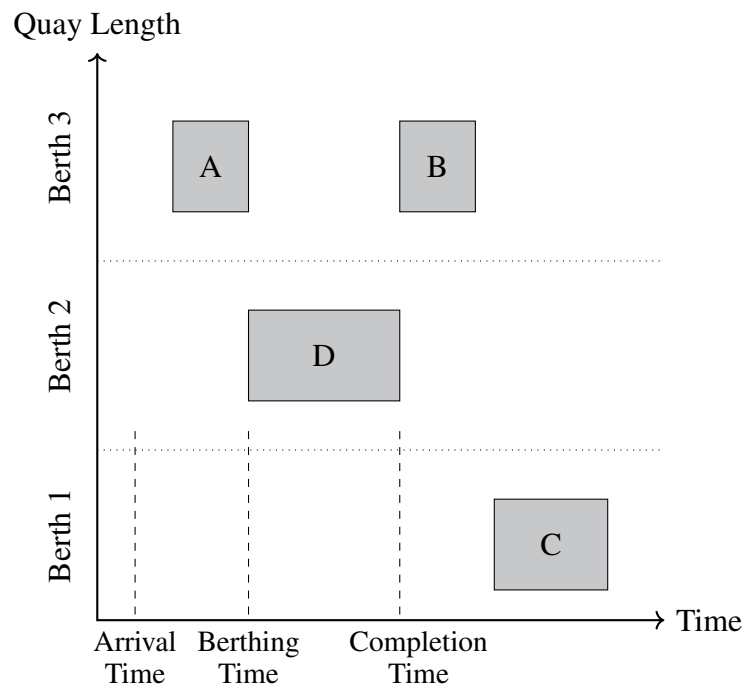
Figure 4. The representation of the berth-time space
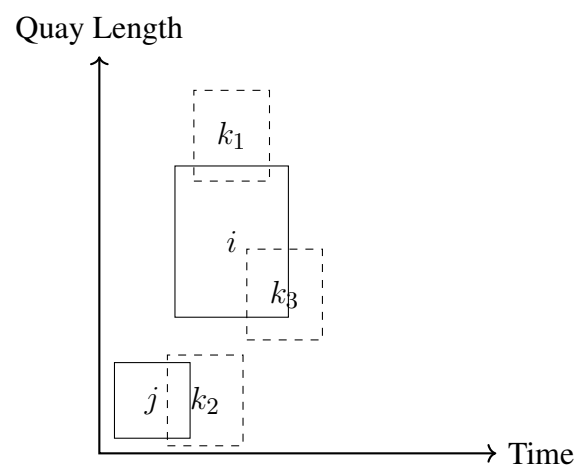
Figure 5. Examples of different methods of overlapping. Space overlap: $v_{k_1} < v_i + s_i \therefore \delta_{k_1 i} = 0$. Time overlap $u_{k_1} < u_j + p_j \therefore \sigma_{k_2 j} = 0$. Both space and time overlap $\sigma_{k_3 i} = 0$ and $\delta_{k_3 j} = 0$.
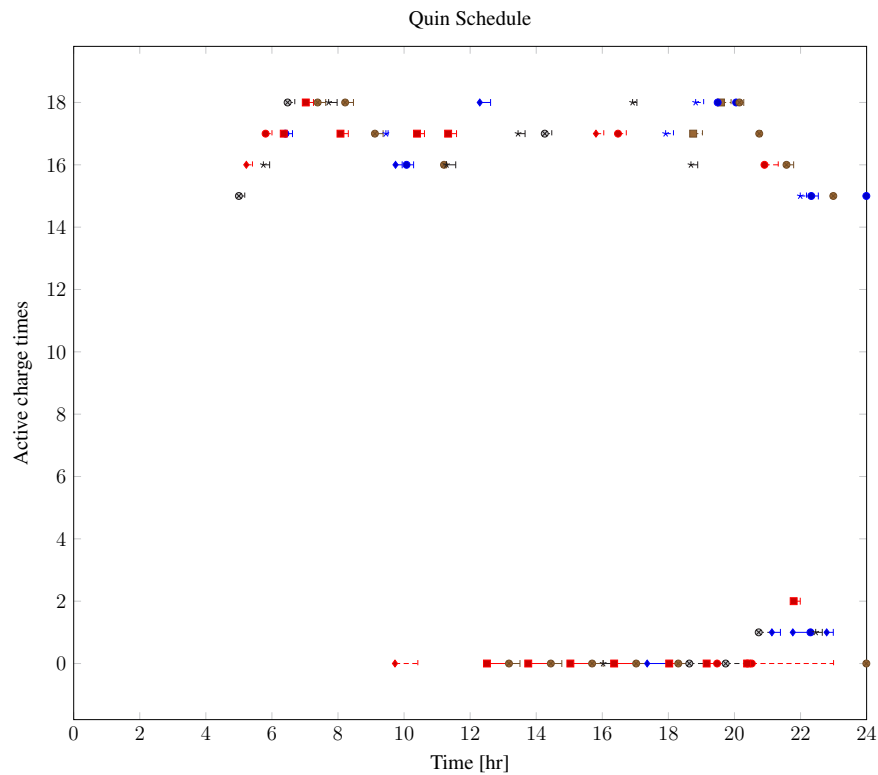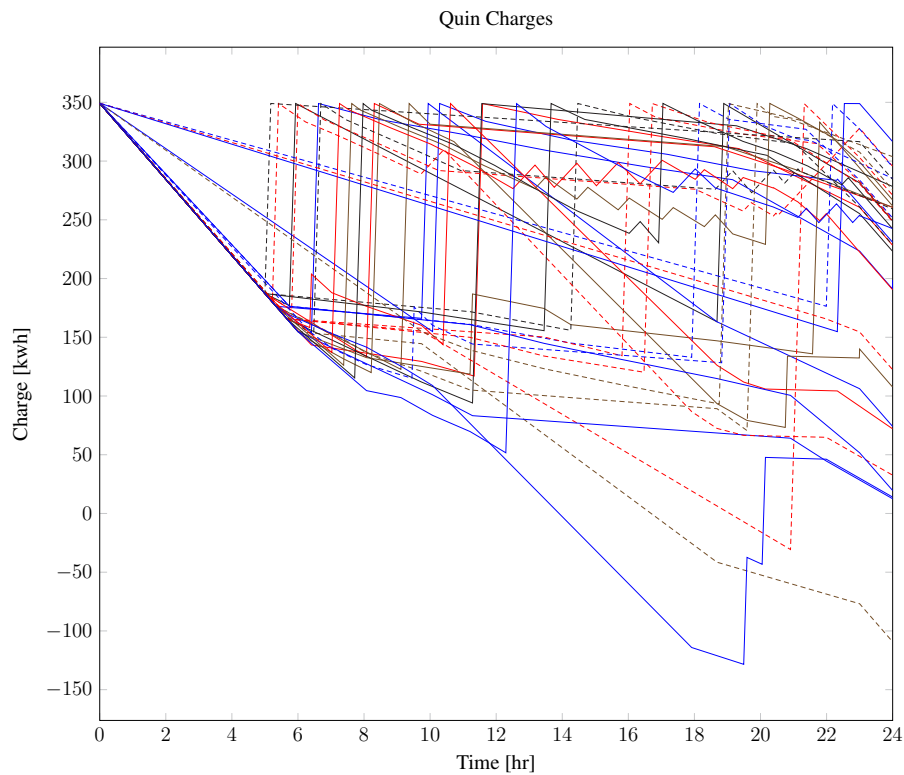
Figure 6a. Charging schedule generated by Quin Modified algorithm.
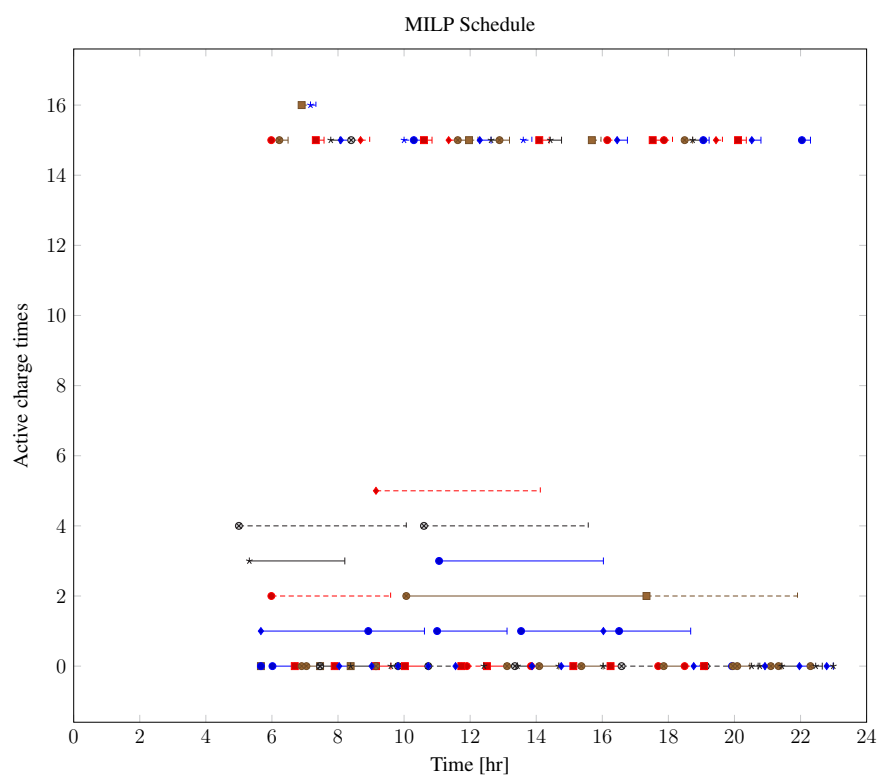
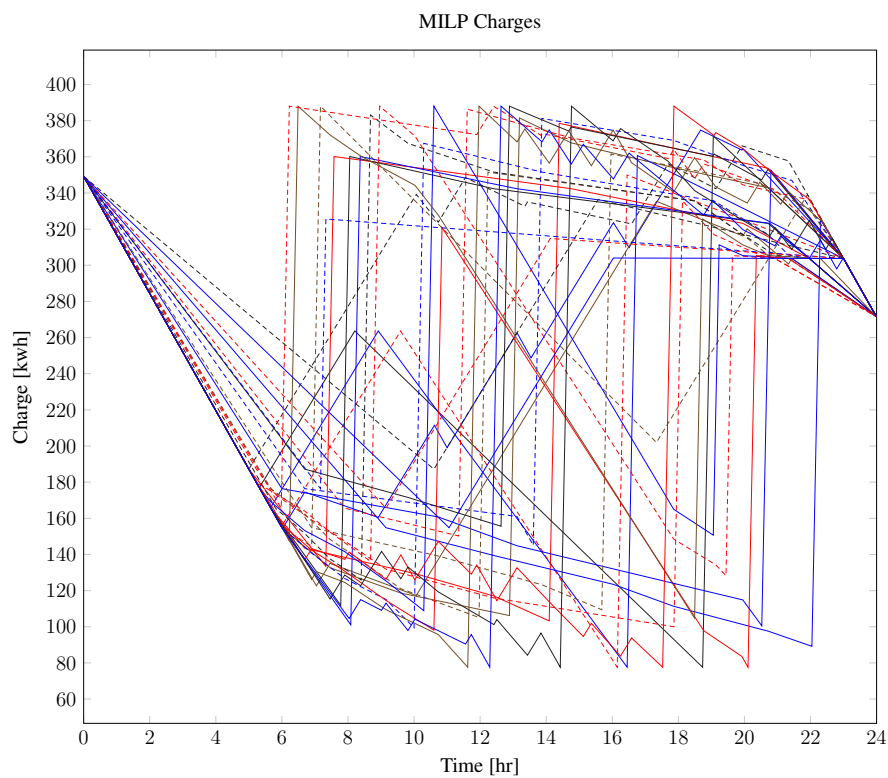

**Figure 6b.** Charging schedule generated by MILP PAP algorithm.

Figure 7a. Bus charges for the Quin Modified charging schedule. The charging scheme of the Quin charger is more predictable during the working day.

Figure 7b. The bus charges for the MILP PAP charging schedule. The MILP model allows for guarantees of minimum/maximum changes during the working day as well as charges at the end of the day.
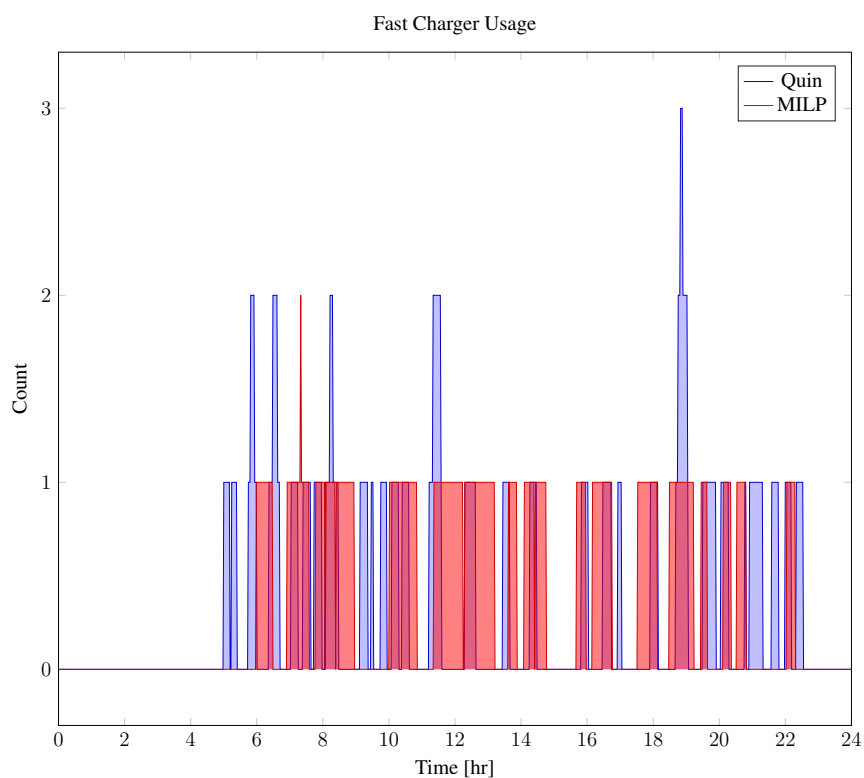
Figure 8a. Number of fast chargers for Quin and MILP PAP.
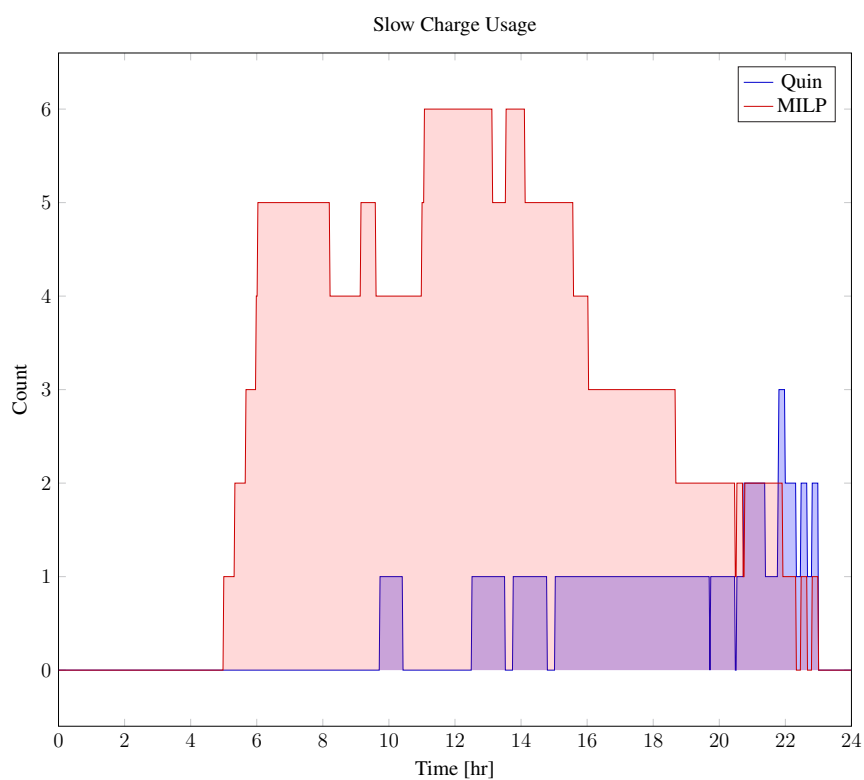
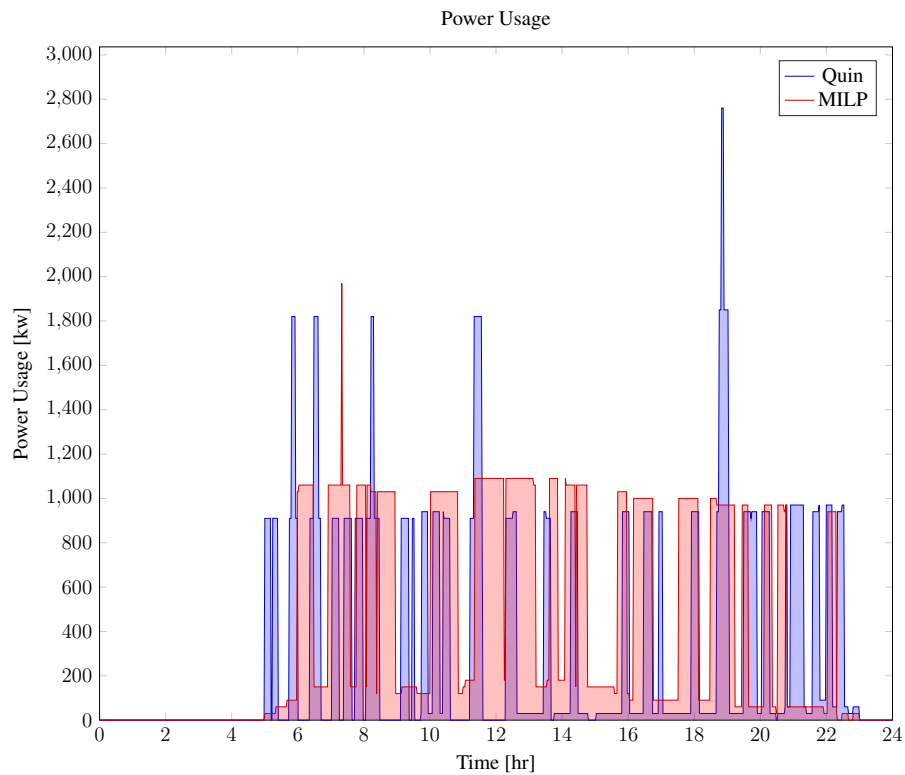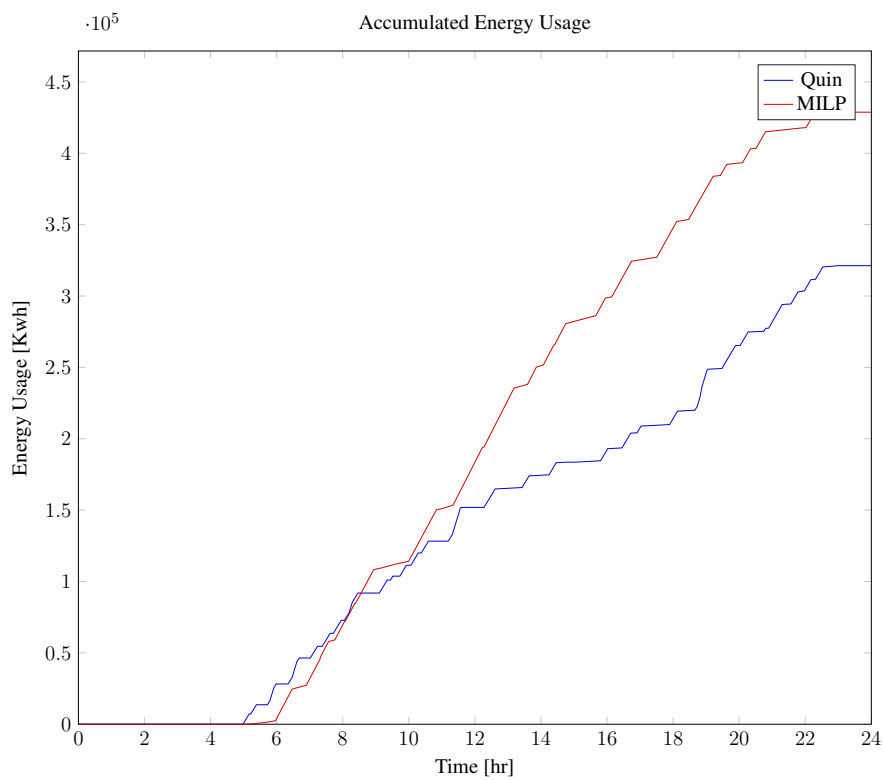**Figure 8b.** Number of slow chargers for Quin and MILP PAP.

Figure 9. Caption

Figure 10. Caption