

GLASGOW CALEDONIAN UNIVERSITY

MEng Group Research Project

MMH723842-24-AB-GLAS

**Design and implementation of a PSD-Based
Analogue 2D Sun Sensor**

word count: xxx

by Zac McCaffery, Alexandru Belea,
Sebastian Alexander, William Kong, Nassor Salim,

Date: April 8, 2025

Contents

Abstract	5
1 Acknowledgements	6
2 Introduction	7
2.1 Problem Statement	7
2.2 Aim of the Project	7
2.3 Objectives of the Project	7
3 LiteratureReview	10
3.1 CubeSat Design	10
3.2 PSD Enabled Sun Sensor	11
3.3 Mechanical Design and Analysis	11
3.4 Photodiode Simulation and Signal Analysis	11
3.5 IoT Communication Enhancement with LEO Satellites	11
4 Methodology	12
4.1 Python Simulation tbc	12
4.2 Prototype Development	12
4.2.1 Lifecycle	12
4.3 System Design Overview	17
4.3.1 Functional Requirements	17
4.3.2 Design Approach	17
4.3.3 System Architecture	17
4.4 Sensor Array Development	17
4.4.1 Functional Requirements	19
4.4.2 Design Approach	19
4.4.3 System Architecture	19
4.5 Signal Conditioning Circuitry	19
4.5.1 Functional Requirements	20
4.5.2 Design Approach	20

4.5.3	System Architecture	20
4.6	Enclosure Design And Fabrication	20
4.6.1	Functional Requirements	22
4.6.2	Design Approach	22
4.6.3	System Architecture	22
4.6.4	Arduino based DAQ	22
4.6.5	Renewable Energy Demonstrator Testbench	22
5	Results	23
5.1	Sensor Characterization	23
5.1.1	Functional Requirements	24
5.1.2	Design Approach	24
5.1.3	System Architecture	24
5.2	Amplification Performance	24
5.2.1	Functional Requirements	26
5.2.2	Design Approach	26
5.2.3	System Architecture	26
5.3	Photodiode Angular Response	26
5.3.1	Functional Requirements	27
5.3.2	Design Approach	27
5.3.3	System Architecture	27
5.4	Enclosure Effectiveness	27
5.4.1	Functional Requirements	29
5.4.2	Design Approach	29
5.4.3	System Architecture	29
5.5	Data Acquisition System Evaluation	29
5.5.1	Functional Requirements	30
5.5.2	Design Approach	30
5.5.3	System Architecture	30
5.6	System Performance Analysis	31
5.6.1	Operational Constraints Identified	31
5.6.2	Environmental Factors Impact	31
5.6.3	System Stability and Repeatability	31
5.6.4	Recommendations for Improvement	31
5.7	Comparative Analysis	31
5.7.1	Breadboard vs. Stepboard Results	32
5.7.2	Iteration Improvements Analysis	32
5.7.3	Performance Against Design Requirements	32
5.7.4	Design Evolution Assessment	32

5.8	System Limitations And Considerations	32
5.8.1	Functional Requirements	33
5.8.2	Design Approach	33
5.8.3	System Architecture	33
6	Conclusions	36
7	FutureWork	37
	Bibliography	37

List of Figures

4.1	System Architecture Diagram	16
4.2	System Design Overview Flowchart	17
4.3	System Architecture Diagram	18
4.4	System Design Overview Flowchart	18
4.5	System Architecture Diagram	19
4.6	System Design Overview Flowchart	20
4.7	System Architecture Diagram	21
4.8	System Design Overview Flowchart	21
4.9	System Architecture Diagram	22
5.1	System Design Overview Flowchart	24
5.2	System Architecture Diagram	25
5.3	System Design Overview Flowchart	25
5.4	System Architecture Diagram	26
5.5	System Design Overview Flowchart	27
5.6	System Architecture Diagram	28
5.7	System Design Overview Flowchart	28
5.8	System Architecture Diagram	29
5.9	System Design Overview Flowchart	30
5.10	System Architecture Diagram	31
5.11	Environmental Testing Results	31
5.14	System Design Overview Flowchart	32
5.12	Overall System Performance Analysis	34
5.13	Prototype Iteration Comparison	35
5.15	System Architecture Diagram	35

Abstract

add abstract here

1. Acknowledgements

2. Introduction

2.1 Problem Statement

With the ever-increasing commercialization of the space and satellite industry there is a growing need for a cost-effective method of attitude tracking for smaller satellite missions of such as CubeSat as these missions are purpose built for very specific objectives. Whilst the larger commercial satellite missions make use of expensive digital camera systems for tracking purposes, this is not feasible for much smaller CubeSat setups. CubeSats are defined from 1 unit to 12 – where 1U is a 10x10x10 cm satellite. Consequently, there is a demand for a cost-effective and easily implementable attitude tracking system that can provide accurate measurements for CubeSat missions, such as a Position Sensitive Detector (PSD) using photodiodes.

2.2 Aim of the Project

"To investigate and develop a cost-effective and reliable sun sensing solution suitable for Low Earth Orbit (LEO) nanosatellite attitude determination."

2.3 Objectives of the Project

To investigate the design of a sun sensing system for nanosatellites, used in orientation determination, through detection of its relative position to the sun using analogue sensors located on the satellite's body. Our goal is to create a system which balances cost-effectiveness and simplicity. To achieve this, we will create a software model of the analogue sensor(s) to simulate the system's ability to track the sun from various angles in orbit. After which, we aim to build a physical prototype and use a movable light source to simulate the sun's movement, allowing comparison between the real sensor's performance against our simulations. Although the physical prototype will be built using non-space-grade materials, one of the objectives is to look at and analyse materials required for building a space-grade PCB and sensor. For this step, the Mechanical side of the team will perform Printed circuit board (PCB) and aperture device finite analysis

using ANSYS to determine resilience to environmental factors such as stress and thermal simulation. Throughout the project, we will address challenges like interference from other light sources (such as the moon), reflections from the Earth's surface, and how factors like radiation and temperature changes in space might impact the sensor's accuracy. The application of signal processing will be explored to provide usable data, filter out noise, and improve the system's accuracy. This approach aims to develop a cost-effective and reliable, in-house sun sensing solution specifically for nanosatellites operating in Low Earth Orbit. Major Objective points:

- **Conduct literature review:**

- Analyse existing research on sun sensing technologies, with a focus on PSD-based analogue sensors and their applications in nanosatellites.
- Identify current challenges, best practices, and advancements in attitude determination in Low Earth Orbit. Use these insights to guide the design and optimisation of the proposed sun sensing system.

- **Develop software model:**

- Simulate the performance of the PSD-based analogue sun sensor in tracking the sun's position from various angles in Low Earth Orbit.

- **Design and fabrication of physical prototype:**

- Integrate analogue sun sensor components, test and validate its performance under controlled conditions.

- **Compare simulated and experimental results:**

- Establish evaluation methodology between simulated and experimental test results to ensure that topology evaluation is applicable.

- **Optimise sensor topology:**

- Research and evaluate various configurations of analogue sun sensing systems to maximise sun detection accuracy and minimise blind spots.

- **Investigate environmental factors:**

- Evaluate the impact of relevant LEO specific environmental factors on the sensor's accuracy and reliability.
- Evaluate the material requirements of the PCB and aperture device.

- **Implement signal processing algorithms:**

- Investigate the filtering of noise to enhance the signal-to-noise ratio and otherwise ensure the acquisition of usable data for accurate sun position determination.
 - Implement data handling which optimises scanning rates and efficiently processes the analogue signal data for real-time attitude determination.
- **Document results and overall cost-effectiveness:**
 - Develop criteria for final evaluation of sun sensing systems, on which to base the final presentation of project findings.

3. Literature Review

3.1 CubeSat Design

Puig-Suari, Turner and Ahlgren published an IEEE paper in 2001 with the help of their students at California Polytechnic State University exploring a need for micro satellites for use by universities in an ever-expanding space programme. They provide as a solution a standard satellite form-factor that will bring down the cost of both manufacture and deployment of satellites by smaller entities: the CubeSat. The paper identifies a key component for the success of this form factor a need for a standard CubeSat deployer mechanism which can deploy several satellites safely and develop such a platform, called Poly Picosatellite Orbital Deployer or P-POD. They point out the need and provide microsatellite size and shape of the CubeSat form factor [1]. Sai balaji et al. performed a study using MATLAB simulation of several attitude control algorithms to look at the ability to control a CubeSat of size 1U. They also simulated sensors such as sun sensors, magnetometer, and gyroscope. They concluded that it is possible to operate the satellite using a magnetorquer type actuator and an array of mathematical models and algorithms: it would take 2000 seconds for a 1U satellite to stabilize at 505km, 98° degree attitude in orbit with the methods utilized by them [?]. Incentivised by the rapidly increasing use of LEO, Lopez-Calle and Franco perform a quantitative comparative study on the catastrophic failure of CubeSats and Nanosats from radiation exposure due to the harsh environment of space versus failure due to collisions in the increasingly busy Low Earth Orbit (LEO). The authors concluded that while sustained damage and damage protection from radiation exposure used to be and currently still is the most crucial factor in protecting LEO microsatellites, increasingly the risk of debris collisions is becoming more important and will become the most important in the following 50 to 70 years. The authors conclude that microsatellite designers need to move their focus more towards defence from debris impacts as these, even if not resulting in catastrophic failure of the satellite, they will impact the attitude of the satellite [?].

3.2 PSD Enabled Sun Sensor

3.3 Mechanical Design and Analysis

3.4 Photodiode Simulation and Signal Analysis

3.5 IoT Communication Enhancement with LEO Satellites

4. Methodology

4.1 Python Simulation tbc

4.2 Prototype Development

4.2.1 Lifecycle

This section provides an overview of the Prototype Development Lifecycle.

Conceptualization and Requirements Definition

- The prototype must have four photodiodes in an xy pattern with respective circuitry required to output 0-5 Volts that will be read by an Arduino based DataAcquisitionSystem (DAQ). The circuit must be able to react to light intensity changes, however the change will be at low frequency (below 1Hz) as a satellite attitude is considered to change only gradually.
- While the prototype may not have a high accuracy, it is hoped that it will be enough to measure light position changes.
- The prototype within the scope of this paper will show the ability to detect the position of light at normal room conditions, therefore it does not need to withstand temperature changes or radiation that a final product would require if deployed in space.
- Interface requirements: the prototype electrical output needs to be compatible with the Arduino Analog to Digital Converter (ADC) input. Therefore, the signal shall not go below 0 Volts or exceed 5 volts.
- Size and weight are not of high importance, but the device must fit in the testing equipment, which is the Renewable Energy Demonstrator arch. Preferably a height not higher than 5cm.

Theoretical Design

- Research photodiode technology options and selection criteria
- Model sun sensor geometry and aperture design
- Determine optimal photodiode placement for coverage and accuracy
- Develop mathematical models for sun vector determination
- Simulate sensor performance under various lighting conditions

Preliminary Design

- Create detailed electrical schematics
- Design photodiode array configuration
- Engineer aperture design and mask pattern
- Develop analog front-end circuitry
- Design signal conditioning and processing circuits
- Outline firmware architecture and algorithms

Component Selection and Procurement

- Select appropriate photodiodes (spectral response, sensitivity)
- Choose microcontroller/processor
- Source analog-to-digital converters
- Identify appropriate materials for aperture and housing
- Procure test equipment for validation

Breadboard Testing

- Assemble basic circuit on breadboard
- Test photodiode response characteristics
- Verify analog front-end performance
- Validate signal processing approach
- Identify design weaknesses and optimization opportunities

First Prototype Development

- Design printed circuit board (PCB)
- Manufacture PCB
- Design and fabricate aperture mask
- Develop housing/enclosure
- Assemble prototype components
- Write initial firmware implementation

Initial Testing and Characterization

- Conduct functional testing
- Measure photodiode response curves
- Characterize sun angle determination accuracy
- Test temperature sensitivity
- Evaluate power consumption
- Assess signal-to-noise ratio

Design Refinement

- Analyze test results
- Modify aperture design if needed
- Optimize photodiode configuration
- Update signal processing algorithms
- Refine PCB layout
- Improve firmware algorithms

Second Prototype Development

- Implement design improvements
- Manufacture revised PCB
- Fabricate improved aperture
- Enhance housing design
- Update firmware with optimized algorithms
- Assemble refined prototype

Comprehensive Testing

- Laboratory performance testing (angular accuracy, resolution)
- Environmental testing (thermal cycling, vibration)
- Radiation testing (if applicable for space applications)
- Interface compatibility testing
- Long-term stability assessment

Validation and Calibration

- Develop calibration procedures
- Create calibration fixtures
- Perform sensor calibration
- Document calibration coefficients
- Validate sensor performance against requirements

Documentation and Production Readiness

- Create detailed technical specifications
- Document calibration procedures
- Prepare assembly instructions
- Write user manual/interface control document
- Develop acceptance test procedures

Pre-production Prototype

- Build small batch of pre-production units
- Conduct acceptance testing
- Verify production processes
- Validate consistency between units
- Finalize design for production

Technology Transfer to Production

- Document manufacturing processes
- Train production personnel
- Establish quality control procedures
- Define production testing requirements
- Prepare for volume manufacturing

1 # Your code here

Listing 4.1: System Architecture Code Example

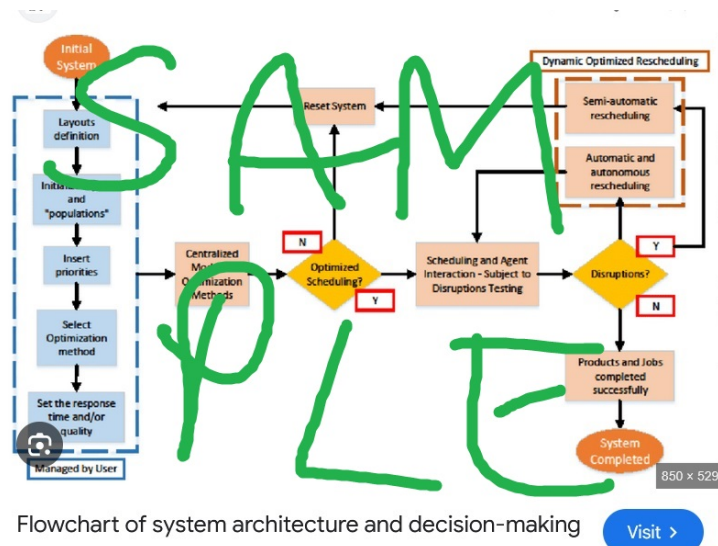


Figure 4.1: System Architecture Diagram

4.3 System Design Overview

This section provides an overview of the System Design Overview.

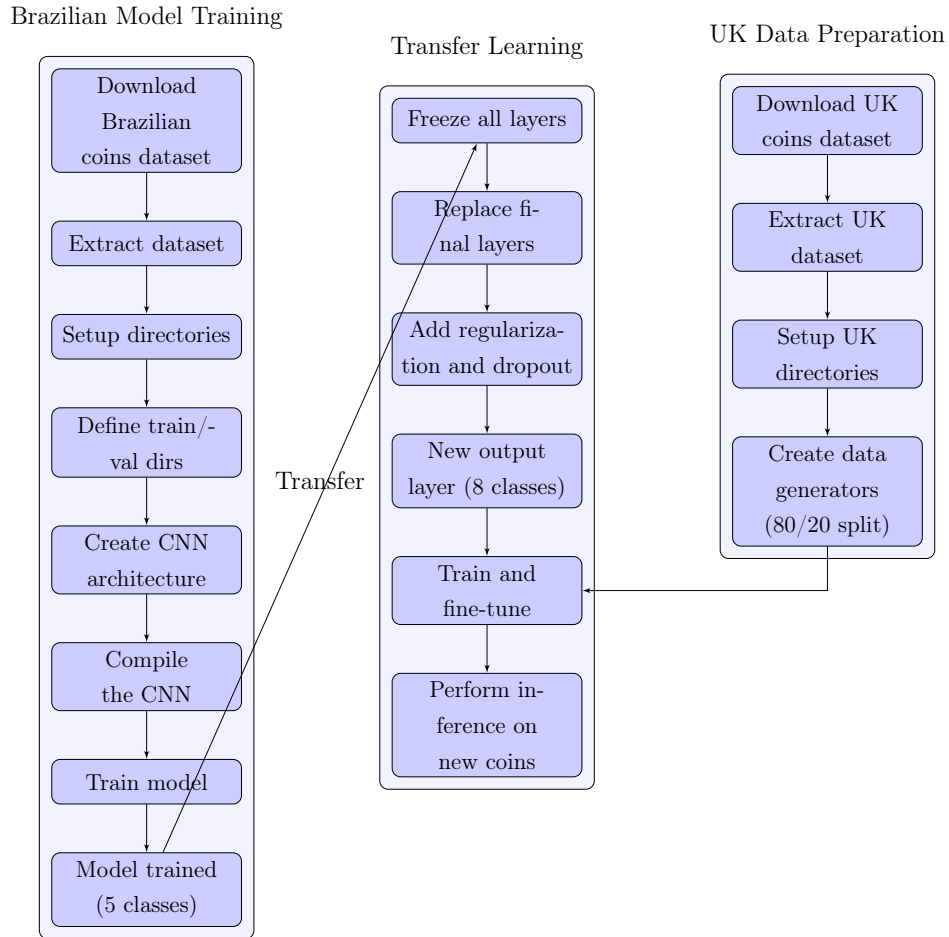


Figure 4.2: System Design Overview Flowchart

4.3.1 Functional Requirements

4.3.2 Design Approach

4.3.3 System Architecture

As shown in Figure 4.2 the system architecture consists of various components.

```
1 # Your code here
```

Listing 4.2: System Architecture Code Example

4.4 Sensor Array Development

This section provides an overview of the Sensor Array Development.



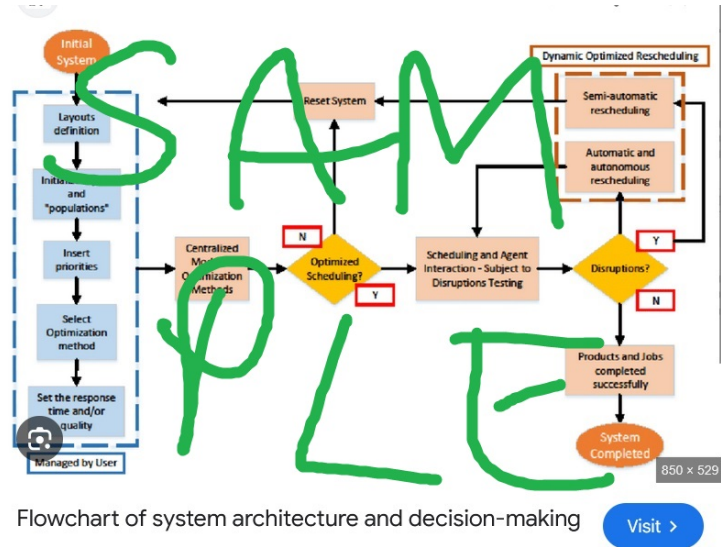


Figure 4.3: System Architecture Diagram


Brazilian Model Training

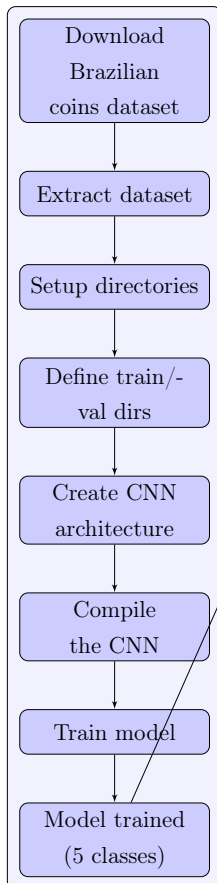

Transfer Learning

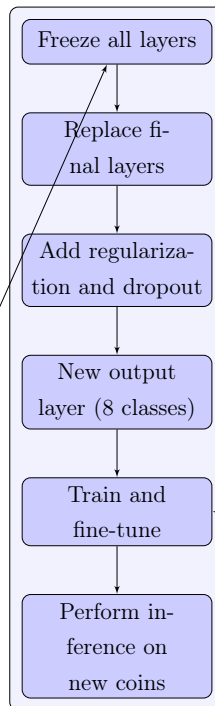

UK Data Preparation

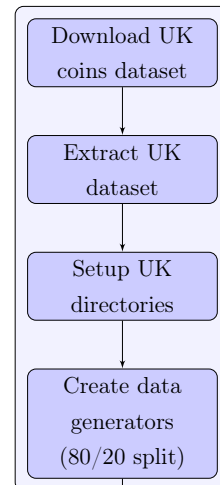

Transfer

Figure 4.4: System Design Overview Flowchart

4.4.1 Functional Requirements

4.4.2 Design Approach

4.4.3 System Architecture

As shown in Figure 4.4 the system architecture consists of various components.

```
1 # Your code here
```

Listing 4.3: System Architecture Code Example

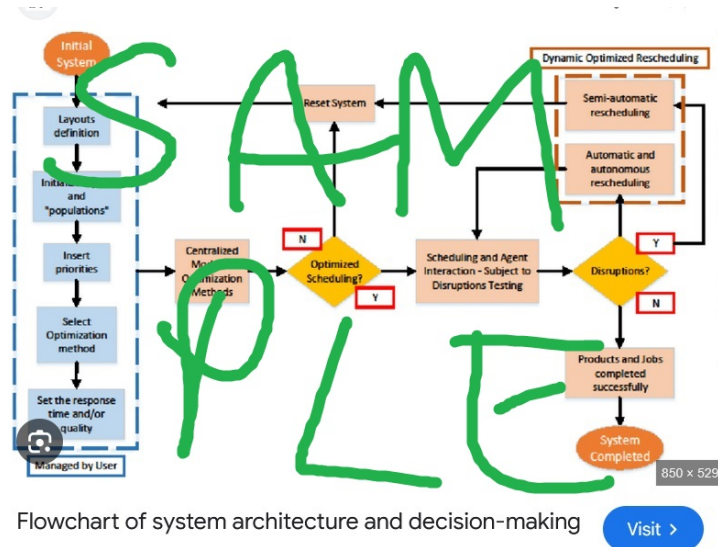


Figure 4.5: System Architecture Diagram

4.5 Signal Conditioning Circuitry

This section provides an overview of the Signal Conditioning Circuitry.

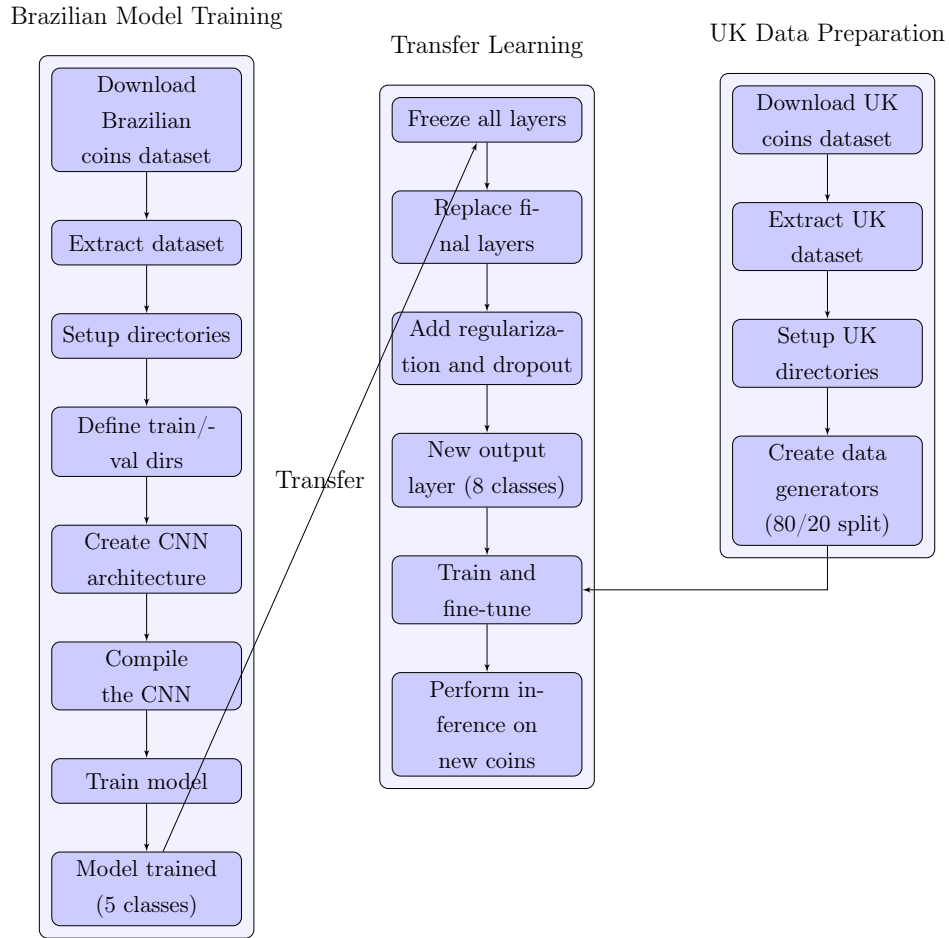


Figure 4.6: System Design Overview Flowchart

4.5.1 Functional Requirements

4.5.2 Design Approach

4.5.3 System Architecture

As shown in Figure 4.6 the system architecture consists of various components.

```
1 # Your code here
```

Listing 4.4: System Architecture Code Example

4.6 Enclosure Design And Fabrication

This section provides an overview of the Enclosure Design And Fabrication.



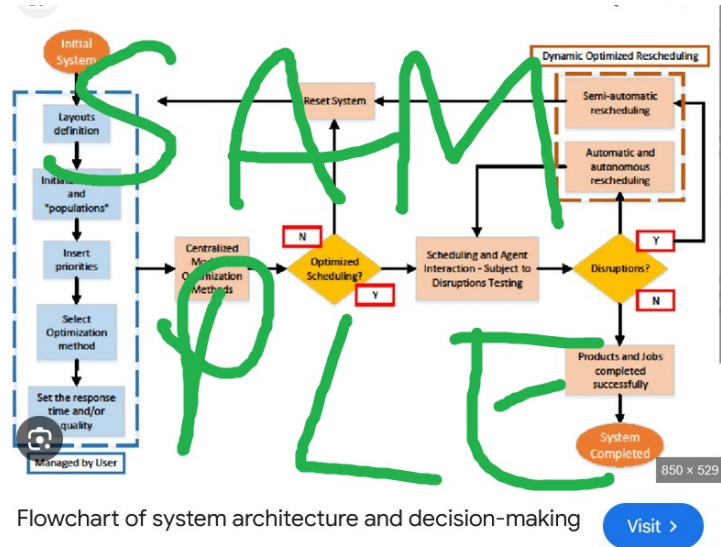


Figure 4.7: System Architecture Diagram


Brazilian Model Training

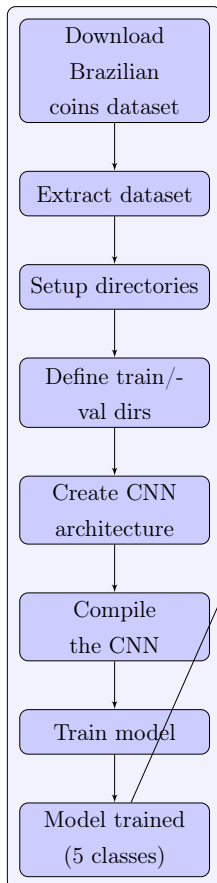

Transfer Learning

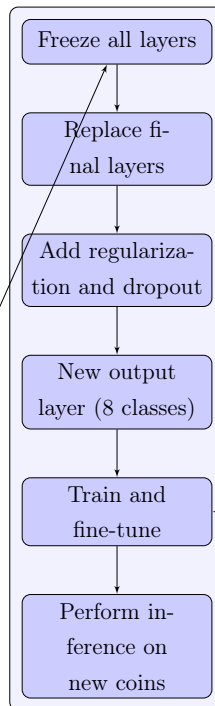

UK Data Preparation

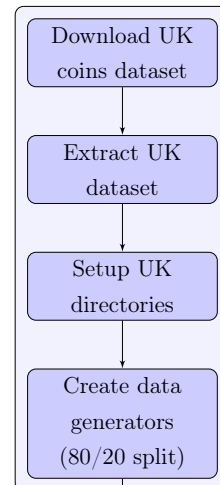

Transfer

Figure 4.8: System Design Overview Flowchart

4.6.1 Functional Requirements

4.6.2 Design Approach

4.6.3 System Architecture

As shown in Figure 4.8 the system architecture consists of various components.

```
1 # Your code here
```

Listing 4.5: System Architecture Code Example

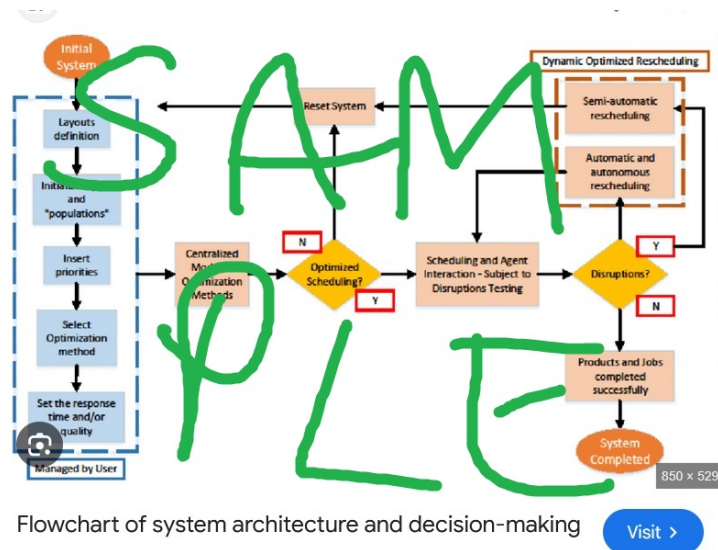


Figure 4.9: System Architecture Diagram

4.6.4 Arduino based DAQ

4.6.5 Renewable Energy Demonstrator Testbench

5. Results

5.1 Sensor Characterization

For the SensorCharacterization.tex file, you'd want to focus on the fundamental properties and performance of your photodiodes themselves, distinct from the other subsections. Here are some key elements that would belong specifically under SensorCharacterization:

- Basic Photodiode Electrical Characteristics:

- Dark current measurements
 - Junction capacitance
 - I-V characteristics in different lighting conditions
 - Spectral response profiles (sensitivity vs. wavelength)

- Individual Sensor Benchmarking:

- Performance comparison between the 4 photodiodes (matching/differences)
 - Responsivity measurements (A/W)
 - Quantum efficiency calculations
 - Detection threshold levels

- Response Linearity:

- Measurements showing linear range of the photodiodes
 - Saturation point characterization
 - Recovery time from saturation

- Temperature Dependency:

- Performance drift with temperature
 - Baseline shift measurements
 - Temperature compensation data

- Aging/Stability Tests:

- Long-term drift measurements
 - Repeatability of measurements over time

This section should focus on the inherent properties of the photodiodes themselves - essentially providing the baseline characterization data that underpins all the other analysis. The other sections then build on this foundation by examining how these sensors perform when integrated into the complete system with amplification, angular positioning, enclosure effects, etc.

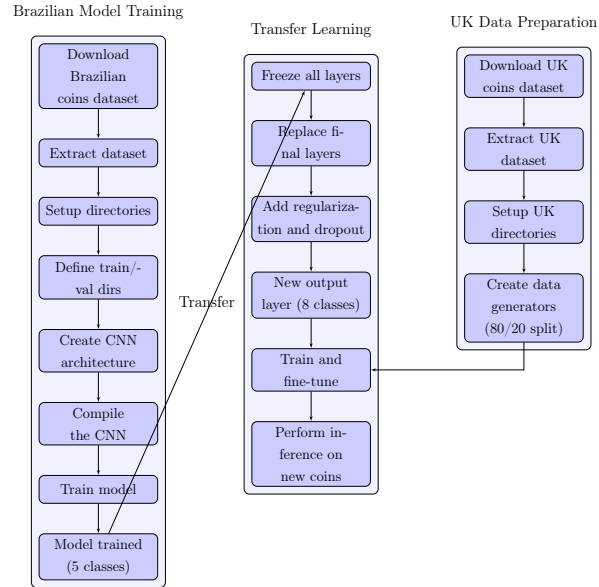


Figure 5.1: System Design Overview Flowchart

5.1.1 Functional Requirements

5.1.2 Design Approach

5.1.3 System Architecture


As shown in Figure 5.1 the system architecture consists of various components.

```
1 # Your code here
```

Listing 5.1: System Architecture Code Example

5.2 Amplification Performance

This section provides results of the amplifier performance.

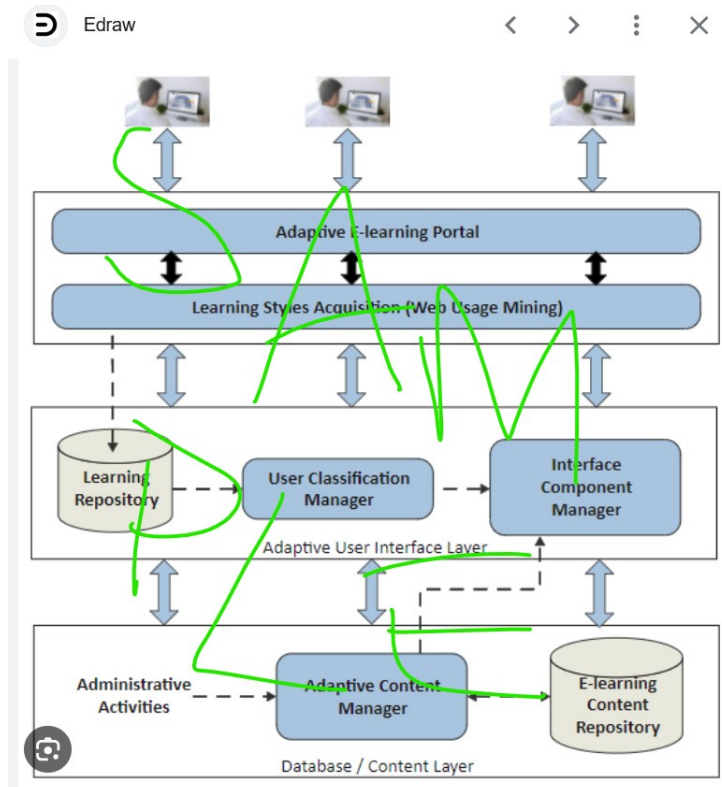

System Architecture Diagram: A Complete Tutorial |

[Visit >](#)

Figure 5.2: System Architecture Diagram

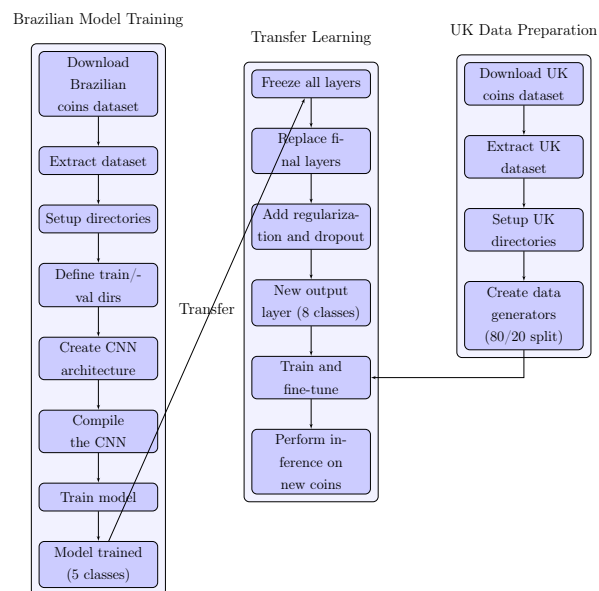


Figure 5.3: System Design Overview Flowchart

5.2.1 Functional Requirements

5.2.2 Design Approach

5.2.3 System Architecture

As shown in Figure 5.3 the system architecture consists of various components.

```
1 # Your code here
```

Listing 5.2: System Architecture Code Example

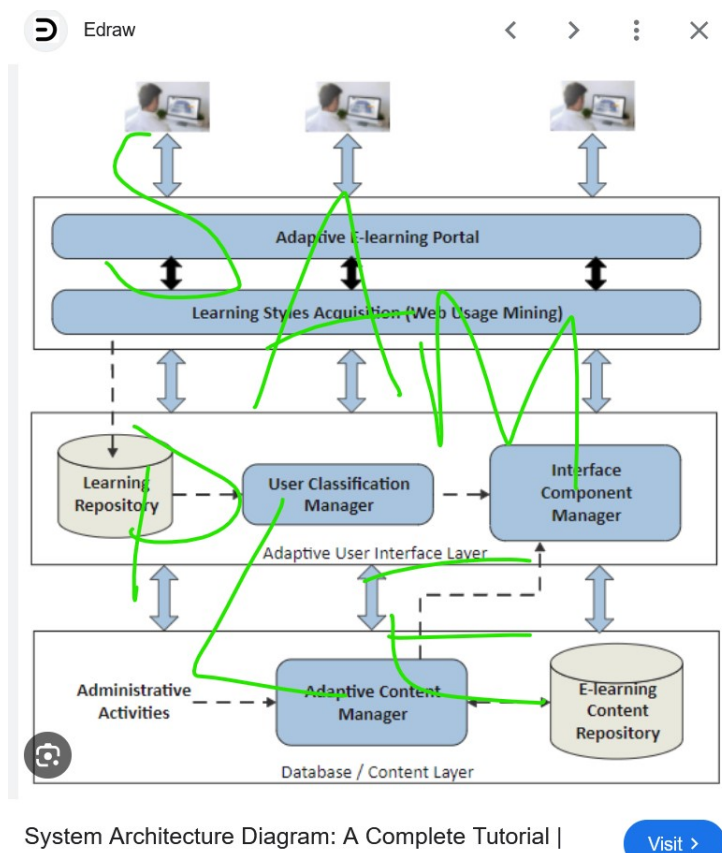


Figure 5.4: System Architecture Diagram

5.3 Photodiode Angular Response

This section discusses the results of the response of the solar sensor to angular changes of the light source.

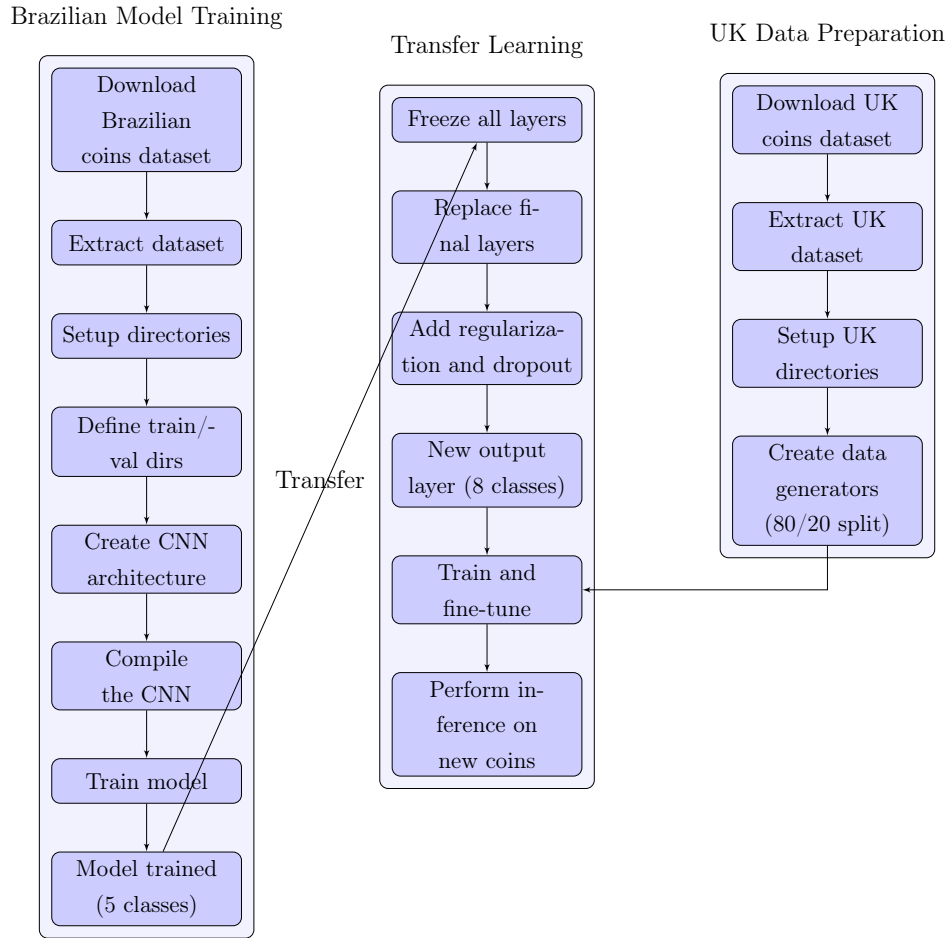


Figure 5.5: System Design Overview Flowchart

5.3.1 Functional Requirements

5.3.2 Design Approach

5.3.3 System Architecture

As shown in Figure 5.5 the system architecture consists of various components.

```
1 # Your code here
```

Listing 5.3: System Architecture Code Example

5.4 Enclosure Effectiveness

This section discusses the effectiveness of the Photodiode enclosure.



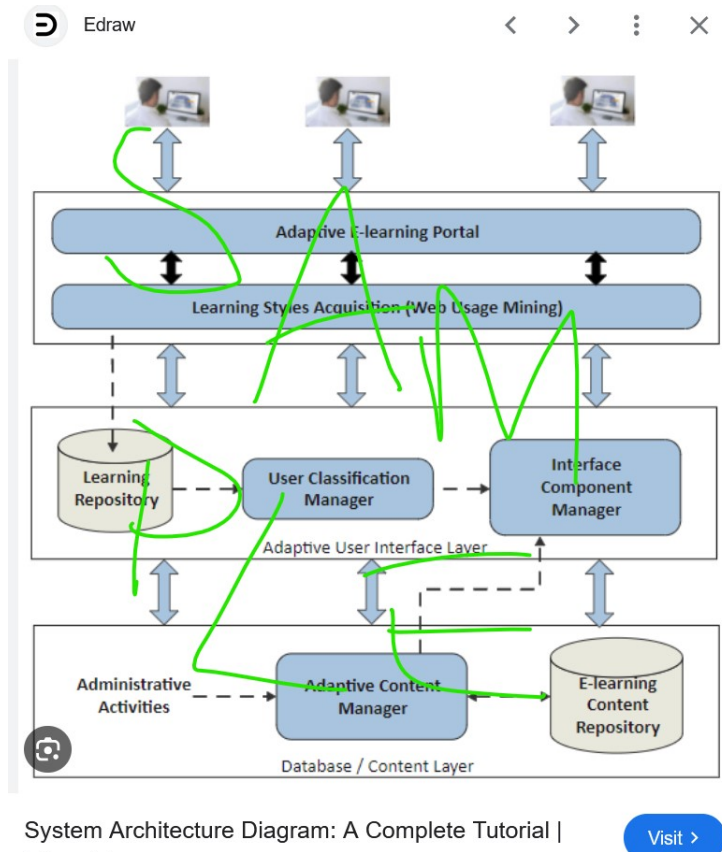


Figure 5.6: System Architecture Diagram


Brazilian Model Training

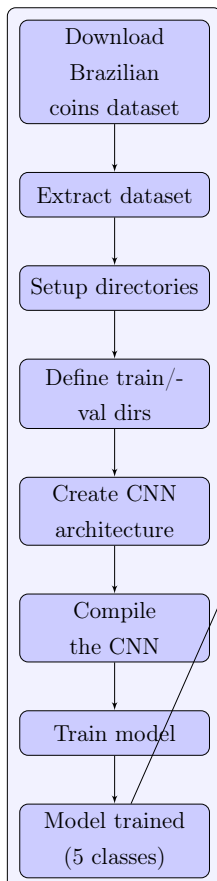

Transfer Learning

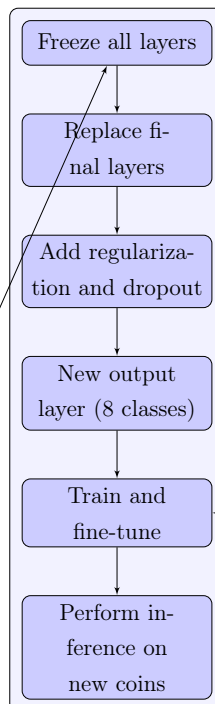

UK Data Preparation

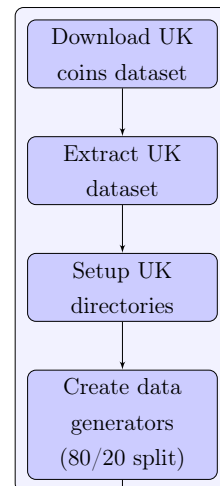

Transfer

Figure 5.7: System Design Overview Flowchart

5.4.1 Functional Requirements

5.4.2 Design Approach

5.4.3 System Architecture

As shown in Figure 5.7 the system architecture consists of various components.

```
1 # Your code here
```

Listing 5.4: System Architecture Code Example

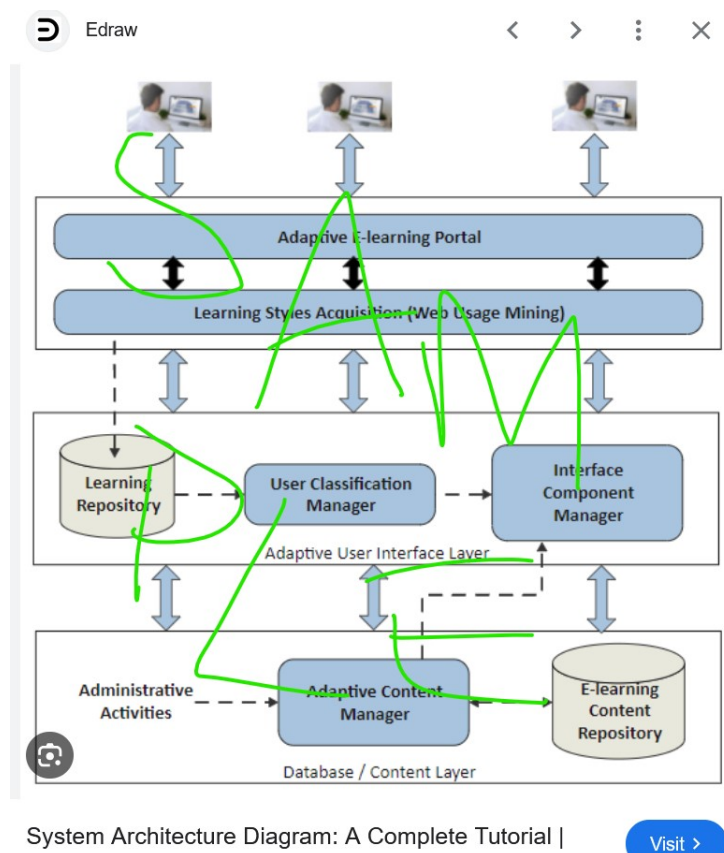


Figure 5.8: System Architecture Diagram

5.5 Data Acquisition System Evaluation

This section provides results related to the Arduino DAQ.

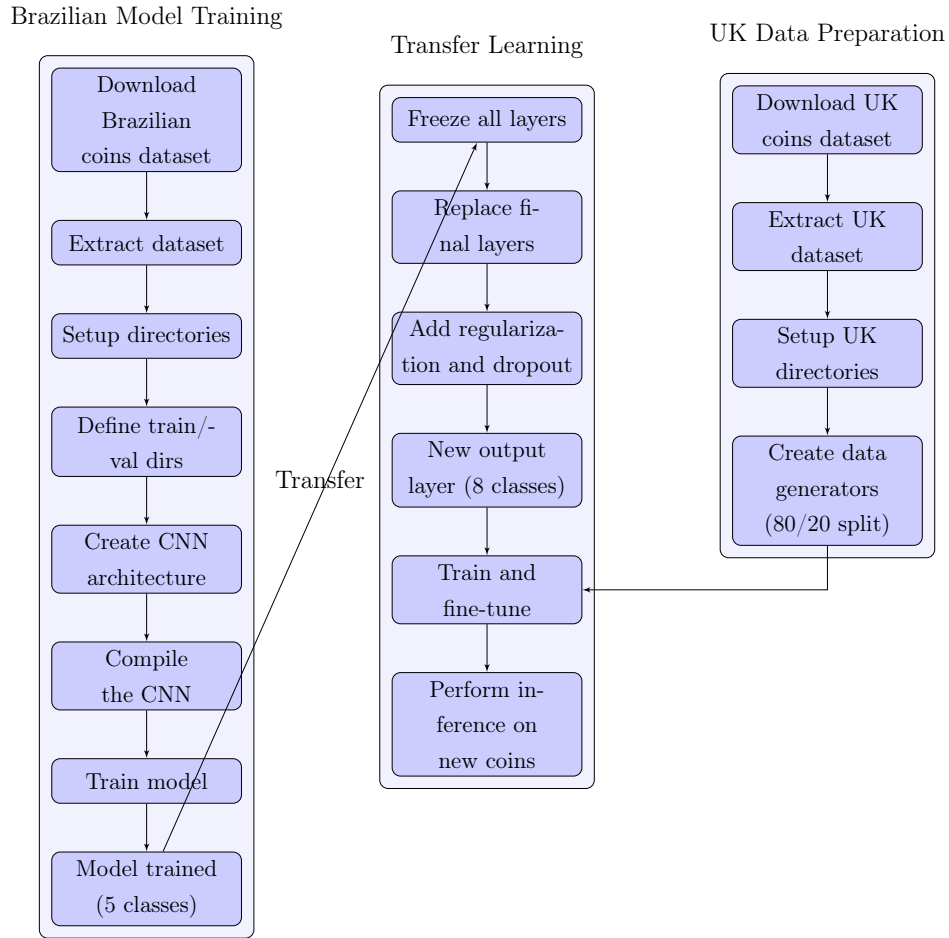


Figure 5.9: System Design Overview Flowchart

5.5.1 Functional Requirements

5.5.2 Design Approach

5.5.3 System Architecture

As shown in Figure 5.9 the system architecture consists of various components.

```
1 # Your code here
```

Listing 5.5: System Architecture Code Example

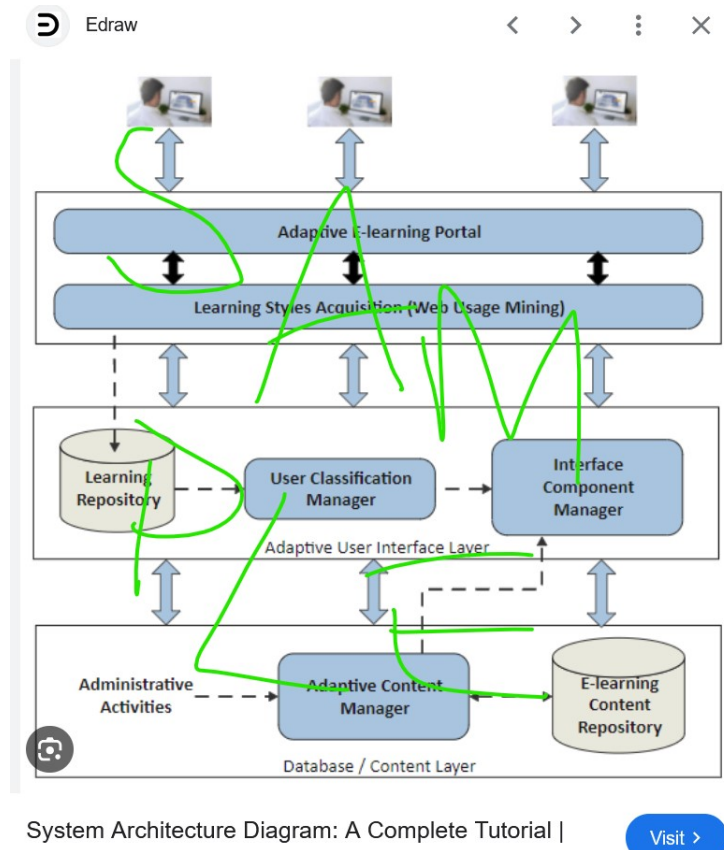


Figure 5.10: System Architecture Diagram

5.6 System Performance Analysis

5.6.1 Operational Constraints Identified

5.6.2 Environmental Factors Impact

```
1 // Environmental test results
2 // Temperature, ambient light, and vibration effects
```

Figure 5.11: Environmental Testing Results

5.6.3 System Stability and Repeatability

5.6.4 Recommendations for Improvement

5.7 Comparative Analysis

This section compares the simulation with the prototype results.

5.7.1 Breadboard vs. Stepboard Results

5.7.2 Iteration Improvements Analysis

5.7.3 Performance Against Design Requirements

The performance ...

5.7.4 Design Evolution Assessment

The what now?

5.8 System Limitations And Considerations

This section discusses the limitations and future work.

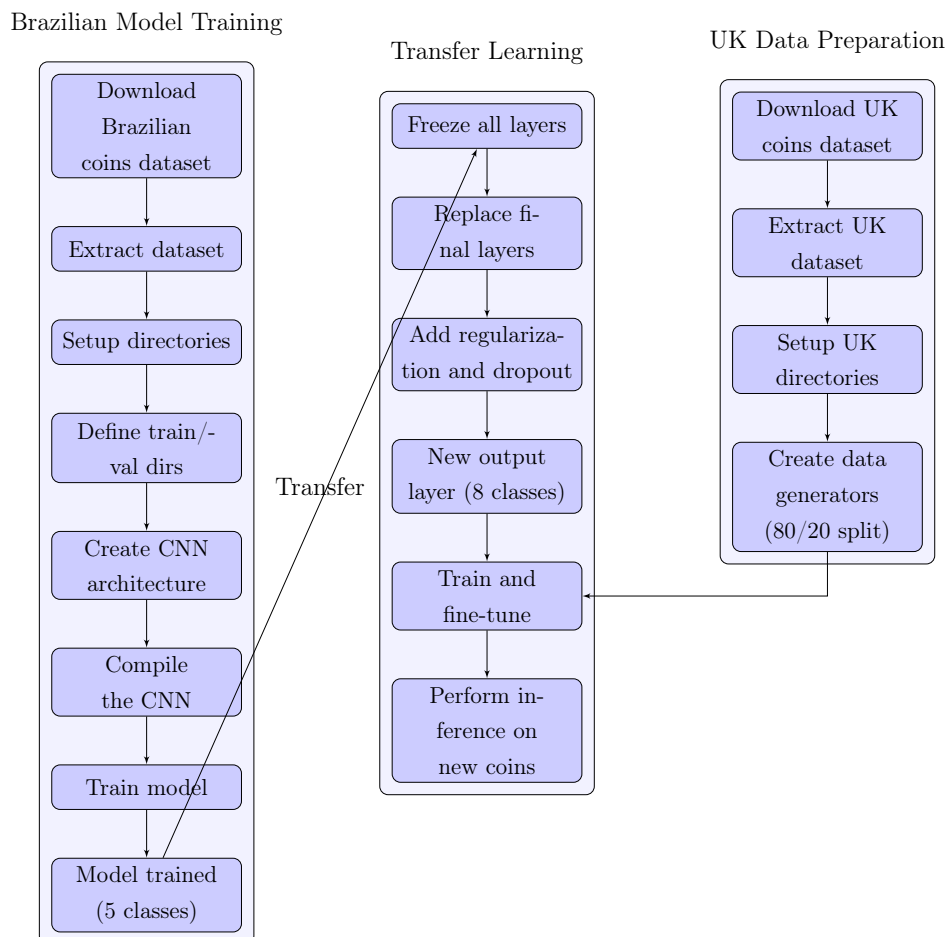


Figure 5.14: System Design Overview Flowchart

5.8.1 Functional Requirements

5.8.2 Design Approach

5.8.3 System Architecture


As shown in Figure 5.14 the system architecture consists of various components.

```
1 # Your code here
```

Listing 5.6: System Architecture Code Example



Edraw

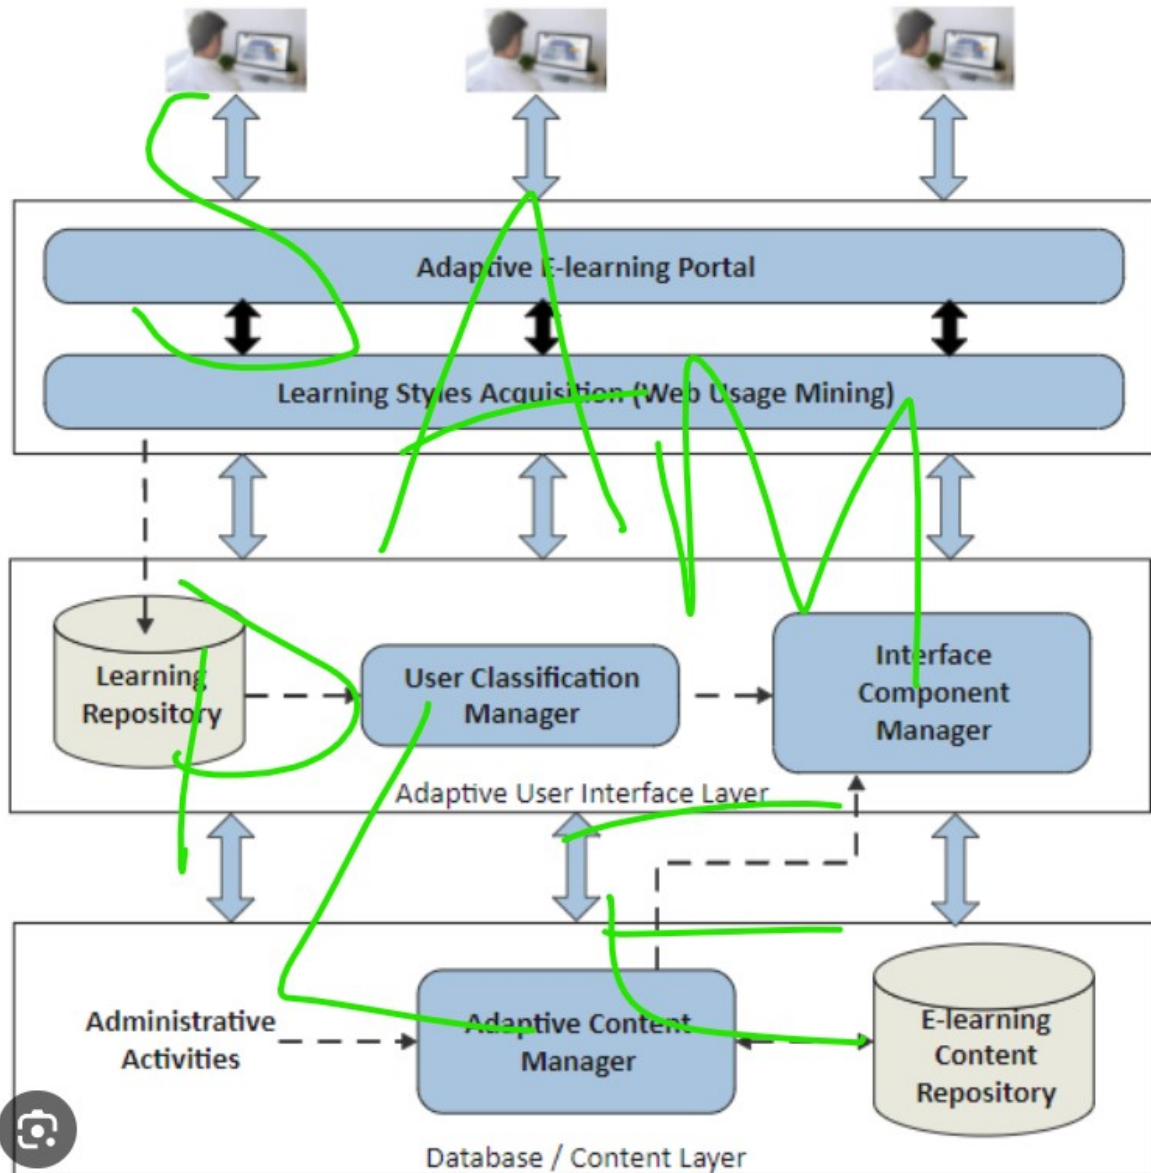

System Architecture Diagram: A Complete Tutorial |

[Visit >](#)

Figure 5.12: Overall System Performance Analysis


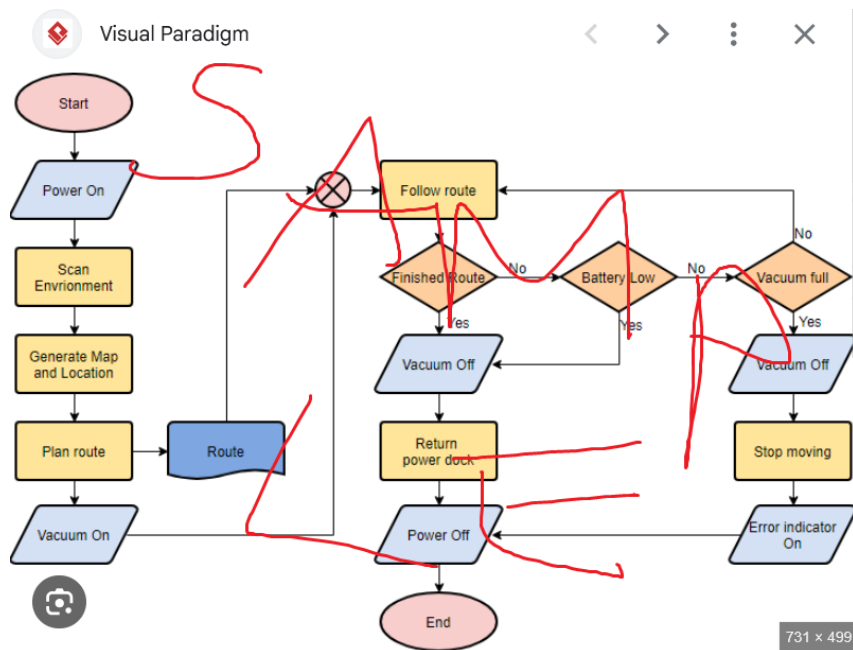


Figure 5.13: Prototype Iteration Comparison

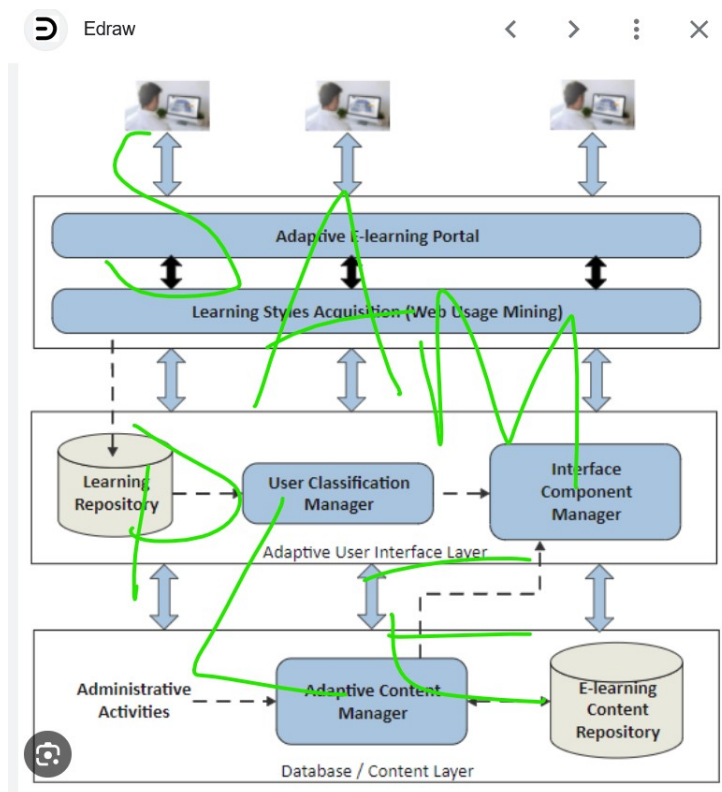

System Architecture Diagram: A Complete Tutorial |

[Visit >](#)

Figure 5.15: System Architecture Diagram

6. Conclusions

7. Future Work

Bibliography

- [1] J. Puig-Suari and C. Turner, “Development of the standard cubesat deployer and a cubesat class picosatellitel.”