

GLASGOW CALEDONIAN UNIVERSITY

MEng Group Research Project

MMH723842-24-AB-GLAS

Design and Implementation of a Photodiode  
Array-Based Analogue 2D Sun Sensor

word count: xxx

by Zac McCaffery, Alexandru Belea,  
Sebastian Alexander, William Kong, Nassor Salim,

Date: April 13, 2025

# Contents

<b>Abstract</b>	<b>7</b>
<b>1. Acknowledgements</b>	<b>8</b>
<b>2. Introduction</b>	<b>9</b>
2.1. Problem Statement . . . . .	9
2.2. Aim of the Project . . . . .	9
2.3. Objectives of the Project . . . . .	9
<b>3. LiteratureReview</b>	<b>11</b>
3.1. CubeSat Design . . . . .	11
3.2. PSD Enabled Sun Sensor . . . . .	12
3.3. Mechanical Design and Analysis . . . . .	12
3.4. Photodiode Simulation and Signal Analysis . . . . .	12
3.5. IoT Communication Enhancement with LEO Satellites . . . . .	12
<b>4. Methodology</b>	<b>13</b>
4.1. Prototype Development . . . . .	13
4.1.1. Lifecycle . . . . .	13
4.1.2. Signal Conditioning Circuitry . . . . .	17
4.1.3. Enclosure Design 3D print . . . . .	17
4.2. Data Acquisition System . . . . .	17
4.2.1. Functional Requirements . . . . .	17
4.2.2. Design Approach . . . . .	18
4.2.3. Technical Specifications . . . . .	19
4.2.4. Testing Strategy . . . . .	27
4.2.5. Evaluation of design . . . . .	27
4.3. Renewable Energy Demonstrator Testbench . . . . .	27
4.4. Software Model . . . . .	28
4.4.1. Introduction . . . . .	28
4.4.2. Theory and Concept . . . . .	29

<b>5. Results</b>	<b>30</b>
5.1. Sensor Characterization . . . . .	30
5.1.1. Functional Requirements . . . . .	30
5.1.2. Design Approach . . . . .	30
5.1.3. System Architecture . . . . .	30
5.2. Amplification Performance . . . . .	31
5.3. Photodiode Angular Response . . . . .	31
5.4. Enclosure Effectiveness . . . . .	31
5.5. Data Acquisition System Evaluation . . . . .	31
5.6. System Performance Analysis . . . . .	31
5.6.1. Operational Constraints Identified . . . . .	31
5.6.2. Environmental Factors Impact . . . . .	31
5.6.3. System Stability and Repeatability . . . . .	31
5.6.4. Recommendations for Improvement . . . . .	31
5.7. Comparative Analysis . . . . .	31
5.7.1. Breadboard vs. Stripboard Results . . . . .	31
5.7.2. Iteration Improvements Analysis . . . . .	31
5.7.3. Performance Against Design Requirements . . . . .	31
5.7.4. Design Evolution Assessment . . . . .	31
5.8. System Limitations And Considerations . . . . .	32
5.8.1. Angle accuracy . . . . .	32
<b>6. Conclusions</b>	<b>33</b>
<b>7. Future Work</b>	<b>34</b>
<b>Bibliography</b>	<b>35</b>
<b>A. Appendix - DAQ Code</b>	<b>36</b>
A.1. Arduino DAQ full code . . . . .	36
A.1.1. Arduino C++ Code . . . . .	36
A.1.2. PC-side Python Serial Receive Script . . . . .	36
<b>B. Appendix - Software Model Code</b>	<b>37</b>
B.1. Section 1 Title . . . . .	37
B.1.1. subsectiontitle . . . . .	37
B.2. Section 2 Title . . . . .	37
B.2.1. subsectiontitle . . . . .	37

<b>C. Further Appendix</b>	<b>38</b>
C.1. Section 1 Title . . . . .	38
C.1.1. subsectiontitle . . . . .	38
C.2. Section 2 Title . . . . .	38
C.2.1. subsectiontitle . . . . .	38

# List of Figures

4.1. Signal Noise Analysis, oscilloscope AC coupled . . . . .	18
4.2. Flowchart Arduino DAQ C++ program . . . . .	22
4.3. FSM Arduino C++ LOOP . . . . .	23
4.4. Python Script Flowchart . . . . .	26

# List of Equations

1. Default ADC Clock Frequency Calculation . . . . .	19
2. Optimized ADC Clock Frequency Calculation . . . . .	19
3. Default ADC Conversion Time . . . . .	20
4. Optimized ADC Conversion Time . . . . .	20
5. Total Sampling Time for 4 Channels (Default) . . . . .	20
6. Total Sampling Time for 4 Channels (Optimized) . . . . .	20
7. Maximum Theoretical Sampling Frequency (Default) . . . . .	20
8. Maximum Theoretical Sampling Frequency (Optimized) . . . . .	20
9. Actual Limited Sampling Frequency . . . . .	20
10. Total Effective Data Rate . . . . .	20

# Abstract

add abstract here

# 1. Acknowledgements

We would like to express our sincere gratitude to our supervisors, Dr. Roberto Ramirez-Iniguez and Geraint Bevan, for their invaluable guidance and unwavering support throughout this project.

Our appreciation extends to the 3rd Floor EEE Lab Technicians and Dr. Carlos Gamio-Roffe, whose technical expertise and assistance were instrumental in the successful construction of the prototype.

We are particularly grateful to the European Project Semester RED Team members—Nikolay Ivanov Shopov, Stef Hannisse, and Samridhi Gupta—for generously allowing the use of their Renewable Energy Demonstrator as a testbench. Their contribution provided an ideal platform for positioning light sources during the testing phase of this project.



## 2. Introduction

### 2.1. Problem Statement

With the ever-increasing commercialization of the space and satellite industry there is a growing need for a cost-effective method of attitude tracking for smaller satellite missions of such as CubeSat as these missions are purpose built for very specific objectives. Whilst the larger commercial satellite missions make use of expensive digital camera systems for tracking purposes, this is not feasible for much smaller CubeSat setups. CubeSats are defined from 1 unit to 12 – where 1U is a 10x10x10 cm satellite. Consequently, there is a demand for a cost-effective and easily implementable attitude tracking system that can provide accurate measurements for CubeSat missions, such as a Position Sensitive Detector (PSD) using photodiodes.

### 2.2. Aim of the Project

"To investigate and develop a cost-effective and reliable sun sensing solution suitable for Low Earth Orbit (LEO) nanosatellite attitude determination."

### 2.3. Objectives of the Project

To investigate the design of a sun sensing system for nanosatellites, used in orientation determination, through detection of its relative position to the sun using analogue sensors located on the satellite's body. Our goal is to create a system which balances cost-effectiveness and simplicity. To achieve this, we will create a software model of the analogue sensor(s) to simulate the system's ability to track the sun from various angles in orbit. After which, we aim to build a physical prototype and use a movable light source to simulate the sun's movement, allowing comparison between the real sensor's performance against our simulations. Although the physical prototype will be built using non-space-grade materials, one of the objectives is to look at and analyse materials required for building a space-grade PCB and sensor. For this step, the Mechanical side of the team will perform Printed circuit board (PCB) and aperture device finite analysis using ANSYS to determine resilience to environmental factors such as stress and thermal simulation. The application of signal processing will be explored to provide usable data, filter out

noise, and improve the system's accuracy. This approach aims to develop a cost-effective and reliable, in-house sun sensing solution specifically for nanosatellites operating in Low Earth Orbit. Major Objective points:

- **Conduct literature review:**
  - Analyse existing research on sun sensing technologies, with a focus on PSD-based analogue sensors and their applications in nanosatellites.
  - Identify current challenges, best practices, and advancements in attitude determination in Low Earth Orbit. Use these insights to guide the design and optimisation of the proposed sun sensing system.
- **Develop software model:**
  - Simulate the performance of the PSD-based analogue sun sensor in tracking the sun's position from various angles in Low Earth Orbit.
- **Design and fabrication of physical prototype:**
  - Integrate analogue sun sensor components, test and validate its performance under controlled conditions.
- **Compare simulated and experimental results:**
  - Establish evaluation methodology between simulated and experimental test results to ensure that topology evaluation is applicable.
- **Optimise sensor topology:**
  - Research and evaluate various configurations of analogue sun sensing systems to maximise sun detection accuracy and minimise blind spots.
- **Investigate environmental factors:**
  - Evaluate the material requirements of the PCB and aperture device.
- **Implement signal processing algorithms:**
  - Investigate the filtering of noise to enhance the signal-to-noise ratio and otherwise ensure the acquisition of usable data for accurate sun position determination.
  - Implement data handling which optimises scanning rates and efficiently processes the analogue signal data for real-time attitude determination.
- **Document results and overall cost-effectiveness:**
  - Develop criteria for final evaluation of sun sensing systems, on which to base the final presentation of project findings.

## 3. Literature Review

### 3.1. CubeSat Design

Puig-Suari, Turner and Ahlgren published an IEEE paper in 2001 with the help of their students at California Polytechnic State University exploring a need for micro satellites for use by universities in an ever-expanding space programme. They provide as a solution a standard satellite form-factor that will bring down the cost of both manufacture and deployment of satellites by smaller entities: the CubeSat. The paper identifies a key component for the success of this form factor a need for a standard CubeSat deployer mechanism which can deploy several satellites safely and develop such a platform, called Poly Picosatellite Orbital Deployer or P-POD. They point out the need and provide microsatellite size and shape of the CubeSat form factor [1]. Sai balaji et al. performed a study using MATLAB simulation of several attitude control algorithms to look at the ability to control a CubeSat of size 1U. They also simulated sensors such as sun sensors, magnetometer, and gyroscope. They concluded that it is possible to operate the satellite using a magnetorquer type actuator and an array of mathematical models and algorithms: it would take 2000 seconds for a 1U satellite to stabilize at 505km, 98° degree attitude in orbit with the methods utilized by them [2]. Incentivised by the rapidly increasing use of LEO, Lopez-Calle and Franco perform a quantitative comparative study on the catastrophic failure of CubeSats and Nanosats from radiation exposure due to the harsh environment of space versus failure due to collisions in the increasingly busy Low Earth Orbit (LEO). The authors concluded that while sustained damage and damage protection from radiation exposure used to be and currently still is the most crucial factor in protecting LEO microsatellites, increasingly the risk of debris collisions is becoming more important and will become the most important in the following 50 to 70 years. The authors conclude that microsatellite designers need to move their focus more towards defence from debris impacts as these, even if not resulting in catastrophic failure of the satellite, they will impact the attitude of the satellite [3].

3.2. PSD Enabled Sun Sensor

3.3. Mechanical Design and Analysis

3.4. Photodiode Simulation and Signal Analysis

3.5. IoT Communication Enhancement with LEO  
Satellites

## 4. Methodology

### 4.1. Prototype Development

#### 4.1.1. Lifecycle

This section provides an overview of the Prototype Development Lifecycle.

##### Conceptualization and Requirements Definition

- The prototype must have four photodiodes in an xy pattern with respective circuitry required to output 0-5 Volts that will be read by an Arduino based Data Acquisition System (DAQ). The circuit must be able to react to light intensity changes, however the change will be at low frequency ( below 1Hz) as a satellite attitude is considered to change only gradually.
- While the prototype may not have a high accuracy, it is hoped that it will be enough to measure light position changes roughly, even if at a low accuracy of  $10^\circ$  or  $20^\circ$  but this will remain to be seen.
- The prototype within the scope of this paper will show the ability to detect the position of light at normal room conditions, therefore it does not need to withstand temperature changes or radiation that a final product would require if deployed in space.
- Interface requirements: the prototype electrical output needs to be compatible with the Arduino Analog to Digital Converter (ADC) input. Therefore, the signal shall not go below 0 Volts or exceed 5 volts.
- Size and weight are not of high importance, but the device must fit in the testing equipment, which is the Renewable Energy Demonstrator arch. Preferably a height not higher than 5cm.

##### Theoretical Design

- Research photodiode technology options and selection criteria
- Model sun sensor geometry and aperture design

- Determine optimal photodiode placement for coverage and accuracy
- Develop mathematical models for sun vector determination
- Simulate sensor performance under various lighting conditions

### **Preliminary Design**

- The design of the Prototype must have four photodiodes in an xy pattern with respective apertures placed such that they cover opposite halves of the photodides. This is to facilitate light location detection by the aperture shadowing the photodiode when the light is on one side but not the other.

### **Component Selection and Procurement**

- Select appropriate photodiodes (spectral response, sensitivity)
- Choose microcontroller/processor
- Source analog-to-digital converters
- Identify appropriate materials for aperture and housing
- Procure test equipment for validation

### **Breadboard Testing**

- Assemble basic circuit on breadboard
- Test photodiode response characteristics
- Verify analog front-end performance
- Validate signal processing approach
- Identify design weaknesses and optimization opportunities

### **First Prototype Development**

- Design printed circuit board (PCB)
- Manufacture PCB
- Design and fabricate aperture mask
- Develop housing/enclosure
- Assemble prototype components
- Write initial firmware implementation

## **Initial Testing and Characterization**

- Conduct functional testing
- Measure photodiode response curves
- Characterize sun angle determination accuracy
- Test temperature sensitivity
- Evaluate power consumption
- Assess signal-to-noise ratio

## **Design Refinement**

- Analyze test results
- Modify aperture design if needed
- Optimize photodiode configuration
- Update signal processing algorithms
- Refine PCB layout
- Improve firmware algorithms

## **Second Prototype Development**

- Implement design improvements
- Manufacture revised PCB
- Fabricate improved aperture
- Enhance housing design
- Update firmware with optimized algorithms
- Assemble refined prototype

## **Comprehensive Testing**

- Laboratory performance testing (angular accuracy, resolution)
- Environmental testing (thermal cycling, vibration)
- Radiation testing (if applicable for space applications)

- Interface compatibility testing
- Long-term stability assessment

### **Validation and Calibration**

- Develop calibration procedures
- Create calibration fixtures
- Perform sensor calibration
- Document calibration coefficients
- Validate sensor performance against requirements

### **Documentation and Production Readiness**

- Create detailed technical specifications
- Document calibration procedures
- Prepare assembly instructions
- Write user manual/interface control document
- Develop acceptance test procedures

### **Pre-production Prototype**

- Build small batch of pre-production units
- Conduct acceptance testing
- Verify production processes
- Validate consistency between units
- Finalize design for production

### **Technology Transfer to Production**

- Document manufacturing processes
- Train production personnel
- Establish quality control procedures
- Define production testing requirements
- Prepare for volume manufacturing



### **4.1.2. Signal Conditioning Circuitry**

A photodiode produces a certain amount of current when light hits the depletion region. Therefore, a larger depletion region is desirable, to produce more current. [2021KeiserFibreOptics]

**Functional Requirements**

**Design Approach**

**Technical Specifications**

**Implementation Plan**

**Testing Strategy**

**Deployment Process**

**Evaluation**

### **4.1.3. Enclosure Design 3D print**

This section provides an overview

**Functional Requirements**

**Design Approach**

**Technical Specifications**

**Implementation Plan**

**Testing Strategy**

**Deployment Process**

**Evaluation**

## **4.2. Data Acquisition System**

### **4.2.1. Functional Requirements**

The output signal from the photodiode array amplifier is required to be converted to digital form for post-processing. This requirement is filled by designing a Digital Acquisition System (DAQ) capable of recording the signal from the four photodiode circuits simultaneously. The choice of design was conceived by analyzing the analog signal and determining some basic requirements of the Analog to Digital Converter (ADC) the DAQ must possess.

## Analog Signal Characteristics

- The signal is four channel, one per photodiode, and between 0 and 5 Volts, as the TIA and post amplification was designed specifically for this output.
- Close to DC frequency, i.e., static in nature, due to light intensity remaining static under most tests. One test is performed at 0.2Hz, which is still very low frequency, with the light completing a semicircular arc once in 130 seconds (26 positions of 5 seconds each).
- Later in testing it was found that the signal is impacted by interference of 400mVpp at a frequency fluctuating from 160kHz to 180kHz from the RED testbench power supply, as pictured in Figure 4.1.



Figure 4.1.: Signal Noise Analysis, oscilloscope AC coupled

### CSV Data Structure and Format Specification is as follows:

The output of the DAQ is to be saved in Comma Separated Values (CSV) file format, with columns as follows: Sample(nr.), Time(ms), A0(V), A1(V), A2(V), A3(V). This allows for easy post-processing and plotting.

### 4.2.2. Design Approach

The characteristics of the signal being low frequency, combined with the requirement to read all four signals simultaneously and in sync, meant two things: the Sampling Rate could be quite low due to Nyquist theorem telling us that the sampling rate must be at least twice the frequency of the signal being sampled, in order to maintain the original signal without aliasing [4, p. 146]. Therefore a low performing ADC is acceptable for a signal changing at under 1Hz. And secondly, the DAQ must support sampling from at least four analog inputs. These requirements meant that a cheap Arduino based DAQ could fit perfectly the needs of the project: it is powered by the Atmega328P which has an included ADC of 15 ksps [5, p.205]. And the Arduino Nano has four analog inputs.

## Arduino Programming

The Arduino-based DAQ will require both a C++ program written for the Arduino itself, as well as a program or script on the PC receiving the digitized signal, this is because the Arduino lacks both the memory requirements and capability to store the recorded digitized signal to some internal memory.

**The Arduino C++ Program** must be able to listen to commands from the user on the PC receiving, start a recording, and immediatly transmit to the PC over serial communication.

### 4.2.3. Technical Specifications

#### Arduino Code

The Arduino Code which uses the Arduino ADC is formed of the `setup()` function triggered once at the start/reset of the device and a standard continuous loop triggered after setup completes. Inside the loop, two if statements check for instructions from the PC script. The recording time limit is hardcoded as a global function. Figure 4.2 shows the algorithm as a Flowchart that checks for Serial data in, waits for a command to start recording, and if recording time has reached the preset limit, it stops recording, sends the last values to the Python script on the PC and a "recording\_stopped" command. A FSM diagram is also available in Figure 4.3. The pseudocode used while designing the Arduino side of the DAQ system, is available in Listing 4.1. The final code is available in Appendix A.1.1.

**The Atmega328P** does not have a separate ADC clock input, therefore the CPU clock is used by first dividing by a default rate of 128, this divider is changed to 16 by changing bits 2-0 to 100, as per [5, p.219]. This increases the clock speed available to the ADC for a higher sampling rate. This results in a 1MHz clock signal to the ADC (16MHz/16) which seemed needed when dealing with multiplexing four analog inputs to a single ADC. The process is as follows:

Original ADC Clock Speed (with default prescaler of 128):

$$f_{\text{ADC-default}} = \frac{f_{\text{CPU}}}{\text{Prescaler}_{\text{default}}} = \frac{16 \text{ MHz}}{128} = 125 \text{ kHz} \quad (1)$$

Optimized ADC Clock Speed (with modified prescaler of 16):

$$f_{\text{ADC-optimized}} = \frac{f_{\text{CPU}}}{\text{Prescaler}_{\text{optimized}}} = \frac{16 \text{ MHz}}{16} = 1 \text{ MHz} \quad (2)$$

Conversion Time Calculations: ADC requires approximately 13 clock cycles for each conversion [5, p.208] Optimized ADC Clock Speed (with modified prescaler of 16):

$$T_{\text{conversion-default}} = 13 \times \frac{1}{f_{\text{ADC-default}}} = 13 \times \frac{1}{125 \text{ kHz}} \approx 104 \text{ } \mu\text{s} \quad (3)$$

$$T_{\text{conversion-optimized}} = 13 \times \frac{1}{f_{\text{ADC-optimized}}} = 13 \times \frac{1}{1 \text{ MHz}} \approx 13 \text{ } \mu\text{s} \quad (4)$$

Time required to sample all 4 analog inputs:

$$T_{4\text{channels-default}} = 4 \times T_{\text{conversion-default}} = 4 \times 104 \text{ } \mu\text{s} \approx 416 \text{ } \mu\text{s} \quad (5)$$

$$T_{4\text{channels-optimized}} = 4 \times T_{\text{conversion-optimized}} = 4 \times 13 \text{ } \mu\text{s} \approx 52 \text{ } \mu\text{s} \quad (6)$$

Maximum theoretical sampling frequency for all 4 channels:

$$f_{\text{sampling-max-default}} = \frac{1}{T_{4\text{channels-default}}} = \frac{1}{416 \text{ } \mu\text{s}} \approx 2.4 \text{ kHz} \quad (7)$$

$$f_{\text{sampling-max-optimized}} = \frac{1}{T_{4\text{channels-optimized}}} = \frac{1}{52 \text{ } \mu\text{s}} \approx 19.2 \text{ kHz} \quad (8)$$

Actual limited sampling frequency (based on minSampleInterval = 2ms):

$$f_{\text{sampling-actual}} = \frac{1}{2 \text{ ms}} = 500 \text{ Hz per channel} \quad (9)$$

Effective data rate across all channels:

$$\text{Data Rate} = 4 \text{ channels} \times 500 \text{ Hz} = 2000 \text{ samples/second} \quad (10)$$

In real testing the actual sampling rate was closer to 330Hz for 5 second recordings or

100Hz for a 2 minute recording - after some investigation the only explanation was the relatively small size of the transmission buffer implemented by the Serial C++ library. The buffer is of only 64 bytes, and when it fills, the function Serial.write() (used by println()) will block the write until there is space in the buffer[ref:arduino.cc/serial.write]. As our line of text is quite long "498,5000,0.059,0.054,0.073" for example has 26 characters (last line of a 5 second recording). For larger recording length, where the first and second column, Sample and Time, can get quite large, the sampling rate decreased considerably, but was kept constant (around 10ms for a 2 minute recording). Presumably due to optimization in the Arduino Serial Hardware/Software or compiler, it remains constant at 10ms. However this was not investigated further as for our near-DC signal, even 10ms was a fast enough sampling rate for our DC-like signal.

```

1  recordingDuration = 5000 // for how long to record in milliseconds
2
3  minSampleInterval = 2    // control how fast to sample to avoid
4                          // relying on Arduino performance
5  // Initialize serial communication
6  // Initialize analog inputs
7  // Setup ADC
8
9  // Infrom PC listening on Serial Connection: Arduino is ready to
   record
10 Serial.print("Arduino_DAQ_Ready")
11 // enter the loop
12 void loop(){
13     //listen for command from PC script:
14     String command = Serial.read()
15     //set system state
16     if (command == "START"){
17         // Send header of csv
18         Serial.println("Sample,Time(ms),A0(V),A1(V),A2(V),A3(V)")
19         // keep track of system state
20         state = recording
21         // keep time
22         startTime = currentTime()
23         // send confirmation
24         Serial.println("recording in progress")
25     }
26     // check if recording
27     if (state == recording){
28         // check if within recording period
29         currentTime = currentTime()
30         elapsedTime = currentTime - startTime
31         if(currentTime <= recordingDuration){
32             // Also check not recording too fast
33             if(currentTime - lastSampleTime >= minSampleInterval){

```

### Arduino DAQ System Flowchart

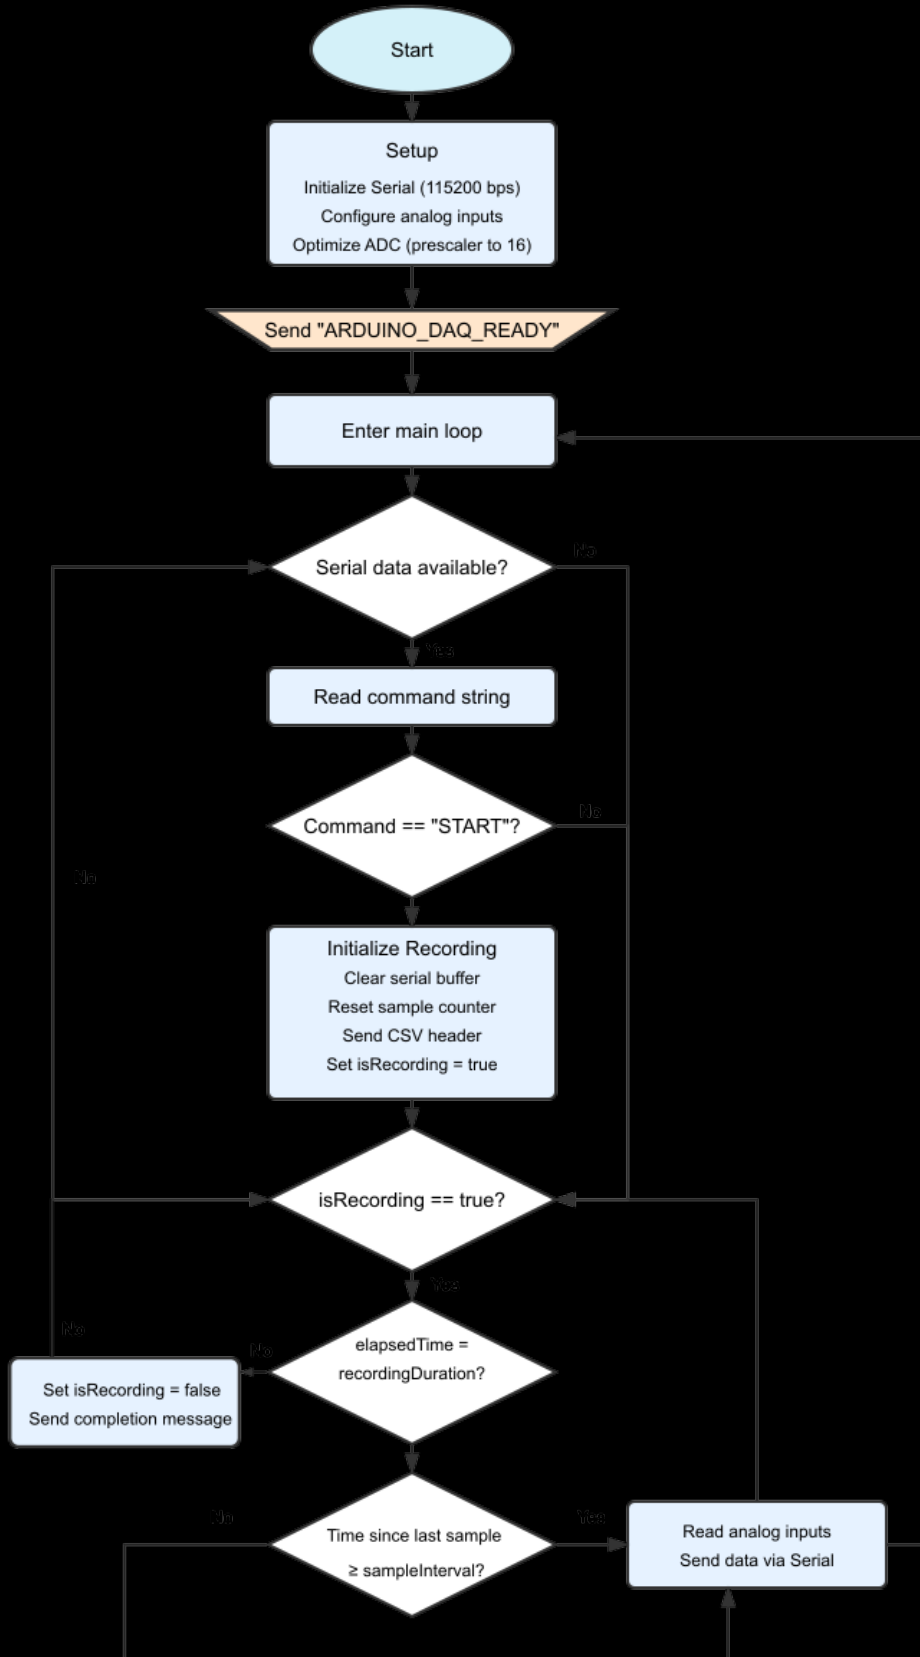


Figure 4.2.: Flowchart Arduino DAQ C++ program

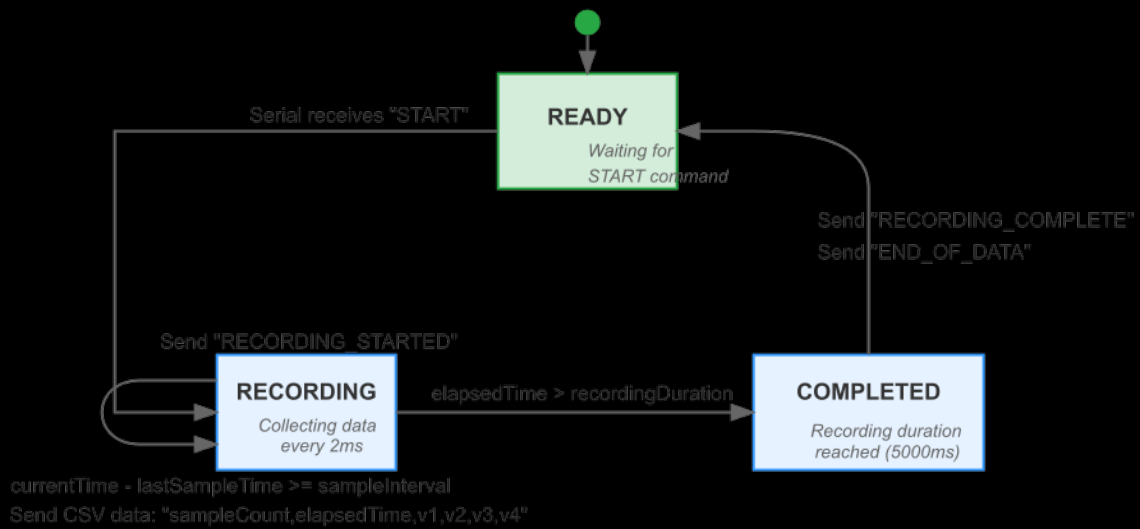


Figure 4.3.: FSM Arduino C++ LOOP

```

34     sampleCount++;
35     // Start each row with sample count and time of sample
36     String currentCSVrow = String(sampleCount) , string(
elapsedTime)
37     // Multiplex through all analog inputs
38     for (int i = 0; i < 4; i++) {
39         //read raw values
40         rawValue = analogRead(analogInputs[i]);
41         // compute real value
42         voltage = rawValue * 5/1023
43         // add value to current row to send
44         currentCSVrow += String(voltage)
45     }
46     // Send completed row to PC
47     Serial.println(currentCSVrow)
48 }
49 }
50 }
51 // end recording
52 else{
53     state = notRecording
54     // tell PC recording finished
55     Serial.println("Recording_finished")
56 }

```

### Listing 4.1: Arduino DAQ PseudoCode

**Sampling Rate Details** Several factors restrict the sampling rate:

**Sample Interval Setting** The most direct limitation is the `sampleInterval` constant set to 2ms in the code. It was meant to avoid having random sampling rates based on the number of computations required. This means samples are taken no more frequently than every 2 milliseconds (500 Hz theoretical maximum) of all four channels. The "jump" to sample the next channel is not limited in the code, but it will take 13 clock cycles, (ie. around 13µs at 1MHz ADC clock) to switch to the next channel.

**ADC Prescaler Configuration** The ADC prescaler is set to 16 (from the default of 128) with this line:

```
ADCSRA = (ADCSRA & 0xF8) | 0x04;
```

This increases the ADC clock to  $16\text{MHz}/16 = 1\text{MHz}$ . With each conversion taking 13 ADC clock cycles, the theoretical maximum sampling rate is about 76.9kHz for a single channel.

**Serial Transmission Overhead** Each sample requires formatting and sending data over serial:

```
String dataString = String(sampleCount) + "," + String(elapsedTime);
// ... format and add voltage values ...
Serial.println(dataString);
```

This string creation and serial transmission takes some time to process as mentioned earlier.

**Serial Baud Rate** The code uses 115200 bps, which limits how quickly data can be transmitted. Each sample in this format might be around 30-40 bytes, which means ~3000-3800 samples/second theoretical maximum throughput.

**String Operations** The use of the Arduino `String` class is memory-intensive and can cause fragmentation over time, potentially causing the slowdowns noticed during testing with larger timeframes (and longer strings).



## Python Script

The digitized signal must be interpreted and saved on the PC. This is done via a python script which listens to the Serial port from the arduino. The signal then also required cleaning from RF interference discovered during testing. In Figure 4.4 a flowchart is produced showing the way the script works: after initial setup that sets up the Serial Communication, the script waits for a "DAQ\_READY" signal from the Arduino. Once this is received, a csv file is created and the script sends a "START" signal which the Arduino interprets and starts sampling and sending the data. The script receives each line and saves it in the new CSV, and continues to record data until the Arduino sends a "RECORDING\_COMPLETE" signal - which will happen when the recordingDuration is reached. At this point the python script performs the following post-processing steps:

**The filter\_and\_save\_data()** function' purpose is mainly to correctly interpret the CSV. It takes a csv with the raw voltage values, saves them into a Pandas DataFrame for easier manipulation and sends each channel to the apply\_lowpass\_filter() function which will be described below. filter\_and\_save\_data().

```
1 FUNCTION filter_and_save_data(filename)
2 // Load data from CSV file into a table structure
3 data_table = READ_CSV(filename)
4
5 // Clean the data by converting text to numbers
6 FOR EACH column IN data_table
7     CONVERT column values to numeric type
8     IF conversion fails for any value
9         REPLACE with NaN (Not a Number)
10 END FOR
11
12 // Remove any rows containing NaN values
13 REMOVE all rows with NaN values from data_table
14
15 // Calculate sampling frequency
16 time_differences = CALCULATE differences between consecutive time
    values
17 typical_time_difference = FIND median of time_differences
18 sampling_frequency = 1000.0 / typical_time_difference // Convert ms
    to Hz
19
20 // Process each data channel
21 channel_list = ["A0(V)", "A1(V)", "A2(V)", "A3(V)"]
22
23 FOR EACH channel_name IN channel_list
24     IF channel name EXISTS in data table
```

### Python DAQ Script Flowchart

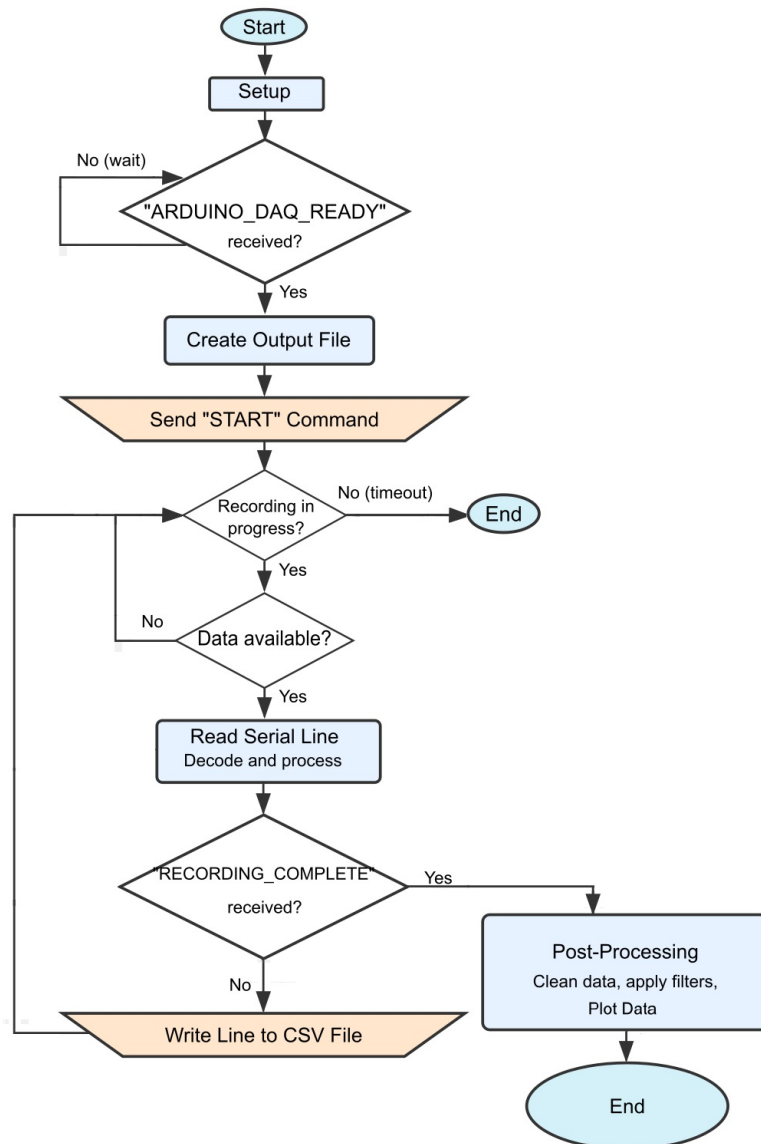


Figure 4.4.: Python Script Flowchart

```

25         filtered_values = APPLY_LOWPASS_FILTER(original_values,
26         sampling_frequency)
27         ADD new column named channel_name + "_filtered" with
28         filtered_values
29     END IF
30 END FOR
31
32 // Save results to new file
33 new_filename = REMOVE_EXTENSION(filename) + "_filtered.csv"
34 WRITE data_table TO new_filename
35
36 RETURN new_filename
37 END FUNCTION

```

Listing 4.2: Python filter\_and\_save\_data() PseudoCode

The

#### 4.2.4. Testing Strategy

The testing was done incrementally with each new version of the program, many tests were carried out as the development was dependent on both C++ code on the Arduino and the Python script on the PC to somewhat work together. At first the C++ program was tested by listening to the output in the Serial Monitor of the Arduino IDE and sending commands the same way. Debug println() lines were used to ensure the loop on the Arduino was in the correct state. Once the C++ program seemed to somewhat work as intended, the Python script was implemented to send / receive.

#### 4.2.5. Evaluation of design

It worked ok. [TO FINISHTO FINISHTO FINISHTO FINISHTO FINISH]

### 4.3. Renewable Energy Demonstrator Testbench

For testing the capability of the Sun Sensor to correctly detect the location of the light source, a test bench was required that could reliably place the location of the light at a precise location repeatedly. For this purpose we used a project built by our colleagues in the European Project Semester year 2021/22 who created just such a device intended for demonstrating renewable energy creation live [6]. Their device was able to demonstrate the energy levels created by a Photovoltaic (PV) cell by light emitted at different angles. The light emission would change location based on time of day and the PV cell readings would show the difference in energy. Further the PV cell was controllable by a joystick to

point the PV Cell at the optimum angle for the highest energy capture. For our project, the arch and LED strip were used for outputting light from different angles.

## Analysis of High Frequency Noise in AC-DC Power Supply

Interference structure of around 170kHz with 400mV peak-to-peak was detected on the signal being received while the RED testbench was on as shown in Figure 4.1. This noise could be generated by several factors in the AC power supply used by the RED testbench:

1. **Switching frequency harmonics** — If it's a switch-mode power supply (SMPS), the fundamental switching frequency or its harmonics might be causing the noise. Many SMPS operate in the 50–200,kHz range.
2. **Poor filtering** — Inadequate output filtering (insufficient capacitance or poor quality capacitors) can allow switching noise to appear on the output.
3. **Improper design of magnetics** — Issues with the transformer or inductor design could cause ringing or oscillations.
4. **Resonance in the circuit** — Parasitic capacitance and inductance forming a resonant circuit at around 170,kHz.
5. **Control loop instability** — PWM controller instability can cause oscillations.
6. **Ground loops or poor PCB layout** — Improper grounding or PCB layout can create noise paths. [7]

To avoid spending time diagnosing and trying to repair the testbench, an easier solution was reached: performing digital filtering of the acquired signal in post processing. Due to the signal of interest being close to DC - frequencies much lower than 1Hz, and the noise being high frequency, around 175kHz, a simple digital Butterworth filter with a cutoff frequency at around 1-2 Herz was found to be a good solution.

The only remaining issue was that this noise would sometimes trigger the internal components of the testbench, unintentionally triggering the button press from the control interface that was changing the light position, but it happened so rare that it was not a major concern.

## 4.4. Software Model

### 4.4.1. Introduction

A Python model was constructed to provide a simulation of the movement and intersection of rays from a movable source to evaluate sensor performance and compare these results with practical experiments. The model allows for a number of configurable parameters:

- The trajectory of the light source 3D space, which moves in configurable discrete increments.
- The placement of any number of sensors and apertures, including their dimensions.
- The form of the output data, including as a static, or animated graphic.

Affording flexibility for the model to simulate any sensor topology under a variety of conditions.

#### 4.4.2. Theory and Concept

The system is modelled in 3D space, consisting of planes and lines. Each line is defined by vectors representing position and normal direction,  $\vec{A} = (a, b, c)$  and  $\vec{u} = (\alpha, \beta, \gamma)$ . The planes are defined by the vectors  $\vec{P} = (l, m, n)$  and  $\vec{n} = (\lambda, \mu, \nu)$ , respectively.

Ray projection, from a source plane to a sensor plane, is modelled using the parametric equation of a 3D line (11). This allows each ray to be described in terms of a parameter  $t$ , which enables the calculation of the intersection points between the light rays and the sensor plane.

$$\frac{x-a}{\alpha} = \frac{y-b}{\beta} = \frac{z-c}{\gamma} (= t) \quad (11)$$

Where the intersection coordinates  $(x, y, z)$  occur within a target area, a hit occurs, representing illumination.

For any given combination of source plane, and sensor plane, the  $t$  parameter is calculated using the Line-Plane Intersection equation

$$t = \frac{\vec{n} \cdot \vec{P} - \vec{n} \cdot \vec{A}}{\vec{n} \cdot \vec{u}} \quad (12)$$

# 5. Results

## 5.1. Sensor Characterization

TO FINISHTO FINISHTO FINISHTO FINISHTO FINISHTO FINISHTO FINISH focus on the fundamental properties and performance of your photodiodes themselves, distinct from the other subsections. Here are some key elements that would belong specifically under SensorCharacterization:

Basic Photodiode Electrical Characteristics:

Dark current measurements Junction capacitance I-V characteristics in different lighting conditions Spectral response profiles (sensitivity vs. wavelength)

Individual Sensor Benchmarking:

Performance comparison between the 4 photodiodes (matching/differences) Responsivity measurements (A/W) Quantum efficiency calculations Detection threshold levels

Response Linearity:

Measurements showing linear range of the photodiodes Saturation point characterization Recovery time from saturation

Temperature Dependency:

Performance drift with temperature Baseline shift measurements Temperature compensation data

Aging/Stability Tests:

Long-term drift measurements Repeatability of measurements over time

This section should focus on the inherent properties of the photodiodes themselves - essentially providing the baseline characterization data that underpins all the other analysis. The other sections then build on this foundation by examining how these sensors perform when integrated into the complete system with amplification, angular positioning, enclosure effects, etc.

### 5.1.1. Functional Requirements

### 5.1.2. Design Approach

### 5.1.3. System Architecture

As shown in Figure the system architecture consists of various components.

## **5.2. Amplification Performance**

This section provides results of the amplifier performance.

## **5.3. Photodiode Angular Response**

This section discusses the results of the response of the solar sensor to angular changes of the light source.

## **5.4. Enclosure Effectiveness**

This section discusses the effectiveness of the Photodiode enclosure.

## **5.5. Data Acquisition System Evaluation**

This section provides results related to the Arduino DAQ.

## **5.6. System Performance Analysis**

### **5.6.1. Operational Constraints Identified**

### **5.6.2. Environmental Factors Impact**

### **5.6.3. System Stability and Repeatability**

### **5.6.4. Recommendations for Improvement**

## **5.7. Comparative Analysis**

This section compares the simulation with the prototype results.

### **5.7.1. Breadboard vs. Stripboard Results**

### **5.7.2. Iteration Improvements Analysis**

### **5.7.3. Performance Against Design Requirements**

The performance ...

### **5.7.4. Design Evolution Assessment**

The what now?

## 5.8. System Limitations And Considerations

This section discusses the limitations and future work.

### 5.8.1. Angle accuracy



## 6. Conclusions

## 7. Future Work

# Bibliography

- [1] J. Puig-Suari and C. Turner, “Development of the standard cubesat deployer and a cubesat class picosatellite,” 2001.
- [2] K. S. Balaji, B. S. Anand, P. M. Reddy, V. C. B, M. D. P. Lingam, and V. K, “Studies on attitude determination and control system for 1u nanosatellite,” *ICCPCT*, pp. 616–625, 2023.
- [3] I. Lopez-Calle and A. I. Franco, “Comparison of cubesat and microsat catastrophic failures in function of radiation and debris impact risk,” *Scientific Reports*, vol. 13, no. 1, -01-07 2023.
- [4] R. W. Schafer, Oppenheim, and Schafer, *Discrete-Time Signals and Systems*. India: Pearson, 2013.
- [5] Atmel, “Atmega328p 8-bit avr microcontroller with 32k bytes in-system programmable flash datasheet,” 2015. [Online]. Available: [https://ww1.microchip.com/downloads/en/DeviceDoc/Atmel-7810-Automotive-Microcontrollers-ATmega328P\\_Datasheet.pdf](https://ww1.microchip.com/downloads/en/DeviceDoc/Atmel-7810-Automotive-Microcontrollers-ATmega328P_Datasheet.pdf)
- [6] N. I. Shopov, S. Hannisse, and S. Gupta, “Renewable energy demonstrator (red),” Glasgow Caledonian University, Tech. Rep., 2022.
- [7] G. L. G. Burbui, U. Reggiani, and L. Sandrolini, “Prediction of low-frequency electromagnetic interferences from smps,” *ISEMC*, vol. 2, pp. 472–477, 2006.

# A. Appendix - DAQ Code

## A.1. Arduino DAQ full code

### A.1.1. Arduino C++ Code

```
1 # Your code here
```

Listing A.1: C++ Code on Arduino

### A.1.2. PC-side Python Serial Receive Script

## B. Appendix - Software Model Code

### B.1. Section 1 Title

#### B.1.1. subsectiontitle

### B.2. Section 2 Title

#### B.2.1. subsectiontitle

## C. Further Appendix

### C.1. Section 1 Title

#### C.1.1. subsectiontitle

### C.2. Section 2 Title

#### C.2.1. subsectiontitle