

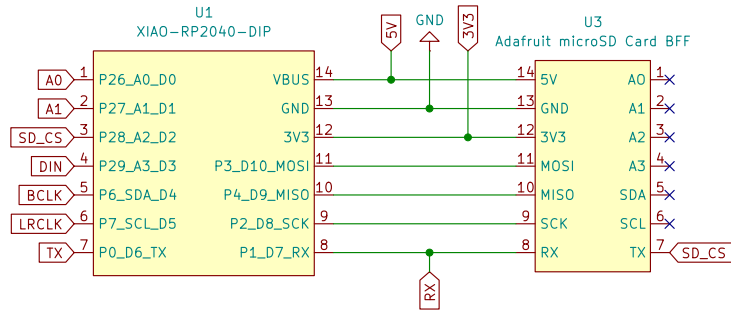


Sampler Board




In the previous version the SD_CS was connected on the pin A0.
In that case a solder jumper as to be done on the SD board.
See <https://learn.adafruit.com/adafruit-microsd-card-bff/pinouts#pin-select-solder-jumpers-3137566>



Any I2S DAC could be use here
eg. MAX98357 to drive speakers
or PCM5102 for line level.

Battery

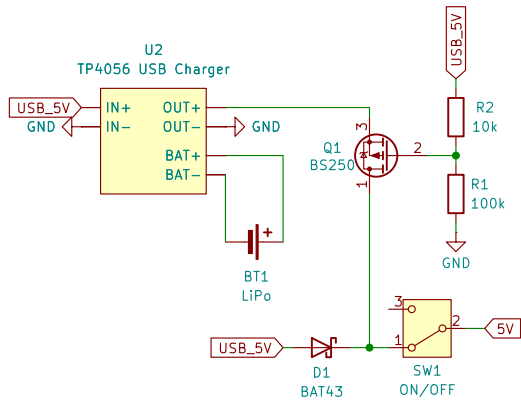

Sheet: /
File: loop.kicad_sch

Title:

Size: A4

Date: 2026-08-26

Rev:

KiCad E.D.A. 10.0.4

Id: 1/1