


Synthetic truth ionogram

2-10 MHz · 100 kHz × 1 km bins · adaptive homing, 168-direction anchors (288-direction reference)

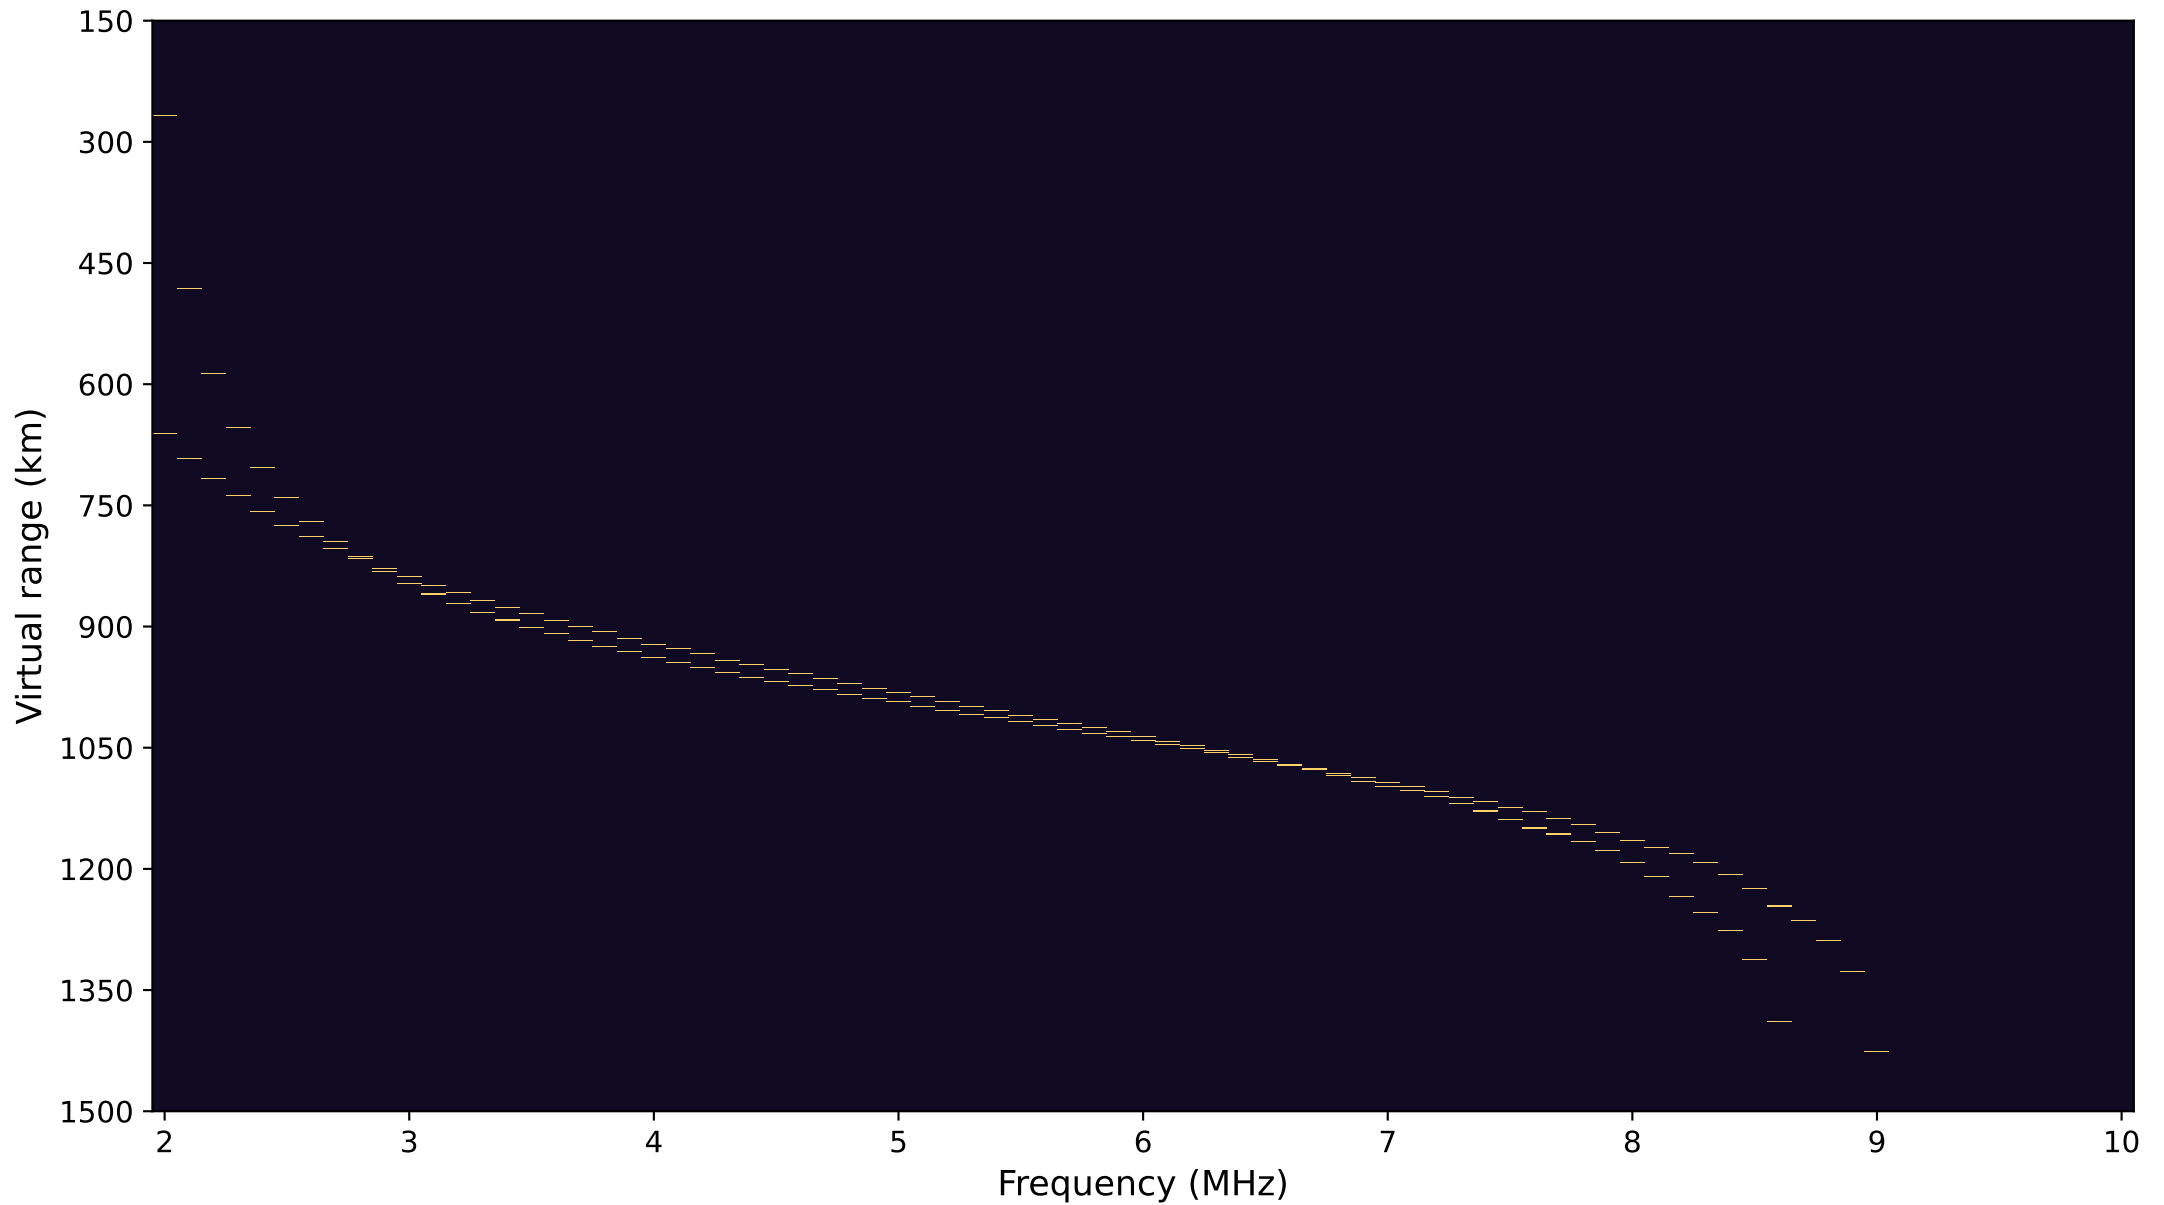

211 accepted O/X returns in 145 occupied bins across 71 frequencies. Each occupied bin is shown once; no smoothing.