

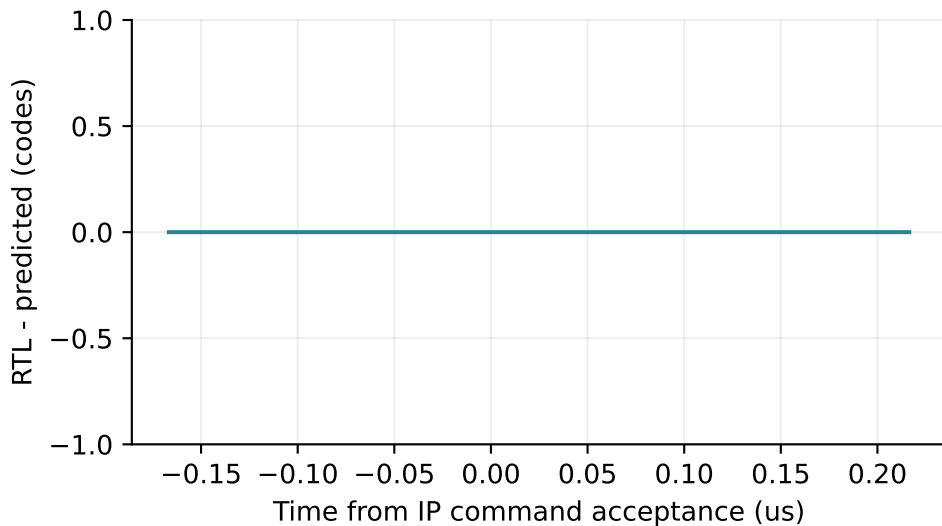
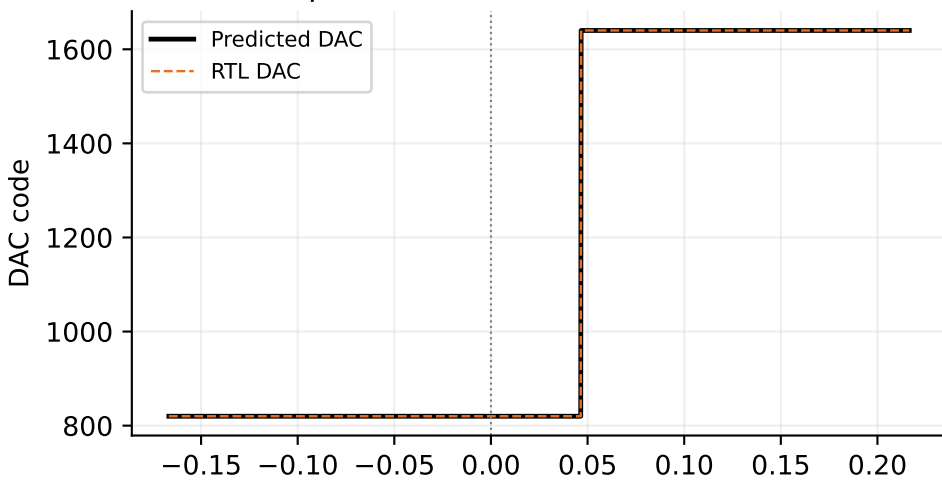


Single-parameter updates: other parameters held constant
Independent scalar phase-integral prediction vs actual RTL (all 16 DAC lanes)

Amplitude: 820 -> 1640 DAC codes

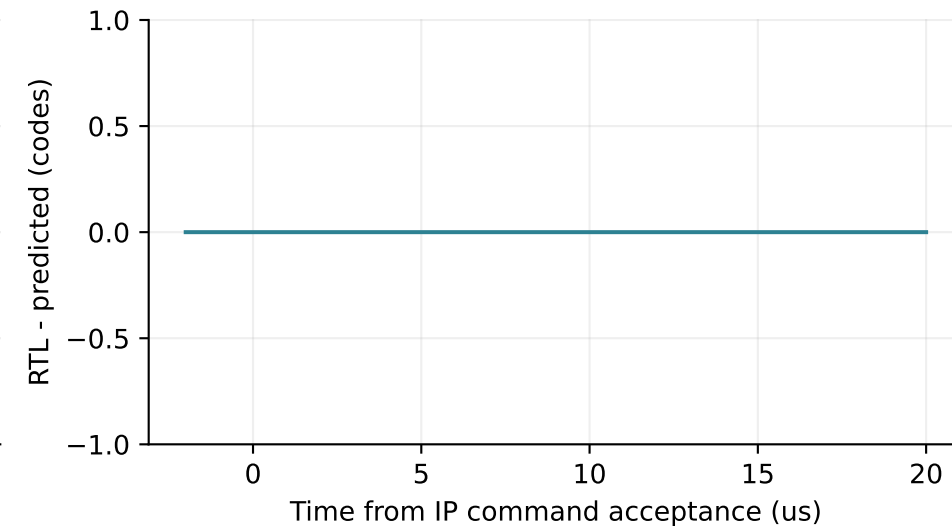

Frequency: 39.9996 -> 80.0002 kHz

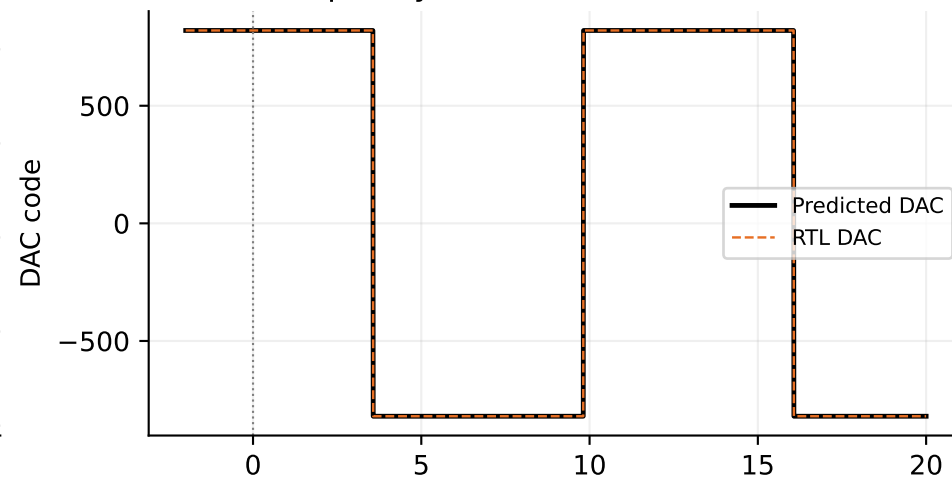

Phase: 0 -> 90 degrees

