

Progress Report Three

Subject: Third Report of Fall 2020
November 2nd, 2020

To: xshan@uh.edu cc:
peiuh4@gmail.com
mailto:
Dr. Xiaonan Shan
4796 Calhoun Rd,
Room W306 Houston,
TX 77004

Dr Shan,

Thank you for your guidance on this project throughout the previous semester. While we have faced many obstacles with the ongoing pandemic and shipping of parts for our prototype, I am pleased to say that we are remaining on schedule! Our team has been hard at work ensuring that we meet our timeline and that all of our research meets your expectations. We can say, with confidence, that we have nearly completed phase two of the deliverables and we are nearing our first flight tests.

Within this report, you will find all of the information related to our past progress and the timeline for the prototype completion. Further, we have researched multiple patents to ensure that our project is both original and utilizing the most modern technology. All of these reports have been completed to our personal quality standard, and I can personally assure you that everything is in place for a final, successful semester. Within the appendix of this report, you can find previous report material for ease of access.

Thank you once again for the advice and time that you have committed to this project throughout the 2020 school year. We look forward to programming, constructing, and testing our quadcopter so that it may suit your research purposes. We hope that our further contributions to this project will allow you to better carry out your research and help the Greater Houston Area.

All the best,

Alex Magyari, Leslie Nix, Ai Nguyen, and Sang Nguyen

**University of Houston
Cullen College of Engineering
9/21/2020**

Autonomous Aerial Vehicle for Real-Time Air Quality Measurements

Team 10

**Sponsor: Dr. Xiaonan Shan
Project Manager: Dr. Pei**

**Team members:
Alex Magyari (Team Leader)
Leslie Nix
Sang Nguyen
Ai Nguyen**

Abstract

In 2019, Dr. Xiaonan Shan, professor in Electrical Department in University of Houston, worked on the project to create a Real-Time Air Quality Measurement Sensor. This project will provide an aerial transportation method for that sensor. Based on the sensor's specifications, our unmanned aerial vehicle (UAV) is designed to carry up to a 1000 [g] load. The UAV is designed as a self-navigating quadcopter which will be able to fly through a potentially chaotic environment while the UAV operator remains at a safe distance. The drone is constructed using a polycarbonate frame with the dimensions being just large enough to safely secure the air quality sensor. Based on the design, the drone has a thrust-to-weight ratio of 1.9 and can produce 5416 [g] of lifting capacity. It will operate at forward speed of 6-10 [m/sec] and an operation range only limited by battery capacity. The drone uses a MSP432 LaunchPad for the flight control unit, a SparkFun Dead Reckoning GPS module for self-navigation, CC2650M for the Bluetooth module, and a 9 degree-of-freedom gyroscope sensor. The flight code is designed in modular fashion which will separate the program into individual blocks to allow ease of use. The users can communicate to the drone via the built-in BLE module to add or remove GPS waypoints for the drone to navigate. The goals of this project are divided into 2 semesters. For the first semester (Spring 2020), the team needs to achieve goal for module designs; for the second semester, we need to combine modules with the microcontroller and complete all tests for the drone. We have currently achieved all goals for first phase including the project timeline, application interface, and a fully researched parts list.

1. Purpose

The overall purpose of this project is to provide an aerial transportation method for a preexisting air quality sensor package developed by Dr. Shan's team. Specifically, the transportation method must be unmanned and have the ability to be operated from a significant distance so as to ensure the operator's safety.

2. User Analysis and Product Specification

The customers for this product can range from research teams to government agencies to environmental agencies to members of the private sector who want to ensure their factories are meeting environmental regulations. This product will be used to transport an air quality sensor over a use- guided path. It is essential that the user can operate the system from a significantly far distance so that they do not inhale any airborne particles that the sensor will be detecting. Three final deliverables are expected: a physical transportation unit that will carry the air-quality sensor, an onboard controller to move the transportation unit, and a controller that the user can utilize to interact with the transportation system.

3. Overview Diagram

The overview diagram in Figure 1 displays the interactivity between all final deliverables of the project. These deliverables will work in harmony to ensure that an operator can control the quadcopter from a significant distance relative to the quadcopter's area of operation.

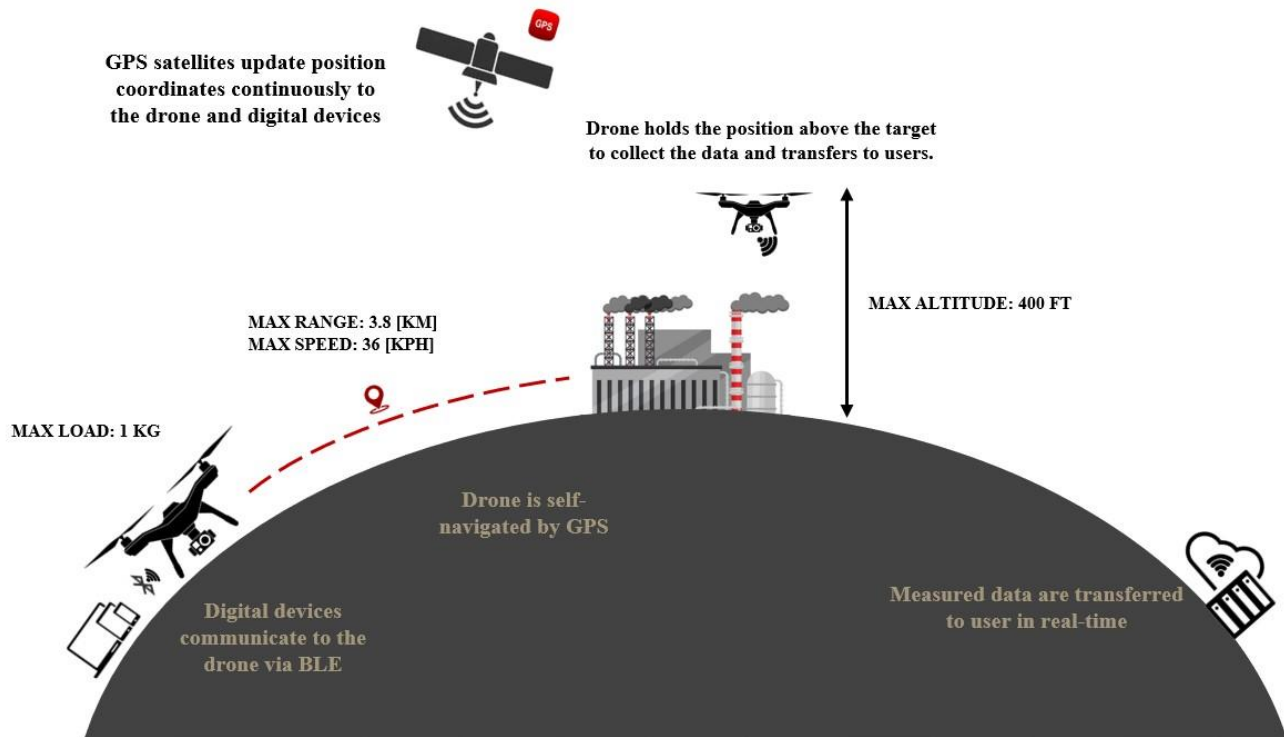


Figure 1: Overview Diagram of Autonomous Aerial Vehicle for Real-Time Air Quality Measurements.

4. Design Considerations

To organize the goals of project, the design is divided in two parts: the flight control unit, or the microcontroller, and physical drone construction. In this project, the design for flight control unit will be concentrated in low energy consumption by using components and programs which are optimized for energy consumption. Therefore, the large portion of the energy provided by the battery will be used for rotors, in turn extending the time flight.

Based on the Overview Diagram, the drone's microcontroller is designed to incorporate following features: wireless communication via Bluetooth Low Energy, GPS (global positioning

system) Navigation, and motor control via high frequency pulse width modulation. The largest concern with our microcontroller is its compatibility with external modules, such as BLE and GPS capabilities. The microcontroller's specifications have to meet requirements such as ease of use/handle so that the operator can control the drone. The minimum frequency of the Pulse Width Modulation from the controller must meet 16 [MHz] for as this is the required frequency for the motors. Further, the board must have various types of memory, such as flash, Read Only Memory and Random Access Memory so that all of the information obtained from the sensors and Bluetooth module can be stored for quick access by the flight control unit. The flight control unit must also have a minimum 40 General Purpose Input/Output Pins, as the number of sensors and motors required for this project will need at most 40 pins. Following our research, the MSP432P401R LaunchPad and TM4C123G LaunchPad are best suited for our requirements. The MSP432 LaunchPad has the highest level of consideration, as it uses less power than the TM4C123G and has more GPIO ports.^[1]

For the wireless communication feature, we decided using a BLE module that is easily incorporated with the MSP432, the BOOSTXL-CC2650MA board. As stated before, low energy consumption is the main concentration for choosing features, Bluetooth Low Energy consumes an insignificant amount of energy, so much so that it is inconsequential. Further, the BLE module must use a Bluetooth controller version 4.0 or higher. Similarly, to BLE, GPS Navigation must follow requirements such as ease of use, reliable, optimize cost, high performance and it must be compatible with MSP432.

The second part of our design is drone construction. As stated in the purposes section, the drone's mission is to carry the real-time sensor to the position dictated by the user. Therefore, the drone mechanism must be designed to be able to lift the weight, which includes the weight of drone itself and the weight of the sensor. Based on the measurement of the sensor provided by Dr. Shan, the dimensions are approximately 5 [in] x 5 [in], and its mass is about 500 [g]. From those measurements, we have decided that the drone will be a quadcopter. The quadcopter design has proven to be sturdy enough to carry loads similar to the sensor, and can provide stability at medium-to-low altitudes.

According to our research and sensor dimension, the frame for quadcopter must be a minimum 5 [in] x 5 [in] to fit the sensor. However, due to the concern of the weight, we decided that the size should be as close to 5 [in] x 5 [in] as possible. Arguably, the most important aspect

of the drone construction is the four rotors with their most distinguishing property bring the thrust-to-weight ratio. Our research shows that we should aim for the thrust-to-weight ratio to be anywhere from 1.8 to 2 ^[2]. That number is determined because it satisfied our design requirements which are able to carry the sensor, perform a flight under a light breeze, and minimize the weight of four rotors as well as the project's cost.

To pick the right motor, we must prioritize the thrust which it can produce along with the weight and cost of the motor. Our estimation shows that the total weight of drone combined with the sensor is about 1300[g]. Therefore, with the thrust-to-weight ratio being anywhere from 1.8 to 2, each motor must produce around 1.25 [kN] of thrust ^[3]. To achieve this, the rotor must spin from 25000 to 30000 [revolutions/minute]. To achieve that value, our motors need to have a minimum 2500 [Kv] and to be operated in a range of voltage from 10 [V] to 12 [V] ^[4]. Of course, the chosen rotors have to meet all specifications which are listed above and be under our budget.

The next part in drone construction that must be considered is the battery. The battery needs to be chosen carefully because it provides the energy for the entire system, and any flight failures due to the battery malfunctioning can cause the entire system to fail. Based on the specification of the drone, we decided using a Lithium Polymer battery, having at least 6 cells and 1500mAh for capacity. 6S Lithium Polymer can provide potential up to 22.2 [V] which satisfies for rotor operation, and 1500mAh can provide enough energy to the drone for 30 minutes of continuous flight. The battery must be light-weight since this will likely be the heaviest part of the drone. Besides those parts which we have listed above, there are several parts like general LED's for a system heartbeat, a power distribution board, plastic rotors for the motor, and basic wiring. However, these parts consume an arbitrarily small amount of energy and an inconsequential weight, so they will be chosen only to fit the general requirements of drone.

5. Constraints

Table 1 Constraints and factors

Constraint	Limiting Factors
Flight Time	<ul style="list-style-type: none"> • Battery Life • Drone Speed
GPS Accuracy	<ul style="list-style-type: none"> • Weather • Distance to satellite
Budget	<ul style="list-style-type: none"> • Sponsor Donations • Department Contribution
Time to Prototype	<ul style="list-style-type: none"> • CoVid-19 • Parts ordering

Table 1 summarizes the constraints in our project that need to be considered and addressed to ensure the project's success. First is the flight time, one of the main features of drone. There are many factors that affect flight time, such as drone's weight, weather, drone's speed, drone's battery quality, ... Our drone is expected to fly about 16.5 minutes, enough to complete a round trip to the specified destination.

Second is the GPS Accuracy: The navigation system may not work properly because at some locations the GPS signal is unstable. What user receive depends on additional factors, including satellite geometry, receiver design features/quality, and weather conditions (such as chemical fire, acid rain).

Next is Budget. Budgets can come from many different sources. Some are from the student's own pocket, but this source is quite limited. Some are from the department but must wait for approval. It also may come from donations of sponsors, but this source is difficult to find.

The last one is Schedule. Due to the Covid pandemic, the schedule was slightly pushed back. Meeting is not easy, and the lab is only open at certain times. Therefore, our schedule is restricted more so than it would have been during a typical semester.

6. Deliverables

Our project has two main deliverables: the application to control with the drone, and the drone itself. While the air quality sensor is the primary motivation for this project, it has already been designed and tested by Dr. Shan's research team. Instead, we will be focusing our efforts on the design and implementation of the drone and the method in which the user controls it.

The method for the control of the quadcopter will be via GPS coordinates sent from a user control application. The motivation for using an application is that it will one, keep costs low as near everyone has access to a smart phone, and two, there are a vast array of widely available application design tools that we can use to implement a solution that is both easy to program and is intuitive for the user. The application will only have a few primary functions: selecting GPS coordinates via Google Maps API, deciding the hover time for each position, and all data are uploaded to the drone's flight controller via Bluetooth Low Energy.

The second deliverable, the drone meant to carry the load of the air-quality monitor, will be the main focus of our work. The flight controller will operate the drone motors, adjusting the speed of each individual motor so as to alter the motion of the drone so that it moves to each coordinate. The flight controller must have Bluetooth capabilities so that it may receive the coordinates from the application. The drone has GPS function to determine its position in realtime and send to flight controller to control direction of the drone. Our final demonstration will show the drones ability to maneuver to each individual uploaded GPS coordinate along with its ability to carry the air-quality monitor.

This product will have a few main specifications that differentiate it from typical drones. These specifications can be seen in Table 2.

Table 2 Drone specifications.

KEY SPECIFICATIONS	
Maximum Distance	~4 miles round trip*
Maximum Battery Life	16.5 [min]*
Application Controlled	Yes
On-board GPS	Yes
On-board Bluetooth (BLE)	Yes
Weight (No load)	3.4 [lbs]
Single or General Purpose	Single Purpose

The key specification of the drone is that its maximum distance is not limited by the ability to communicate with the user, which is the downfall of the standard drone. Since this design features autonomous control, the maximum distance is only limited by the battery life. The maximum distance and maximum battery life of the drone are evaluated based on a 4-Cell 1500mAh battery, operation at 14.8 [V], net weight (with load) of 4.4 [lbs] and a maximum battery discharge of 90%. These values can be improved by upgrading the battery with higher capacity with inconsequential of weight. The application is designed as mobile UI app which can be installed on any Android, iOS, or Google device.

7. Test Plan

Figure 2 below depicts the projects goals for the remainder of the project timeline which is more fully described in Section 6. Schedule, below. Due to time constraints and logistical challenges encountered during the Spring 2020 semester, several goals which were originally slated for Spring 2020 completion have been delayed to the current semester. Remaining originally planned Fall 2020 goals are depicted in blue. The team remains confident that the project target objective will be completed on-time due to the work performed on other project tasks through the Summer 2020 break.

The target objective for this project is as follows: after receiving a set of GPS coordinates representing the desired flightpath from the user, the quadcopter and its real time sensor package load will begin to follow the desired flightpath within a three-meter margin of error in each direction (latitude, longitude, and altitude) at a forward flight speed of 2-4 [m/sec]. After completing the flight, the quadcopter will return to land at its starting location.

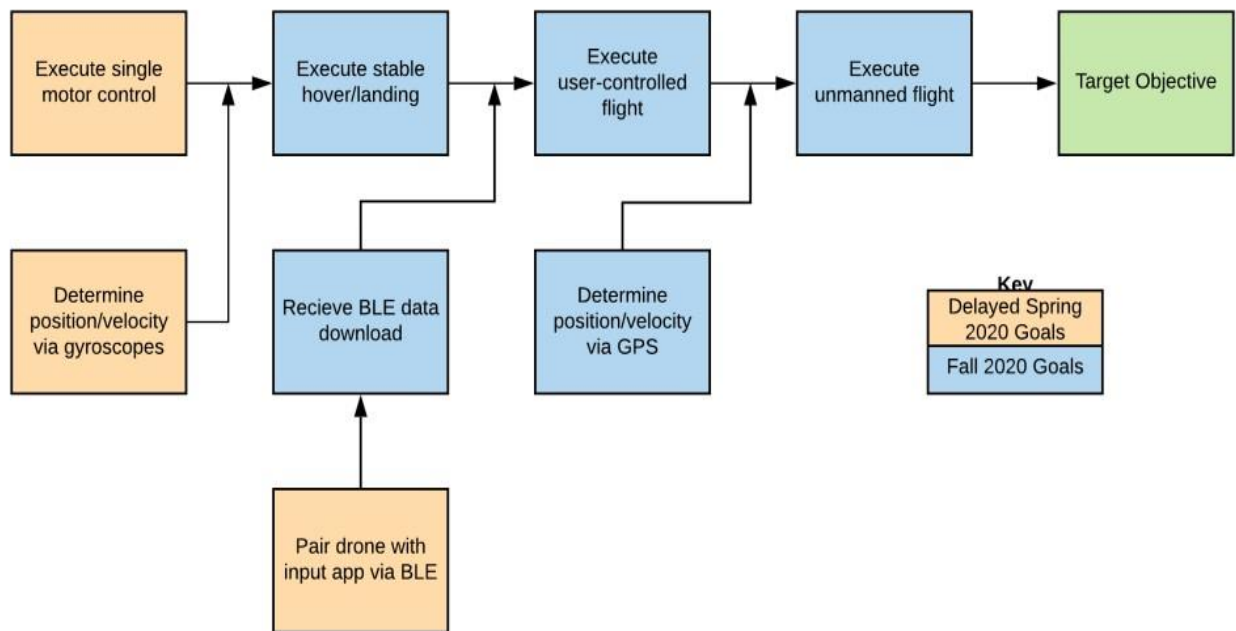


Figure 2: Goal Analysis

Tables 3 and 4, below, indicate the requirements for each of the goals outlined in the Goal Analysis (Figure 2).

Table 3. Test plan for outlined goals, part 1/2.

	Execute Single Motor Control	Determine position/velocity via gyroscopes	Pair drone with input app via BLE	Execute stable hover/landing
R e q u i r e m e n t s	Able to drive the motor in both positive and negative directions up to 2500 rpm	Able to calculate current velocity, position, and orientation within 250ms	Establish communication between phone application and quadcopter Bluetooth module	Able to take off, hover at 2 meters for 1 minute in still (indoor) conditions while carrying sensor package
	Motor speed and direction is made selectable, within 5 rpm, by varying the input signal from the flight controller			Gyroscope data does not show deviations in relative orientation of more than 5 degrees
	The thrust produced by the motor achieves the desired thrust-to-weight ratio of 1.8 – 2.0			

Table 4. Test plan for outlined goals, part 2/2.

	Receive BLE data download	Execute user-controlled flight	Determine position/velocity via GPS	Execute unmanned flight
R e q u i r e m e n t s	Able to receive data from app with minimal packet loss and load data into flight controller software	Able to be flown in still (indoor) conditions at a forward and climb speed of 2-4 m/sec while carrying load	Able to determine position via GPS module with 3 meters accuracy and import data into flight controller software	Able to follow a provided flight path in still (indoor) conditions within a 3 meters margin of error
		Able to execute shallow turns, lateral and vertical movement in response to user input via BLE with low latency (less than 500ms)		

8. Schedule

An overview of the updated project's planned schedule is shown in **Figure 3**, below. Further, a summary of the task completion status can be seen in **Table 5**.

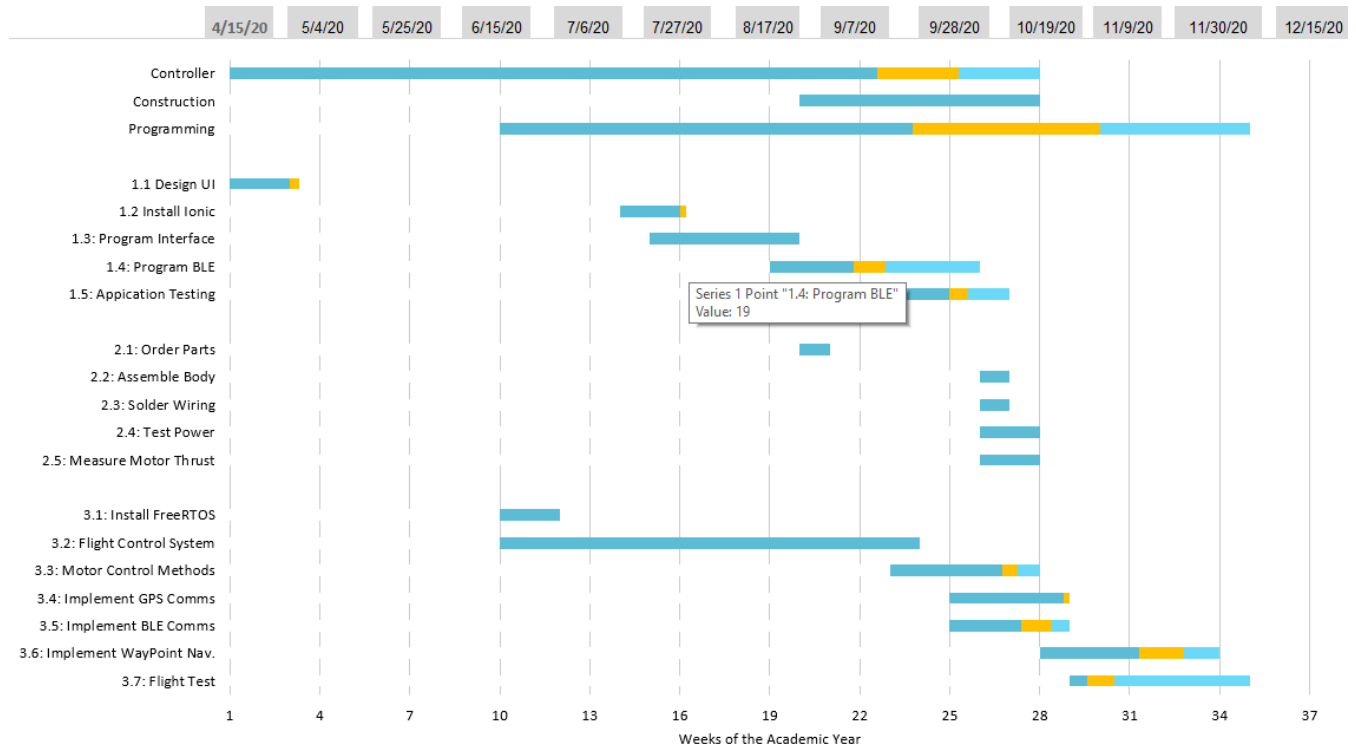


Figure 3: Overview of Fall 2020 Project Schedule

Table 5: Table of Tasks for the Project.

TASK	SUB-TASK	ACCOMPLISHMENTS	ROADBLOCK
Application Controller	UI Design	Previously Completed	
	Ionic Installation	Previously Completed	
	Program Interface	Previously Completed	
	BLE-Programming		Waiting on BLE from FCU
	Application debugging	Thoroughly tested multiple use cases	Waiting on BLE Programming
Construction	Order parts	Previously Completed	
	Assemble body	Previously Completed	
	Solder Wiring	Previously Completed	
	Test Power, Measure Thrust	Previously Completed	
Flight Controller	Install Free RTOS	Previously Completed	
	Program Flight Control System	Previously Completed	
	Program Motor Control Methods	Code “structure” complete	Difficult exporting Simulink model
	Implement GPS Communication	Integrated with I2C Protocol	
	Implement BLE Communication	Integrated with FreeRTOS	
	Implement Waypoint Navigation	Constructed the waypoint navigation method	
	Perform Flight Test		Wait for drone built.

8.1. Drone Controller

The drone is controlled via a mobile application, as the user will select GPS waypoints within the application and upload them to the drone over BLE. The only portion of this task that was designated for semester one was the UI design, a task that was successfully completed. The proposed application layout can be seen in section A6.1.

Come the start of the Fall 2020 semester, the task of developing the application controller remained. Since then, the majority of the application has been completed. Features such as the ability to add or remove drone waypoints, edit hover times at set waypoints, drag waypoints to new positions, reset GPS coordinates, estimate drone battery usage in relation to the flight path, and modify various features pertinent to drone operation have all since been implemented.

Screenshots from the developed application can be seen in Figure 3. Figure 3 a displays the basic layout of the application. The interactive map can be seen at the top of the screen, with four user defined waypoint positions. The fire location can also be seen on the map. Figure 3 b displays the popup when a user adds or edits a waypoint; here, the user can change how long the drone hovers at the set location and records air quality data. Figure 3 c shows the remaining interface not

visible in the previous images. This displays the drones estimated flight time, battery usage, and buttons to modify drone parameters such as weight, battery size, and travel speed.

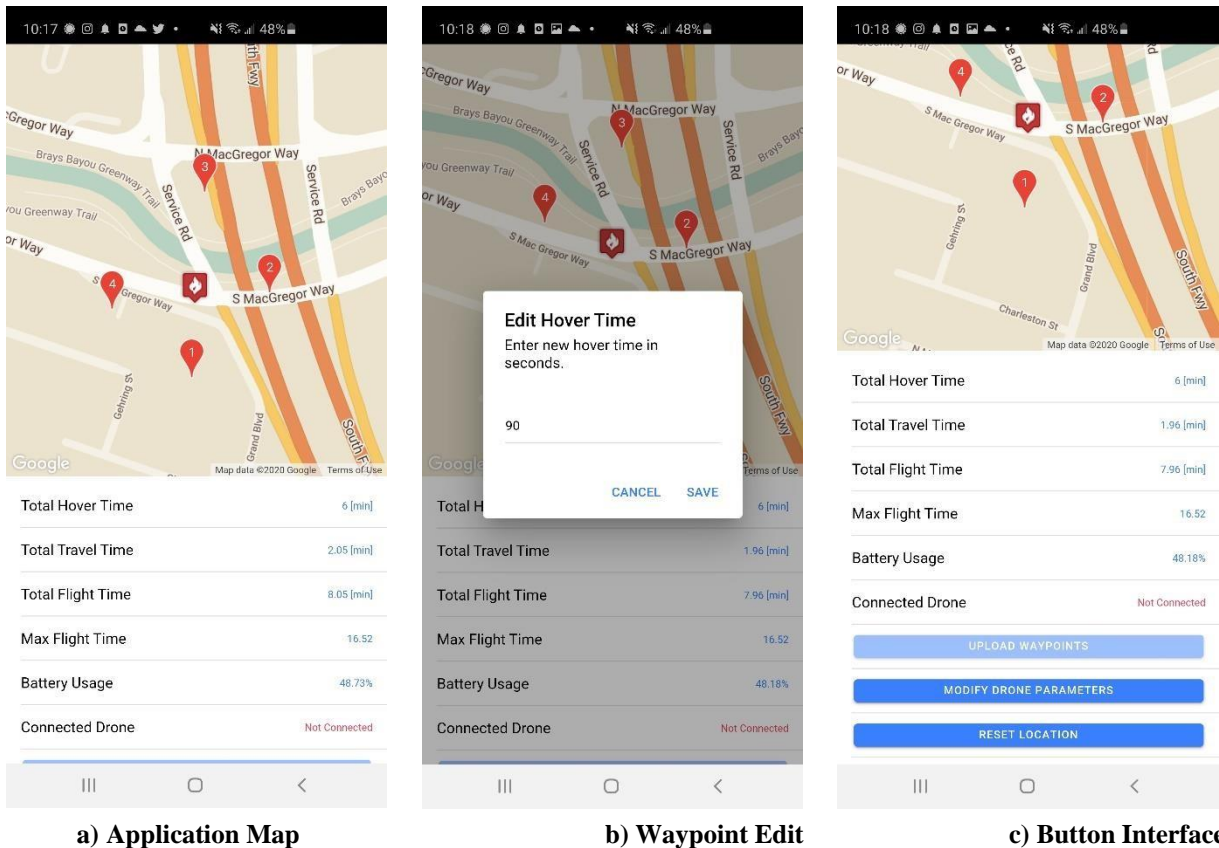


Figure 3 – Developed Drone Control Application

The sole remaining task for the application is the integration of BLE, as that is a feature that cannot be successfully constructed until the flight control unit has the capability to communicate via BLE. Once the drone can send and receive Bluetooth characteristics, the application will have a clear development path for Bluetooth operation. Until that point, we as the development team do not have a way to test Bluetooth communication, and therefore do not wish to develop a potentially erroneous communication protocol.

8.2. Construction

As previously reported, the team's previous progress in this task has resulted in early completion of all subtasks, and therefore no future work is expected in this task area.

8.3. Programming

The project has seen good progress in this task since the closing of the Spring 2020 Academic term. Specifically, significant progress was made in regards to the installation of the flight computer operating system as well as the design, modeling, and simulation of the flight environment: this includes both the linear control models for tuning of various autonomous flight parameters as well as a nonlinear simulation model to reduce the time and burden of testing the physical hardware. Additionally, the flight control system contains the framework for processing incoming sensor data, making the hardware integration subtasks more straightforward. The remaining subtasks and their associated completion requirements as outlined in the aforementioned test plan in Tables 3 and 4 are as follows: implementation of the motor control methods (Execution of Single Motor Control, Determine Position/Velocity via Gyroscopes, Execute Stable Hover/Landing); establishing GPS and BLE communications (Pair Drone with Input App via BLE, Receive BLE Data Download); implementation of the GPS Waypoint navigation (Determine Position/Velocity via GPS), and a final series of flight tests (Execute User-Controlled Flight, Execute Unmanned Flight).

9. Patents

9.1. Patent 1

Figure 4 shows the model of Autonomous Security Drone which is designed in semi-auto pilot mode to support drivers in parking at night for personal security purpose.

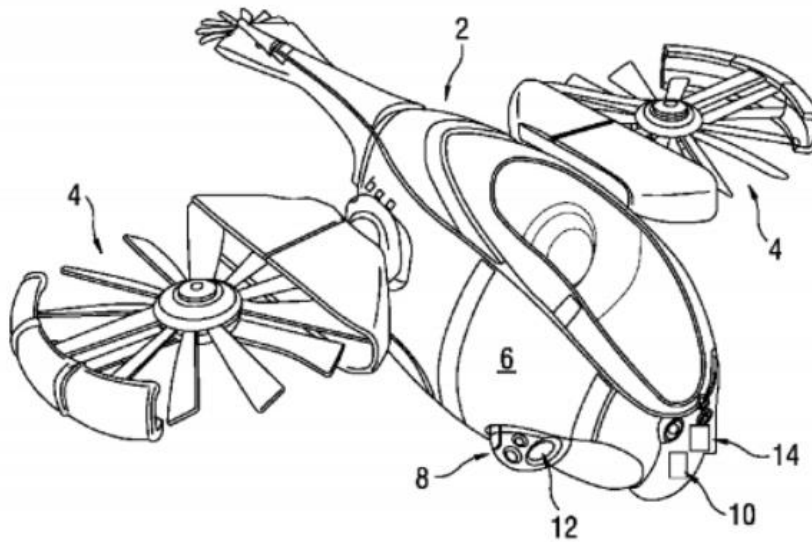


Figure 4: The model of Autonomous Security Drone

Table 6: The table of details of Autonomous Security Drone System and Method patent.

AUTONOMOUS SECURITY DRONE SYSTEM AND METHOD	
PATENT NO.: US 10,496,107 B2	
DATE OF PATENT: DEC. 3, 2019	
Applicant	Valeo North America, Inc., Seymour, IN (US).
Inventor	Mark Anthony, Pattison, Farmington Hills, MI (US); Gavin Francis Warner, Columbus, IN (US); John Steven Orisich, Columbus, IN (US)
Assignee	Valeo North America, Inc., Seymour, IN (US)
Filed	Jan. 17, 2017
Prior Publication Data	Jul. 19, 2018
Abstract	A drone aircraft for personal assistance or protection. When a driver's car is located in a parking lot at night, the driver can summon a drone stored in the vehicle which flies to the driver

	and leads the driver to the vehicle by projecting a spot of light onto the ground. The drone makes video recording of events occurring at this time and transmit to remote storage.
--	---

Table 7: Table of specification compared between the patent and our project.

	Patent's Specification	Project's Specification
Built-in Camera	Yes	No
Control Method	Hand Controller	Mobile App
GPS Navigation	No	Yes
Autonomous Flight Control	Yes	Yes
User Interface Control	Yes	Yes
Bluetooth Communication	No	Yes

9.2. Patent 2

Table 8: Table of method for automatic drone package pick up.

METHOD FOR AUTOMATIC DRONE PACKAGE PICK UP	
PATENT NO.: US 10,807,715 B2	
DATE OF PATENT: OCT 20, 2020	
Applicant	Wing Aviation LLC, Mountain View, CA (US).
Inventor	Trevor Shannon, Mountain View, CA (US).
Assignee	Wing Aviation LLC, Mountain View, CA (US).
Filed	May 22, 2018.
Prior Publication Data	Nov 28, 2019.
Abstract	A payload retrieval apparatus including a structure having an outwardly facing portion, a payload support member adapted for having a payload positioned thereon, one or more magnets engage one or more magnets on a payload retriever attached to a tether suspended from an UAV.

Figure 5 shows a visual model of how the drone picks up the goods automatically. Compared to our drone, the two drones have similarities and differences. The similarity is that both are GPS-based and fly automatically without an operator. Both use map-based navigation provided with a map to navigate drone to a particular location on the map. Moreover, both apply waypoints which are sets of coordinates that identify points in space, including latitude, longitude, and altitude. Although both have a GPS sensor and gyroscope sensor, our drone also has an altimeter sensor for altitude measurement while the automatically drone package picks up owns a magnet sensor and pressure sensor help to better determine position and facilitate the pickup process. The latter can detect frequency either in or out of human range. They can listen to and execute commands from the operator's words in order to determine the specific location.

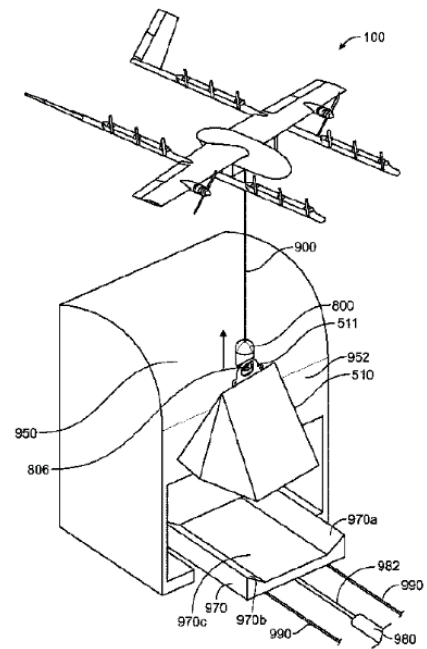


Figure 5. Model for automatic drone package pick up

9.3. Patent 3

The third patent investigated by the team was awarded to Working Drones, Incorporated for the development of a mobile device-based flight controller for UAVs (general information regarding this patent can be found in **Table 9**) below.

Table 9: Summary of Patent #3 Information

MOBILE COMPUTING DEVICE-BASED NAVIGATION AND CONTROL FOR UAVs	
PATENT NO.: US 9,611,038 B2	
DATE OF PATENT: April 4, 2017	
Applicant	Working Drones, Inc., Tallahassee, FL (US)
Inventor	Robert L. Dahlstrom, Tallahassee, FL (US)
Assignee	Working Drones, Inc., Tallahassee, FL (US)
Filed	June 3, 2015
Abstract	An aerial system including a hover or slow-moving mode as the predominant behavior during the system task, with a removeable mobile device-based flight controller and/or data acquisition unit. With the flight controller removed, the user is able to manually control the aircraft.

Briefly, the system described in US 9,611,038 B2 (Figure 6, below) operates in a similar manner to the current project: a mobile computing device and UAV are used to perform a task that predominately involves hovering and slow movement. However, the current project only uses a mobile device for the setting of GPS waypoints for navigation which are then transferred via BLE to the permanent on-board flight control unit. Additionally, the system described in the patent allows for removal of the flight controller to enable manual operation; our project only allows autonomous operation.

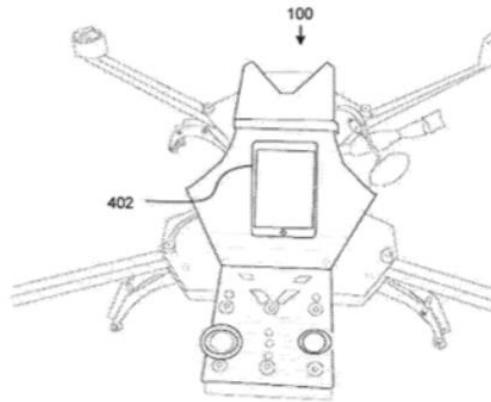


FIG. 4

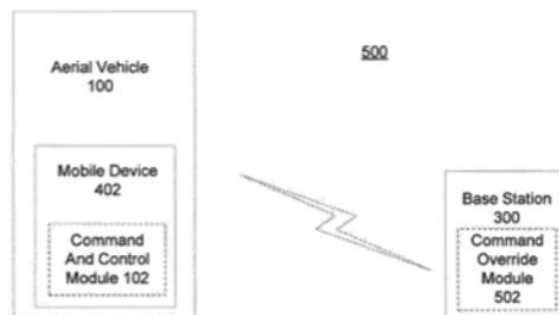


Figure 6: General System Diagram for Patent #3 (Fig. 4 in US 9,611,038 B2)


9.4. Patent 4

The fourth and final patent that our team researched is the autonomous aircraft designed to self-report any equipment malfunctions. A summary of this patent can be seen in **Table 10**.

Table 10: Summary of Patent #4 Information

AUTONOMOUS AIRCRAFT HEALTH SYSTEMS AND METHODS	
PATENT NO.: US 0362190 A1	
DATE OF PATENT: December 20, 2018	
Applicant	Aurora Flight Sciences Corporation (US)
Inventor	Jeffery T. Chambers
Assignee	Working Drones, Inc., Tallahassee, FL (US)
Filed	Aurora Flight Sciences Corporation (US)
Abstract	A condition aware aircraft configured to make inflight decisions autonomously, based on the most up-to-date information, to perform missions under dynamic conditions, while also providing feedback to maintenance units and depots in order to coordinate required and upcoming maintenance.

This system is similar to our design in that it performs functions autonomously. It has the ability to monitor its peripherals and utilize logic to determine if it is necessary to return to a maintenance depot. While it does have some autonomous functionality, it does not have the ability to guide itself around a user defined path, like our project. With regard to future operations for our project, our team may look into further integration this form of technology, as self-reporting any malfunctions is an invaluable asset to an autonomous quadcopter. Figure 7 summarizes the appearance of the aircraft monitoring system.

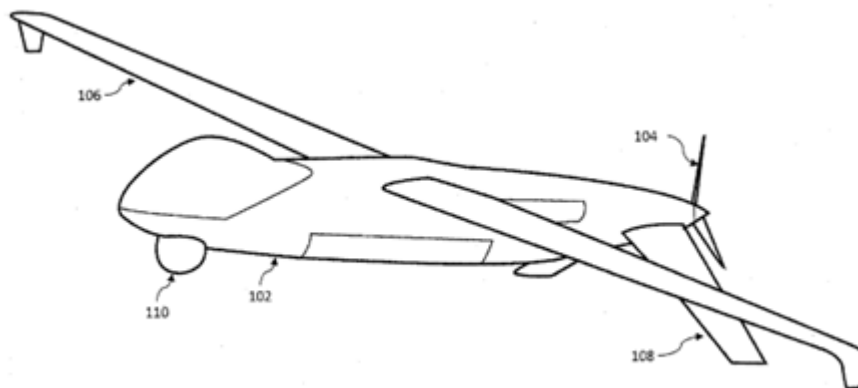**Figure 7:** General System Diagram for Patent #4 (US 0362190 A1)

10. Budget

No changes have been made to the total budget (Figure 8) during the current reporting period.

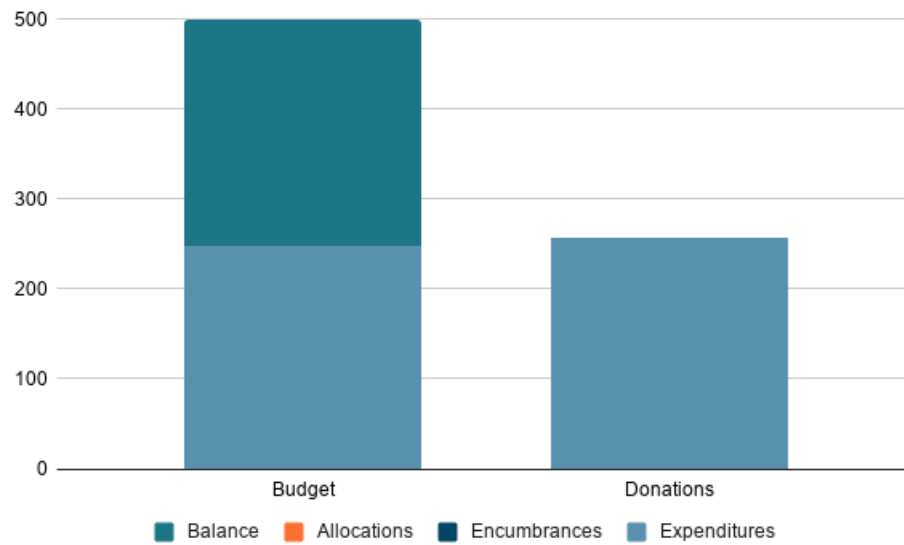


Figure 8: Total Project Budget for Autonomous Air-Quality Sensing Quadcopter

11. Standards

Various standards, from both the government and private sector, have guided our planning and construction process. A summary of those standards can be seen in **Table 11**.

Table 11. Drone's Standards from Government and Retail Market

Drone's Standards	
Government Drone Standards	Retail Drone Standards
Weight: 55 lbs (25kg) Groundspeed: 100 mph (87 knots) Altitude: 400 feet Above ground level Minimum weather visibility: 3 miles Schedule: 30 minutes before official sunrise to 30 minutes after official sunset.	Standard Flight Time: 15 minutes Standard Control Method: RC Controller Typical Features: <ul style="list-style-type: none"> • Camera • Interchangeable Batteries • Possible app interaction • Flight stabilization • Auto-Landing Feature

a) Government's standard

Air transport is not as complicated and dangerous as road transport or maritime transport, but it also needs to follow strict regulations from the government to maintain a safe airspace for not only you, but others flying as well. Here are some basic rules for small unmanned aircraft from Part 107 Guidelines from FAA (Federal Aviation Administration).

The total weight including the drone, its attached systems, payload and cargo should not exceed 55 lbs. Although the drone's engine is developing day by day, that doesn't mean it can carry a large payload. The weight limit makes the drone fly more stable and the user can control it more easily.

Maximum groundspeed of 100 mph and maximum altitude of 400 feet above ground level. The higher the fly, the more likely the drone is to crash with a civil aircraft or helicopter. The regulation of altitude and speed limits aims to ensure not only the safety of the flying vehicles but also the safety of people.

Flight time is daylight-only operations, meaning 30 minutes before sunrise until 30 minutes after sunset. Users cannot see the drone's vision directly but have to go through the camera and GPS. Therefore, flying at night or in low light conditions makes it impossible for the user to have a sweeping view and to be unable to fully control the drone.

Users must stand in an open place and have a good view to make sure the flight is conducted within visual line of sight and avoid standing on moving vehicles or aircraft. In addition, the user must also guarantee the drone is not flying too far where the user is standing.

As with any vehicle, a drone operator needs a license and a drone needs to be registered. The drone user is either licensed or supervised by a licensed drone user. You need to be over 16 years old, pass knowledge and practice tests from the FAA to be awarded a license.

b) Retail Drone Standards

According to the FAA (Federal Aviation Administration) in 2018, there were more than 1 million registered drones, including 122,000 public and commercial drones. The FAA also predicts that the number will rise to 4 million by 2021. With the advancement of technology, drones become cheaper and cheaper, leading to widespread use and ease of control. Like the government, the drone retail market has its own set of rules.

The battery quality is improving day by day, the world record for the longest flight time of a drone up to 4 hours and 40 minutes. However, the average flight time of a consumer drone is still between 10 and 20 minutes. It sounds short, but it is suitable for short-term drone purposes such as photography, video recording, surveillance, research, or inspecting.

Drone controllers work by sending radio signals from the remote control to the drone and telling it what to do. That is why the drone controller is called the RC controller. Each remote control has different features, but all have the basic features, such as the left stick of controlling the drone up and down or spinning; the right stick is to redirect the drone to left to right, backward or forward. Some controllers also feature GPS to track the drone's location, BLE for receiving drone signals and data, and a monitor so users can use a smartphone to fly FPV (first person view).

There is a stereotype that every drone has a camera attached. This is not true because depending on the intended use the drone will or may not have a camera. However, it does speak of the importance and popularity of camera drones. The camera is used by both professional and amateur drone users. Cameras make it possible for drones to take pictures, record videos, collect data and events without the

need for giant and complex flying vehicles like helicopters. Camera type, video resolution, megapixels and media storage format those are the user's requirements when investing in the camera on the drone.

In addition to the above features, the retail drone market has rules about batteries that can be interchangeable, as long as it fits the drone in terms of physical size, capacity, and voltage which gives the drone enough power to fly further and longer. Another feature is the interaction between the drone and the smartphone, which makes it possible for the user to store images and data from the drone, or locations the drone flies over. Another important feature is the ability to automatically balance and stabilize in flight, or the ability to land safely.

12. Risks and Mitigation Strategies

The updated risk matrix for the current reporting period is shown in Figure 9, below. The only change made since the previous reporting period is the removal of one risk which was completely mitigated (as previously reported). Additionally, the mitigation plans for the remaining risks (listed in Table 12, below) is unchanged from the previous reporting period.

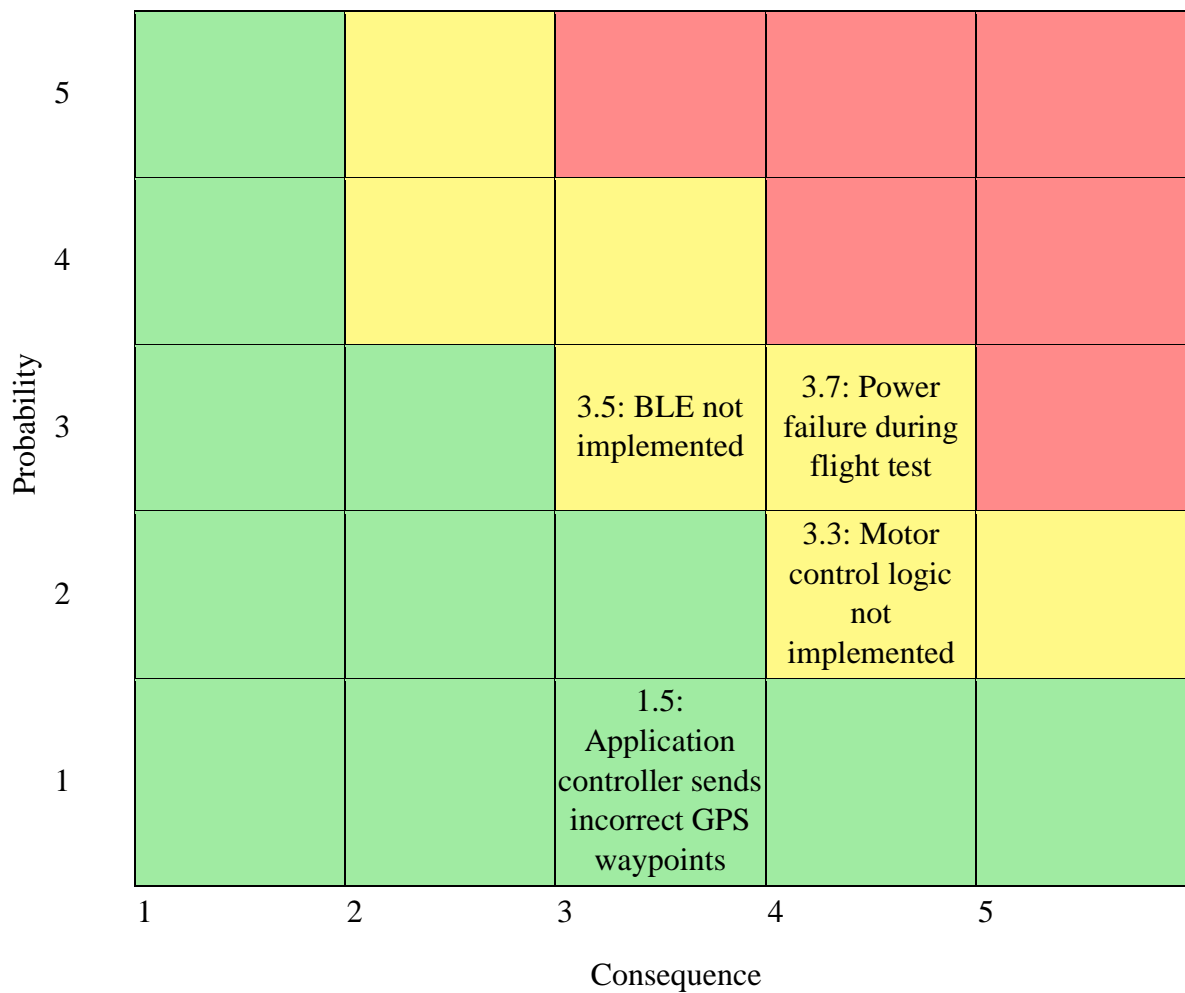


Figure 9: Risk Matrix for the Current Project Reporting Period

Table 12. Risk Mitigation Strategy

Risk (Severity)	Mitigation Plan
3.7: Power failure during flight test (12)	Implementation of low battery voltage flight abort procedure
3.3: Motor control logic not implemented (9)	Prioritize task; use manual flight control
3.5: BLE not implemented (9)	Prioritize task; use direct flight controller programming
1.5: Application controller sends incorrect GPS waypoints (3)	No action required

12. Conclusion

The purpose of our project is to design and implement an Autonomous Aerial Vehicle for RealTime Air Quality Measurements. Over this past month, we have made progress with both product planning and product construction. With regards to planning, we have evaluated multiple risks and developed unique mitigations plans. With regards to construction, we have completed the drone build, enabled all motor functions, implemented the GPS module, gyroscope, and altimeter. Before our next report, we are anticipating running our first flight tests.

Since the last reporting period, we have researched four patents that are relative to our project. We have determined that we are developing new technology and will not be interfering with any existing patents. Further, we have integrated all modules mentioned previously into one, united quadcopter. Our quadcopter now has the ability to read all peripheral devices and control its motors at the same time, all while completely disconnected from a terminal machine like a PC.

Aside from the risks identified in the risk matrix, we do not see any true obstacles to the completion of this project. We are, by our own measurement, firmly ahead of schedule. We have full confidence that the project will be completed before the conclusion of the semester.

APPENDIX I

A1. Drone Performance Calculations

The motion of the drone is represented in Newton's Second Law with the following diagram:

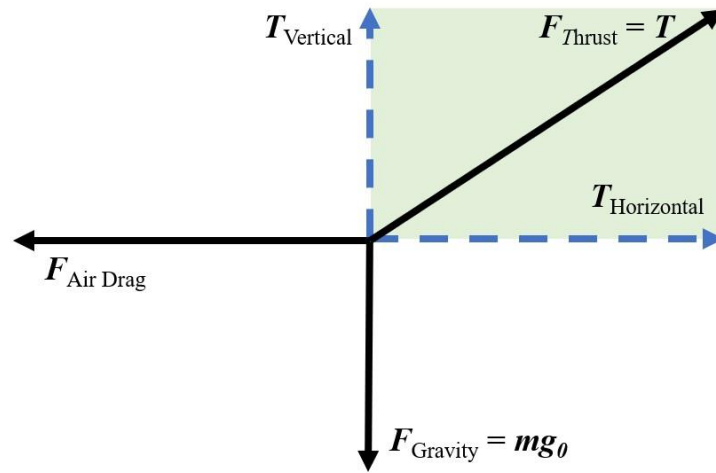


Figure A.1: Motion Model Analysis Diagram.

$$F_{Thrust} - F_{Gravity} - F_{AirDrag} = ma$$

Derived Equations from Newton's Second Law analysis [6]:

$$F_{T0} = gT_0$$

$$P_{max} = \cos^{-1} \left(\frac{F_{T0}}{T_0} \right)$$

$$v_{max} = V_{load} \cdot kv \cdot Pitch \cdot \frac{60}{12} \cdot \frac{1}{5280} \cdot \frac{1}{2.23647} \cdot \sin(P \cdot \sin(P \cdot \frac{1}{2.23647}))$$

$$v = a_0 + a \cdot t$$

$$F_T = F_{T0} \cdot \left(\frac{v_{max} - v^{n-1}}{v_{max}^{n-1}} \right) - F_{dn-1}$$

$$F_d = \frac{1}{2} \cdot \rho \cdot C_d [(A_{front} \cdot \cos(P_{max} - P_{motor})) + (A_{top} \cdot \sin(P_{max} - P_{motor}))] \cdot v_{n2-1}$$

T_0 = total thrust of motor [kg]

F_{r0} = Force of thrust (in newtons) at 0 velocity

F_T = net force of thrust in newtons

F_d = drag force

P_{motor} = pitch angle of the motor relative to the frame's horizontal axis
 P_{max} = max pitch angle without losing altitude

ρ = air density = $1.225 \frac{kg}{m^3}$

C_d = drag coefficient, varies by object shape

A_{front} = area of the front of the quad in m^2

A_{top} = area of the top of the quad in m^2

g = gravity = $9.81 \frac{m}{s^2}$

t = time in seconds

m = mass of quad in kg

v_{max} = max attainable velocity = velocity with no drag force
 v = velocity

v_{load} = battery voltage under load

Pitch = propeller pitch

a = acceleration

Frame Info	Frame Weight	Frame Height	Frame length	Frame width	Arm Length	Arm Height	Arm Width	Cd	ρ
	0.285 [kg]	80 [mm]	340 [mm]	340 [mm]	254 [mm]	6 [mm]	10 [mm]	1	1.2 [kg/m ³]
Motor/Prop Info	Motor Diameter	Motor Height	Motor Voltage	Pitch	Thrust per Motor	Motor angle	Battery Weight	Cells	V _{Load}

	29.5 [mm]	19.5 [mm]	2550 [kv]	6''	1.354 [kg]	400	0.256 [kg]	6	13.6 [V]
Calculated Values	Area Top	Area Front	Vmax m/s	Theoretical Vmax	Total T	Max Time	Max Drag	Max MPH	Max KPH
	0.126 [m ²]	0.033 [m ²]	67.92 [m/s]	151.94 [m/s]	5.416 [kg]	15 [mins]	2.15 [kg]	62.47	100.53

Table A.1: The theoretical calculation data for drone specifications.

Table A.1 the input values and calculated values of drone specifications using equations which derived from Newton's Second Law. The calculation using the hardware specification and average value for drag coefficient like. The calculation is calculated at max value for drone performance; therefore, V_{load} is used 13.6 [V] which is the idle operation voltage for motor. The flight time is calculated based on 1.3 [A] for idle current of motor, and four motor consume 66.66% power of entire system.

A2. Notable Flight Code Subsystems

Figures A.2 and A.3 depict Simulink block diagrams of the notable Flight Code subsystems.

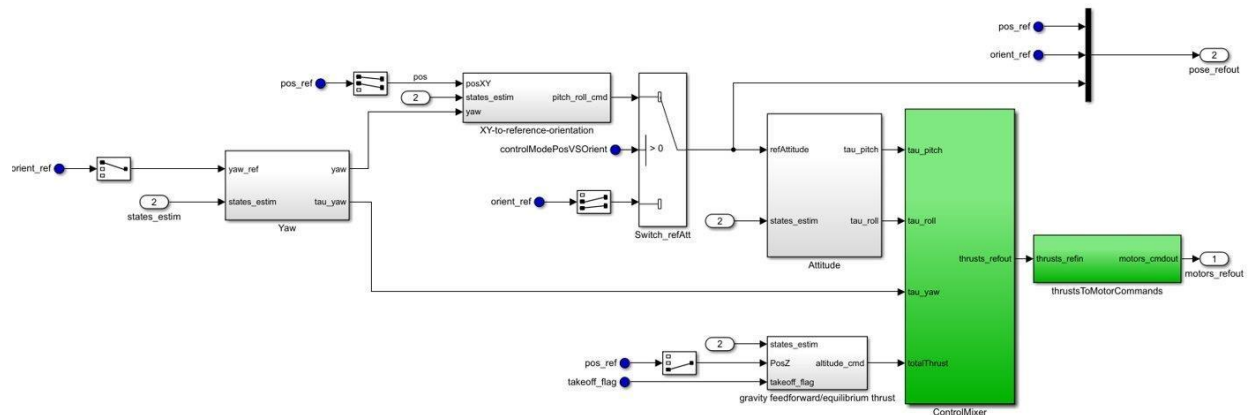


Figure A.2: Flight Controller Block Diagram

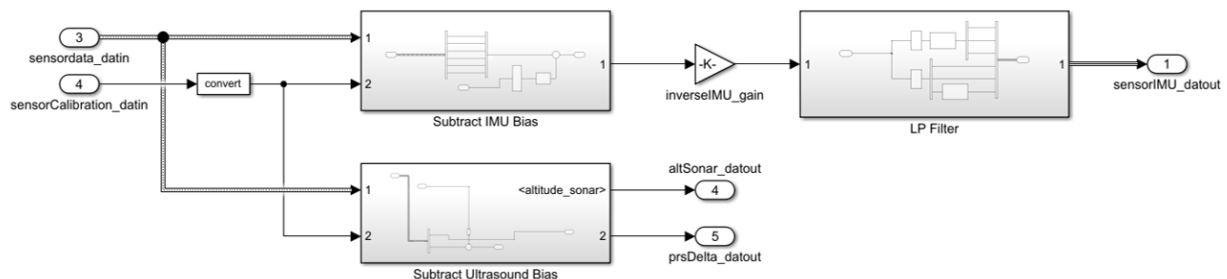


Figure A.3: Sensor Processing Block Diagram**A3. Current drone regulations (Old Information)**

- Fly at or below 400 feet
- Keep your drone within sight
- Don't fly in restricted airspace
- Don't fly near other aircraft, especially near airports
- Don't fly over groups of people
- Don't fly over stadiums or sports events
- Don't fly near emergency response efforts such as fires
- Don't fly under the influence

A4. Problem and Need (Old Information)

Frequent chemical fires in the Houston area leave local residents wondering which, if any, hazardous materials they may be exposed to, and accurate real-time measurements allow for more accurate responses from emergency responders and local authorities to keep citizens safe while responding to the dangers imposed by the fire.

The current project sets out to learn which aerosolized byproducts are produced from chemical fires in real time while keeping human operators at a safe distance. To obtain measurements throughout the potentially contaminated site, an airborne transportation vehicle for a real-time sensor package would be the only appropriate choice given the spatial dimensions of a fire and resulting smoke plume – namely altitude. Correlating these measurements with the aerial vehicle's flight path allows for quick tracking of air quality, which is of primary concern to both emergency responders as well as citizens who live or work in the area near such fires. In this way, this project has the potential to limit the human suffering caused by these tragedies.

A5. Deliverables (Old Information)

Our project has two main deliverables: the application to control the drone, and the drone itself. While the air quality sensor is the primary motivation for this project, it has already been designed and tested by Dr. Shan's research team. Instead, we will be focusing our efforts on the design and implementation of the drone and the method in which the user controls it.

The method for the control of the quadcopter will be via GPS coordinates sent from a user-controlled application. The motivation for using an application is that it will one, keep costs low as near everyone has access to a smart phone, and two, there are a vast array of widely available application design tools that we can use to implement a solution that is both easy to program and is intuitive for the user. The application will only have primary functions: selecting GPS coordinates via Google Maps API and uploading those coordinates to the drone's flight controller via Bluetooth Low Energy. During our final demonstration, we will show all views available in the application and discuss how the user interacts with them to control the drone.

The second deliverable, the drone meant to carry the load of the air-quality monitor, will be the main focus of our work. The flight controller will operate the drone motors, adjusting the speed of each individual motor so as to alter the motion of the drone so that it moves to each coordinate. The flight controller must have Bluetooth capabilities so that it may receive the coordinates from the application. Our final demonstration will show the drones ability to maneuver to each individual uploaded GPS coordinate along with its ability to carry the airquality monitor.

A6. Engineering Specifications

A6.1 Drone Hardware and Sensors

There are many specifications to keep in mind when building a drone. Depending on the intended use, the way to choose materials is also different. Table 1, below, summarizes the two general aspects of the project: the physical parameters and the quadcopter's performance.

- **Size:** Because the primary purpose of this project is to carry the air quality sensor, we have chosen a frame that is large enough to attach each of the four motors and be capable of lifting itself and the 2 [kg] air quality sensor. Therefore, we have selected a 34 [cm] x 34 [cm] frame, and after adding a sensor, the height would be around 80 [mm].
- **Flight time:** Given the objective forward flight speed of no more than 10 [m/s] and the calculated current draw from the battery, as well as the air quality testing constraints of potential users, the drone will be able to deliver a maximum 15-minute flight time.
- **Battery:** The chosen battery a Lithium-Ion Polymer (Li-Po) which is capable of providing more power due to its higher capacity and a lower internal resistance at a reduced weight compared to other battery chemistries.

- **Range:** To ensure the safety of the quadcopter operator as per our user's required product specifications, the project require a large range of operation. Due to the limitations imposed by the maximum forward speed and flight time, the drone is only able to operate at a maximum straight-line distance of 1 [km], with the usable range dependent on the specific waypoints chosen by the user.

Table 1. Hardware Specifications

Physical Specification	Frame Dimension	33.4 [cm] x 33.4 [cm]	Motors	34,680 RPM [MAX]
	Total Weight	2795 [g] (sensor is attached)	Propeller – length	Diameter: 8"
				Pitch: 6"
	Drone Weight	795 [g]	Microcontroller	MSP432
	Drone Height	80 [mm]	GPS Module	NEO-6M
	Wheelbase	472 [mm]		CC2650
	Thrust-to-Weight Ratio	1.9		PMU6500
Performance	Maximum Speed	36 km/h	Altitude	122 [m]
	Operation Distance	Up to 1000 [m]	Operation Temperature	50 to 120 [°F]
		5.416 [kg]		Lithium-Ion 6S (22.2V, 1550mAh)
	Flight Time	Up to 13 minutes	Battery	
			Wind Speed	7 to 11 [km/h]

Figure 2, below, shows the theoretical calculation for performance of the velocity versus the acceleration and distance based on classical Newtonian dynamics. The four motors provide total 5.416 [kg] of thrust at maximum performance, and this amount of thrust provide the force for drone reach maximum acceleration $15.408 \text{ [m/s}^2\text{]}$ at start time. After that, the velocity of the drone increases rapidly while acceleration decrease due to decrement of the thrust. The slope of

velocity curve decreases after 2.5 [seconds], and at this time the velocity reaches 23.59 [m/s²]. After that, the velocity curve increases slowly and stabilizes at 3.5 [seconds]. After this time, the velocity of the drone changes negligibly and reaches maximum speed at 4 [seconds]. At this time, the drone has traveled approximately 90 [m]. However, in the high-fidelity simulation of the overall system, the model is unable to afford these theoretical values nor are they necessary for achieving our product specifications.

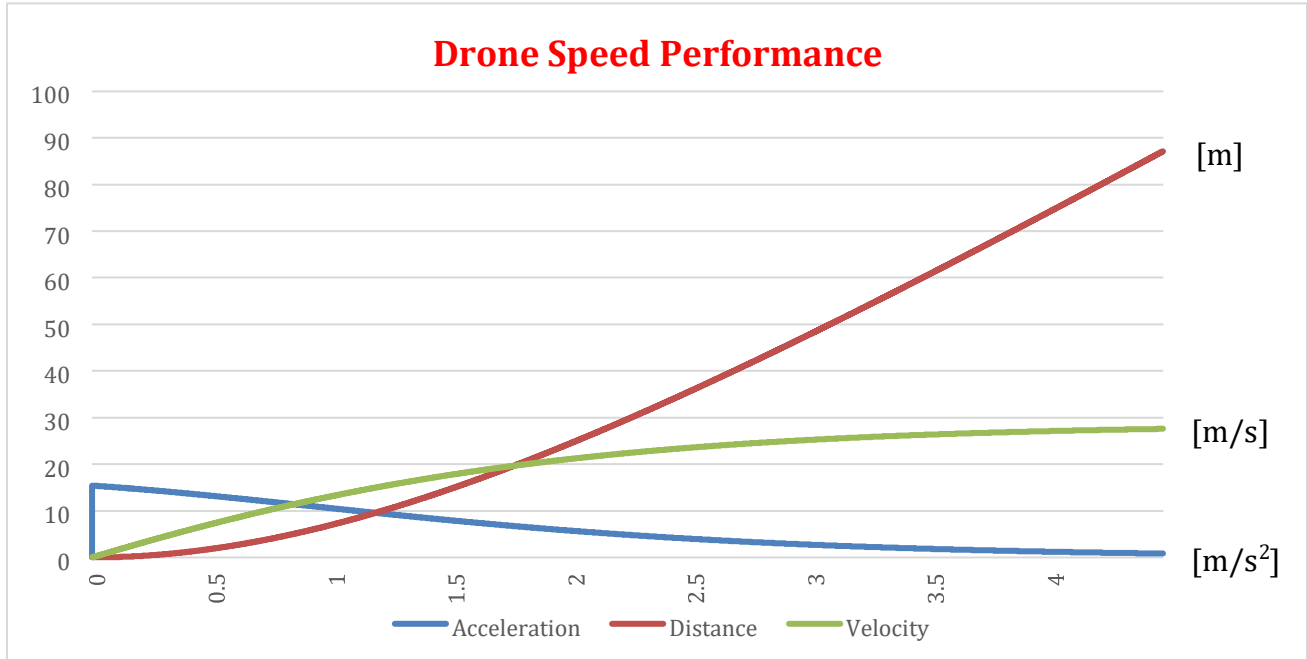


Figure 2: Performance of Quadcopter Dynamics

Figure 3, below, shows the hardware layout and the construction of the drone. The carbon fiber frame is the backbone of the drone. Each motor is attached to the end of each arm of the frame. The center part, consisting of the Power Distribution Board and the battery, is the heart of the drone. From this “heart,” the power source is distributed all over the drone, helping the drone to operate smoothly. The BLE module received signals from the user so that the drone can be programmed to follow specific waypoints. The GPS module allows the quadcopter to determine its current position, which further allows it to faithfully follow the pre-programmed waypoints provided by the user. Additionally, an inertial measurement unit (IMU) consisting of three gyroscopes and a three-directional accelerometer to determine each of the six degrees of motion, as well as a barometer/thermistors and ultrasound module to determine altitude are required for proper

operation and stabilization of the quadcopter. Each of these modules are connected to the drone's "brains," an MSP432 Launchpad with different wires. The MSP432 contains the flight code, which accepts and stores the waypoints determined by the user and adjusts the rotation speed of each motor, thereby controlling the speed and direction of travel of the drone.

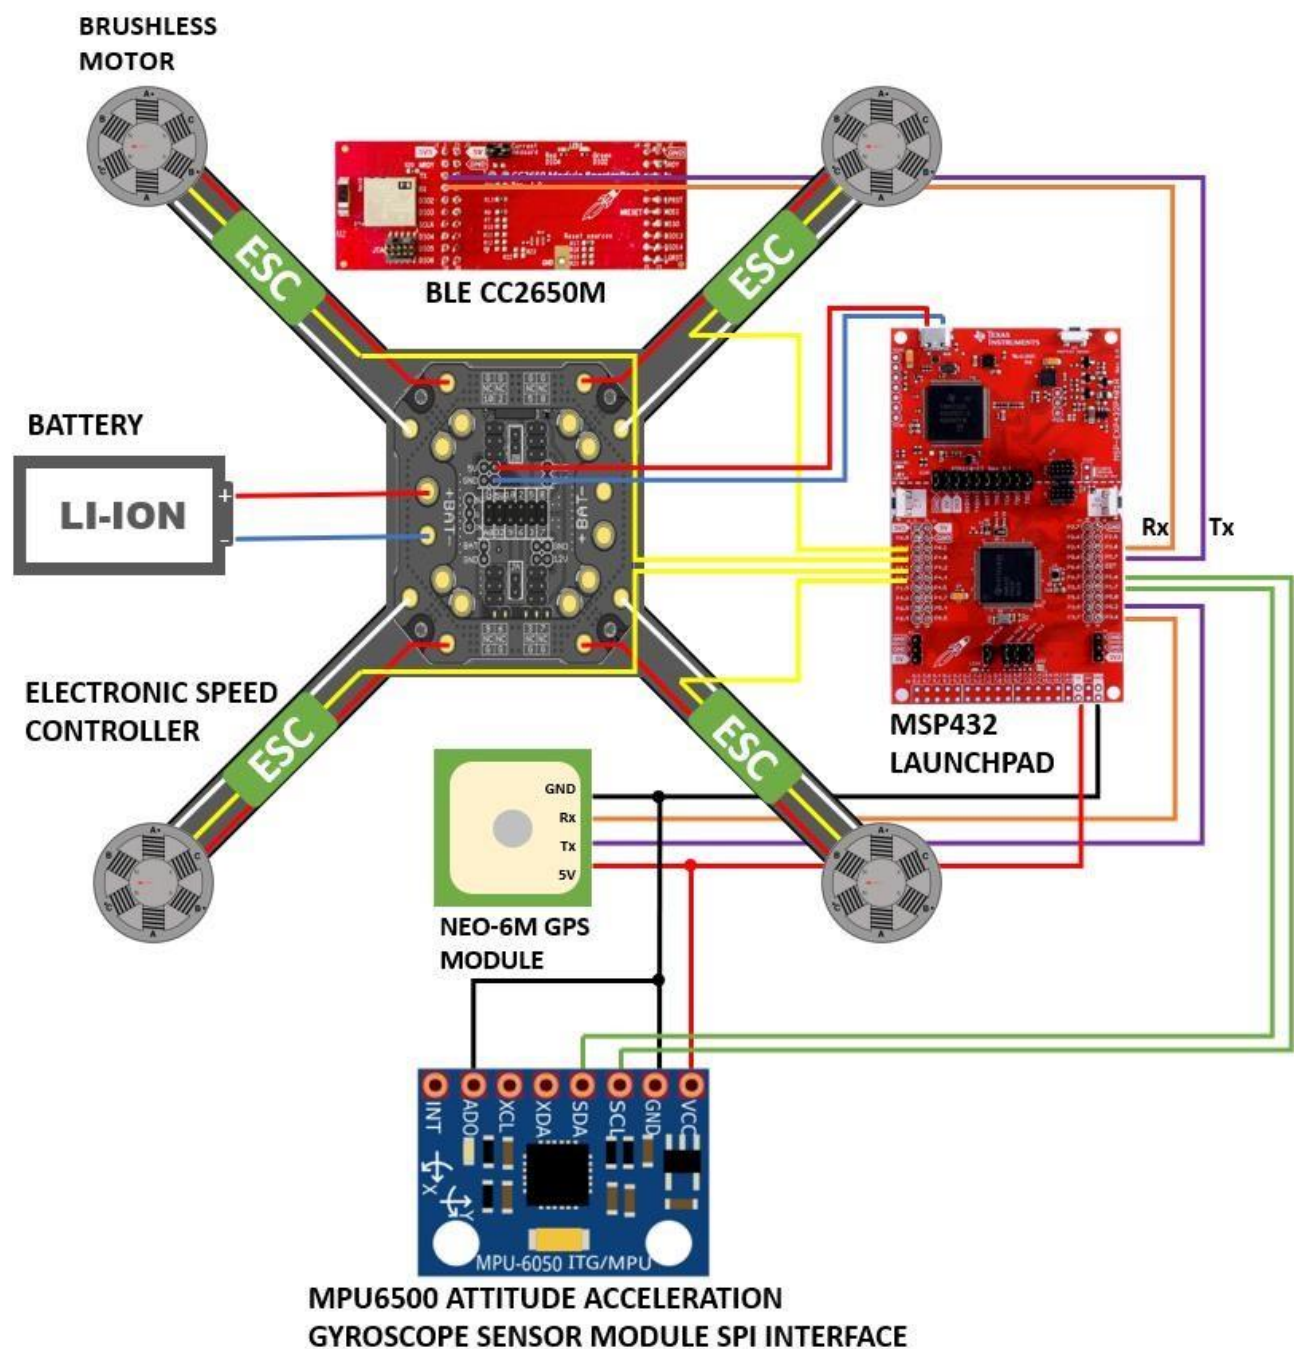


Figure 3: Hardware Construction Diagram

Abort Procedures	The flight code includes logic to immediately attempt to land the quadcopter should an outlier condition be observed. These conditions include a forward velocity of more than 10 [m/sec], an altitude of less than 2[m] while not executing take-off or landing, a deviation of more than 15[m] from the intended flight path, or a deviation of more than 20% of the estimated states of the system compared to the measured states determined from the sensors.
Flight Controller	Tuning of the flight controller prioritizes stable, level flight (deviation of no more than 5 degrees for relative orientation) by ensuring no steady-state error and minimizing the step-response rise time (< 2 seconds) and maximum overshoot (<10%) of each individual controller (6 total).

A6.3 Application

The application will be used to upload GPS coordinates to the drone. Application requirements and performance metrics are outlined in Table 3.

Table 3 – Application Requirements

Requirement	Description
BlueTooth Connectivity	The mobile application will communicate with the Flight Control Unit via Bluetooth transmission. New flight coordinates and hover times for each coordinate will be uploaded to the drone over BlueTooth communication. The coordinates and flight timing must be uploaded to the drone with 100% accuracy.

Ability to add/remove GPS Coordinates	The user must be able to both add and remove GPS coordinates in a path so that they can dictate where the drone flies so that it may log air-quality data. Without the ability to add and remove waypoints, the user will not have a way to direct where the drone flies. The user must be able to input and edit at least 20 different waypoints, with each waypoint including latitude and longitude positional data.
Map View and List View of GPS Coordinates	The map and list views will provide ease of access for viewing and editing the flight path data. The map will provide a view of the drone route, and allow easily placed waypoints. The list will be a comprehensive view of all the points the drone will fly to and how long it will hover there to collect data. The map and list must show every waypoint that the user has input.
Select Hover Time for Each Coordinate	When the user places a new waypoint in the path for the drone, they must select how long the drone should hover in place to log sensor data. This is to prevent the drone from flying the path too quickly without logging enough data.

The features outlined in Table 3 can be compiled into one comprehensive application that the user can easily navigate, displayed in Figure 5. This figure outlines the expected display of the application, along with button and grid layouts. The ‘+’ button on the map will allow the user to add new waypoints by touching a location on the map, and the ‘-’ button will allow the user to remove waypoints by touching the waypoint they would like removed. Further, when a user inserts a new waypoint, they will be asked to input a hover time for that particular point. A summary of each point will be displayed in the list view below the map, where a user will also be able to edit waypoint information.

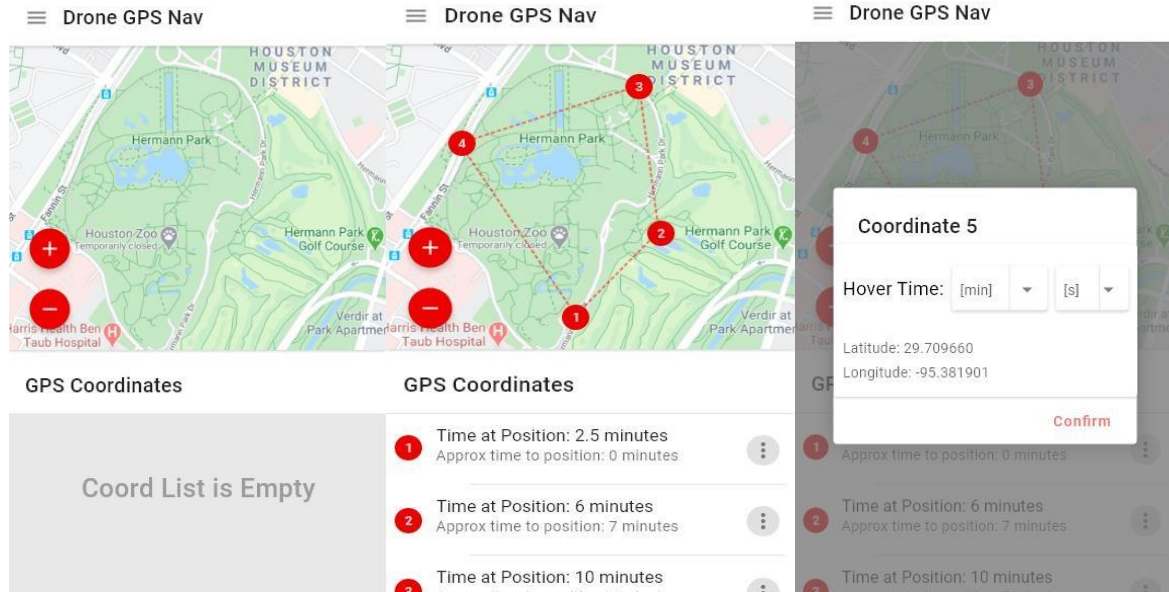


Figure 5 – Application-Visuals Expectations Outline

References

[1]	<p>“SimpleLink™ MSP432P401R high-precision ADC LaunchPad™ Development Kit MSP-EXP432P401R This product has been released to the market and is available for purchase. For some products, newer alternatives may be available.”</p> <p><i>MSPEXP432P401R SimpleLink™ MSP432P401R high-precision ADC LaunchPad™ Development Kit</i> / TI.com. [Online]. Available: http://www.ti.com/tool/MSPEXP432P401R#technicaldocuments. [Accessed: 05-Apr-2020].</p>
[2]	<p>“Thrust to Weight Ratio,” NASA. [Online]. Available: https://www.grc.nasa.gov/www/k-12/airplane/fwrat.html. [Accessed: 05-Apr-2020].</p>
[3]	<p><i>Estimate Propeller Static Thrust</i>. [Online]. Available: https://rcplanes.online/calc_thrust.htm. [Accessed: 05-Apr-2020].</p>
[4]	<p>Jack, “Brushless Motor KV To RPM Calculator,” <i>Quadcopter diy, quadcopter controller knowledges build quadcopter and quadcopter design by yourself</i>, 16-Aug2017. [Online]. Available: http://www.rcdronegood.com/brushless-motor-kv-to-rpm/. [Accessed: 05-Apr-2020].</p>
[5]	<p>“Lumenier QAV-RXL 2 - 10" FPV Quadcopter Frame,” GetFpv. [Online]. Available: https://www.getfpv.com/lumenier-qav-rxl-2-10-fpv-quadcopter-frame.html. [Accessed: 05-Apr-2020].</p>

[6]	“Part 7: The Equations for Speed,” <i>Quadstar Drones</i> , 12-Mar-2020. [Online]. Available: https://quadstardrones.com/the-equations-for-speed/ . [Accessed: 01-May-2020].
------------	--