


GOLDENEYE

Alex Millar, Artem Veklich, Benson Guo, Chanumi Mukadange, Gethin Price, Joe Beddoe


Vertical Launch. High-Speed Flight.
Precision Payload Control.

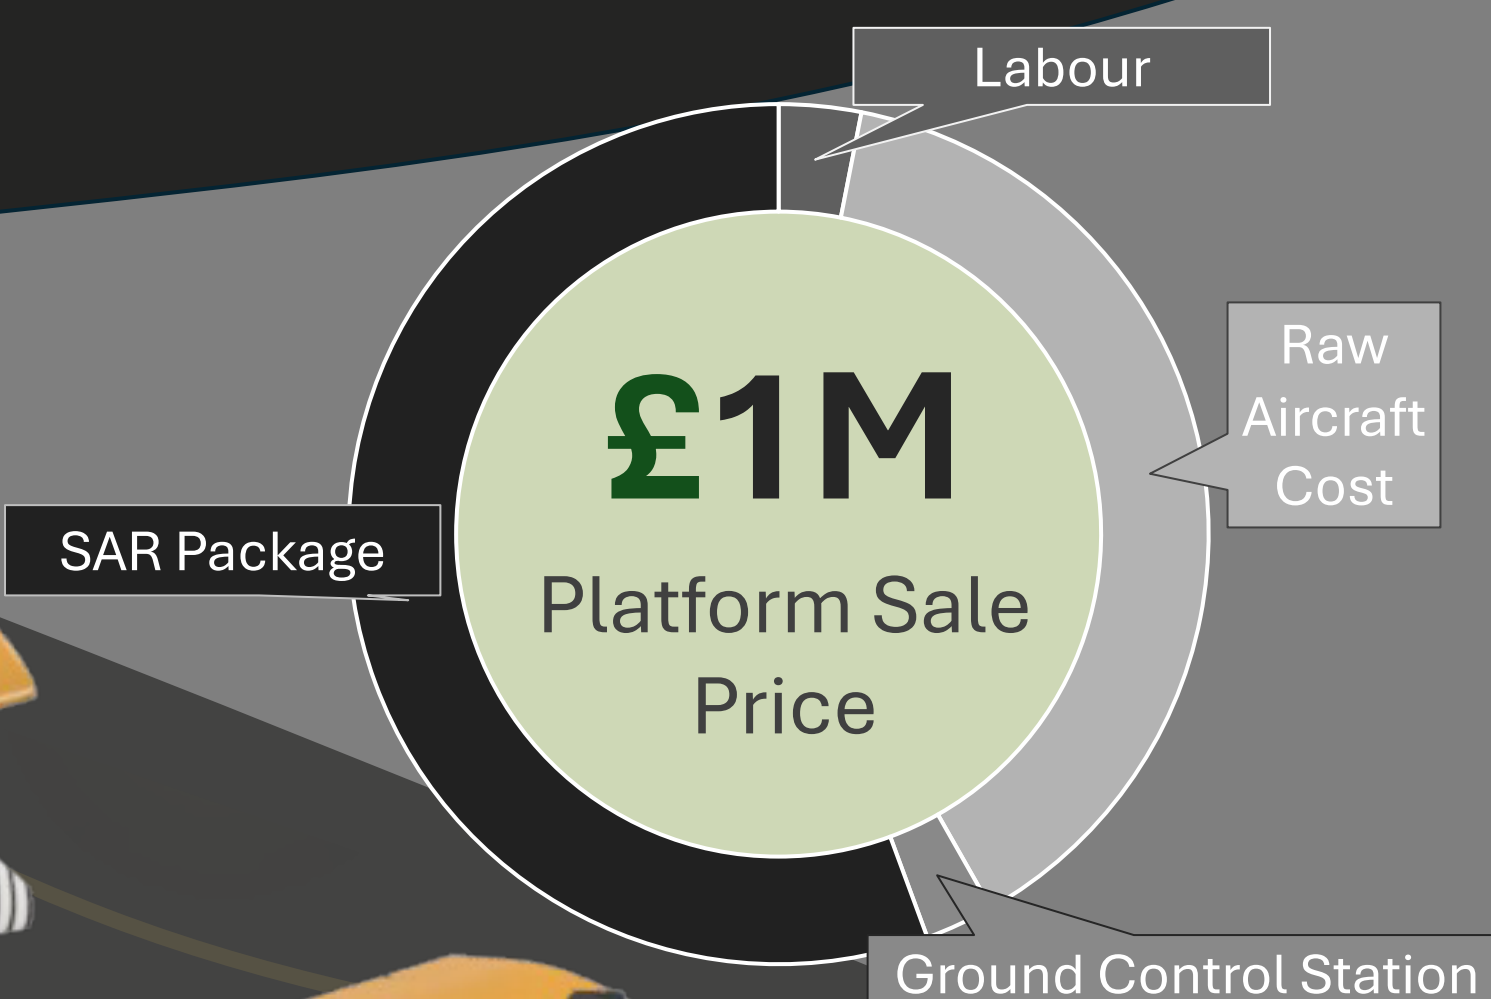

This UAV is designed as a solution to these challenges by combining VTOL capability, fixed-wing efficiency and a gimballed-fuselage control system.

Small Drones	GoldenEye	Large UAVs
£10k-250k	~£1m	£2m-£8m+
<10 kg payload	50 kg payload	Large footprint
Short endurance	VTOL + cruise	High Infrastructure needs

The aircraft can operate in confined spaces, transition smoothly into forward flight and maintain stable, efficient cruise performance

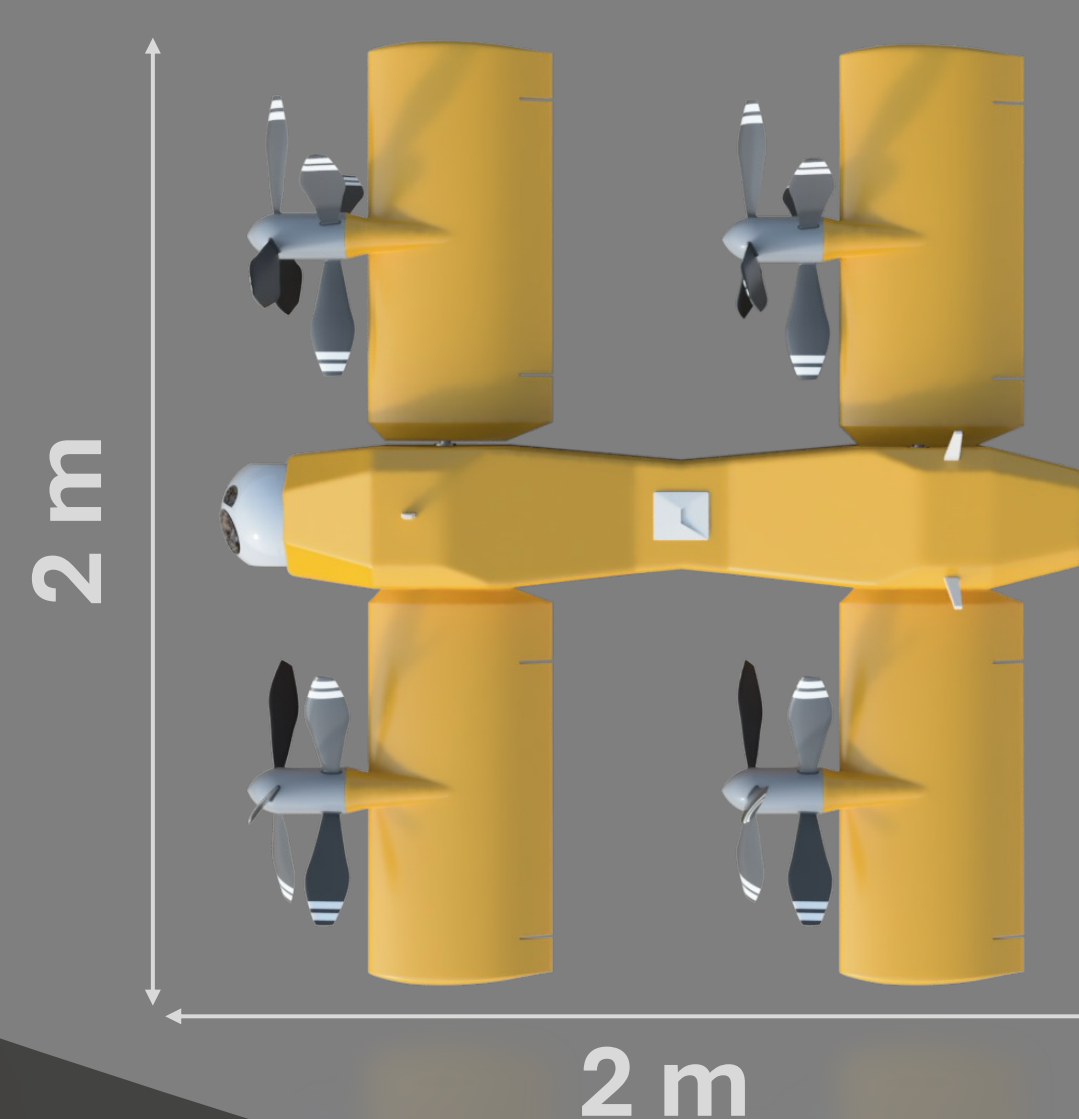

Payload **50 kg**

Allows for adaptable payloads for configurable use.

Range **600+ km**

Suitable for missions longer than 2 hours.

Speed **300+ km/h**


Designed to exceed the speed of a Sea King helicopter.

Mission Roles **5+**

Capable of being fitted for specific customer operations.

Rapid Response

The UAV's VTOL capabilities allow it to be launched from anywhere (including sloped surfaces thanks to the gimbaling fuselage). This capability alongside the 300km/h cruise speed allows it to reach its destination in less total time than a fixed wing aircraft. The fast-charging battery and ICE refuelling means the UAV can be relaunched quickly in between flights.

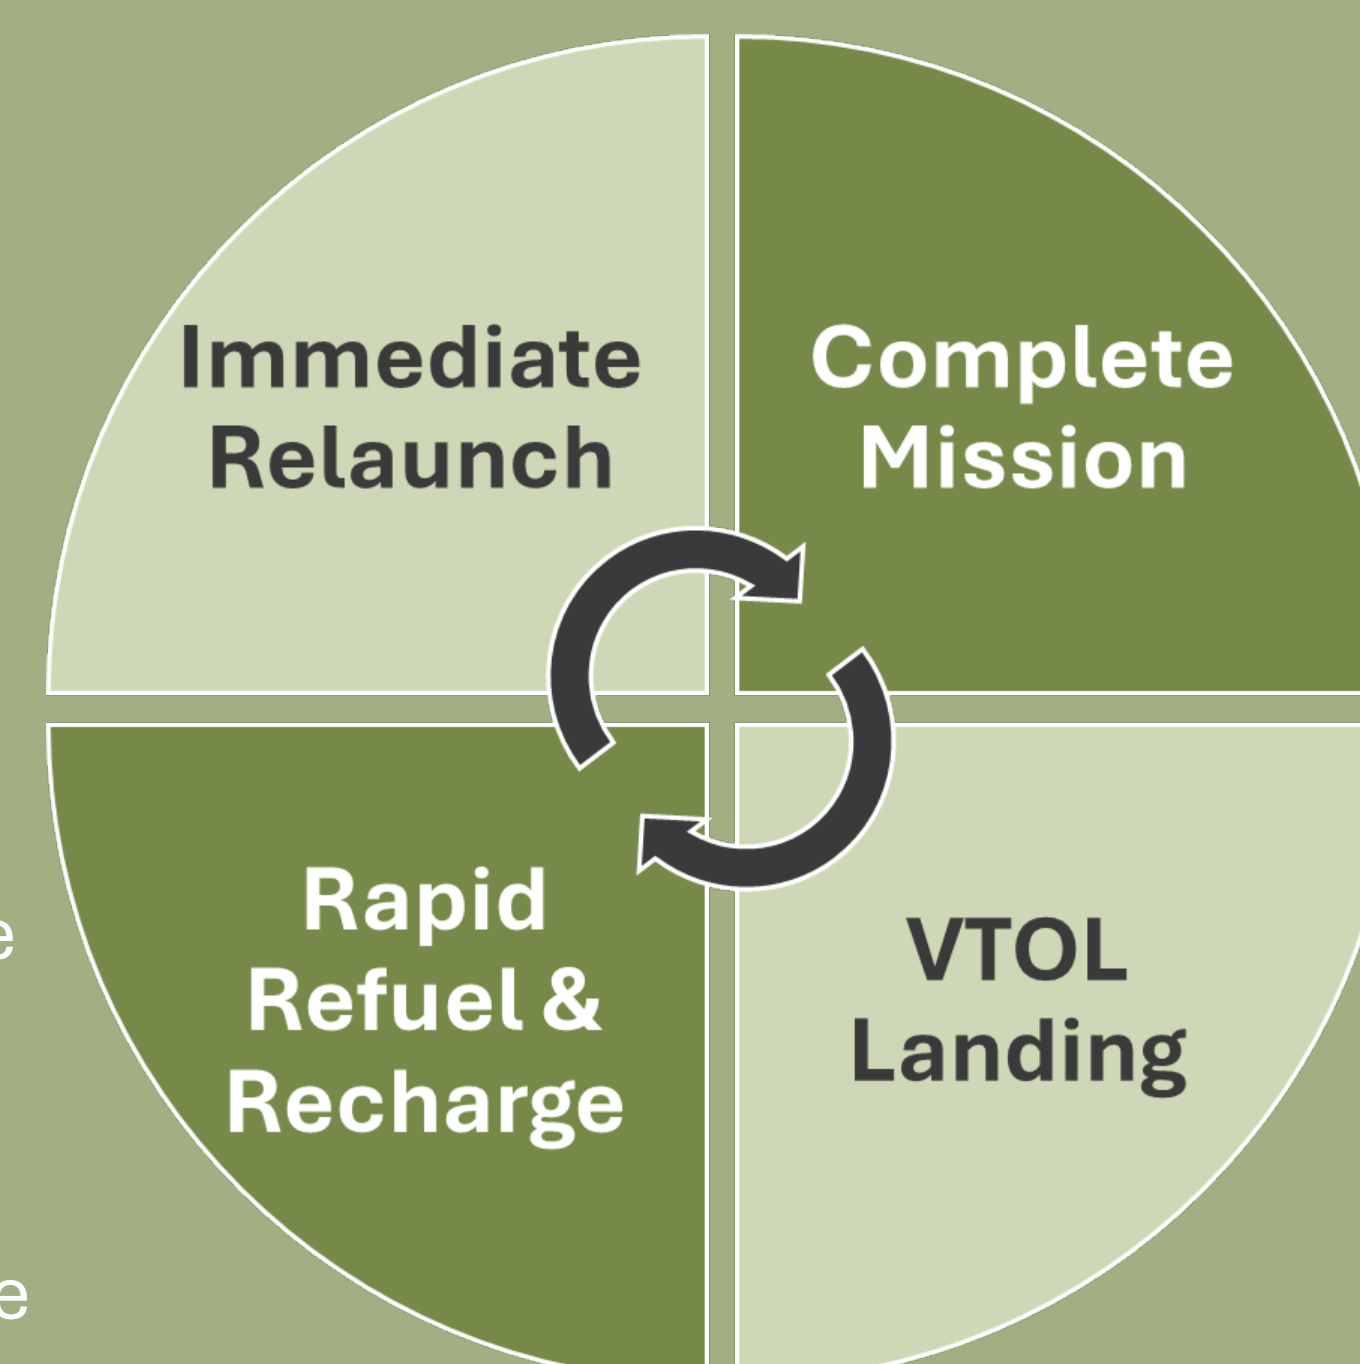


Platform Potential


The same baseline UAV can be adapted for different missions through swappable payload packages. This allows GoldenEye to operate either as a cargo transport platform or as a specialist mission aircraft carrying sensors, medical supplies, filming equipment or SAR modules.



Cinematography




ISR Surveillance



Medical Delivery




EO/IR Search & Rescue

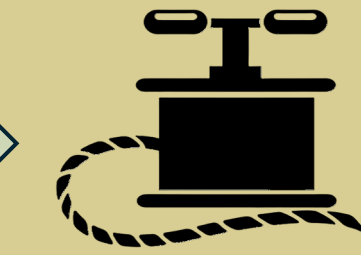

Mine Clearance

The Gimbal Gamechanger

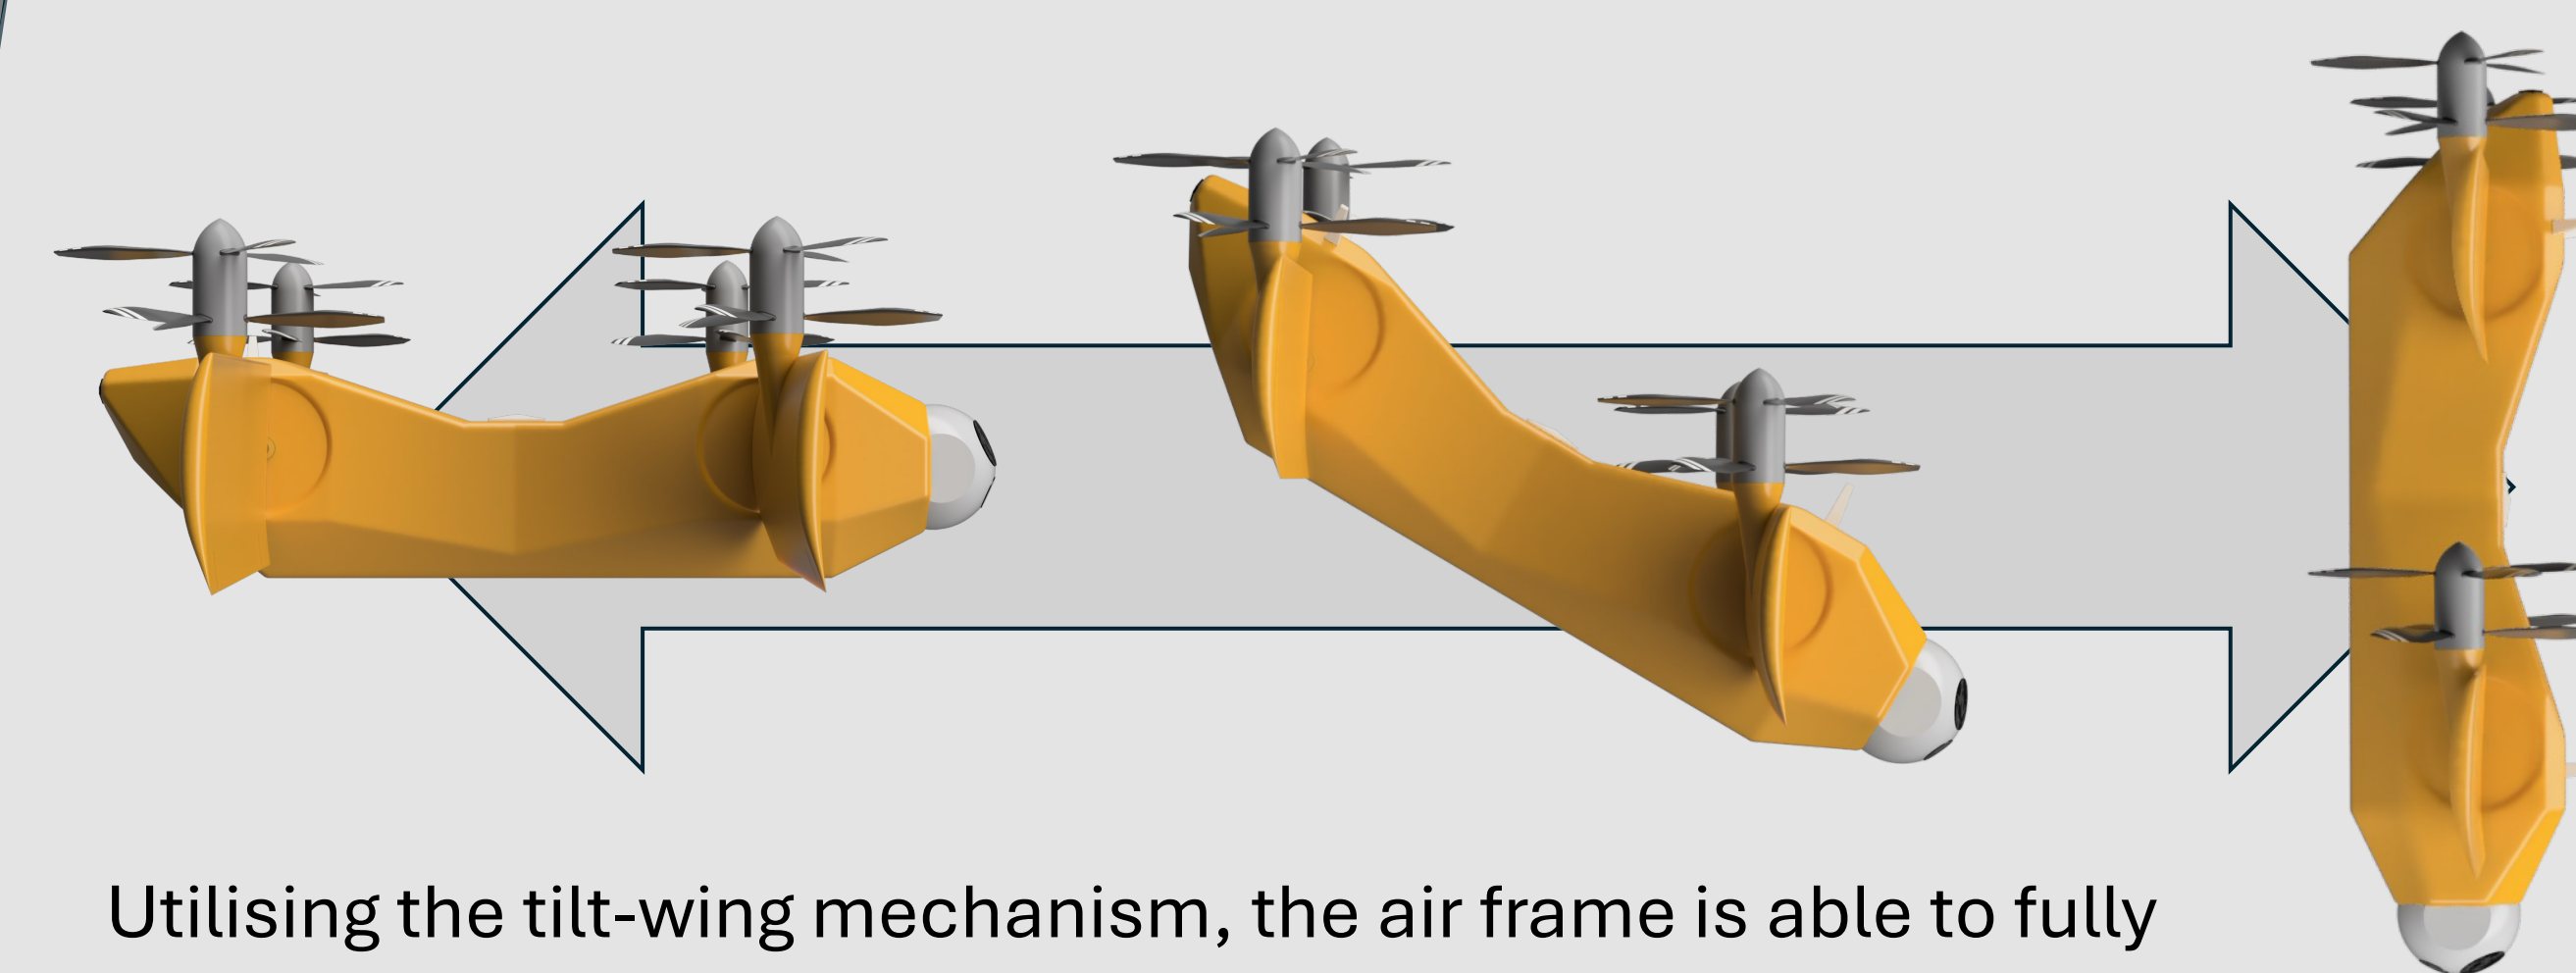

Utilising the tilt-wing mechanism, the air frame is able to fully gimbal in fixed wing mode to point the payload in any direction.

Prolonged Performance

The Internal Combustion Engine burns fuel and spins a shaft. That shaft is connected directly to the PMSG generator, which converts the spinning into electricity. A LiPo battery handles the VTOL transition.




ICE Engine
AIE 225CS



90%
Battery
24S - 60Ah




Generator
PMSG - 27.1 kW

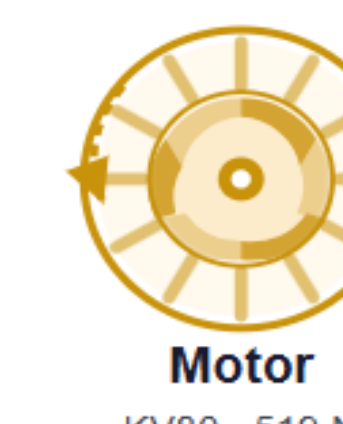

Motor
KV80 - 519 N

Together, they power eight motors producing more than 2x the thrust needed to stay airborne.

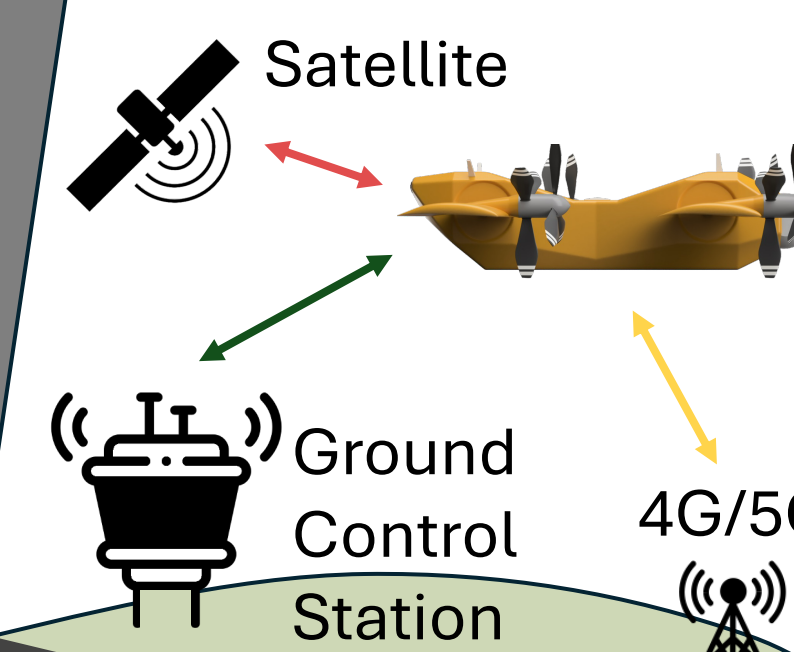

Direct Radio Link 0-150+ km

Extendable with relay GCS sites

4G / 5G Fallback Coverage dependent


Useful near populated areas

SATELLITE BLOS 600+ km

Beyond-horizon mission link

The Communications Architecture provides continuous command and control from 0 – 600+ km through automatic multi-tier link management.

Autonomous mission logic allows GoldenEye to continue, return or hold safely during link degradation.

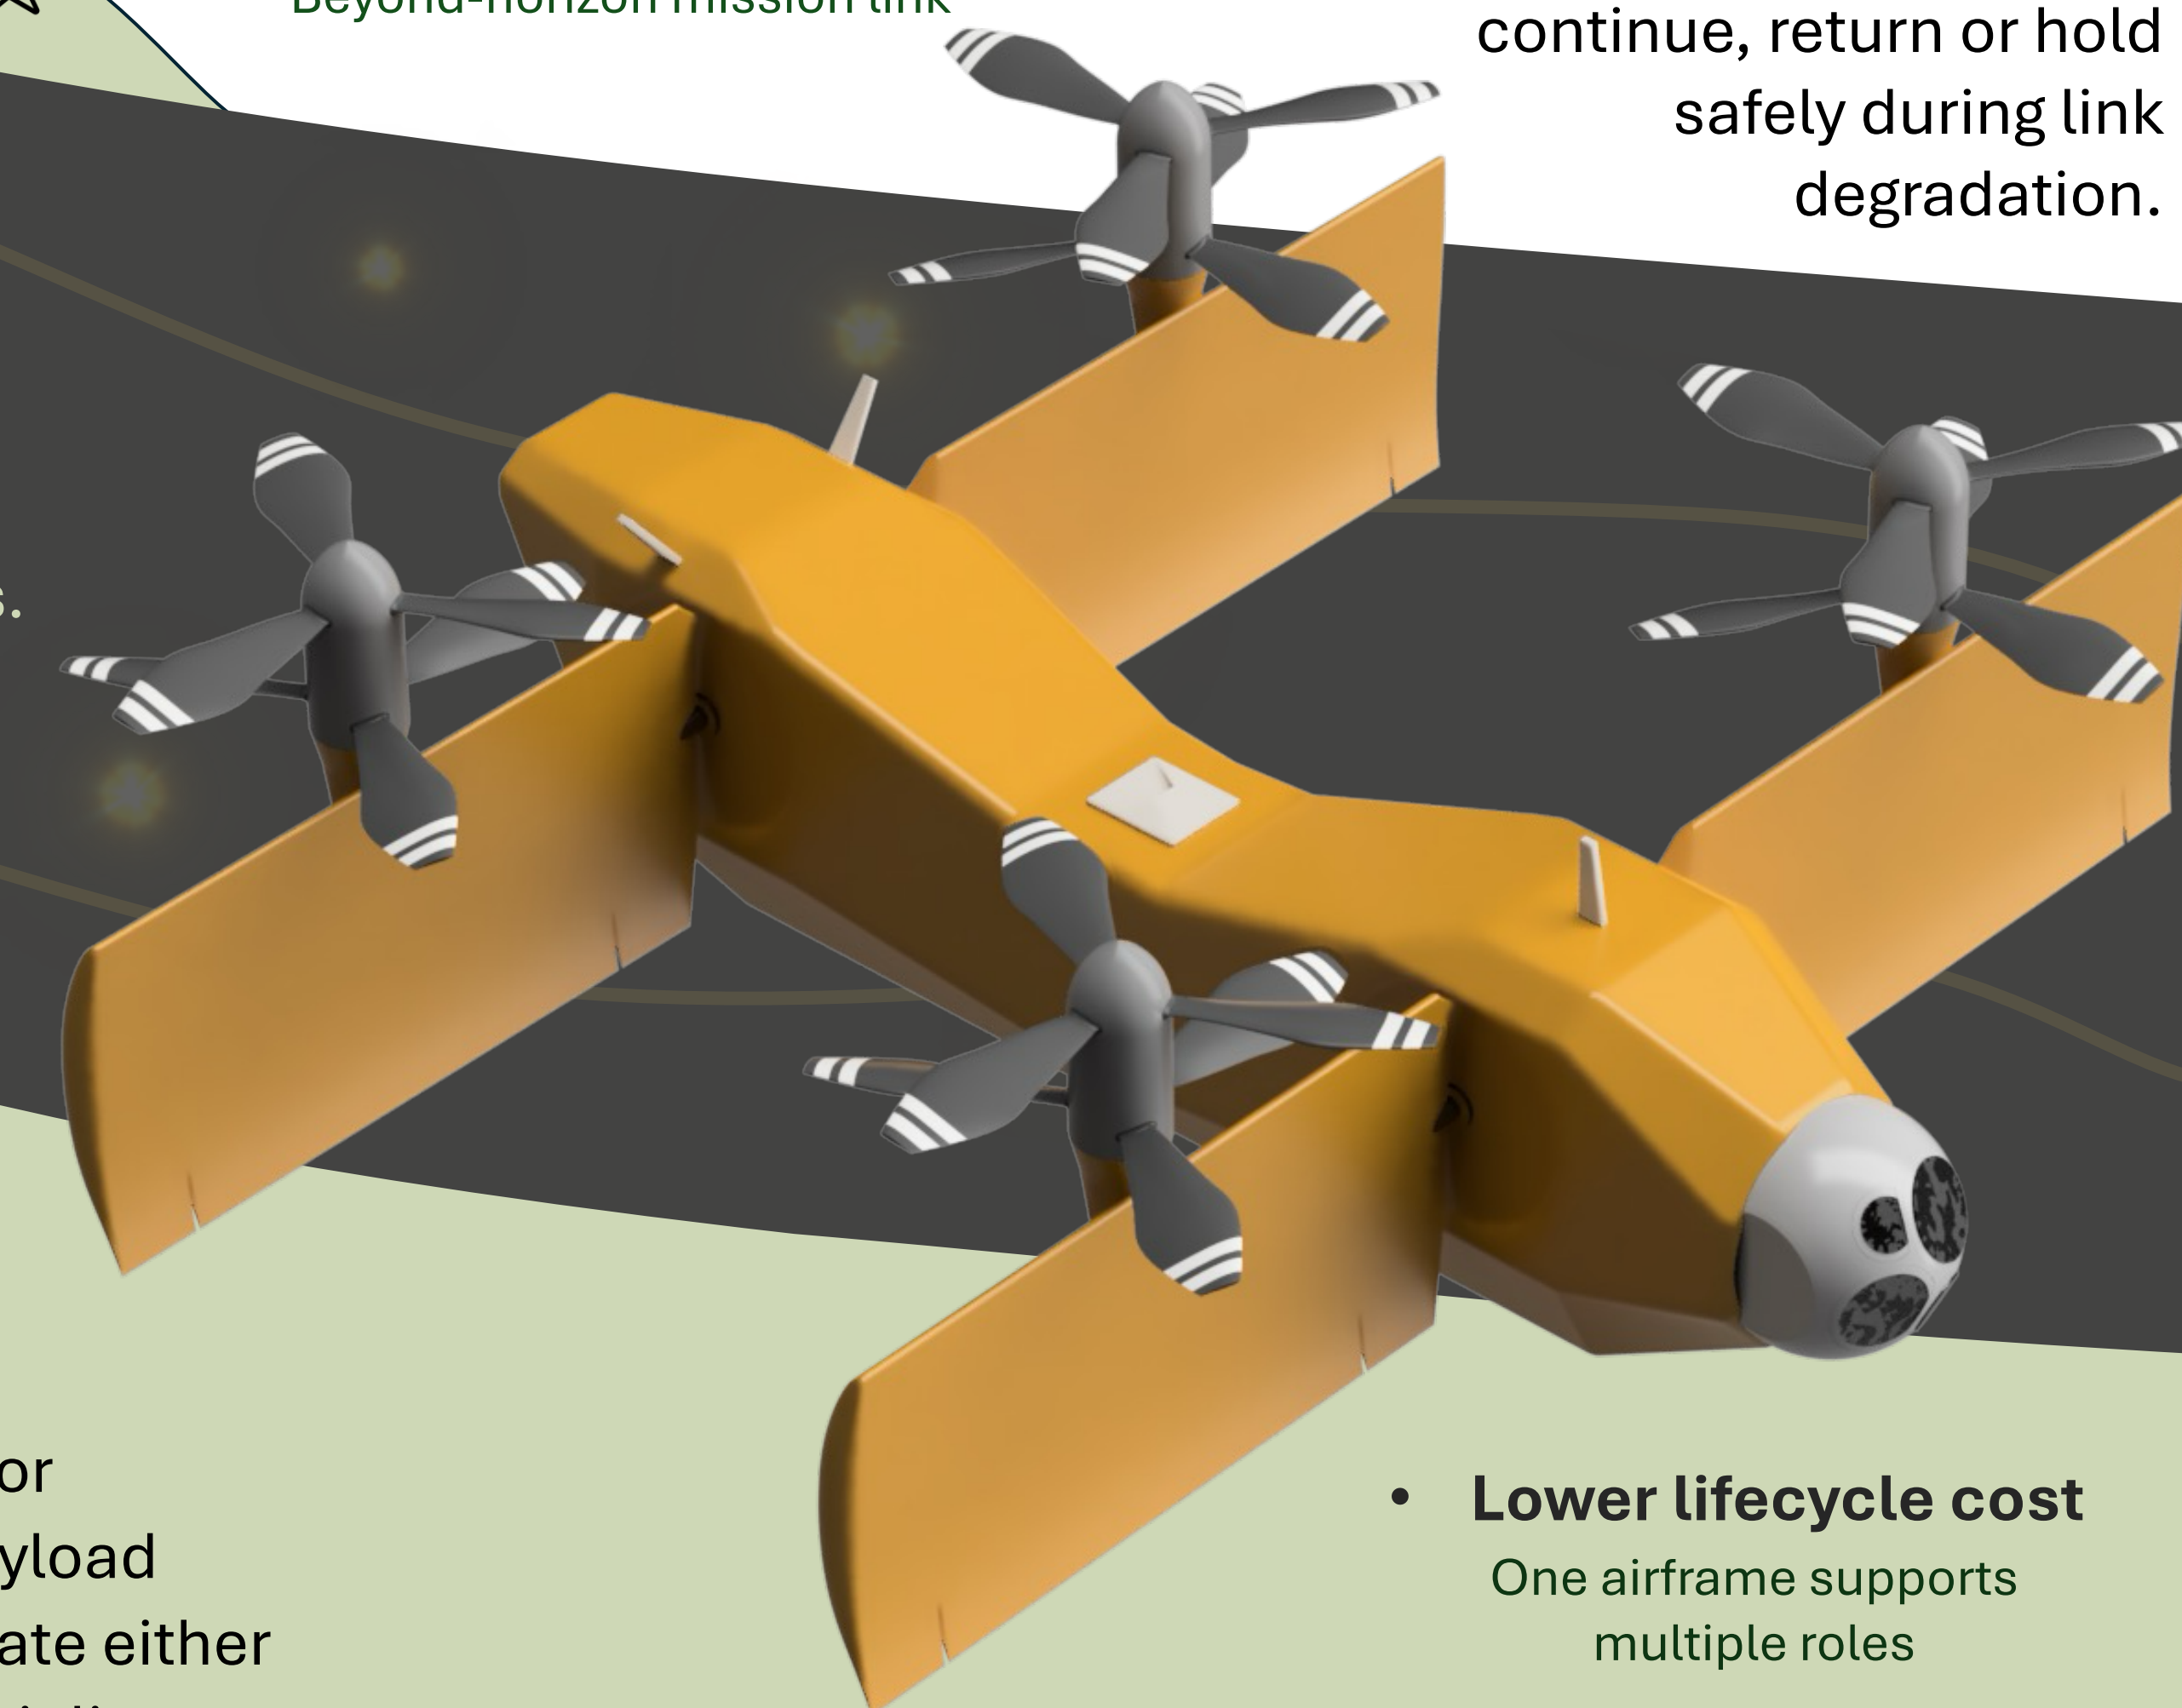


• **Lower lifecycle cost**
One airframe supports multiple roles

• **Faster reconfiguration**
Payload package selected for mission need

• **Shared training & support**
Same aircraft, Ground Control Station and maintenance base

One Platform, Multiple Markets

The aircraft that doesn't change, no matter the mission

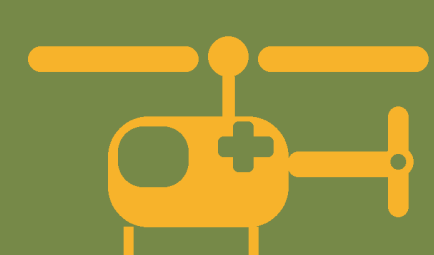

Search and Rescue



Mine Clearance



Border Surveillance



Medical Delivery



Film & Production