



WESTFÄLISCHE  
WILHELMS-UNIVERSITÄT  
MÜNSTER

# Barcode Detection and Recognition in Non-constrained Systems

**Ausarbeitung**

Veranstaltung:

**Begleitendes Praktikum zu Computer Vision WS 2016/17**

Themensteller: **Prof. Dr. Xiaoyi Jiang**

Dimitri Berh

Andreas Nienkötter

Betreuer: Aaron Scherzinger

Verfasser: **Aleksej Matis**

**Alexander Schlüter**

**Kjeld Schmidt**

# Barcode Detection and Recognition in Non-constrained Systems

Aleksej Matis, Alexander Schlüter, Kjeld Schmidt

24 March 2017

## Contents

<b>1</b>	<b>Introduction</b>	<b>3</b>
<b>2</b>	<b>Localization</b>	<b>4</b>
2.1	Gradient+Blur . . . . .	4
2.2	LSD . . . . .	5
<b>3</b>	<b>Boundary Detection</b>	<b>7</b>
3.1	Variation . . . . .	7
3.2	LSD Bound . . . . .	8
3.3	Wachenfeld . . . . .	8
<b>4</b>	<b>Reading</b>	<b>10</b>
<b>5</b>	<b>Comparison</b>	<b>11</b>
5.1	Datasets . . . . .	11
5.2	Laufzeit . . . . .	11
<b>6</b>	<b>Improvements</b>	<b>12</b>
6.1	Gradient+Blur Detection . . . . .	12
6.1.1	Vary by rotation . . . . .	12
6.1.2	Vary kernel sizes . . . . .	12
6.2	LSD . . . . .	12
6.2.1	Unite interrupted line segments . . . . .	12

Barcode Detection and Recognition in Non-constrained Systems	2
6.3 Wachenfeld . . . . .	13
6.3.1 Proper preprocessing, multiple scanlines . . . . .	13
6.4 Template Matching . . . . .	13
6.4.1 Precompute patterns for blur of various strengths . . . . .	13
<b>7 Conclusion</b>	<b>14</b>
<b>8 Meta: Wie zitiere ich?</b>	<b>15</b>

# **1 Introduction**

- Motivation
- Barcodes und EAN13
- Aufteilung in Lokalisation+Boundary+Reading

## 2 Localization

In order to read a barcode, we first have to localize it in a given image. We implemented two approaches. Gradient+Blur is a simple algorithm, with which we had some initial success. We later discarded it in favor of the much more successful Line Segment Detector approach. Both are detailed in this chapter.

### 2.1 Gradient+Blur

Our initial localization attempt showed limited success, but is conceptually very simple. The Gradient+Blur approach seeks to exploit the strong boundaries between the (white) background area and black bars in a standard barcode. In a few words; Detect edges on the image, then blur the result to remove noise and apply a threshold to the result. Open and close the resulting shapes, then select the biggest one. We will now go through the steps in more detail.

#### 1. Edge Detection

We begin by detecting edges with the Sobel operator. We calculate the absolute gradient, discarding direction information. This leads to slightly worse results for barcodes rotated by about 45 degrees. The resulting image will usually contain large amounts of noise. This is fixed in the next step.

#### 2. Blur+Threshold

Next, we blur the previous result to smooth out the noise and apply a threshold afterwards. The blur is a normalized box filter of size 9. Note that 'noise' here refers not only to image imperfections, but also noise in the absolute gradient which might be a result of complex textures or other sources. The threshold is not set as a constant brightness of 127. Instead, we calculate the mean brightness of the image, add that value to 255 and divide by 2. This simple extra step gives slightly better results when dealing with very noisy images.

#### 3. Close Forms

The next two steps are very similar operations. First we *close* the remaining white areas. This means we first dilate the image, then erode it by the same amount. Dilation creates a new image in which a pixel is set to white if there is at least one white pixel within a given radius white in the original image. More

intuitively, white pixels grow outwards. Erosion is the opposite operation; A pixel is set to black, unless all pixels in the radius are white. This *closes* empty spaces between neighboring and inside of structures, while structures with no neighbors will remain unchanged. At this point, the barcode will ideally have merged into a solid shape,

#### 4. Open Forms

Opening the forms is similar to closing, but in reverse order; First eroding, then dilating by the same amount. This will eliminate small structures (which is not actually important at this point), while straightening edges on larger structures.

#### 5. Selection

Finally, we select the largest structure to be the most likely location of the barcode in the original image. In most cases, our result will be a jagged shape, only roughly tracing a rectangle. To simplify matters going forward, we now find the minimal area rectangle around the selected structure. This will get passed into the boundary detection step.

## 2.2 LSD

This localization method is based on the LineSegmentDetector algorithm [5], which is implemented in OpenCV 3 in the `cv::LineSegmentDetector` class [1]. The algorithm detects line segments in an image, such as the segments formed by the bars in a barcode. On a high level, it works by first calculating the image gradient and assigning to each pixel a unit vector perpendicular to the gradient, resulting in a *level line field*. Pixels with a gradient magnitude under a certain tolerance are discarded. Connected pixels with similar level line angles are clustered together and form a *line support region*. To each line support region, a rectangle is fit which covers the whole region. To limit the number of false detections, the rectangle is only accepted as a line segment if the number of covered pixels with aligned level lines is high enough relative to the total number of covered pixels. The exact threshold is based on a statistical model (a *contrario* method), so that the rectangle is only accepted if, in a purely random level line field, the found ratio of aligned level lines is unlikely. Before a rectangle is rejected, some variations of the rectangle's parameters are tried.

The barcode localization method is taken from Creusot et al. with minor modifications. First we run the LineSegmentDetector provided by OpenCV on the image. We

use default parameters, except for the first parameter `LSD_REFINE_NONE`, which disables refinement of line segments. We found that line refinement tends to break up barcode bars into multiple segments, e.g. if the bars in the image are not quite straight due to kinks in the material on which the barcode is printed, or if there are glare spots on the barcode. This is undesirable, since in the following steps we rely on the length of line segments in the barcode to be similar.

Next we want to find a line segment which belongs to a barcode bar approximately in the middle of the barcode. To each detected line segment, a score is assigned based on how many other line segments might belong to bars of the same barcode as the first one. Two line segments are regarded as possibly belonging to the same barcode, if

1. their centers are not too far apart,
2. they have similar length,
3. they have similar angles and
4. their projected intersection covers most of the smaller segment.

Calculation of the first three distance measures is straightforward: Let  $c_i$  be the center positions,  $l_i$  the segment lengths and  $\alpha_i$  the segment angles, where the index  $i = 1, 2$  denotes the first or the second line segment, respectively. The used criteria are

$$d_{\text{center}} := \frac{\|c_1 - c_2\|}{l_1} < 1, \quad \frac{|l_1 - l_2|}{l_1} < 0.3, \quad |\alpha_1 - \alpha_2| < 0.1.$$

As `BIIIIIIILD` shows, two lines fulfilling the first three criteria might still not be arranged like barcode bars, if they are displaced along the line direction. To catch these cases, we project the second line onto the first and check that the intersection is large enough relative to the length of the smaller line, see `BIIIIIIILD2`.

For each line segment which fulfills the criteria, Creusot et al. increment the score of the first line by one. Instead, we increment the score of the first line segment by  $1 - d_{\text{center}}$ . This effectively weights the score by the distance between the line segments, which favors line segments which lie in the middle of the barcode.

Finally, we select the line segment with the highest score. This line segment should correspond to a barcode bar in the middle of the barcode.

### 3 Boundary Detection

To complement the LSD localizer, which returns a line segment in the middle of the barcode (hereafter called *best line*), we need to find the barcode's boundaries before we can attempt to read it.

#### 3.1 Variation

The variation boundary finder is the original boundary detection method proposed in [3] in conjunction with the LSD localization. Let  $L_{\perp}$  denote the sequence of intensity values along the line perpendicular to the best line, going through the best line's center (hereafter called *bisector*). Since barcodes consist of alternating black and white bars, the variation of intensity values along a line crossing the barcode is expected to be high. The boundary points are thus expected to have the following property: Extend a "probing" line (*inner probe*) from the boundary point along the bisector, pointing inside the barcode, i.e. in direction of best line's center. Extend a second "probing" line (*outer probe*) from the boundary point in the opposite direction, away from the barcode. The variation along the inner probe is now expected to be much higher than the variation along the outer probe.

To find the boundary points, for each index  $k$  along the bisector, the signed variation difference

$$\phi_{L_{\perp}}(k) = \sum_{j=-R}^0 |L_{\perp}(k+j) - L_{\perp}(k+j-1)| - \sum_{j=0}^R |L_{\perp}(k+j) - L_{\perp}(k+j+1)|$$

is computed. Here,  $R$  is the probing distance, which we chose as  $R = l_*/2$ , half of the length of the best line.

The right boundary point should lie at the bisector index with maximal  $\phi_{L_{\perp}}$ , while the left boundary point should have minimal  $\phi_{L_{\perp}}$ .

We deviate slightly from Creusot et al. by instead using the variation measure

$$\phi_{L_{\perp}}^*(k) = \sum_{j=-R}^0 |L_{\perp}(k+j) - L_{\perp}(k+j-1)| \cdot (R+j) - \sum_{j=0}^R |L_{\perp}(k+j) - L_{\perp}(k+j+1)| \cdot (R-j),$$

giving higher weight to pixel values near the current boundary candidate at index  $k$ .



### 3.2 LSD Bound

Motivated by the high quality of line segments returned by LineSegmentDetector, we constructed a new boundary finder, using ideas from the variation method described above. The goal is to determine the line segments corresponding to the two outer barcode bars, the *boundary segments*.

We first filter the line segments, so that only segments parallel to and located next to the best line are kept. To that end, we use the angle criterion and the criterion of sufficient projected intersection as described in section 2.2. The remaining segments are sorted based on the position of the projection of their centers onto the bisector line. The boundary segments should have the following property: As before, extend an inner probe from the projected center of the boundary segment along the bisector, pointing inside the barcode. Extend an outer probe in the opposite direction, away from the barcode. The inner probe is expected to cross a large number of line segments parallel to and located next to the best line (i.e. segments which have not been filtered out in the previous step). The outer probe is expected to cross very few such lines. For each index  $k$ , a score is assigned to both probes

$$s(k) = \sum_{j=-R} (l_* - c_j) \cdot \max(0, l_* - |l_* - l_j|).$$

The first factor again weighs line segments higher if they are close to the current boundary segment candidate. The second factor weighs segments higher if their length is close to the best line's length. For each index  $k$ , we now subtract the outer probe's score from the inner probe's score and assign the result as score of the line segment with index  $k$ . On each side of the best line, we select the three segments with the highest score as boundary candidates and try all combinations of those in the reading step.

### 3.3 Wachenfeld

Another implementation was adapted from the barcode detection and recognition algorithms proposed by Wachenfeld et al. [7]. The method is subdivided into the three steps of preprocessing, barcode edge detection and hypothesis based reading. Since we implemented barcode localization (section 2) and barcode reading (section 4) as separate steps only the edge detection with a bit of preprocessing is adapted.

The originally proposed boundary detection assumes that the position of the bar-

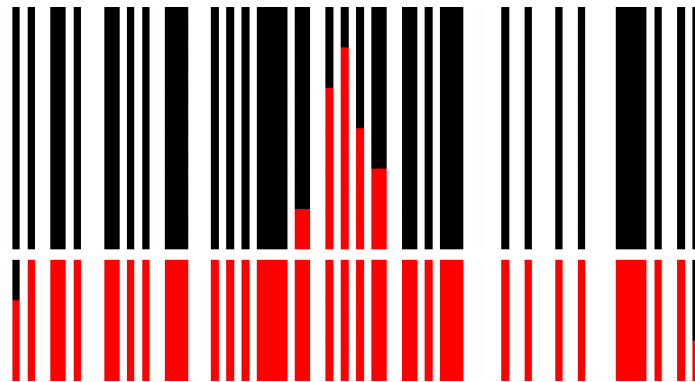


Figure 1: Wachenfeld

code is centered. This way a simple scan line can be applied to the picture. If the barcode is unreadable or misaligned the scan line can be reapplied with a rotation or shift factor. Since the position and rotation of the barcode is already determined in the localization step it is sufficient to place a scan line perpendicular to the best line and apply shift factors only if the initial reading fails.

...fig. 1

## 4 Reading

Our reading method is taken from [4] and is based on matching deformable templates to a 1D scanline obtained from the localization and boundary detection steps.

Let us first describe the structure of an EAN-13 barcode [6]: The smallest width of a bar is called the base width. A typical digit is encoded in four bars, alternating black and white, where the number of base widths of each bar is variable, but the total number of base widths of all four bars is seven. The exact number of base widths of each bar encodes a specific digit as well as a digit type, one of A, B or C.

A barcode is now composed as follows:

1. A left quiet zone,
2. a guard pattern, consisting of three bars, each one base width,
3. six digits of type A or B,
4. a center guard pattern, consisting of five bars, each one base width,
5. six digits of type C,
6. a guard pattern, same as 2.,
7. a right quiet zone.

The pattern types (A or B) of the first six read digits encode the actual first digit of the barcode. The last digit is a check digit and has to match the digit obtained through a calculation based on the other digits.

	<b>Errors</b>	<b>Hit rate</b>	<b>Time in sec.</b>
<b>Gradient + Blur</b>	831	22%	266
<b>LSD + Wachenfeld</b>	452	56%	319
<b>LSD + LSDBounds</b>	41	97%	1760
<b>LSD + Variation</b>	279	74%	1595

Figure 2: Comparison of different algorithms on the Wachenfeld database [7]

## 5 Comparison

Einleitun...

### 5.1 Datasets

Übersicht über die Datasets

- Generiert
- Wachenfeld [7]
- ArteLab [9] [8]

### 5.2 Laufzeit

Geprüft auf dem Wachenfeld Dataset mit 1055 Bildern [7]

Laufzeit gemessen auf Debian 8 mit 4Gb Ram, 2.2 Ghz CPU (Intel N2940), 4 Kerne und 4 Threads

Siehe fig. 2

## 6 Improvements

In this section, we will consider some possible improvements of our algorithms.

### 6.1 Gradient+Blur Detection

#### 6.1.1 Vary by rotation

Since the Gradient+Blur-detection builds from the absolute gradients found by the Sobel operator, results might be poor when a barcode is rotated close to 45 degrees. To remedy this, we might run the detection on rotated versions of the image. Rotating once by 45 degrees would yield the greatest improvement, however, multiple rotations could be checked at diminishing returns.

#### 6.1.2 Vary kernel sizes

In our current implementation, all operations (blurring, closing, opening) are applied with a constant kernel size. This is somewhat problematic, since the effectiveness of these parameters is dependent on the size of the barcode. If a barcode is not detected successfully, we might try different kernel sizes.

The initial kernel size might also be considered further: The current values have been empirically determined to be most useful for the image sizes we worked with. Scaling the kernel size appropriately for each image might lead to better results, since it seems likely that the relative sizes barcodes in images is independent of image resolution.

### 6.2 LSD

#### 6.2.1 Unite interrupted line segments

A remaining common failure of the LSD algorithm is its poor handling of reflections on the barcode. These reflections visually interrupt the barcode lines, so two short line segments are returned instead of one. This is problematic, as length of line segments is an important factor in deciding whether two line segments might be part of the same barcode. This ultimately leads to a split in the barcode, where the detected area covers just the larger side of the code.

This problem could be fixed in two related ways: First, we could try a *line segment unification*. This process would seek to unite line segments which lie on the same line

in space. This easy calculation would unite line segments across gaps, thus restoring the proper length and avoiding rejection. To avoid uniting many stray lines across the image, simply limit unification to line segments where the gap size is less than some small multiple of the segment size itself.

This first approach has the weakness of only working when the reflection splits the line segment into two parts. Even better would be an approach that could handle a missing endpoint. This should be handled by this second approach, which is also more complicated: Instead of uniting line segments, we would now consider the endpoints of line segments in a second pass over all segments. During the first pass, whenever a pair of lines is considered to likely be part of the same barcode, save the location of their endpoints in two different lists, based on distance from the origin. After this first pass, those lists can easily construct the upper and lower bound of the barcode. With this new information, discard the previous scores and redo them. However, this time, instead of checking for similar length, check whether two line segments have an endpoint near one of those two lines before assigning a score to them. This second pass will now also handle missing endpoints.

## **6.3 Wachenfeld**

### **6.3.1 Proper preprocessing, multiple scanlines**

Since we have found quick success with the LSD-Boundary detection, our current implementation of the Wachenfeld algorithm does not prepare the image in the way recommended in the original paper, that is, there is no adaptive thresholding along the scanline, which is a major factor of success for the original implementation. Thus, proper initialization would likely greatly improve our results. Also, we could detect along multiple scanlines and vote for most likely boundaries.

## **6.4 Template Matching**

### **6.4.1 Precompute patterns for blur of various strengths**

While the algorithm is already very capable in handling blurred barcodes, this might be improved even further by precomputing patterns specifically not for an ideal, clean barcode, but for one that is already blurred.

## **7 Conclusion**

## 8 Meta: Wie zitiere ich?

1. Titel des Papers bei <https://scholar.google.de/> Google Scholar suchen.
2. Bei dem Eintrag zu dem Paper unten auf zitieren klicken, dann auf BibTex.
3. Den BibTex string kopieren in die LITERATUR.BIB
4. Zitat hinzufügen durch `\CITE{name}`
5. Übersicht BibTex: [https://de.wikibooks.org/wiki/LaTeX-Kompendium:\\_Zitieren\\_mit\\_BibTeX](https://de.wikibooks.org/wiki/LaTeX-Kompendium:_Zitieren_mit_BibTeX)

Beispiel Templatematching [2]

Einleitung Lokalisierung Rand Lesen Testdaten Vergleich der Verfahren Verbesserung



## References

- [1] G. Bradski. *cv::LineSegmentDetector Class Reference*. Mar. 20, 2017. URL: [http://docs.opencv.org/3.1.0/db/d73/classcv\\_1\\_1LineSegmentDetector.html](http://docs.opencv.org/3.1.0/db/d73/classcv_1_1LineSegmentDetector.html).
- [2] Ling Chen, Hong Man, and Huading Jia. "On scanning linear barcodes from out-of-focus blurred images: a spatial domain dynamic template matching approach". In: *IEEE Transactions on Image Processing* 23.6 (2014), pp. 2637–2650.
- [3] Clement Creusot and Asim Munawar. "Low-computation egocentric barcode detector for the blind". In: *Image Processing (ICIP), 2016 IEEE International Conference on*. IEEE. 2016, pp. 2856–2860.
- [4] Orazio Gallo and Roberto Manduchi. "Reading 1D barcodes with mobile phones using deformable templates". In: *IEEE transactions on pattern analysis and machine intelligence* 33.9 (2011), pp. 1834–1843.
- [5] Rafael Grompone von Gioi et al. "LSD: a Line Segment Detector". In: *Image Processing On Line* 2 (Mar. 2012), pp. 35–55. DOI: 10.5201/ipol.2012.gjmr-lsd.
- [6] GS1. *GS1 General Specifications*. Jan. 2017. URL: <http://www.gs1.org/barcodes-epcrfid-id-keys/gs1-general-specifications>.
- [7] Steffen Wachenfeld, Sebastian Terlunen, and Xiaoyi Jiang. "Robust recognition of 1-d barcodes using camera phones". In: *Pattern Recognition, 2008. ICPR 2008. 19th International Conference on*. IEEE. 2008, pp. 1–4.
- [8] Alessandro Zamberletti, Ignazio Gallo, and Simone Albertini. "Robust angle invariant 1d barcode detection". In: *Pattern Recognition (ACPR), 2013 2nd IAPR Asian Conference on*. IEEE. 2013, pp. 160–164.
- [9] Alessandro Zamberletti et al. "Neural Image Restoration for Decoding 1-D Barcodes using Common Camera Phones." In: *VISAPP (1)*. 2010, pp. 5–11.