


Site and Site Wind Direction data explained

Please note that these tables contain a number of redundant fields (columns) inherited from previous versions of the database. Data in these fields may be either missing, incorrect or otherwise unreliable. In fact, no guarantee of reliability of any of the data can be given or implied .

Site data is held in two related tables.

- The Site table stores data related to each site with the following fields being the most relevant where usable wind directions are concerned:
 - *begin* - **rotating clockwise**, the start direction of the useful wind directions - saved as text eg NW, SSE
 - *end* - the final useful wind direction
 - *from* - a numeric value in the range 0 to 15 representing the first of the site's usable directions
 - *to* - a numeric value in the range 0 to 15 representing the last of the site's usable directions
- The Site Wind Directions table stores the usable wind directions for each site and utilises the following fields:
 - *siteID* - a reference corresponding to the id field of a Site.
 - *direction* - a number (0 to 15) corresponding to a wind direction - see table below.

Note - each site is likely to have several usable wind directions each representing one point of a sixteen point compass rose. As shown in the table below, a direction of SW would be represented by the value 10, the value 13 would translate as a WNW direction.

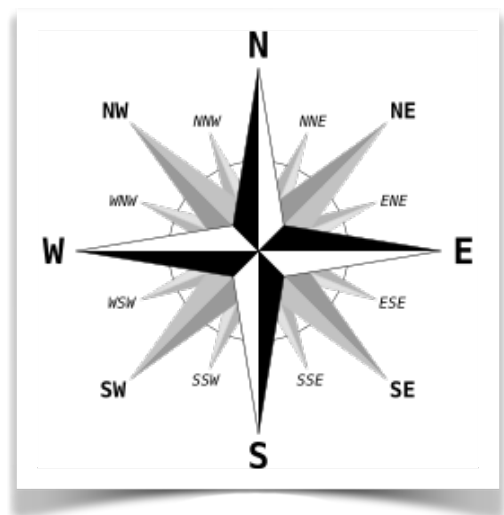

0	1	2	3	4	5	6	7	8	9	10	11	12	13	14	15
N	NNE	NE	ENE	E	ESE	SE	SSE	S	SSW	SW	WSW	W	WNW	NW	NNW

Table showing compass rose points for direction values

Usable wind directions are represented as having the 'from' value being the beginning direction and the 'to' value being the end when facing away from the slope and rotating in a clockwise direction. For example a SSE to WSW slope would be from 7 to 11. A site having a 'from' of 14 and a 'to' of 3 would be usable from NW to ENE