

Two-component Topcoat (A+B)



DESCRIPTION

Vanlei Topcoat (component A) needs to be mixed with curing agent (component B). The water-based polyurethane topcoat as a protective sealer for microcement. It has very good resistance to chemicals, water and alkalis, good resistance to abrasion and scratches.

USES

Vanlei microcement is ideal for unifying the appearance of concrete surfaces. It is suitable for using to ceiling, floors & walls ,both indoors & outdoors, ranging from residential to heavy commercial and industrial applications. It's also suitable for stairs, tables, stools ,kitchens, bathrooms,other crafts surfaces finishing, applied by roll or trowel.

ADVANTAGE

✓ Excellent flexibility - microcement has high flexibility,as long as the base does not crack,microcement themselves do not crack.

✓ High strength adhesion - has better adhesion to various substrates,can be directly constructed in marble,ceramic tile, cement board and other substrate surface.

✓ High compressive strength - the compressive strength of microcement reaches 607N, which is much higher than that of other conventional floor materials.

✓ Class A fire rating - noncombustible material for all kinds of space applications.

✓ Waterproof - can be used in the toilet for a long time,get the scour of cold hot water, created more possibility for narrow space that defend bath.

✓ Stain resistance - Coke, coffee, sauce and other acid or alkali material will not be made on its surface into injury, easy to take care of.

✓ Rich in color - reference to color chart.

✓ Wide range of applications - both indoors and outdoors, walls, floors, tables, stools and other crafts can be painted.

COVERAGE

The coverage will vary depending on application technique, substrate, and finish. The following are typical ranges:

PRODUCT	WEIGHT	CONVERAGE	TIMES
primer	5 kg/bucket	30m ²	1+1
base sand + emulsion (16:4)	20 kg/kit	10-12m ²	2
medium sand +emulsion (16:4)	20 kg/kit	10-12m ²	2
fine sand +emulsion (10:4)	14kg/kit	14-16m ²	2
topcoat + curing agent (4:1)	5 kg/kit	30m ²	2

Two-component Topcoat (A+B)




LIMITATIONS

Base surface shall be dry and clean, flat without crack.
Do not apply if ambient temperature is below 10°C and the relative humidity is greater than 85%.
Before applying a new layer, the previous one must hard dry.


SYSTEM DETAIL

Refers to attached Powerpoint


Cement Floor Application :

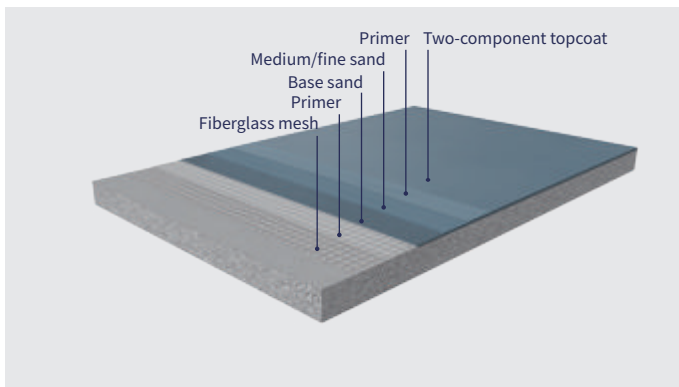


Tiles Floor Application:

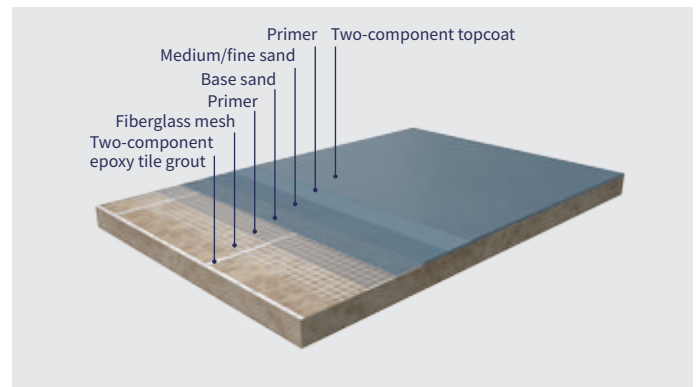


Wood Boards / Plasterboard Application:

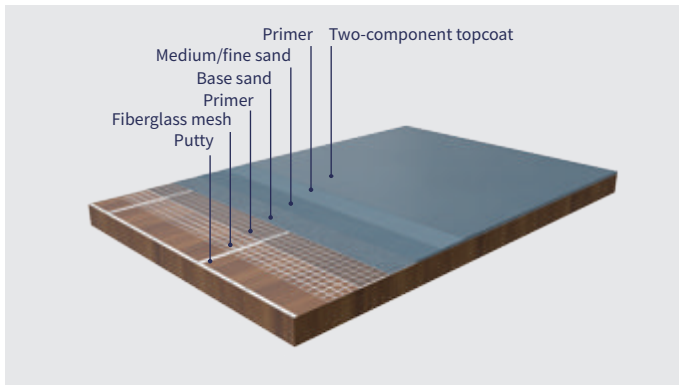


Wall & Ceiling (after skim coat) Application:

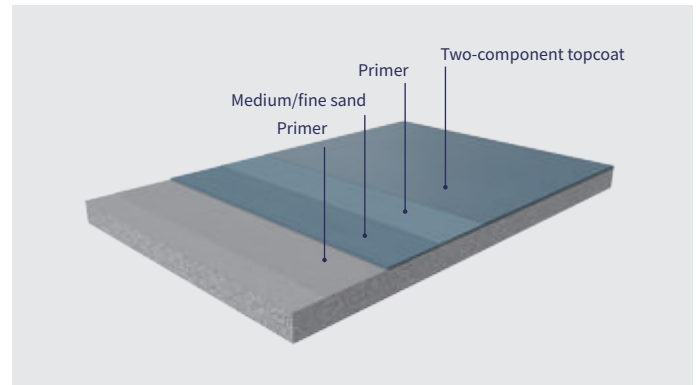

Wall & Ceiling (without skim coat) Application:

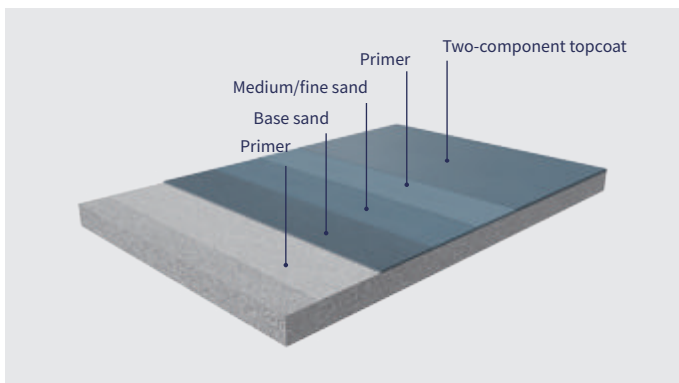

Steel Surface Application:

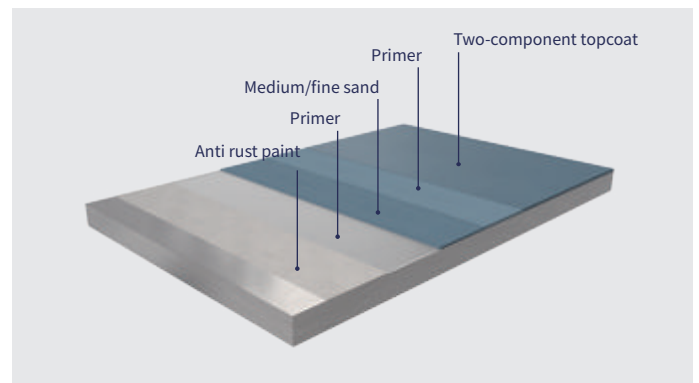

Two-component Topcoat (A+B)



• SURFACE PREPARATION

The second primer layer must be flat, clean and grease-free. It is highly recommended to apply Vanlei Two-component Topcoat after the previous layer complete dry.

• MIXING

Mixed with the topcoat and the curing agent until a homogeneous mixture is obtained. To guarantee the properties of the coating it is essential to respect the proportion 4 kg topcoat + 1 kg curing agent (4:1)

• SAFETY PRECAUTIONS

KEEP OUT OF REACH OF CHILDREN. DO NOT TAKE INTERNALLY.

May Irritate to eyes and skin. Wear protective gloves, safety goggles and dust mask during applications .

FIRST AID: Eyes – Do not rub eyes, immediately flush with fresh water.

Skin – Wash with soap and water.

Inhalation – If experience difficulty breathing or if inhaled, move to fresh air. If symptoms persist, seek medical attention.

• CLEANING

Clean all tools and equipment promptly with clean water.

• PACKAGING

• APPLICATION

Notes:

Before applying the topcoat layer, first apply one coat of Vanlei Micro Primer by roller. The second primer layer is sealing microcement, water proofing and keep the color fresh. After hard dry, use 240 mesh sand paper polish and clean the dust.

Apply Vanlei Two-component Topcoat of two times by roller . The second coat is applied after the previous one hard dry. Both two coats is sanded with 240 grit sandpaper then clean dust.

• POT LIFE

The pot life of the mixture (component A + component B) is 3 hours at approx. 20°C. (Under sealed condition).

• STORAGE

Keep material sealed covered to prevent exposure to moisture.

Store in a dry, cool and well-ventilated place, away from heat sources and direct sunlight.

SERIES	PRODUCT KIT	PACKAGE
Primer	primer	5 kg/bucket
Microcement	base sand+emulsion	16kg/bucket+4kg/bucket
	medium sand+emulsion	16kg/bucket+4kg/bucket
	fine sand+emulsion	10kg/bucket+4kg/bucket
Topcoat	topcoat+curing agent	4kg/barrel+1L/tin