




Note: The assembly instructions use the MentorPi M1 Mecanum-wheel version as an example, but they also apply to the MentorPi A1 Ackermann version.

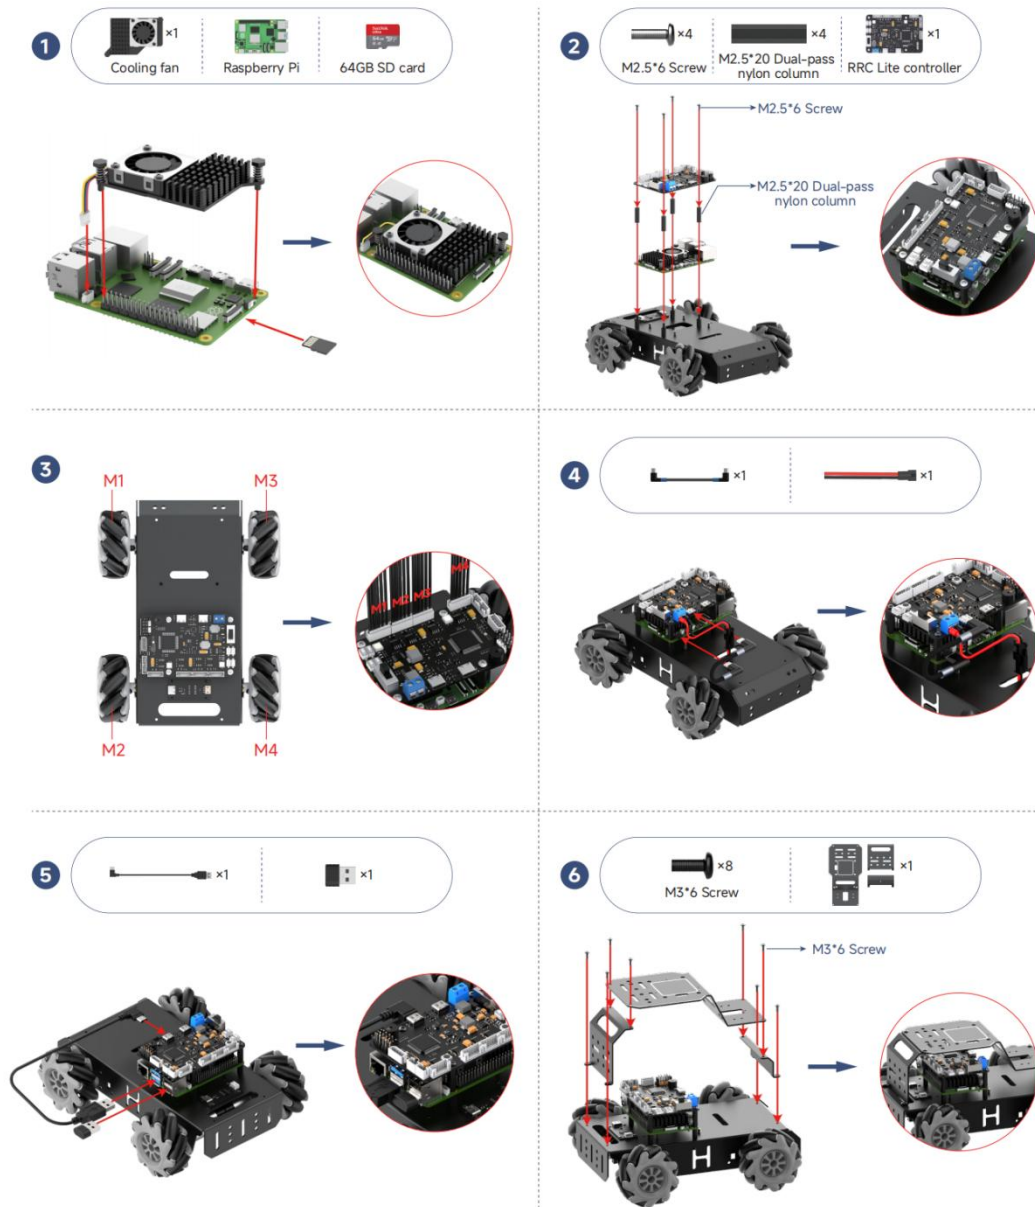

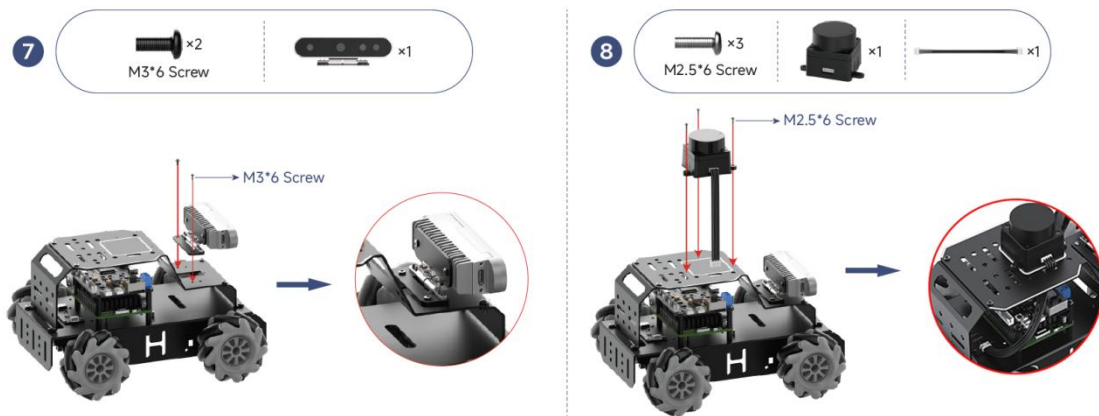


Wiring setup for Ackermann Chassis

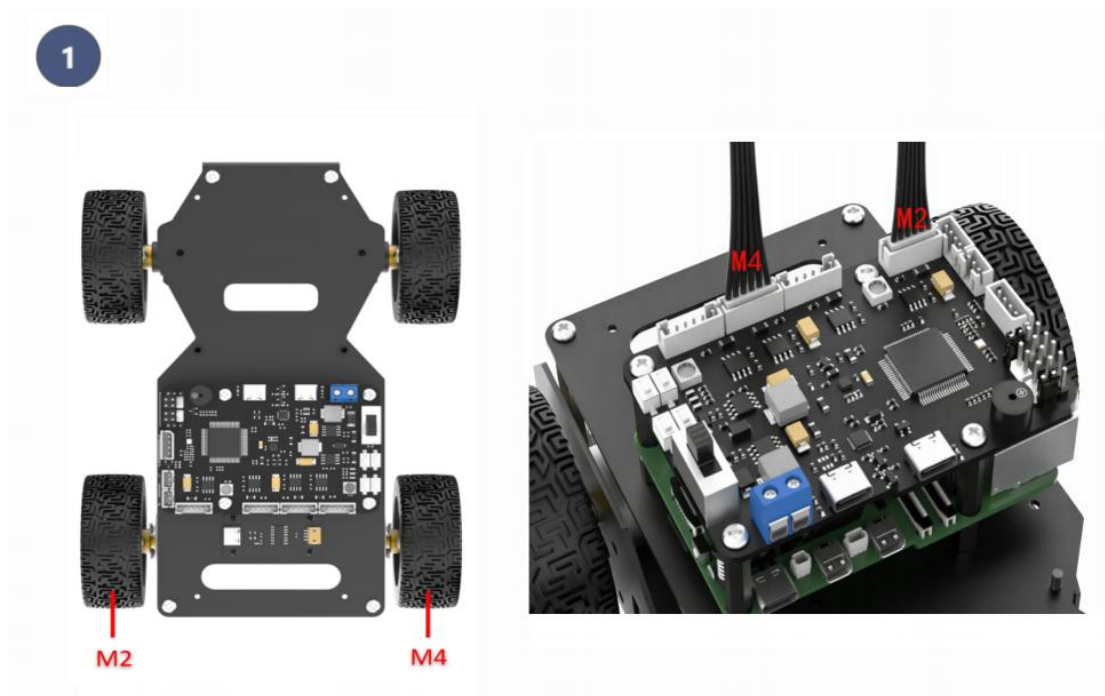


2




3

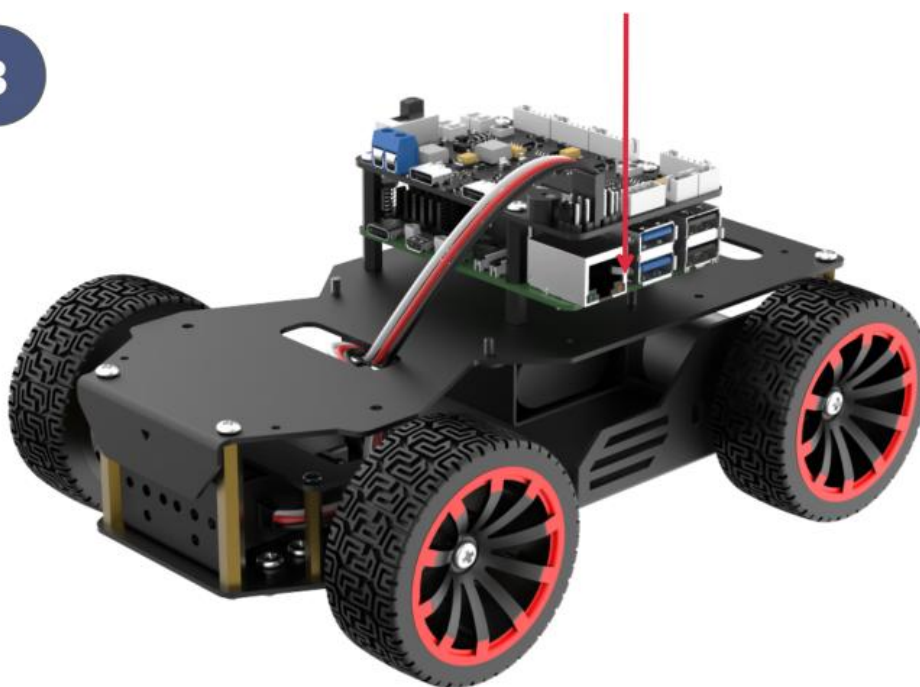

If you have purchased the monocular camera version,
please follow the installation steps below.

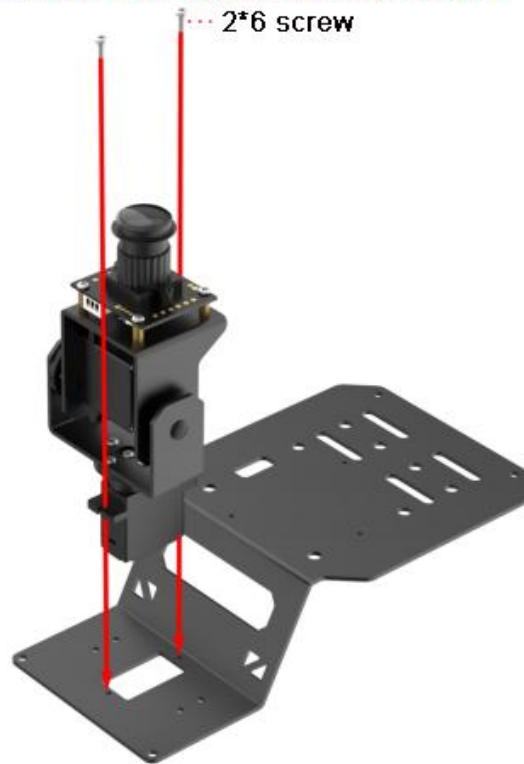

Use a jumper cap to connect the pin header to the 5V terminal.
(This configuration is set by default at the factory.
You may refer to the diagram below to verify the connection.)

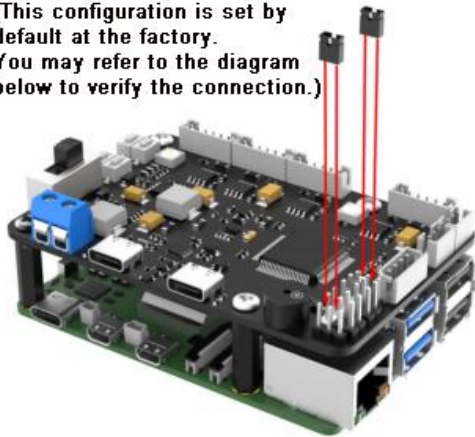

Post installation:





Brown wire (Ground)

Red wire (Power)

Yellow wire (Signal)

②
①

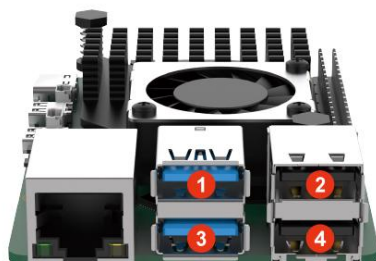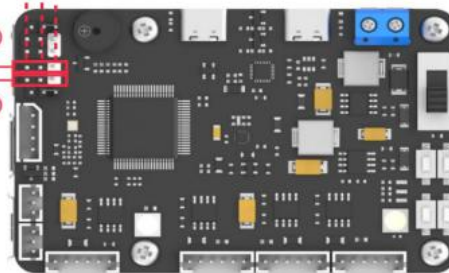

NO.	Connected accessories
①	Monocular/ Depth camera
②	Lidar
③	RRC Lite controller
④	Handle receiver

Post Installation (Take Mecanum-wheel version as example)

