



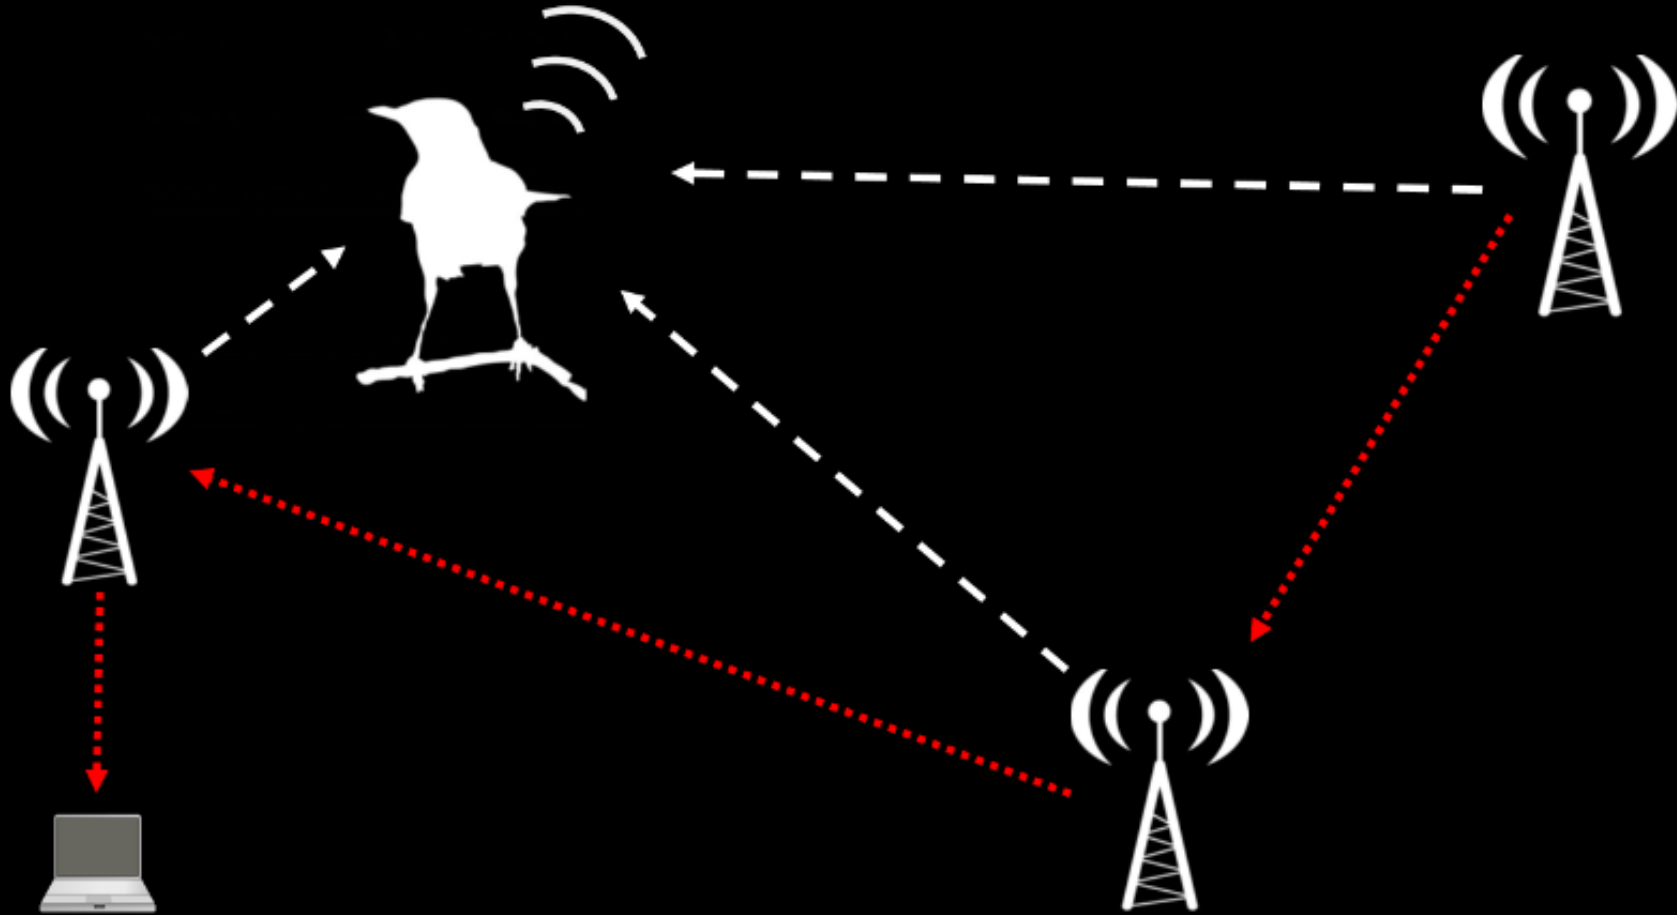

AMRUPT

(Animal Movement Research Using Phase-based Trilateration)




Technical Approach:


Receiver architecture

Will the CC1310 be sufficient for DF?


What about SDRs?

RTL-SDR
\$20

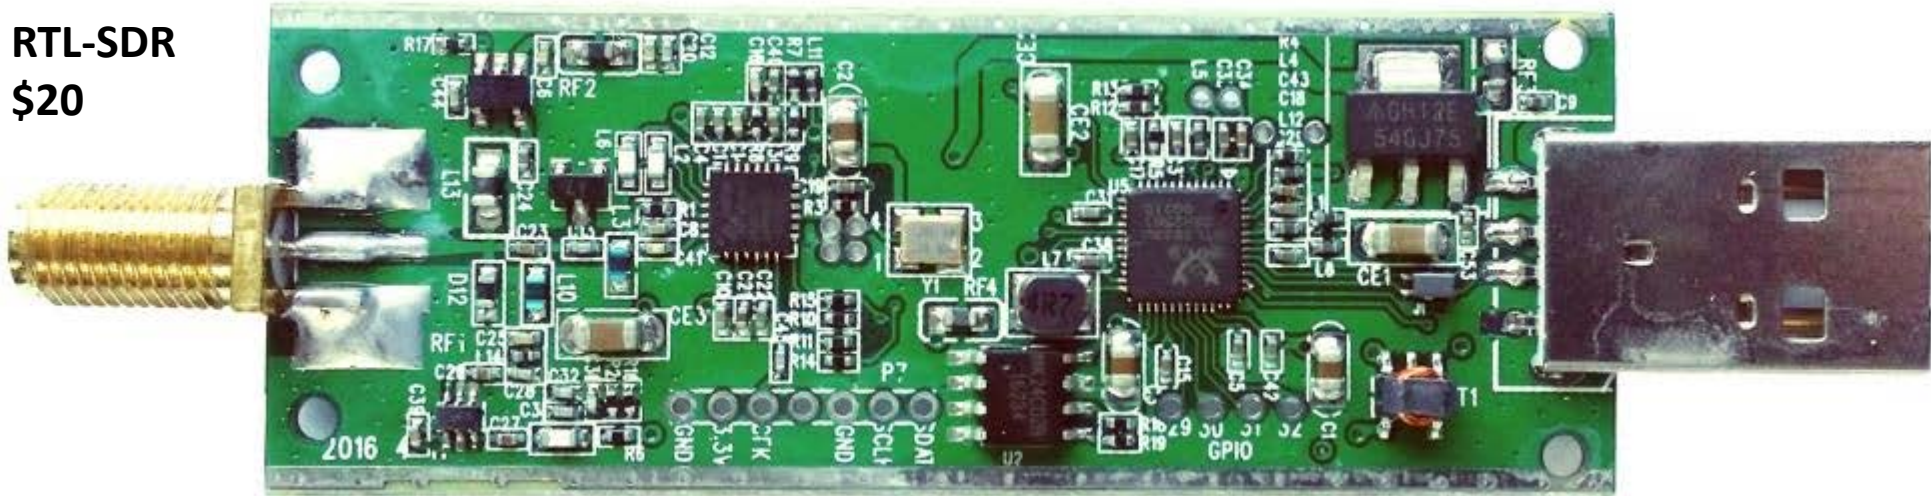

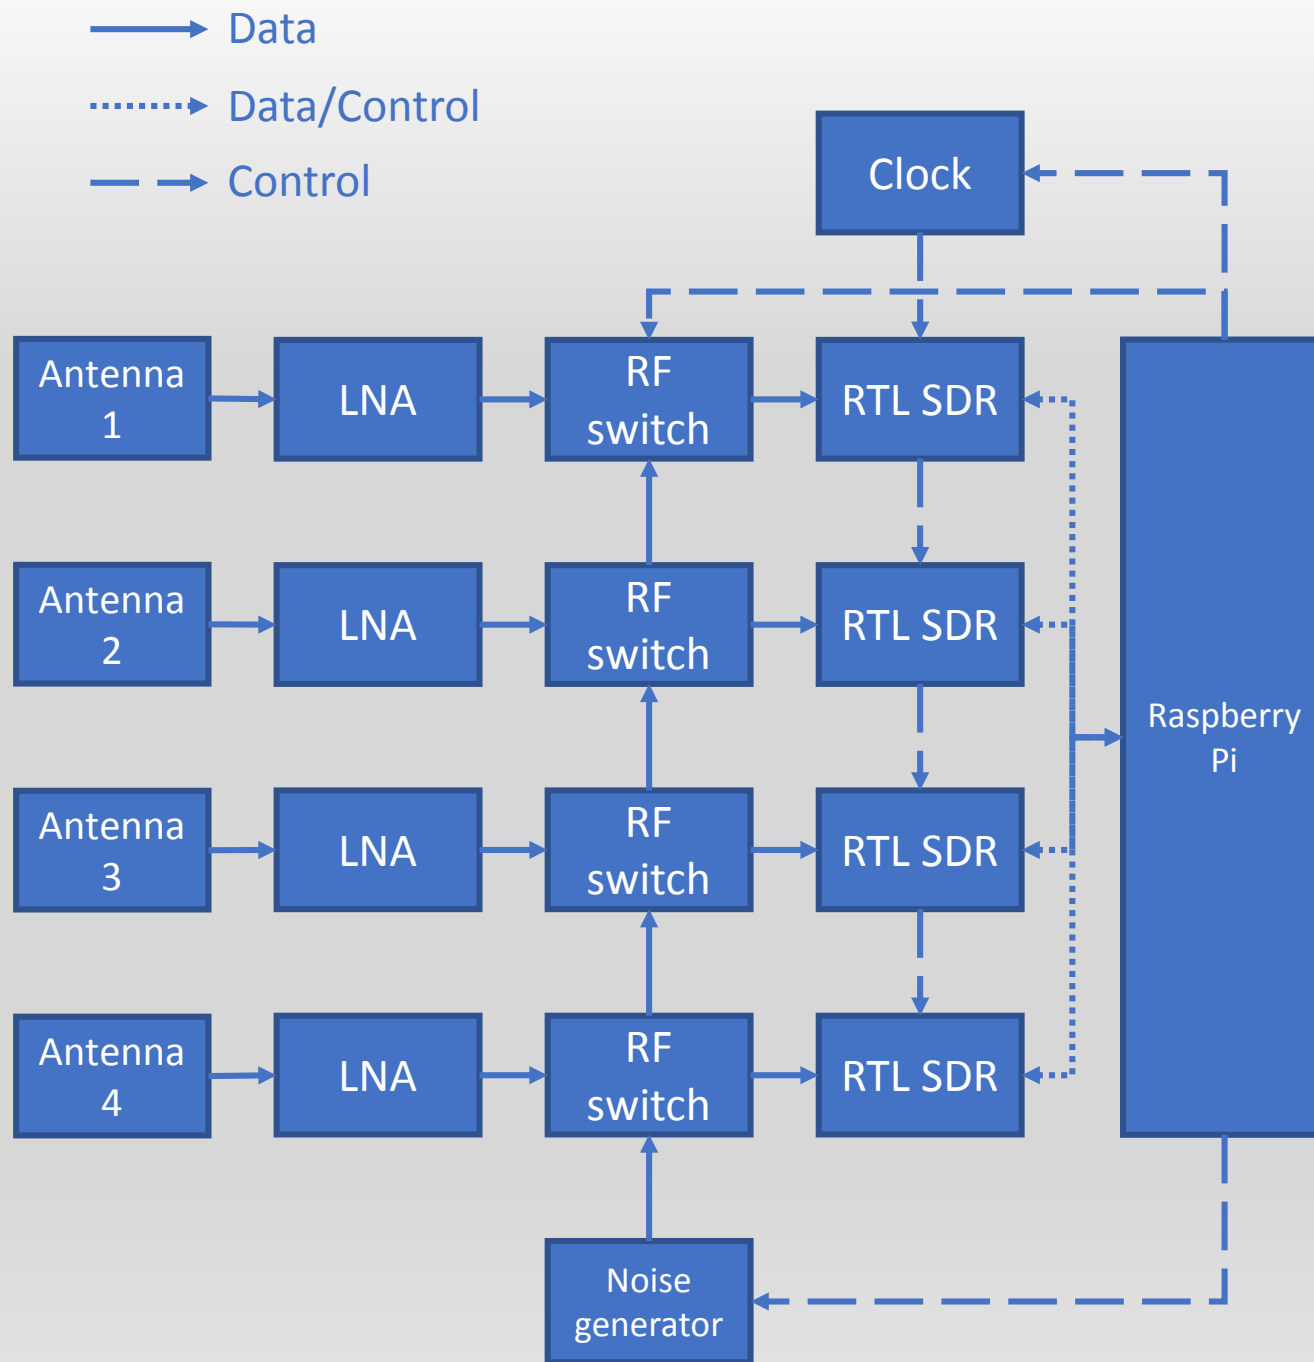







- 4 antennas – allows for Watson-Watt AOA measurement
- LNA – Improved SNR
- 4 RF switches and noise generator – switching in RF noise calibrates for initial phase offsets due to program execution differences
- RTL-SDR – cheap (\$20) SDRs which can be synchronized with a common local oscillator, and fast I/Q sampling (2 Msps)
- Clock – dedicated board with highly stable (0.1 ppm) TCXO and enough drive strength for multiple SDRs, synchronize SDRs
- Raspberry Pi – cheap interface for DSP, and to control Clock, Noise generator, RF switches, and SDRs

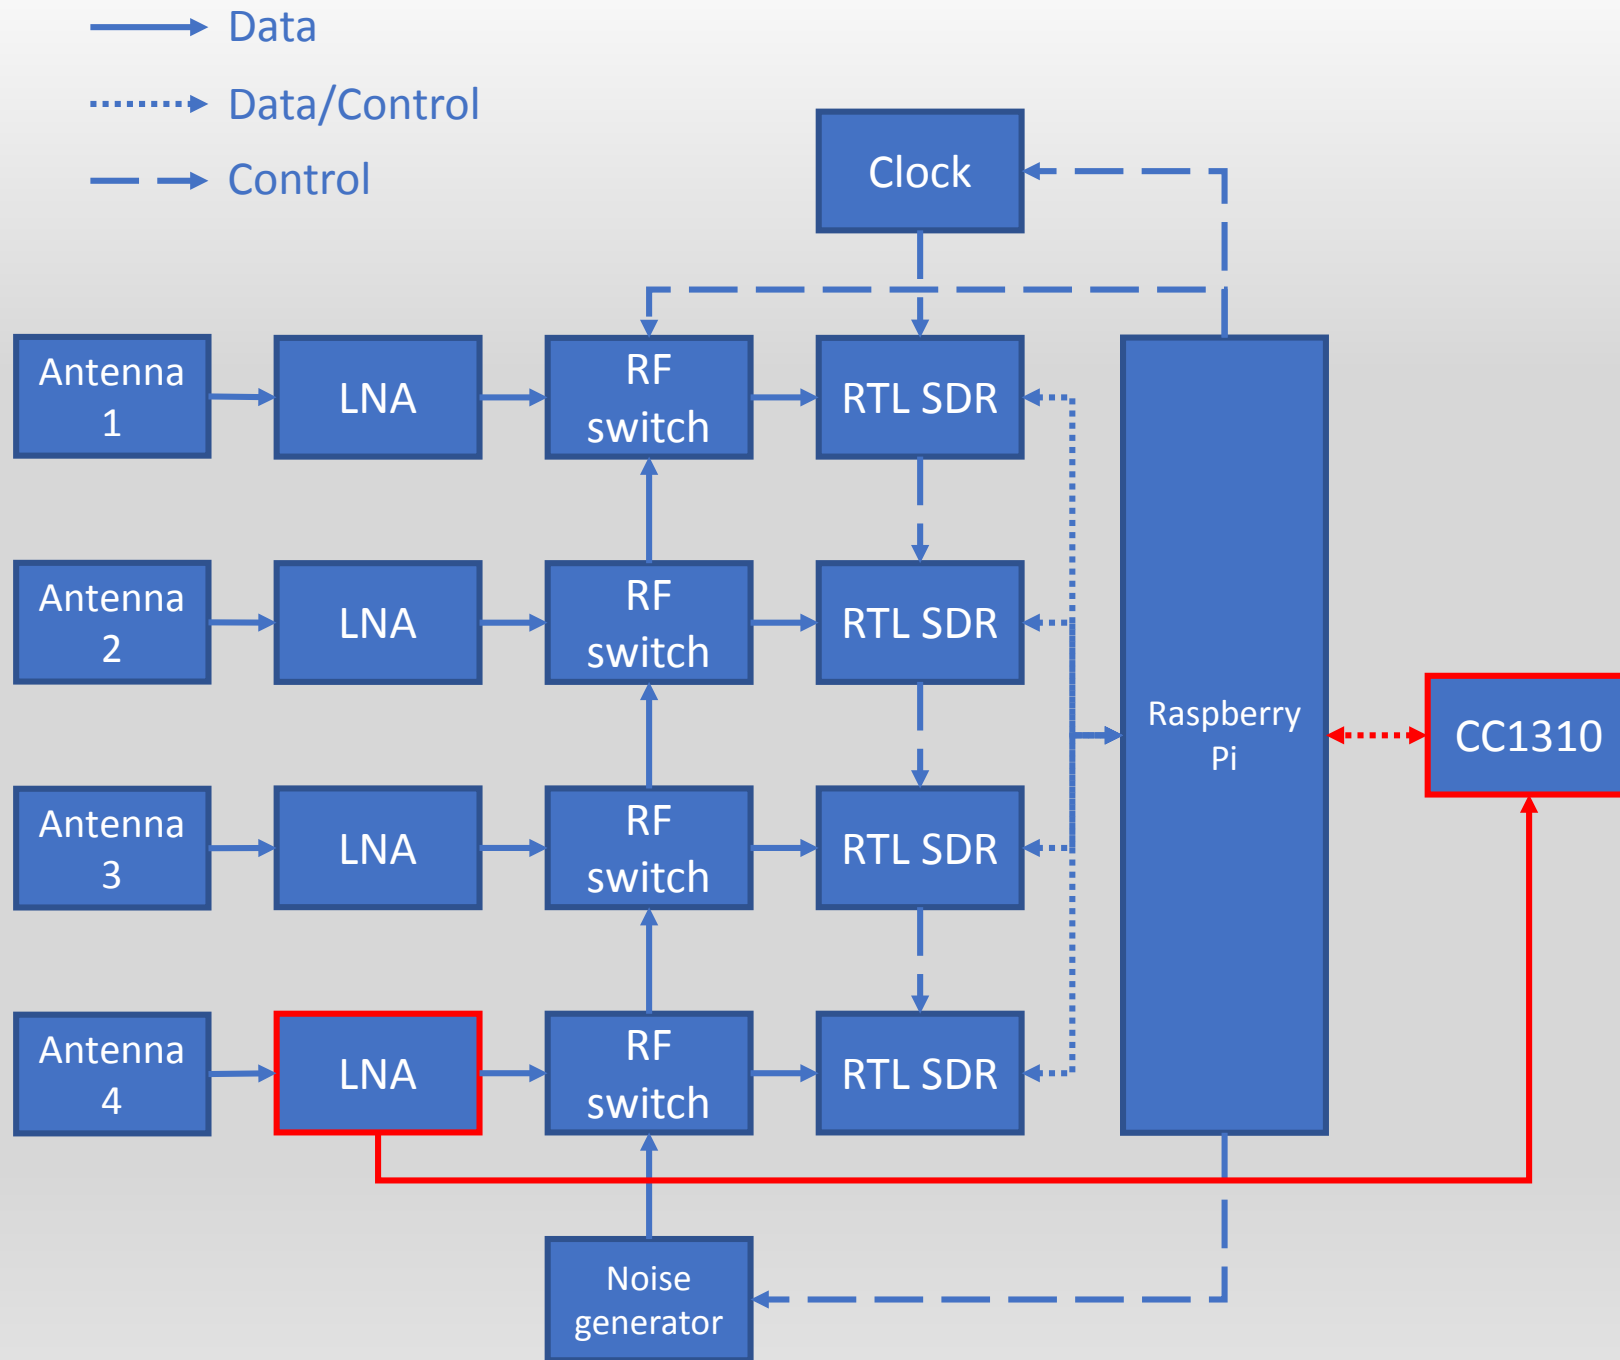

**What about transmitting
commands to the mobile
nodes?**


Boards available from www.coherent-receiver.com

We must reverse-engineer and simplify design to reduce cost!!

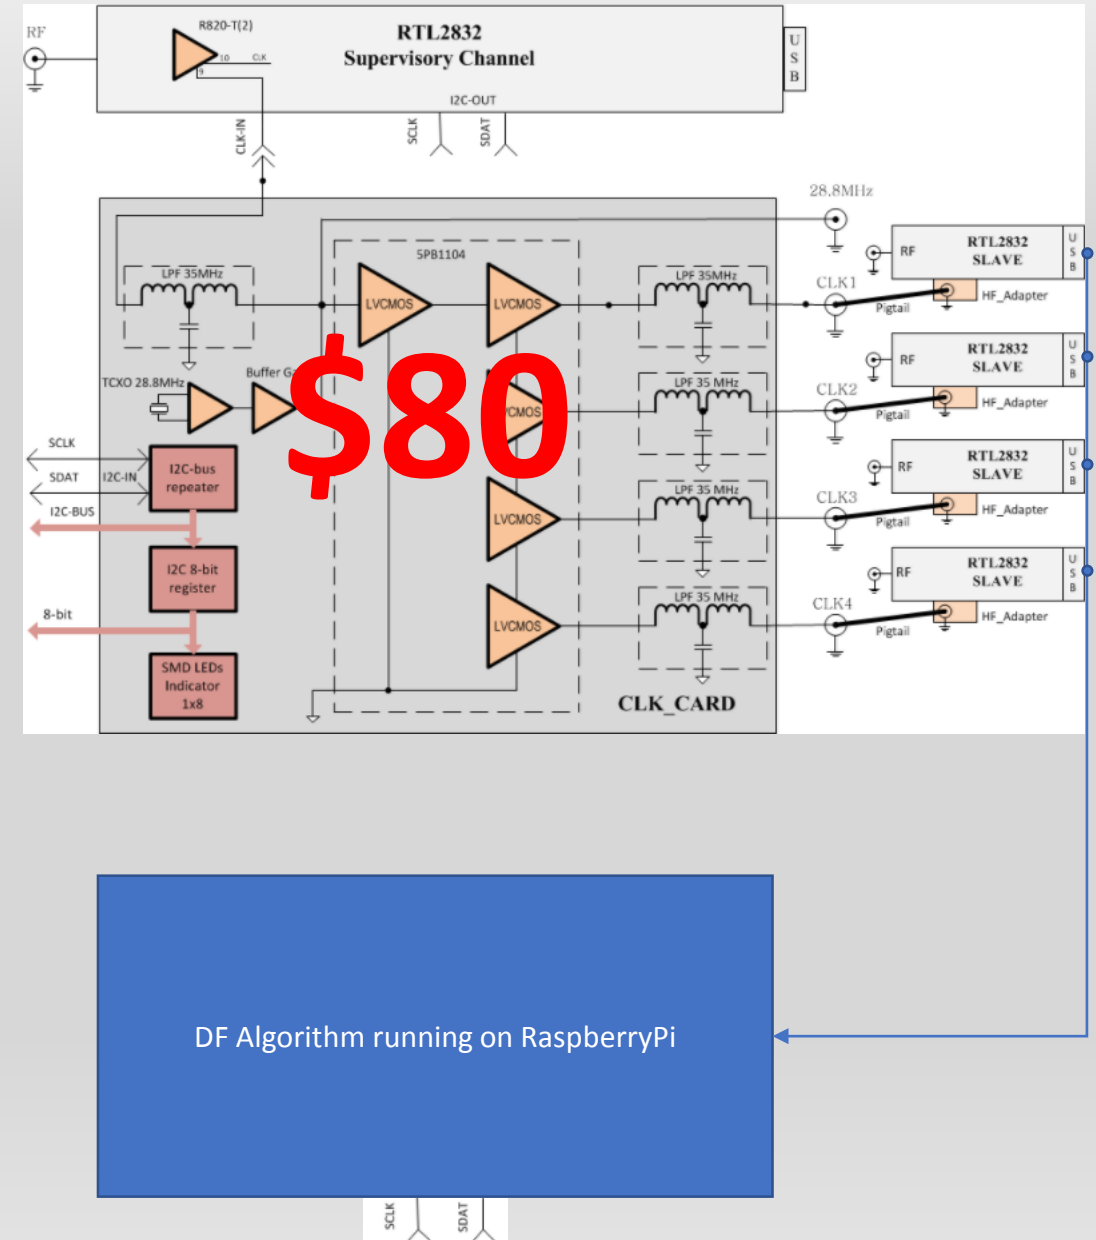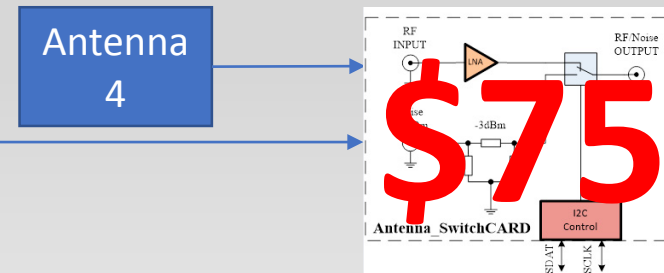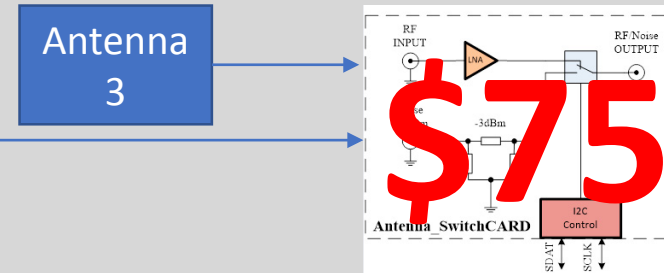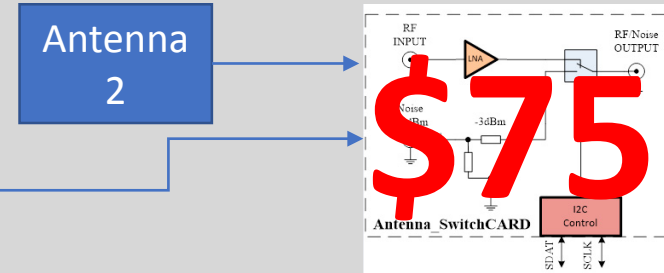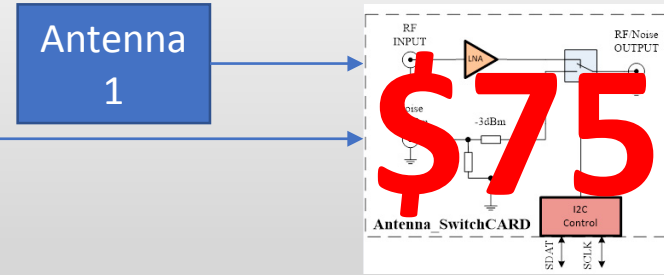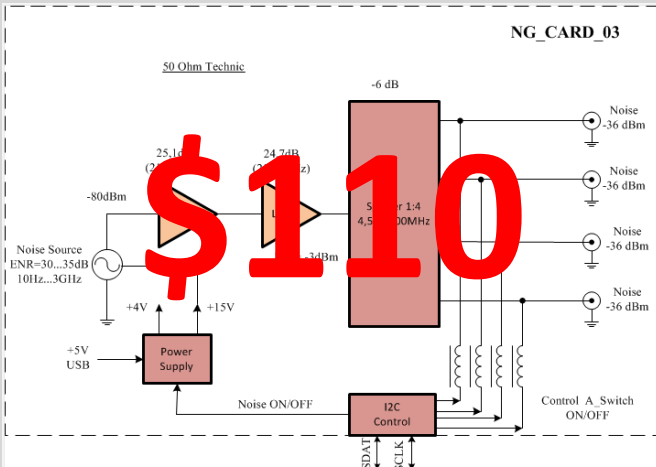


DF Algorithm running on RaspberryPi

Boards available from www.coherent-receiver.com

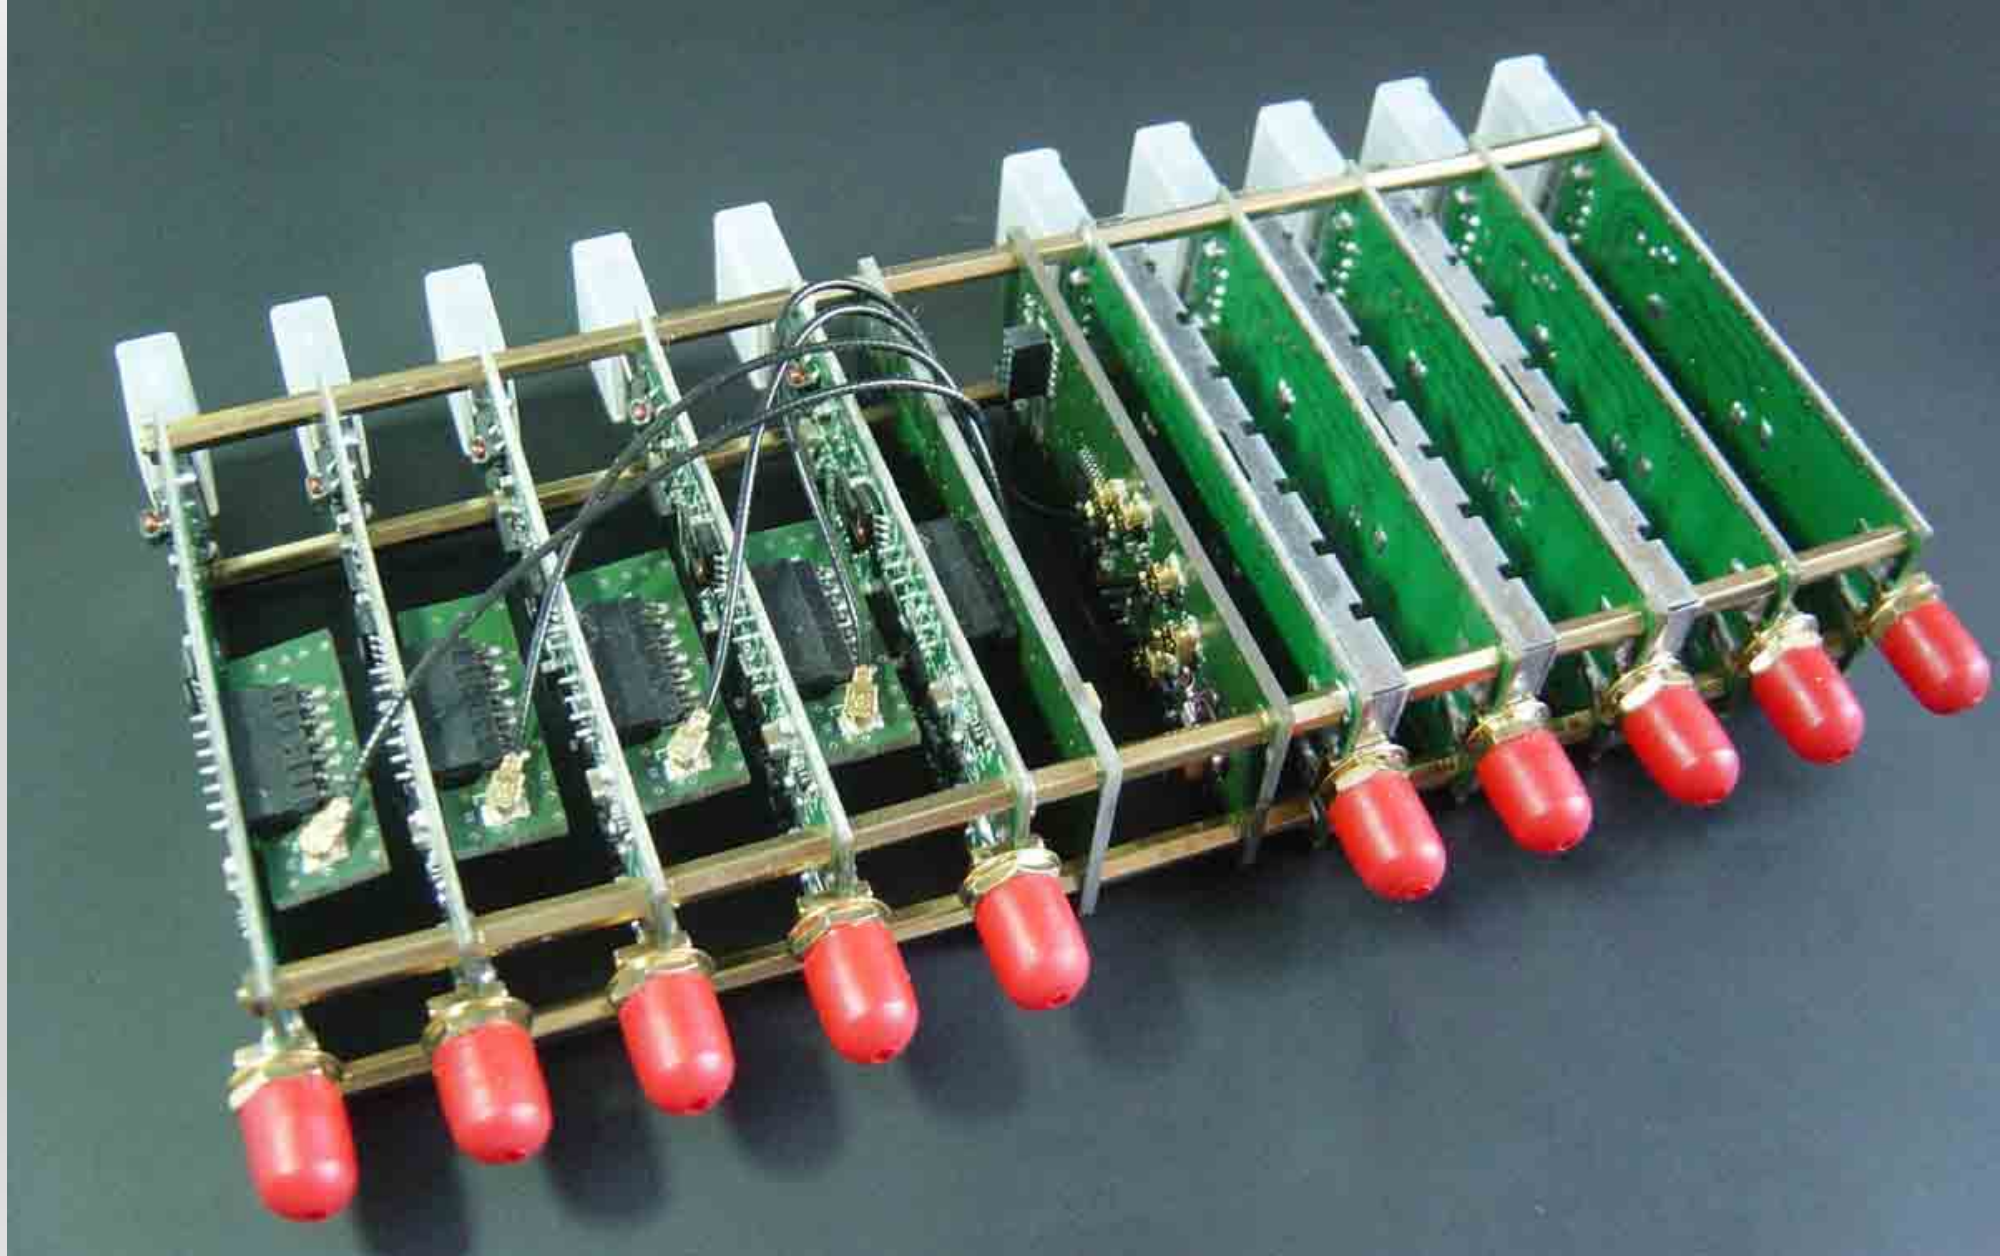

Software/DSP: GNU Radio

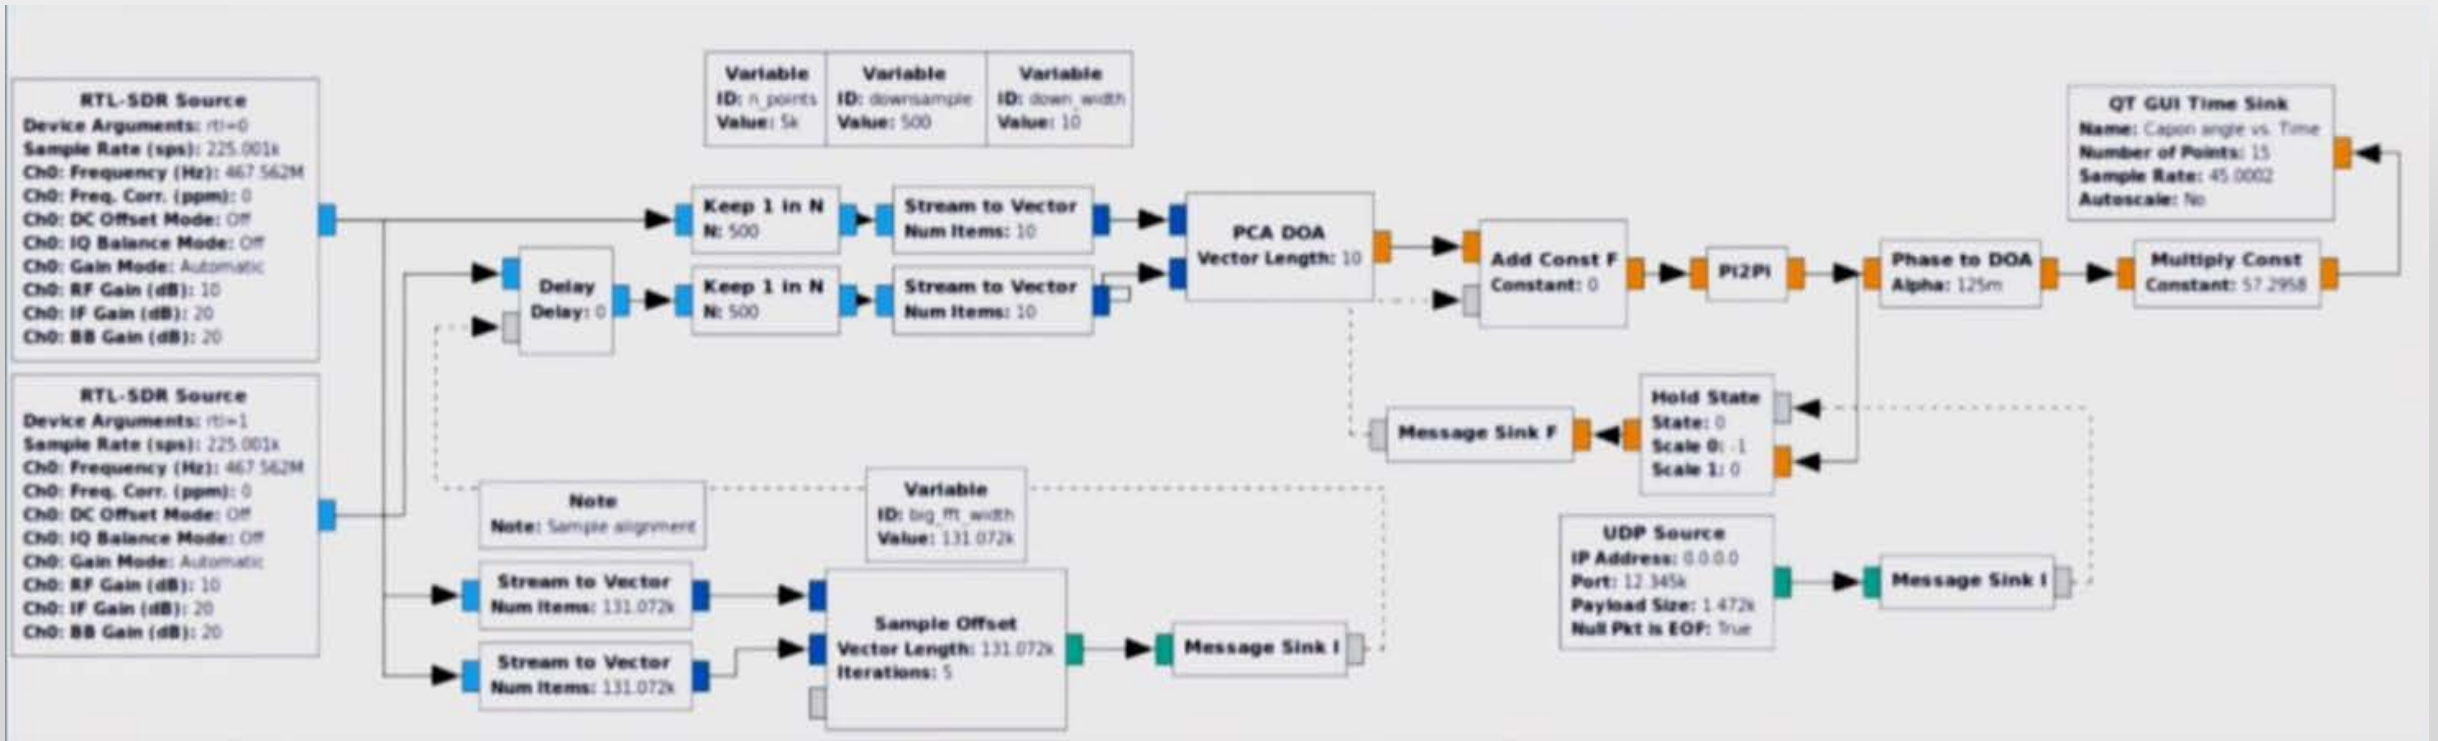

1. Existing code blocks for high-level functionality
2. Simulate RF signals and signal processing
3. Create DSP algorithms for processing real output from RTL-SDR sources
4. Well supported, open-source, and free

Resources to jump-start our project

1. www.RTL-SDR.com
2. www.coherent-receiver.com
3. www.radioreference.com
4. GitHub repositories:
 - RTL-Coherent
 - Multi-RTL
 - Gnuradio-doa ([video](#))
 - Thrifty

RTL-SDR.COM
RTL-SDR (RTL2832U) and software defined radio news and projects. Also featuring Airspy, HackRF, FCD, SDRplay and more.

Tagged: **direction finding**

JANUARY 25, 2018

PSEUDO-DOPPLER DI OPERA CAKE

Last week we posted about Micheal Or HackRF. The talk was streamed live for available as of yet. However, Hackaday

In their direction finding experiments the switcher board. It allows you to connect several of the same type of measurements can be taken by quickly demonstrate their setup by finding the

If/when the talk is released for viewing

N-Channel Coherent Receivers

- Unlimited number of channels
- 8 bit, 2.4 MHz per channel
- 24 MHz = 1766 MHz
- Temperature compensated oscillator from
- Reusable components (compatible with o

RadioReference.com
Your Complete Reference Source

Home Databases Live Audio Forums Wiki Classifieds Submit Info About

The RadioReference.com Forums > Computer Aided Monitoring and Programming

Software Defined Radio

User Name (User Name) Password Remember Me? Log in

FAQ Members List Calendar Today's Posts Search

Whisper WS1065 Desktop Digital Scanner \$249.95 ✓prime (176)

Whisper WS1040 Handheld Digital Scanner Radio \$242.94 ✓prime (253)

Whisper TRX-1 Handheld Digital Scanner Radio \$487.57 ✓prime (253)

Whisper WS1025 Analog Desktop Scanner (Black) \$85.92 (396)

Software Defined Radio - A forum for general discussion of software defined radio (SDR) receiver equipment.

Page 1 of 80 1 2 3 4 5 11 51 > Last

Threads in Forum : Software Defined Radio Forum Tools Search this Forum

Announcement: Posting the same content to more than one forum or thread is not permitted Views: 915,555 03-28-2013

Announcement: Negative posts regarding encryption and audio streaming will now cease Views: 672,176 01-01-2013

Announcement: Forum Rules and etiquette blanton! (Founder and CEO) Views: 1,020,954 05-30-2008

Thread / Thread Starter	Rating	Last Post	Replies	Views
Sticky: New SDR CommRadio CR-1 (E) 1 2 3 ... Last Page		12-03-2017 12:11 PM	1,392	432,411

Communications with Coherent-Receiver.com

“I don’t think that the open sourcing will reduce the prices.

Initially, we developed this project for the commercial customer in order to improve the reception in the moving objects; the second idea was to use it in DRM30. Our public available realisation was made as flexible as possible incl. different components versions for various application scenarios, e.g. clock-card10 or clock-card 0.2/2. You can consider these products as development boards in order to test your ideas or make some research. These were not intended to be and are not the mass-market products.

The design and realization for volume products (with cheaper prices) should be different. We designed such version for the above mentioned application scenario but cannot provide more details at the moment.

We provide the detailed description about the public available products. Moreover, you can ask the technical questions that we will try to answer.”

Where to go from here?

- Review existing SDR DF designs
- Learn about (and test-drive) GNU Radio Companion
- Continue to formulate specific questions for Dr. Kan and his students for next week's meeting with him, focusing on evaluating the compatibility of SDRs with his approach
- Finish up proposal revisions, incorporating SDR approach

The RTL2832 SDR Dongle

Russell Silva – AMRUPT, Spring '18




General Information

- “RTL-SDR is a very cheap software defined radio that uses a DVB-T TV tuner dongle based on the RTL2832U chipset. With the combined efforts of Antti Palosaari, Eric Fry and [Osmocom](#) it was found that the signal I/Q data could be accessed directly, which allowed the DVB-T TV tuner to be converted into a wideband software defined radio via a new software driver.” – rtl-sdr.com
- “The whole RTLSDR thing is fluke and not an intentional product. Basically 1.5 years ago someone discovered a stealth test mode on a commercial satellite TV receiver USB and it popped up on Reddit and the rest is history.” – Reddit Post
- The nature of the semiconductor and electronics industries in Asia is *highly competitive* so they are über paranoid about sharing information.” – Reddit Post
- “An enterprising hacker, Eric Fry, found that the device sends [IQ data](#) over the USB connection that can allow us to use it as an [SDR](#). A lot of smart folks wrote code for linux, windows, etc and now we can use that IQ data as a means to listen to and view signals that the RTLSDR receives.” – Reddit Post

Concerns:

- Highest Safe Sampling Rate of the I/Q Extraction: 2.56 MS/s (Superkuh)
- Superheterodyne devices – Employs IF mixing; however, it is unclear whether I/Q signals can be taken after this stage
- No Formal Datasheet

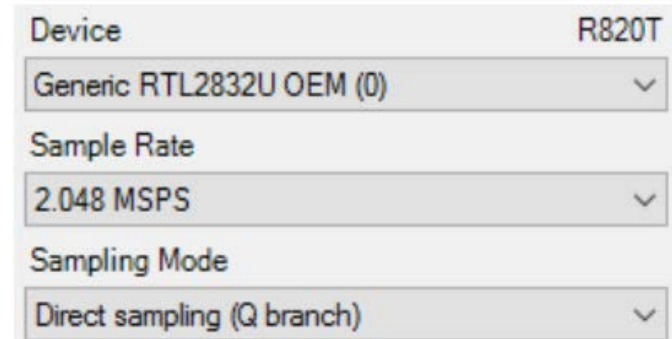

A screenshot of the RTL-SDR Blog V3 Datasheet settings interface. It shows four configuration options, each with a dropdown menu:



- Device:** R820T
- Generic RTL2832U OEM (0)** (dropdown arrow)
- Sample Rate:** 2.048 MSPS (dropdown arrow)
- Sampling Mode:** Direct sampling (Q branch) (dropdown arrow)

RTL-SDR Blog V3 Datasheet
(rtl-sdr.com)

Clock selector jumper

- Clock selector jumper – “By soldering in a 4 pin 1.27mm pitch jumper header and removing the default 0 Ohm resistor, one can now easily select between the onboard clock, an external clock, or having the on board clock be the output for another dongle. This is for advanced users only who want to experiment with things like passive radar, and coherent receivers.” (RTL-SDR Blog V3 Datasheet – rtl-sdr.com)

Phase Interferometry Project using RTL SDRs (tejeez – Github)

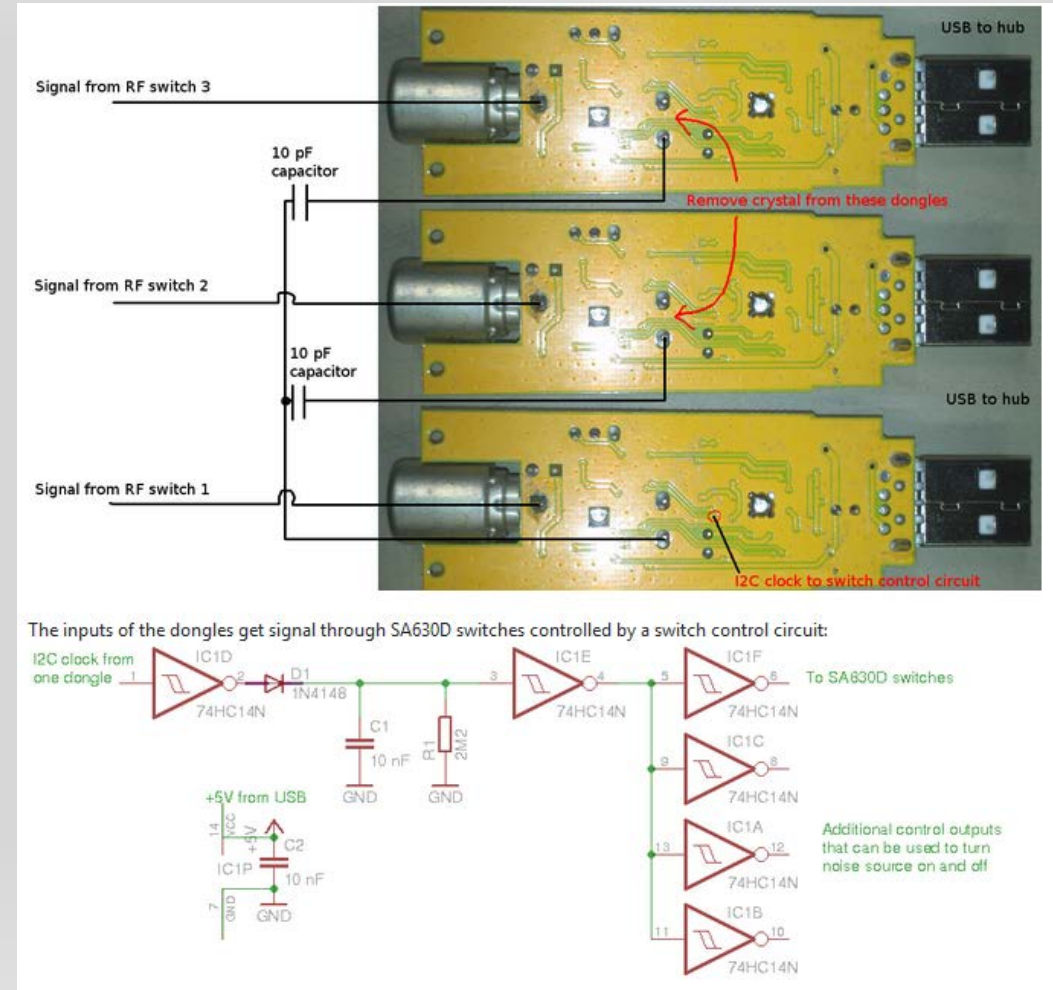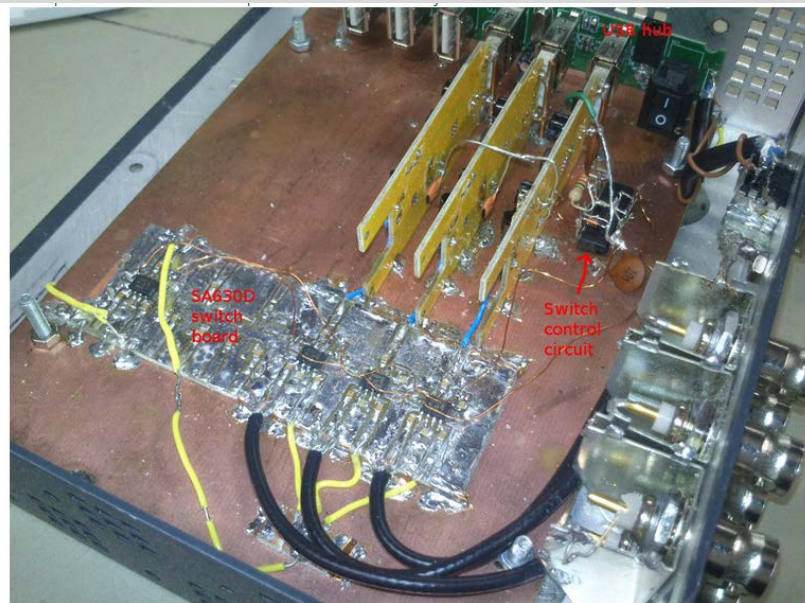

GNU Radio Software:

```
Using device 0: Generic RTL2832U OEM
Found Rafael Micro R820T tuner
Exact sample rate is: 2500000.107620 Hz
Sampling at 2500000 S/s.
Tuned to 100122000 Hz.
Tuner gain set to 40.20 dB.
Reading samples in async mode...
```

The raw, captured IQ data is saved in a file called *FMcapture1.dat*, which is stored in my home directory by default. You can download the file by clicking [here](#):

[FMcapture1.dat](#)

The raw, captured IQ data is 8 bit unsigned data. Each I and Q value varies from 0 to 255 (since, $00000000_2 = 0$ and $11111111_2 = 255$). To get from the unsigned (0 to 255) range we need to subtract 127.5 from each I and Q value, which results in a new range from -127.5 to +127.5. Then the complex data is simply $y = I + jQ$. We perform this using Matlab by applying the following custom function *loadFile*, which is presented below. You can download this function by clicking [here](#).

```
function y = loadFile(filename)
% y = loadFile(filename)
%
% reads complex samples from the rtlsdr file
%

fid = fopen(filename, 'rb');
y = fread(fid, 'uint8=>double');
```

“How to capture raw IQ data.” (Dr. Aaron Scher, 2015)

Sources:

- <http://superkuh.com/rtlsdr.html>: “Central Hub” source for RTL SDR Information
- https://github.com/tejeez/rtl_coherent: Phase Interferometry Project using RTL SDRs
- https://www.reddit.com/r/RTLSDR/comments/6n9hdk/welcome_new_visitors_a_little_info_about_rtlsdr/ Reddit Post detailing how RTL SDRs became popular
- <https://www.rtl-sdr.com/about-rtl-sdr/>: General Information
- <https://www.rtl-sdr.com/buy-rtl-sdr-dvb-t-dongles/>: Buying Location
- aaronscher.com/wireless_com_SDR/RTL_SDR_AM_spectrum_demod.html
“How to capture raw IQ data,” (Dr. Aaron Scher, 2015)

Keep in Mind: U.S. Frequency Allocation:

