
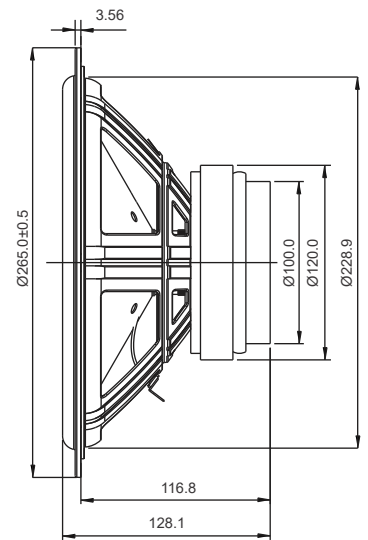


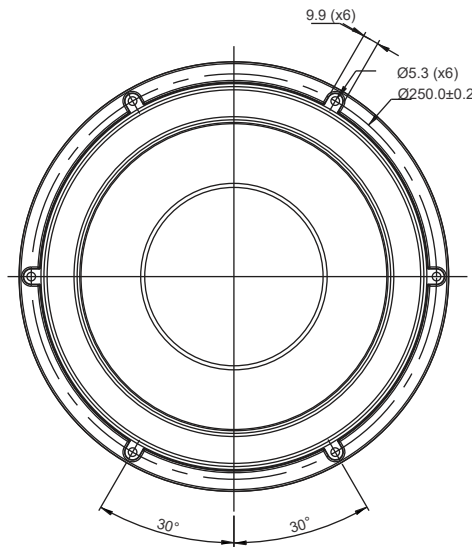


FEATURES

- Hard pressed vented paper cone
- Durable rubber surround
- Symmetric suspension
- Non-conductive coil former
- Long life litz wires
- Vented chassis
- Bucking magnet

Specs :

Nominal Impedance	4 Ω	Free air resonance, Fs	27.4 Hz
DC resistance, Re	3.3 Ω	Sensitivity (2.83V/1m)	91 dB
Voice coil inductance, Le	1.0 mH	Mechanical Q-factor, Qms	5.59
Effective piston area, Sd	346 cm ²	Electrical Q-factor, Qes	0.47
Voice coil diameter	38.5 mm	Total Q-factor, Qts	0.43
Voice coil height	21.8 mm	Moving mass incl. air, Mms	55.2 g
Air gap height	6 mm	Force factor, Bl	8.2 Tm
Linear coil travel (p-p)	15.8 mm	Equivalent volume, Vas	104 liters
Magnetic flux density	1.05 T	Compliance, Cms	0.61 mm/N
Magnet weight	1.1 kg	Mechanical loss, Rms	1.7 kg/s
Net weight	2.9 kg	Rated power handling*	80 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

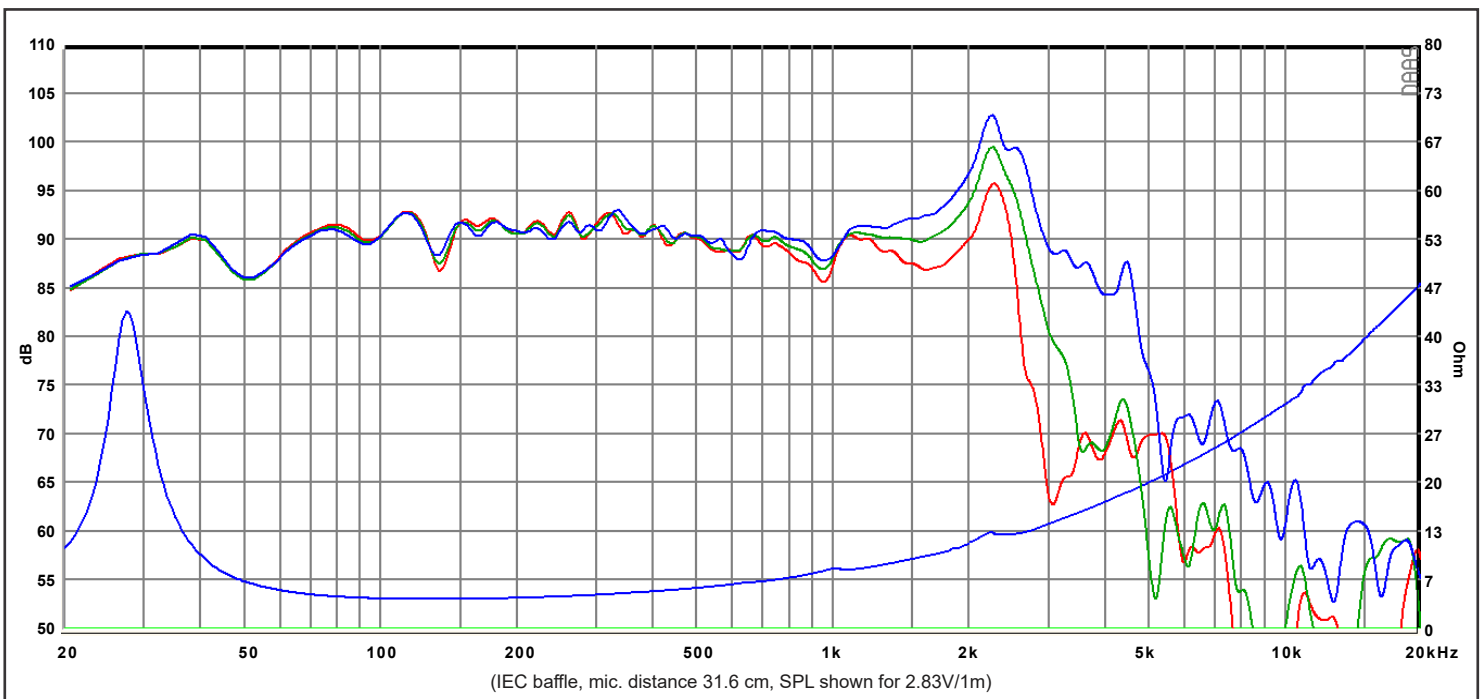

Response Curve :
 — (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis

REV. 1 (16.09.2022)