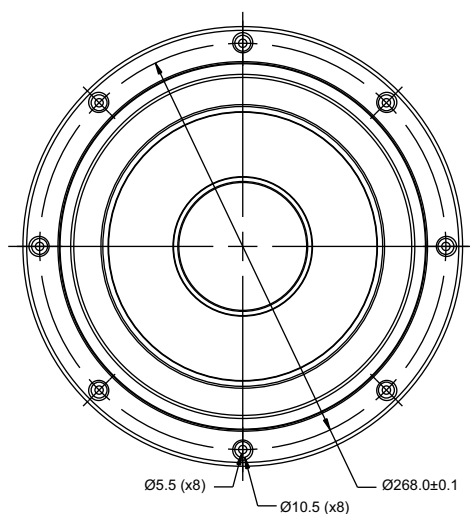


### FEATURES

- Hard paper cone for improved piston operation (made in-house)
- Cast aluminium chassis for optimum strength
- Low damping medium hardness rubber surround for improved dynamic linearity and mechanical stability
- Easily adjustable moving mass

### Specs :

|                                               |                     |                               |           |
|-----------------------------------------------|---------------------|-------------------------------|-----------|
| Effective piston area, $S_d$                  | 312 cm <sup>2</sup> | Mechanical loss, $R_{ms}$     | 3 kg/s    |
| Free air resonance, $F_s$                     | 10.2 Hz             | Mechanical Q-factor, $Q_{ms}$ | 10.8      |
| Compliance, $C_{ms}$                          | 0.48 mm/N           | Equivalent volume, $V_{as}$   | 66 liters |
| Moving mass incl.air, $M_{ms}$                | 505 g               | Net weight                    | 1.75 kg   |
| Maximum mechanical cone excursion, $X_{mech}$ | ±17 mm              |                               |           |

T/S parameters measured on drive units that are broken in.  
Parameters apply with the pre-mounted DW50 in place.

REV.2 (21.01.2019)