


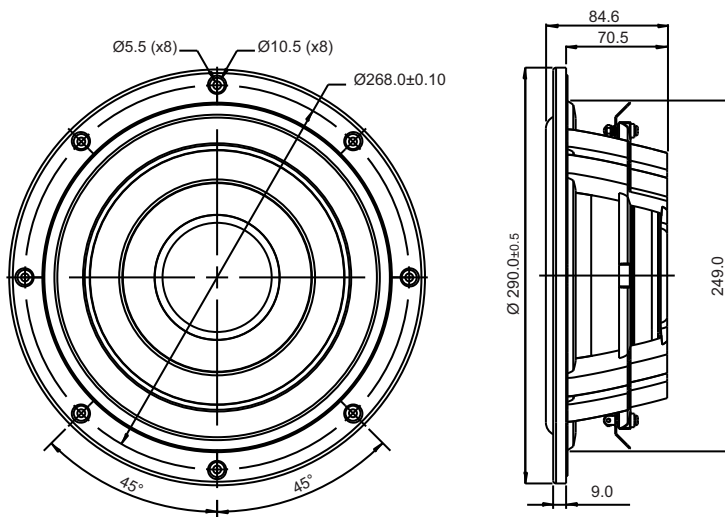

FEATURES

- Unique patented long throw shallow design
- Vented cast aluminum chassis for optimum strength and low compression
- Dual rigid aluminum cone structure
- Non-conducting fiber glass coil former for minimum damping
- Shorting ring in motor system for reduced distortion
- Copper voice coil for improved power handling
- Long life insulated silver lead wires
- Powerful neodymium motor system

Specs :

Nominal Impedance	8 Ω	Free air resonance, F_s	19.5 Hz
DC resistance, R_e	6.4 Ω	Sensitivity (2.83 V / 1 m)	83 dB
Effective piston area, S_d	312 cm ²	Mechanical Q-factor, Q_{ms}	4.4
Voice coil diameter	75.5 mm	Electrical Q-factor, Q_{es}	0.29
Voice coil height	30 mm	Total Q-factor, Q_{ts}	0.28
Air gap height	6 mm	Moving mass incl.air, M_{ms}	172 g
Linear coil travel (p-p)	24 mm	Force factor, Bl	21.4 Tm
Magnetic flux density	1.0 T	Equivalent volume, V_{as}	54 liters
Magnet weight	281 g	Compliance, C_{ms}	0.39 mm/N
Net weight	3.43 kg	Mechanical loss, R_{ms}	4.8 kg/s
		Rated power handling*	250 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

Box recommendations :

Sealed box : 9 - 16 ltr.

Reflex box : Not recommended

