
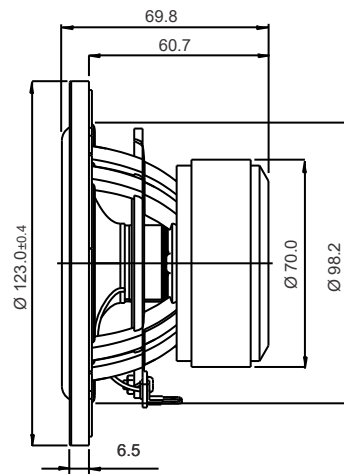


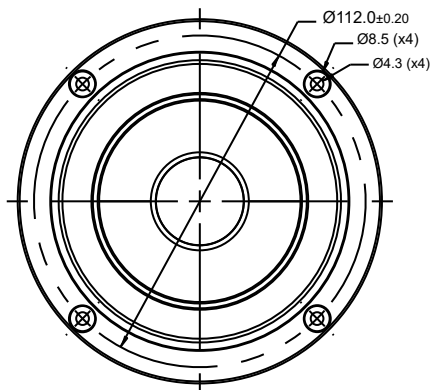

FEATURES

- Proprietary cone material with natural fibres made in-house
- Foam surround for maximum transparency and midrange resolution
- Vented pole piece for reduced compression
- Vented cast aluminium chassis for optimum strength and low compression
- CCAW voice coil for reduced moving mass
- Long life silver lead wires
- Non-conducting fibre glass coil former for minimum damping
- Shorting ring in motor system for reduced distortion

Specs :


Nominal Impedance	4 Ω	Free air resonance, F_s	61 Hz
DC resistance, R_e	3.1 Ω	Sensitivity (2.83 V / 1 m)	87 dB
Voice coil inductance, L_e	0.27 mH	Mechanical Q-factor, Q_{ms}	5.3
Effective piston area, S_d	50 cm ²	Electrical Q-factor, Q_{es}	0.53
Voice coil diameter	25.4 mm	Total Q-factor, Q_{ts}	0.48
Voice coil height	15 mm	Moving mass incl.air, M_{ms}	5.8 g
Air gap height	5 mm	Force factor, Bl	3.6 Tm
Linear coil travel (p-p)	10 mm	Equivalent volume, V_{as}	4.1 liters
Magnetic flux density	0.84 T	Compliance, C_{ms}	1.17 mm/N
Magnet weight	0.32 kg	Mechanical loss, R_{ms}	0.42 kg/s
Net weight	0.75 kg	Rated power handling*	30 W

* IEC 268-5, T/S parameters measured on drive units that are broken in.

Box recommendations :

Sealed box : 4L - 11L (Less damped - Damped)

Reflex box : Not recommended

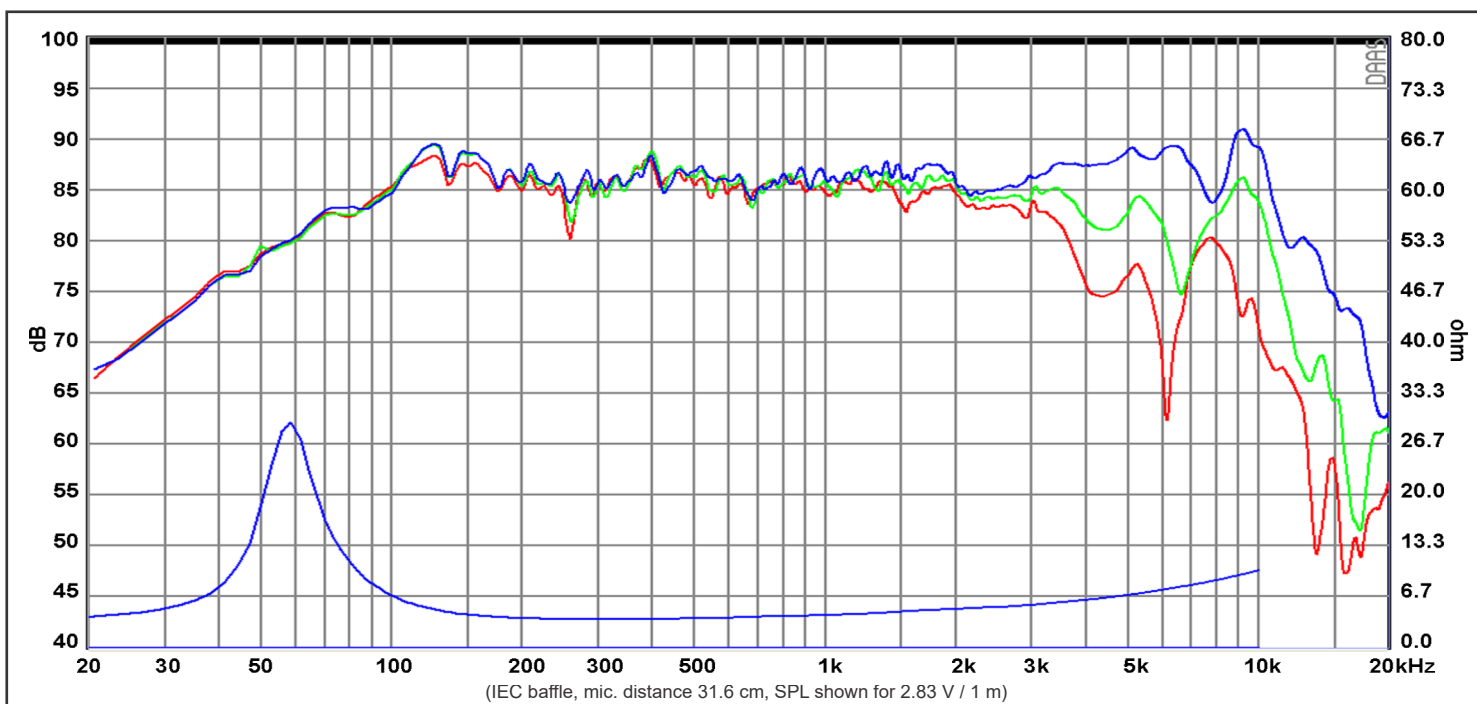

Response Curve :

— (Blue) : on axis

— (Green) : 30° off-axis

— (Red) : 60° off-axis

REV.2 (31.07.2023)